

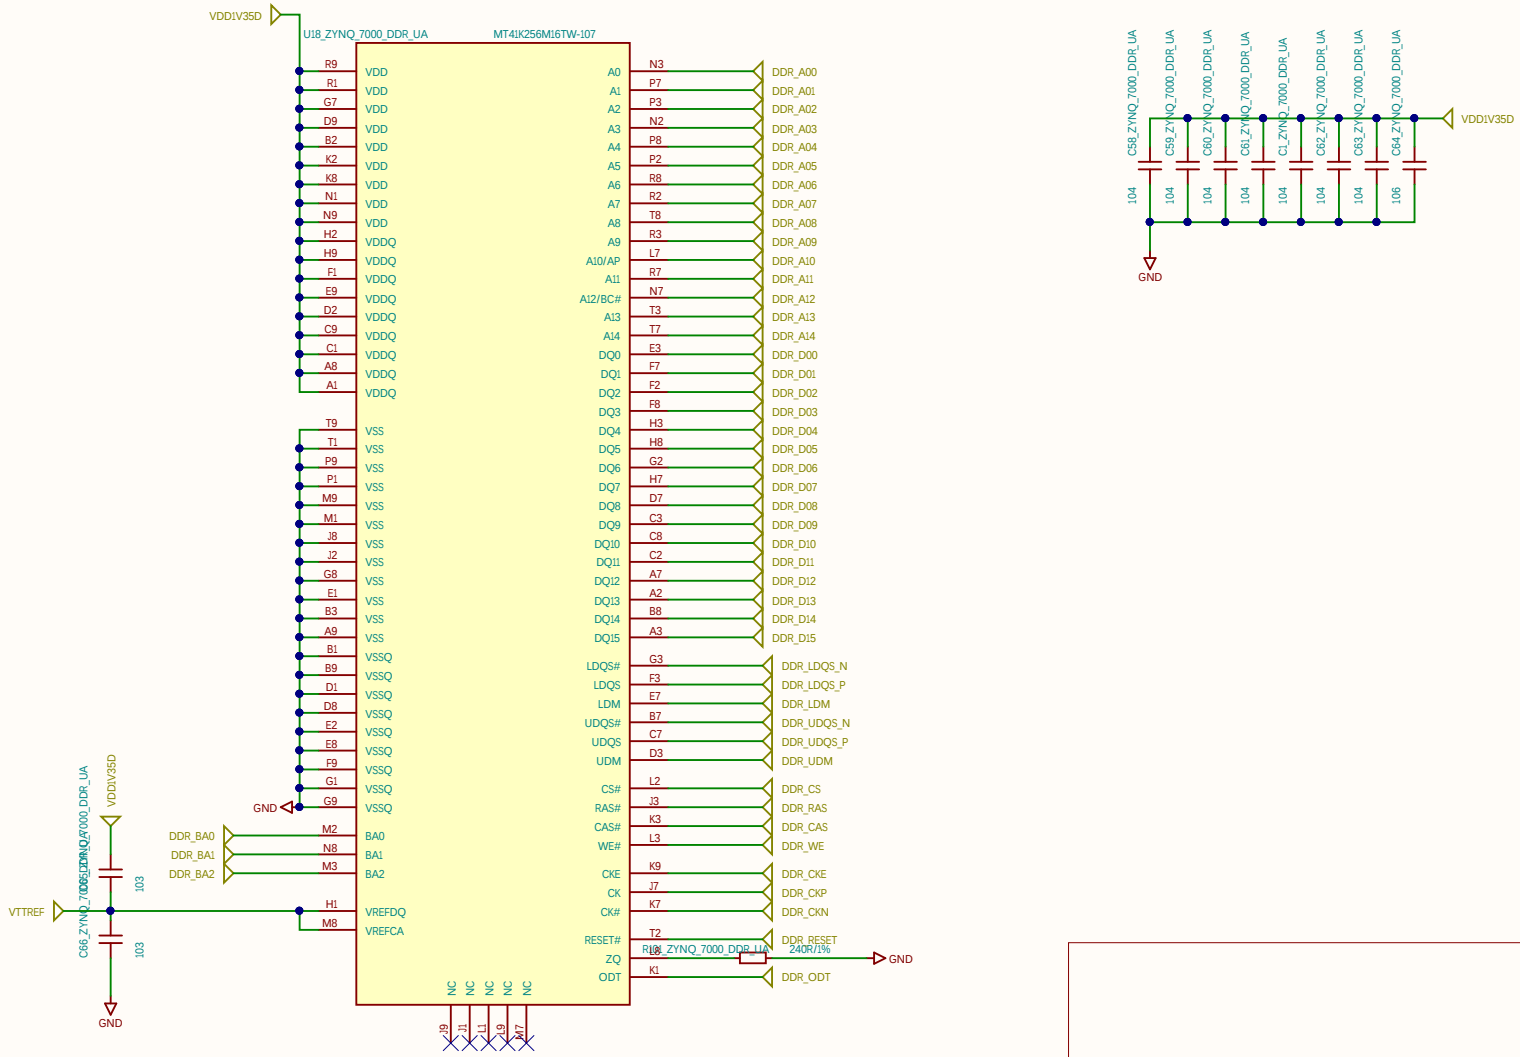
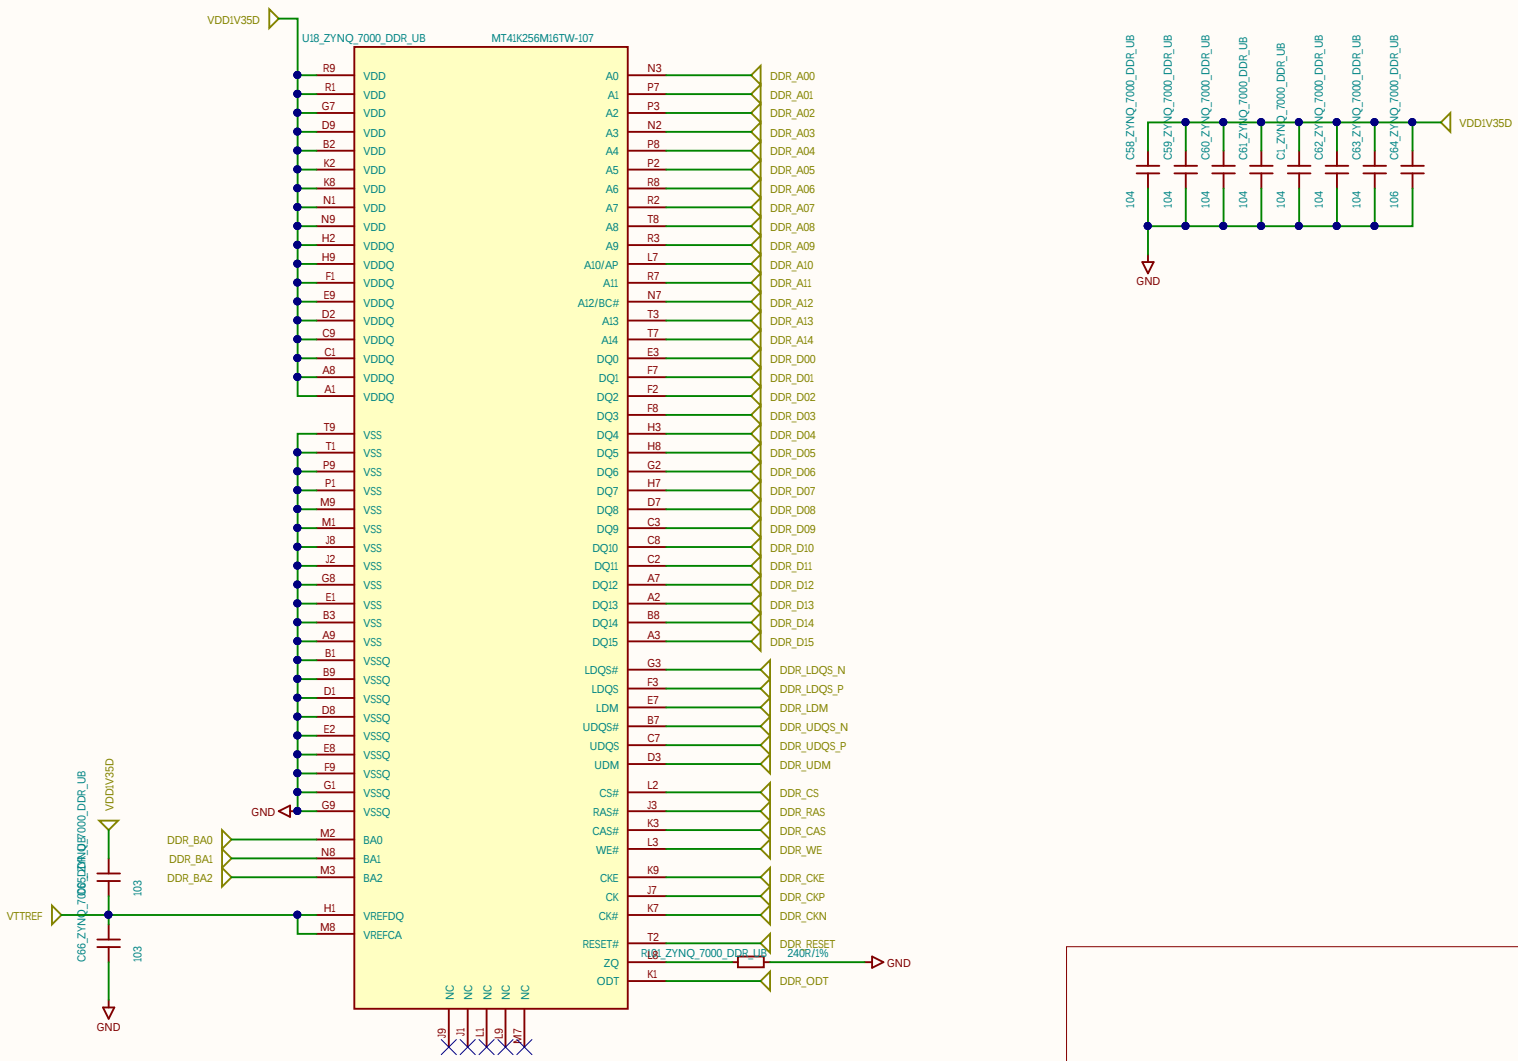


Sheet: /		
File: zynq_7000_ddr_unit.kicad_sch		
Title: DDR_unit		
Size: A4	Date:	Rev:
KiCad E.D.A. kicad (5.1.4)-1		Id: 1/1

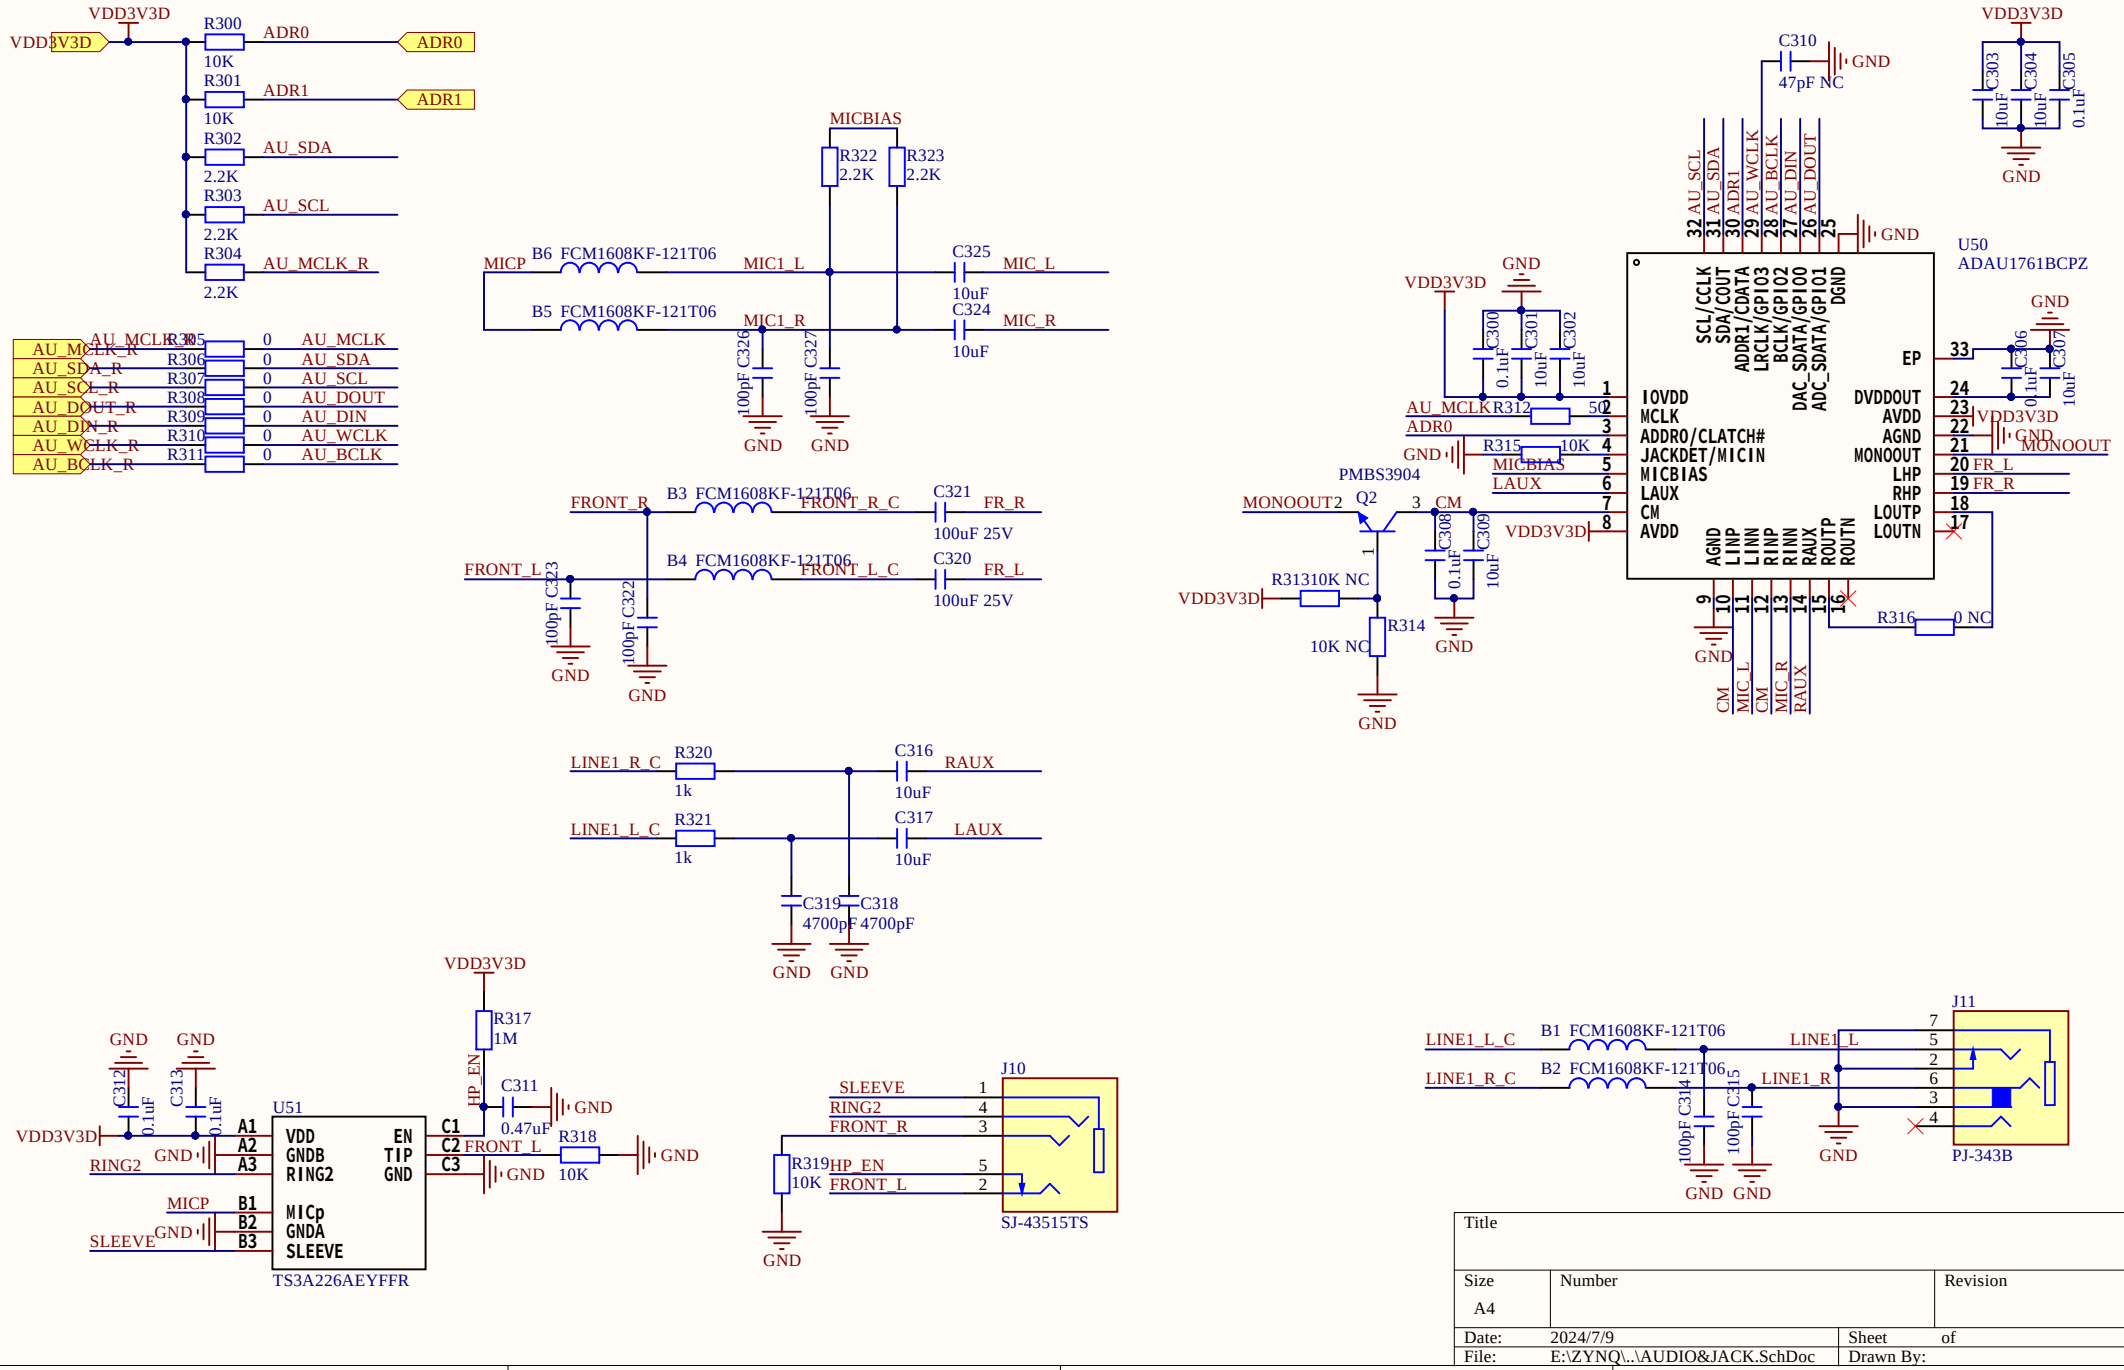


Sheet: /		
File: zynq_7000_ddr_unit.kicad_sch		
Title: DDR_unit		
Size: A4	Date:	Rev:
KiCad E.D.A. kicad (5.1.4)-1		Id: 1/1



VDD3V3D
R300 10K ADR0
R301 10K ADR1
R302 2.2K AU_SDA
R303 2.2K AU_SCL
R304 2.2K AU_MCLK_R
AU_MCLK_R R305 0 AU_MCLK
AU_SDA_R R306 0 AU_SDA
AU_SCL_R R307 0 AU_SCL
AU_DOUT_R R308 0 AU_DOUT
AU_DIN_R R309 0 AU_DIN
AU_WCLK_R R310 0 AU_WCLK
AU_BCLK_R R311 0 AU_BCLK
MICBIAS
R322 2.2K
R323 2.2K
MICP B6 FCM1608KF-121T06 MIC1_L
B5 FCM1608KF-121T06 MIC1_R
C325 10uF MIC_L
C324 10uF MIC_R
C326 100pF
C327 100pF
GND
FRONT_R B3 FCM1608KF-121T06 FRONT_R_C
C321 100uF 25V FR_R
FRONT_L B4 FCM1608KF-121T06 FRONT_L_C
C320 100uF 25V FR_L
C323 100pF
C322 100pF
LINE1_R_C R320 1k
C316 10uF RAUX
LINE1_L_C R321 1k
C317 10uF LAUX
C319 4700pF
C318 4700pF
C310 47pF NC
C303 10uF
C304 10uF
C305 0.1uF
U50
ADAU1761BCPZ
SCL/CCLK
SDA/COUT
ADDR1/CDATA
LRCLK/GPIO3
BCLK/GPIO2
DAC_SDATA/GPIO0
ADC_SDATA/GPIO1
DGND
EP
IOVDD
MCLK
ADDR0/CLATCH#
JACKDET/MICIN
MICBIAS
LAUX
CM
AVDD
DVDDOUT
AVDD
AGND
MONOOUT
LHP
RHP
LOUTP
LOUTN
AGND
LINP
LINN
RINP
RINN
RAUX
ROUTP
ROUTN
C306 0.1uF
C307 10uF
C300 0.1uF
C301 10uF
C302 10uF
AU_MCLK R312 50
ADR0
R315 10K
MICBIAS
LAUX
PMBS3904
MONOOUT2 Q2
CM
C308 0.1uF
C309 10uF
R31310K NC
R314 10K NC
R316 0 NC
FR_L
FR_R
MONOOUT
U51
TS3A226AEYFFR
VDD
GNDB
RING2
MICp
GNDA
SLEEVE
EN
TIP
GND
C1
C2
C3
C312 0.1uF
C313 0.1uF
R317 1M
HP_EN
C311 0.47uF
R318 10K
FRONT_L
J10
SJ-43515TS
R319 10K
J11
PJ-343B
LINE1_L_C B1 FCM1608KF-121T06 LINE1_L
LINE1_R_C B2 FCM1608KF-121T06 LINE1_R
C314 100pF
C315 100pF
Title
Size A4
Number
Revision
Date: 2024/7/9
File: E:\ZYNQ\..\AUDIO&JACK.SchDoc
Sheet of
Drawn By:

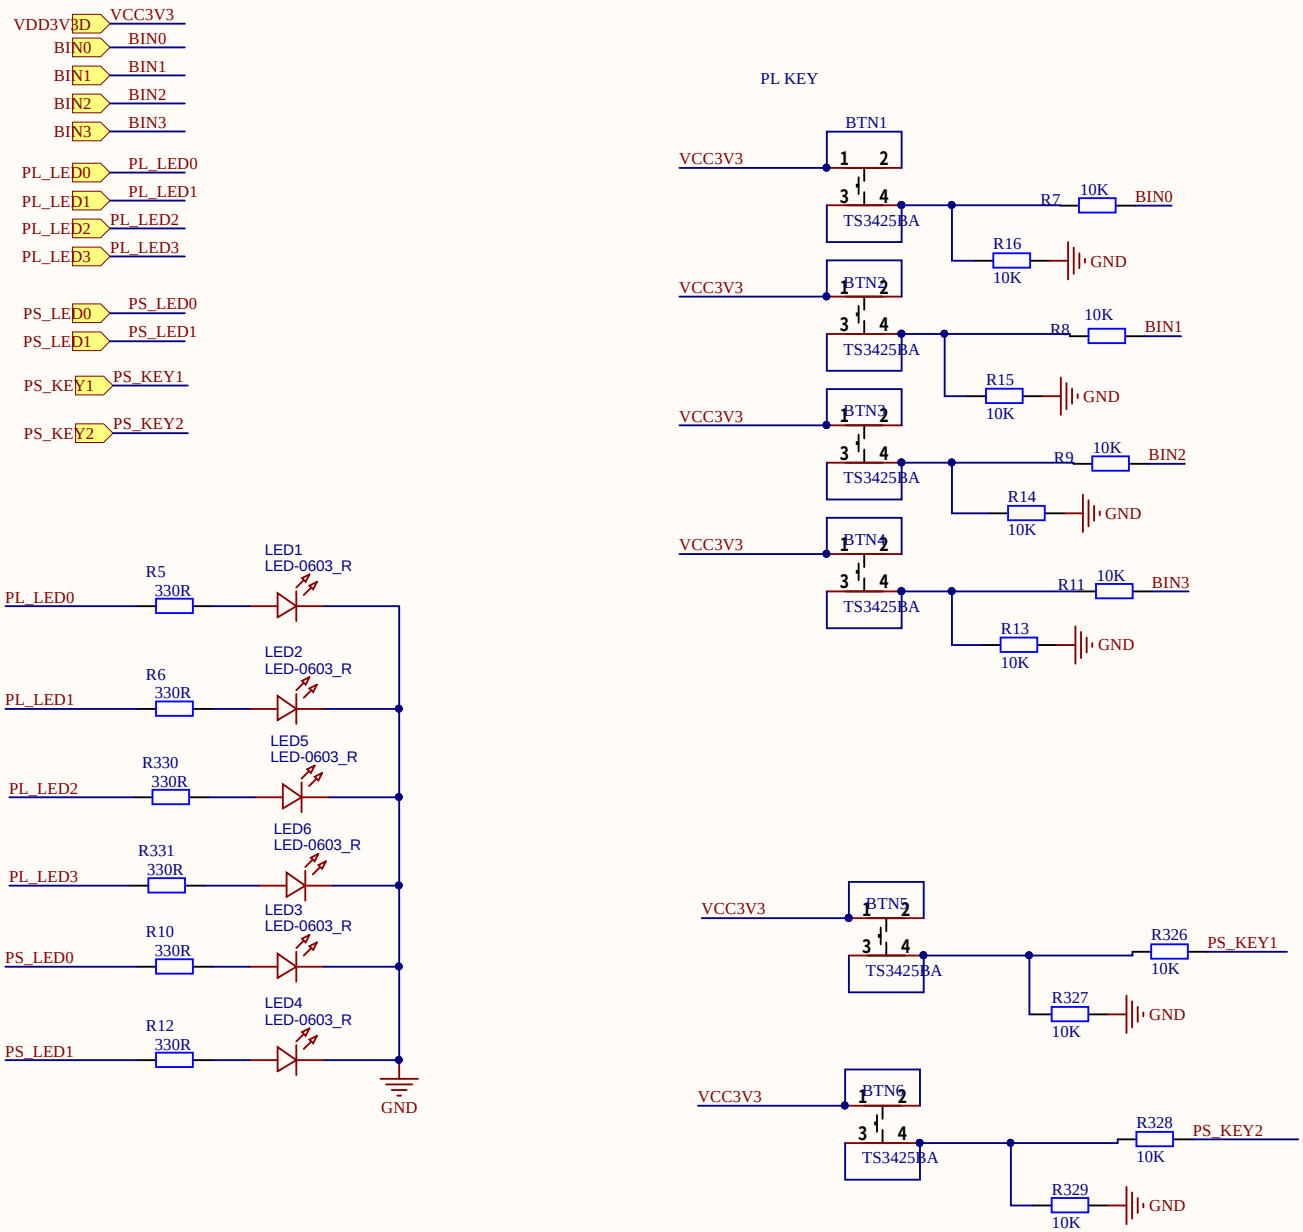



Title	button_switch_led	
Size: A4	Number	Revision
Date: 2024/7/9	Sheet of	
File: E:\ZYNQ\..\button switch led.SchDoc	Drawn By:	

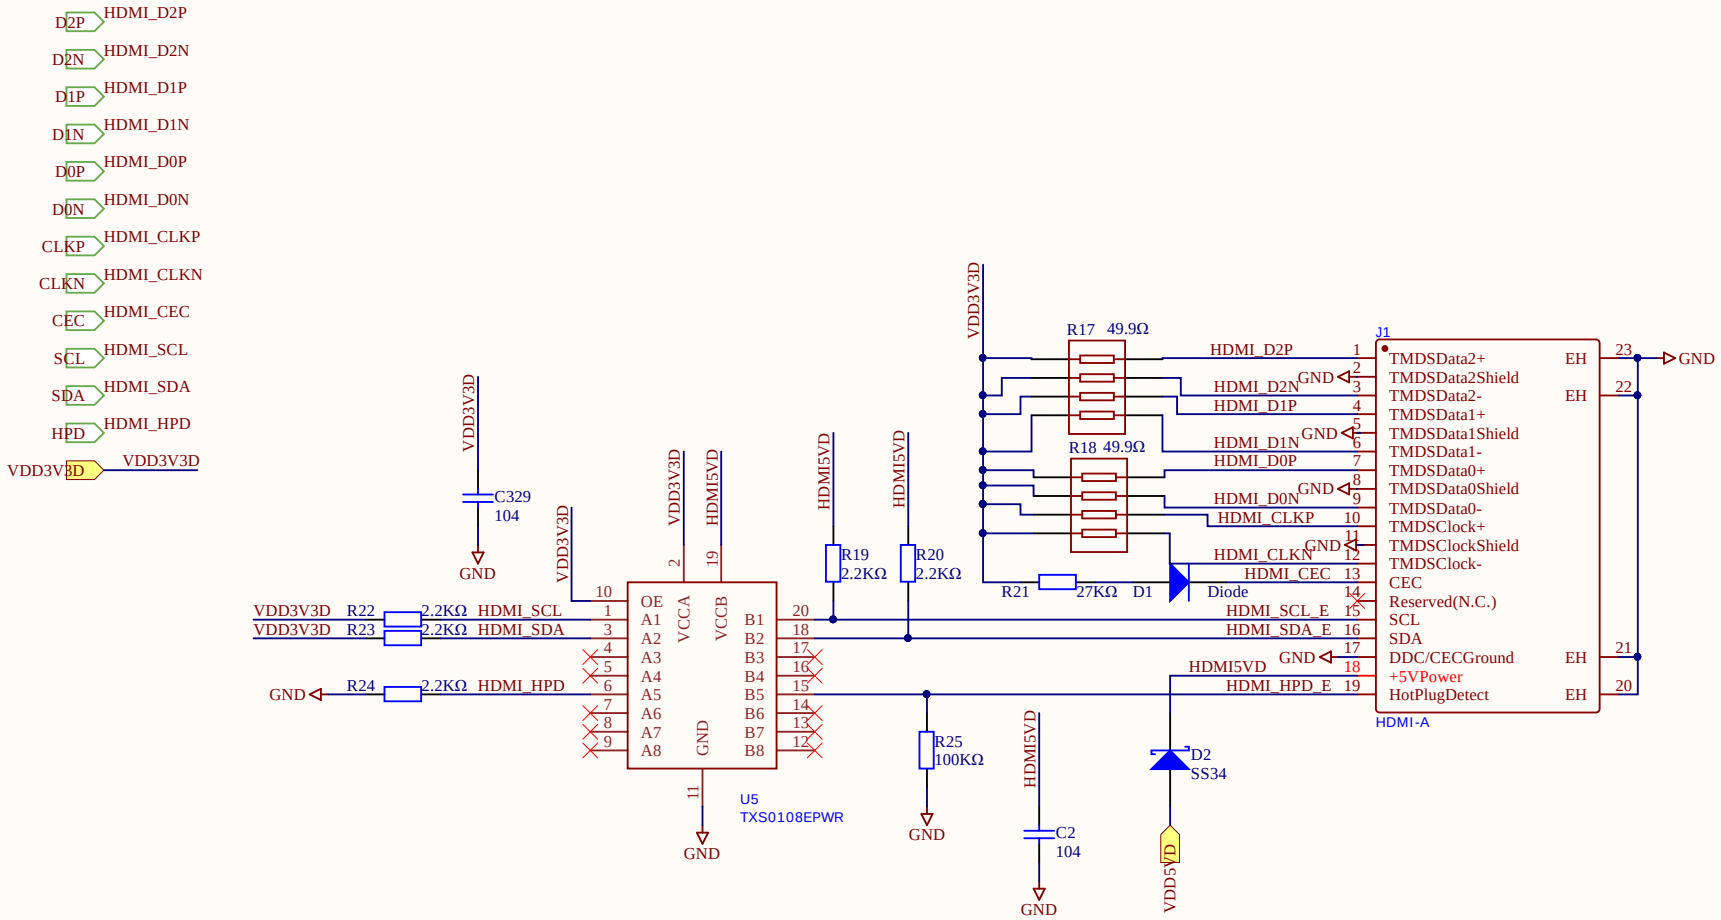


Title	HDMI_TX		
Size	Number		Revision
A4			
Date:	2024/7/9	Sheet	of
File:	E:\ZYNQ\..\hdmi.SchDoc	Drawn By:	

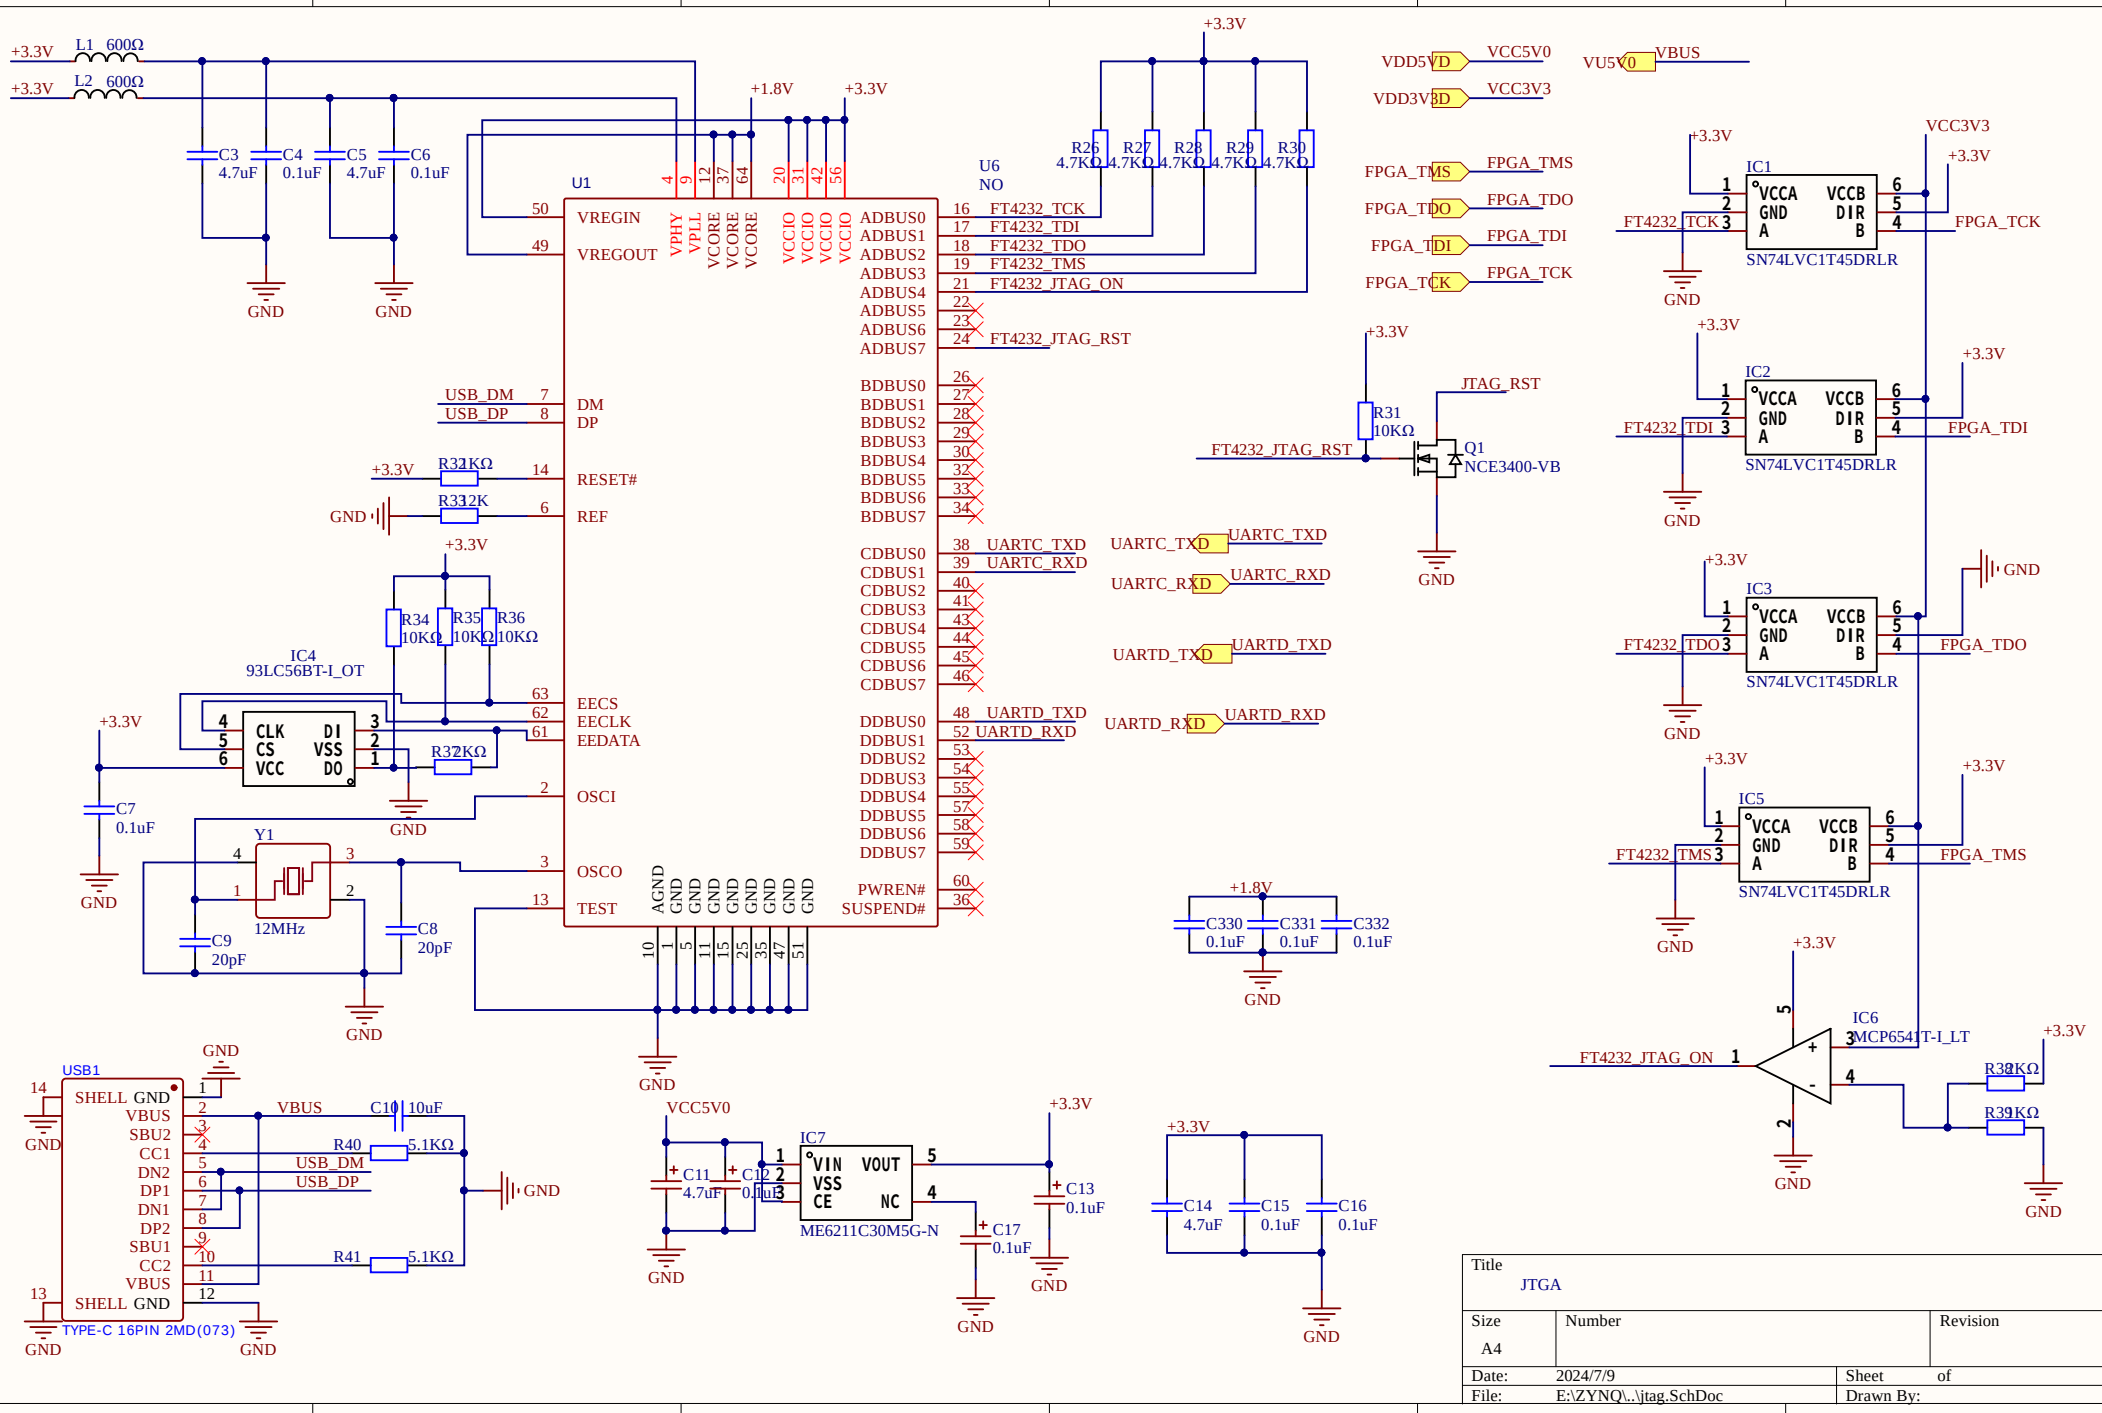

+3.3V
L1 600Ω
L2 600Ω
C3 4.7uF
C4 0.1uF
C5 4.7uF
C6 0.1uF
GND
+1.8V
U1
VREGIN
VREGOUT
VPHY
VPLL
VCORE
VCCIO
R26 4.7KΩ
R27 4.7KΩ
R28 4.7KΩ
R29 4.7KΩ
R30 4.7KΩ
U6
NO
ADBUS0 FT4232_TCK
ADBUS1 FT4232_TDI
ADBUS2 FT4232_TDO
ADBUS3 FT4232_TMS
ADBUS4 FT4232_JTAG_ON
ADBUS7 FT4232_JTAG_RST
USB_DM
USB_DP
DM
DP
RESET#
REF
R32 12K
R33 12K
BDBUS0
BDBUS1
BDBUS2
BDBUS3
BDBUS4
BDBUS5
BDBUS6
BDBUS7
CDBUS0 UARTC_TXD
CDBUS1 UARTC_RXD
CDBUS2
CDBUS3
CDBUS4
CDBUS5
CDBUS6
CDBUS7
DDBUS0 UARTD_TXD
DDBUS1 UARTD_RXD
DDBUS2
DDBUS3
DDBUS4
DDBUS5
DDBUS6
DDBUS7
PWREN#
SUSPEND#
R34 10KΩ
R35 10KΩ
R36 10KΩ
IC4
93LC56BT-I_OT
CLK
CS
VCC
DI
VSS
DO
R37 2KΩ
EECS
EECLK
EEDATA
C7 0.1uF
Y1
12MHz
C9 20pF
C8 20pF
OSCI
OSCO
TEST
AGND
VDD5VD VCC5V0
VDD3V3D VCC3V3
VU5V0 VBUS
FPGA_TMS
FPGA_TDO
FPGA_TDI
FPGA_TCK
R31 10KΩ
JTAG_RST
Q1
NCE3400-VB
UARTC_TXD
UARTC_RXD
UARTD_TXD
UARTD_RXD
IC1
IC2
IC3
IC5
SN74LVC1T45DRLR
VCCA
VCCB
GND
DIR
A
B
FT4232_TCK
FT4232_TDI
FT4232_TDO
FT4232_TMS
FPGA_TCK
FPGA_TDI
FPGA_TDO
FPGA_TMS
C330 0.1uF
C331 0.1uF
C332 0.1uF
IC6
MCP6541T-I_LT
FT4232_JTAG_ON
R38 2KΩ
R39 1KΩ
USB1
TYPE-C 16PIN 2MD(073)
SHELL GND
VBUS
SBU2
CC1
DN2
DP1
DN1
DP2
SBU1
CC2
C10 10uF
R40 5.1KΩ
R41 5.1KΩ
USB_DM
USB_DP
VCC5V0
C11 4.7uF
C12 0.1uF
IC7
VIN
VOUT
VSS
CE
NC
ME6211C30M5G-N
C13 0.1uF
C17 0.1uF
C14 4.7uF
C15 0.1uF
C16 0.1uF
Title
JTGA
Size
A4
Number
Revision
Date: 2024/7/9
File: E:\ZYNQ\..\jtag.SchDoc
Sheet of
Drawn By:

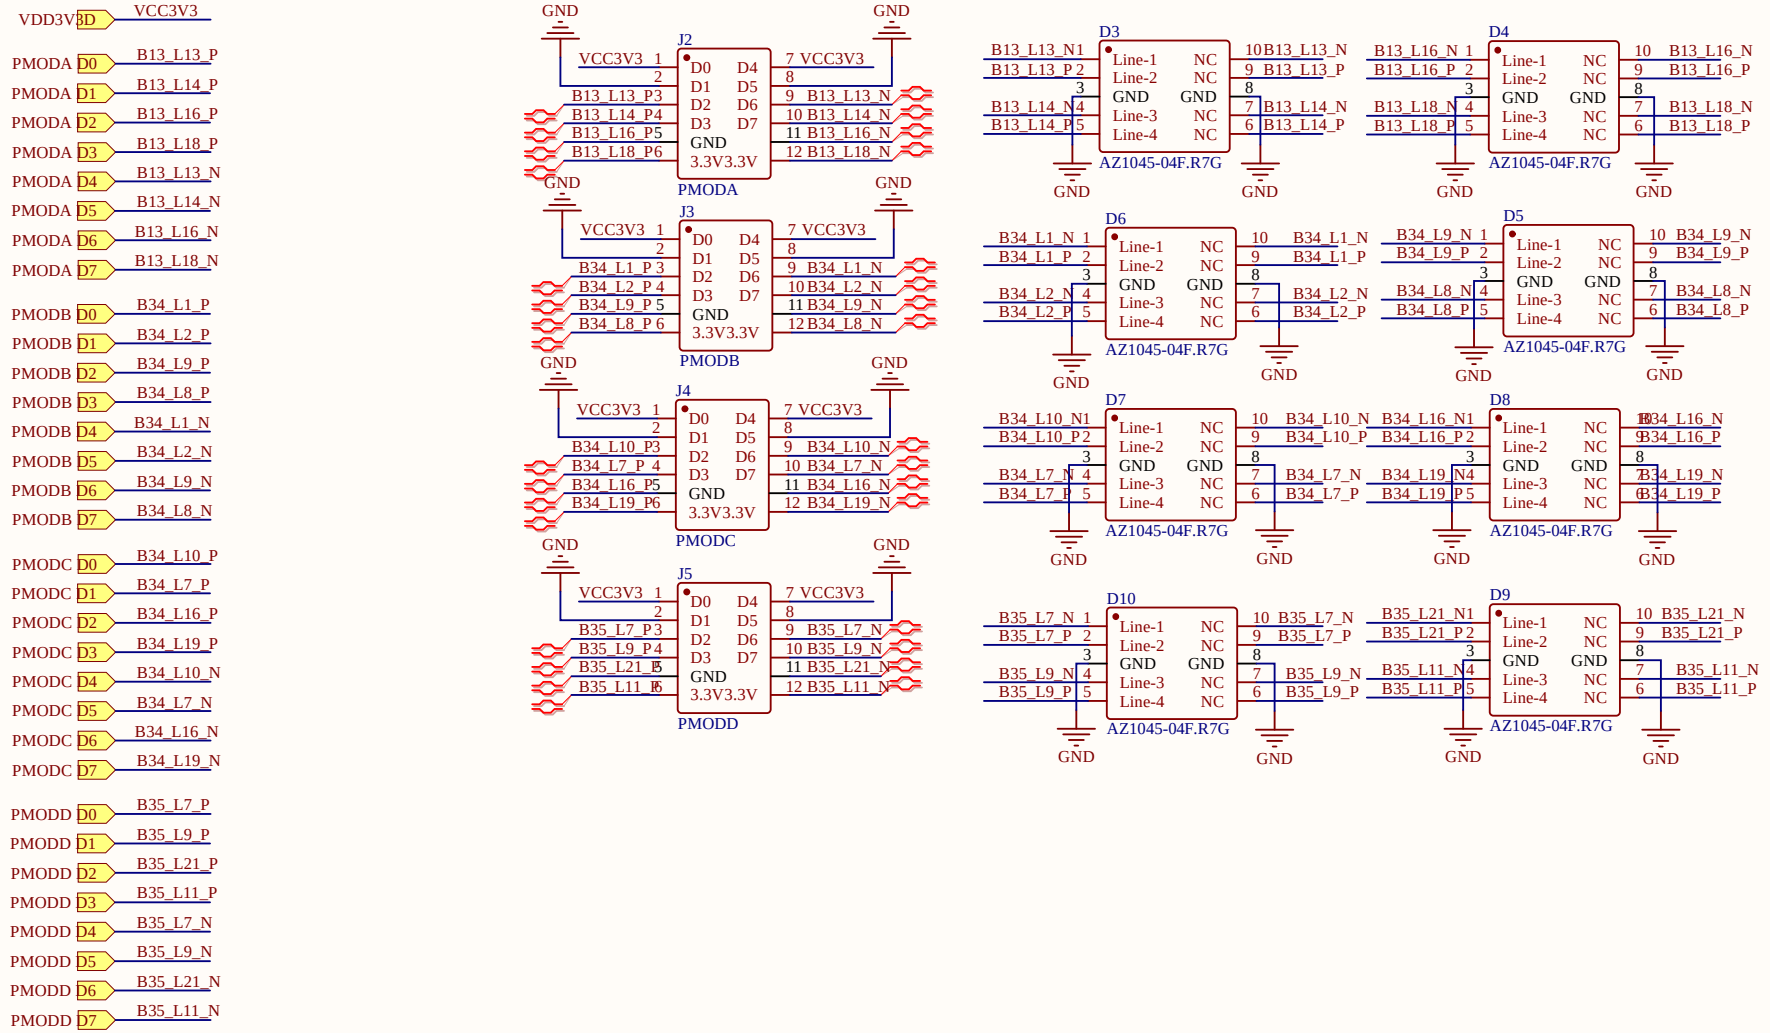
VDD3V3
VCC3V3
PMODA D0 B13_L13_P
PMODA D1 B13_L14_P
PMODA D2 B13_L16_P
PMODA D3 B13_L18_P
PMODA D4 B13_L13_N
PMODA D5 B13_L14_N
PMODA D6 B13_L16_N
PMODA D7 B13_L18_N
PMODB D0 B34_L1_P
PMODB D1 B34_L2_P
PMODB D2 B34_L9_P
PMODB D3 B34_L8_P
PMODB D4 B34_L1_N
PMODB D5 B34_L2_N
PMODB D6 B34_L9_N
PMODB D7 B34_L8_N
PMODC D0 B34_L10_P
PMODC D1 B34_L7_P
PMODC D2 B34_L16_P
PMODC D3 B34_L19_P
PMODC D4 B34_L10_N
PMODC D5 B34_L7_N
PMODC D6 B34_L16_N
PMODC D7 B34_L19_N
PMODD D0 B35_L7_P
PMODD D1 B35_L9_P
PMODD D2 B35_L21_P
PMODD D3 B35_L11_P
PMODD D4 B35_L7_N
PMODD D5 B35_L9_N
PMODD D6 B35_L21_N
PMODD D7 B35_L11_N
J2
PMODA
J3
PMODB
J4
PMODC
J5
PMODD
GND
VCC3V3
3.3V
D3
D4
D5
D6
D7
D8
D9
D10
AZ1045-04F.R7G
Line-1
Line-2
Line-3
Line-4
NC
Title
PMOD
Size
A4
Number
Revision
Date: 2024/7/9
Sheet of
File: E:\ZYNQ\..\pmod.SchDoc
Drawn By:

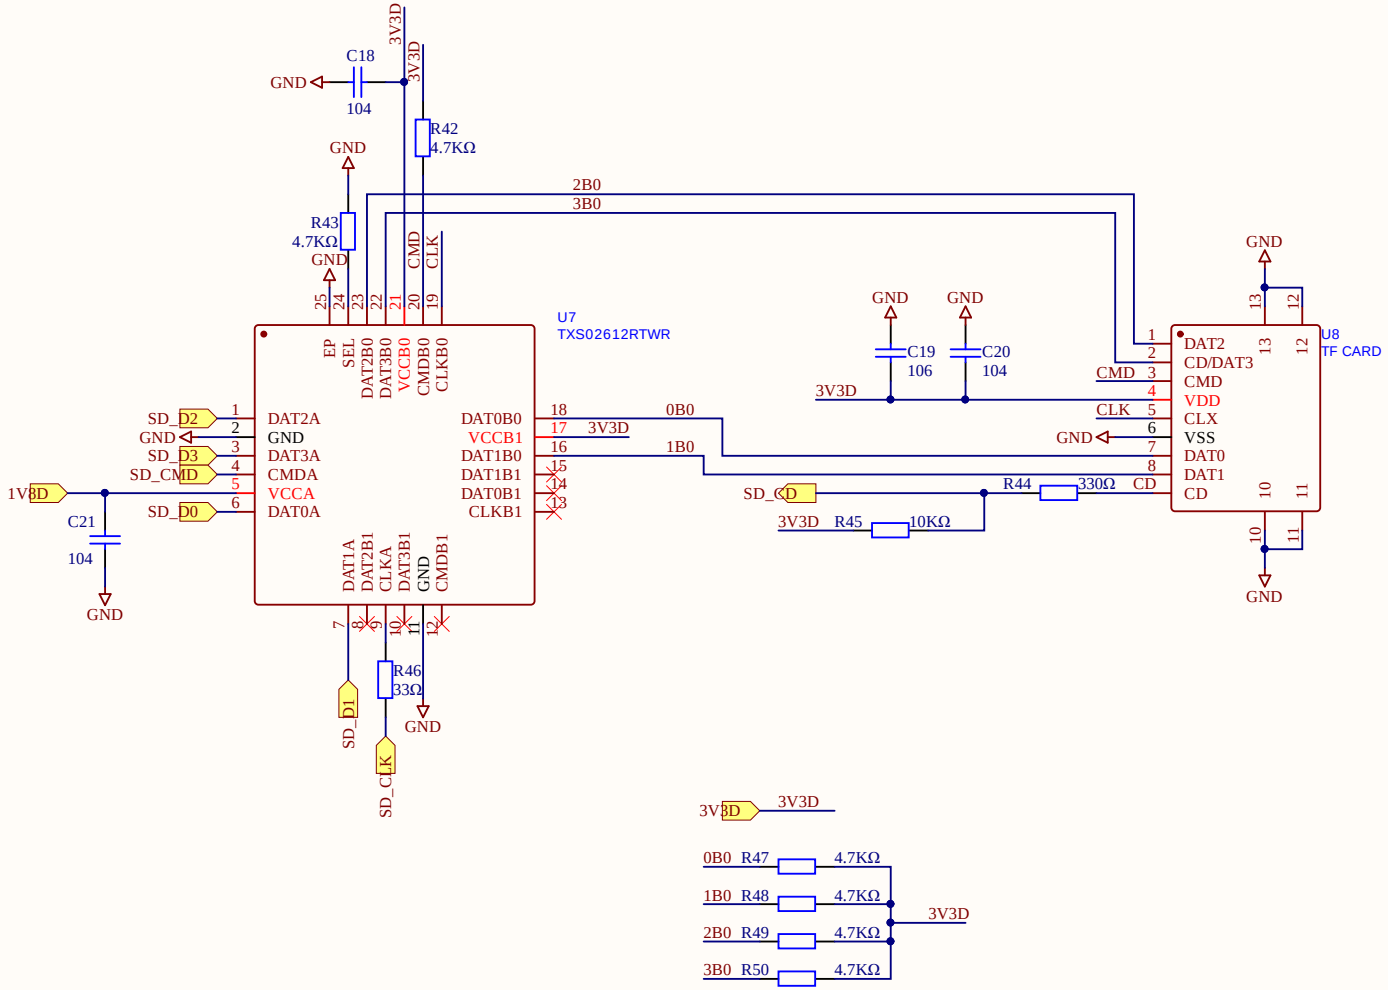


Title	sd_card	
Size: A4	Number	Revision
Date: 2024/7/9		Sheet of
File: E:\ZYNQ\..\sd.SchDoc		Drawn By:

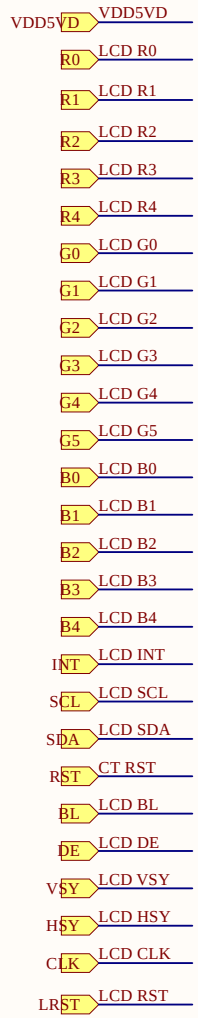


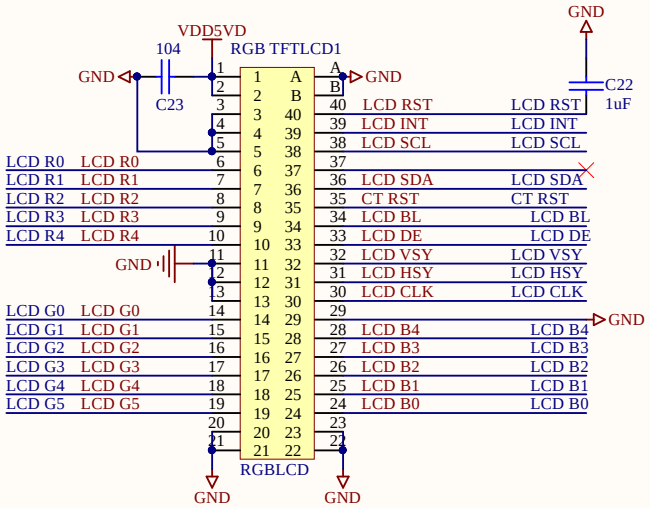


Title	TFT_LCD	
Size: A4	Number:	Revision:
Date: 2024/7/9		Sheet of
File: E:\ZYNQ\..\TFT.SchDoc		Drawn By:

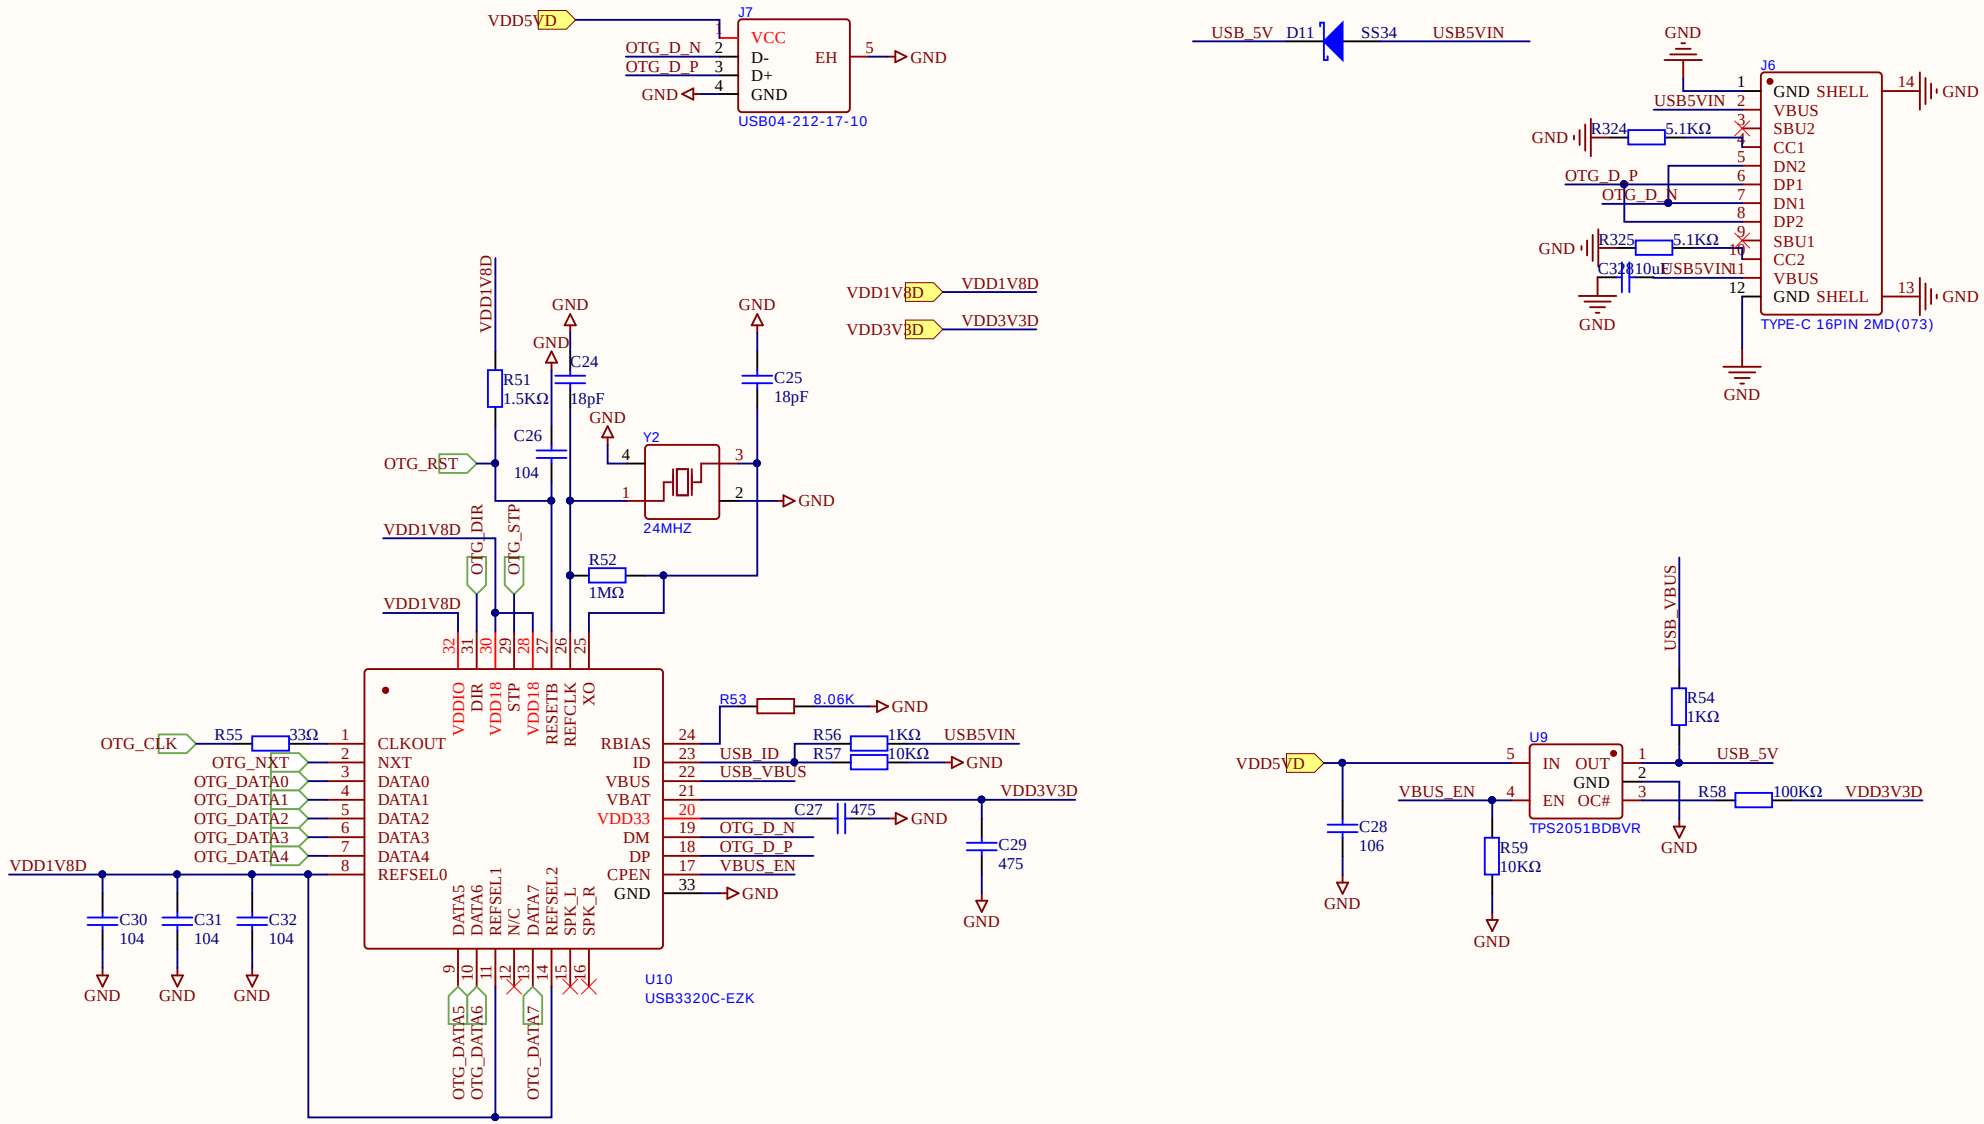


Title	host_usb/slave_usb	
Size: A4	Number	Revision
Date: 2024/7/9		Sheet of
File: E:\ZYNQ\..\usb.SchDoc		Drawn By:

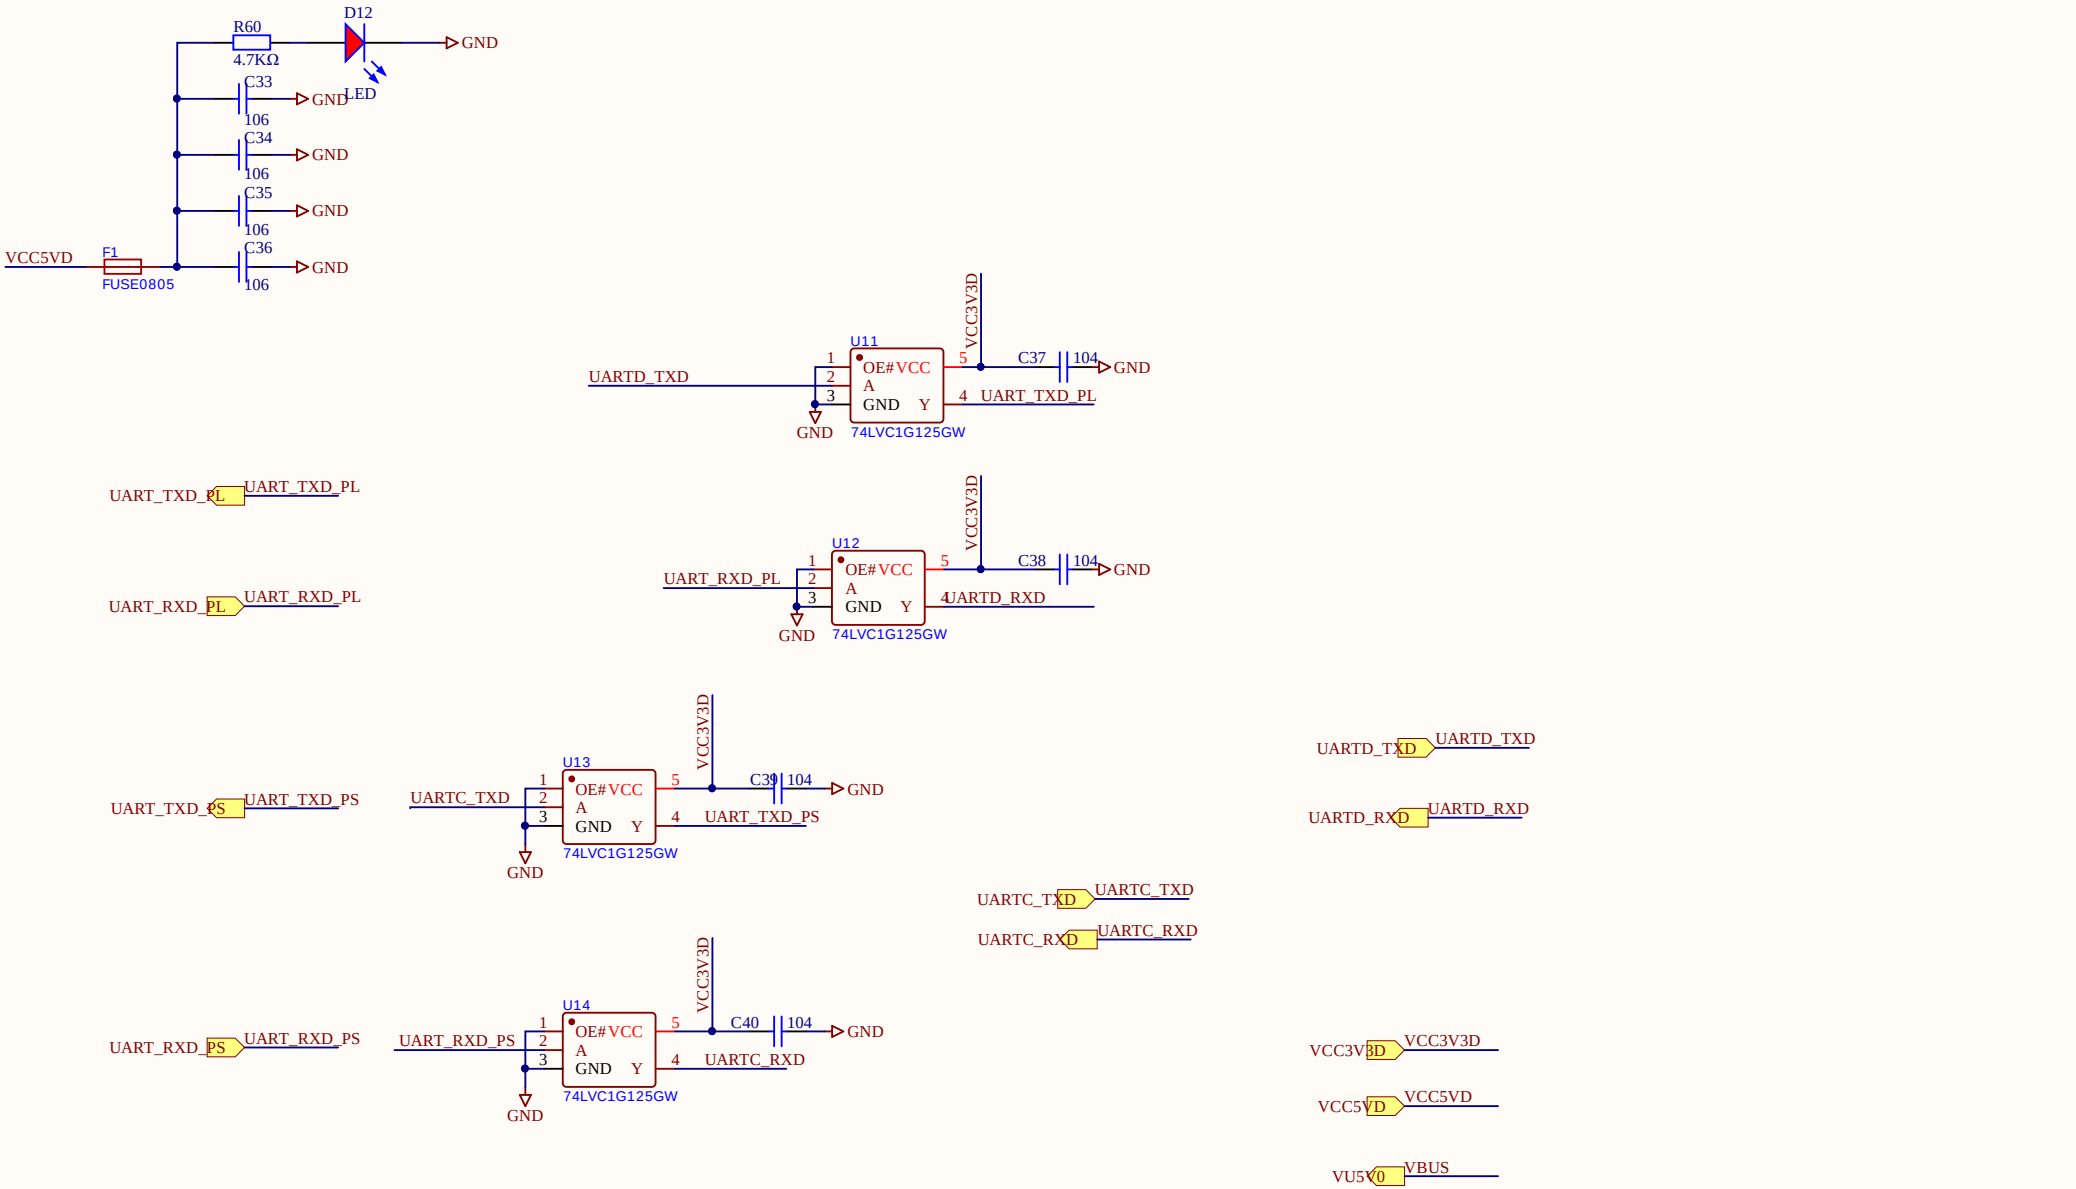


Title	usb_to_uart	
Size: A4	Number	Revision
Date: 2024/7/9		Sheet of
File: E:\ZYNQ\..\usb_to_uart.SchDoc		Drawn By:

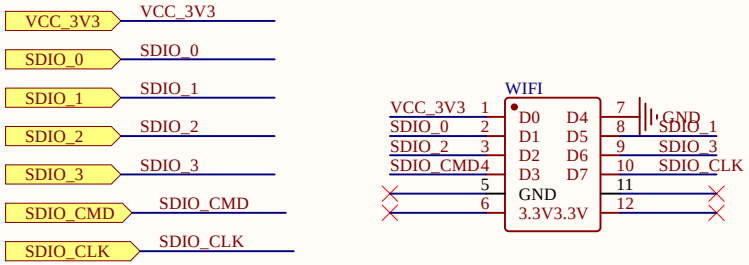



Title		
Size: A4	Number	Revision
Date: 2024/7/9		Sheet of
File: E:\ZYNQ\..\wifi.SchDoc		Drawn By:

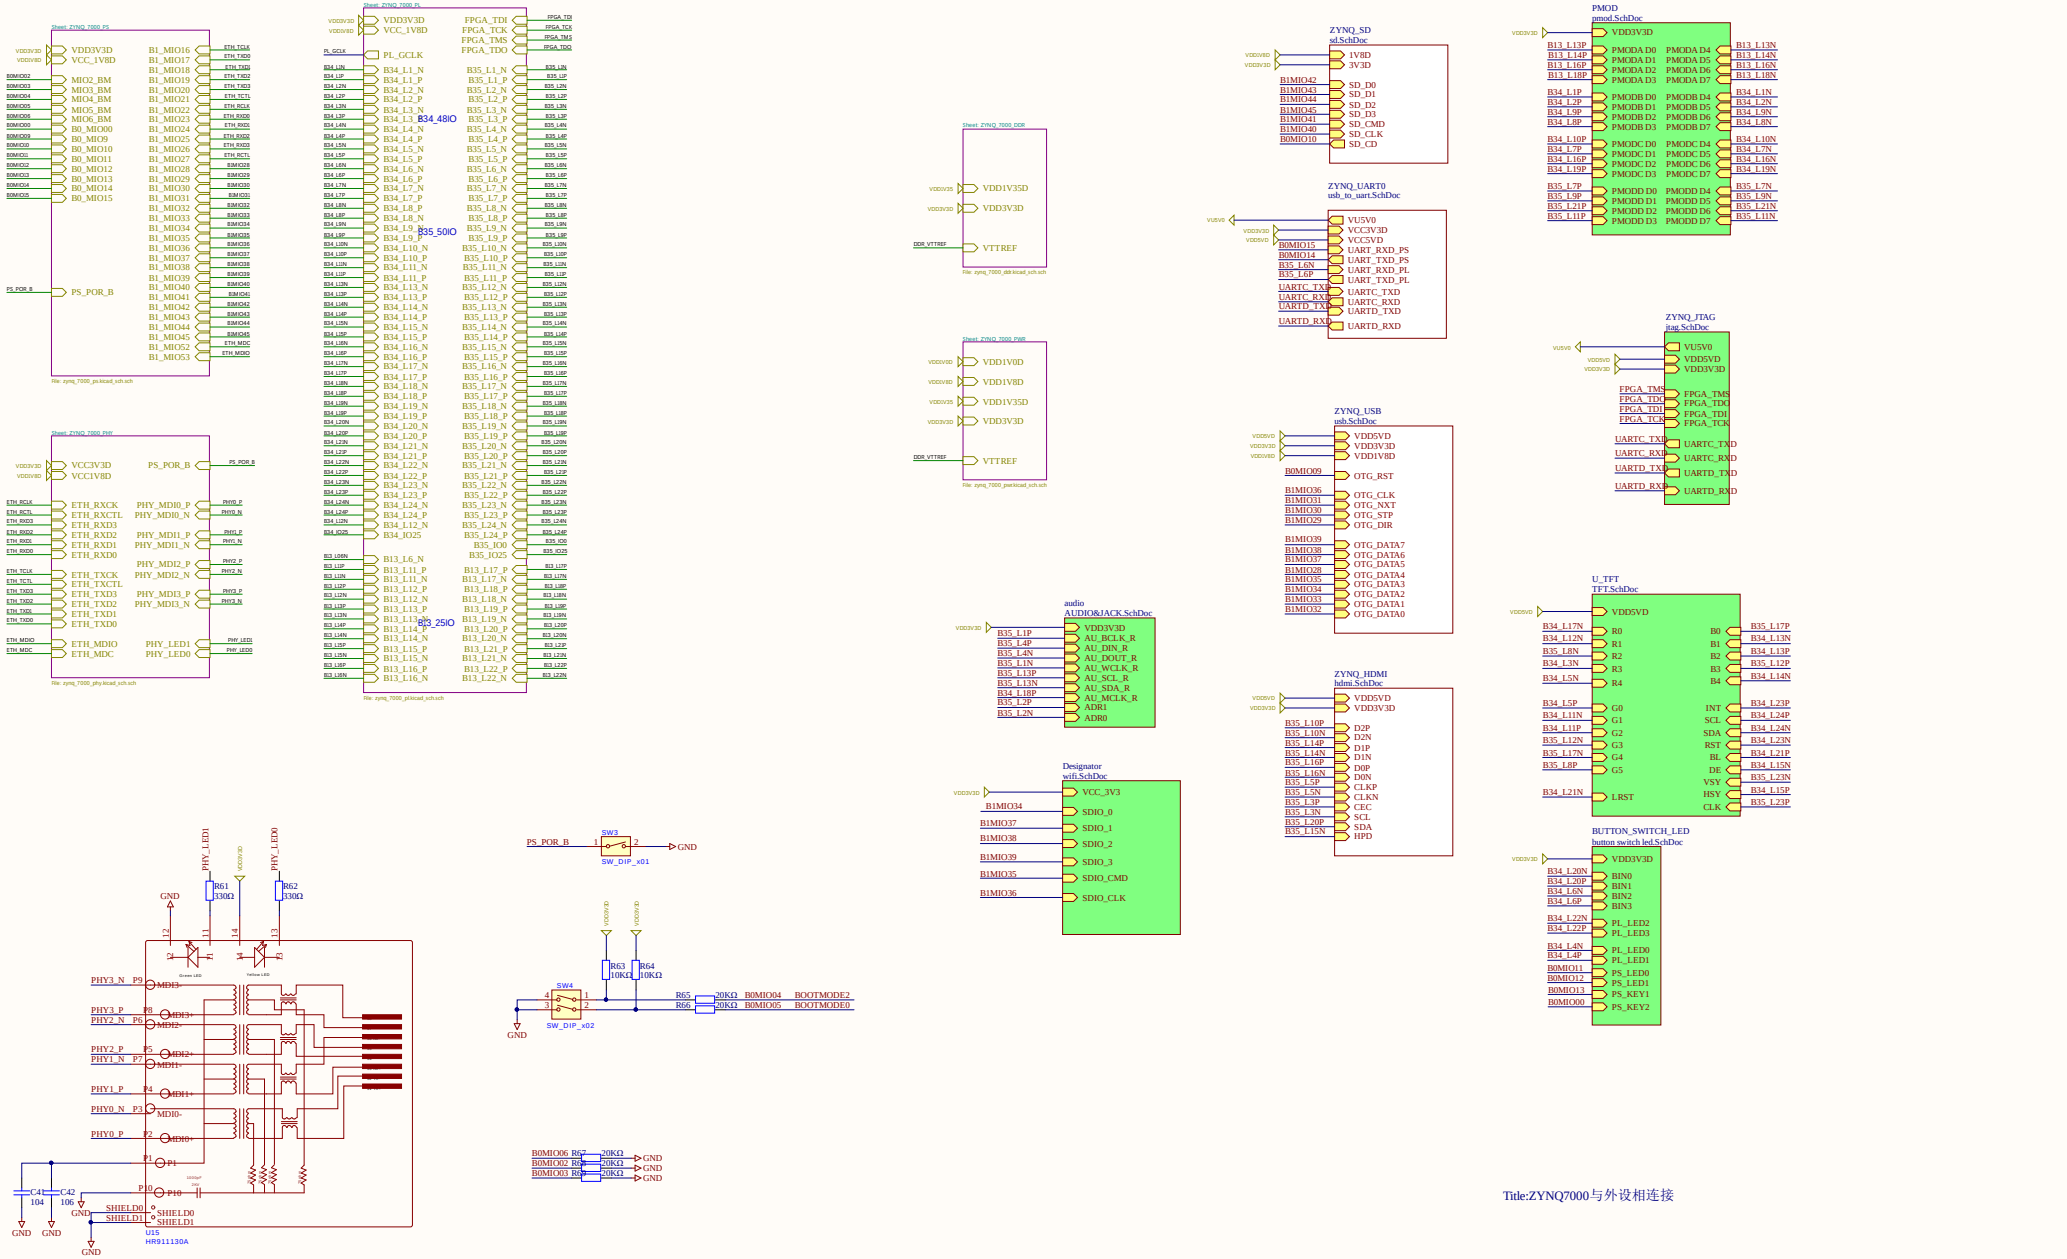

Title:ZYNQ7000与外设相连接

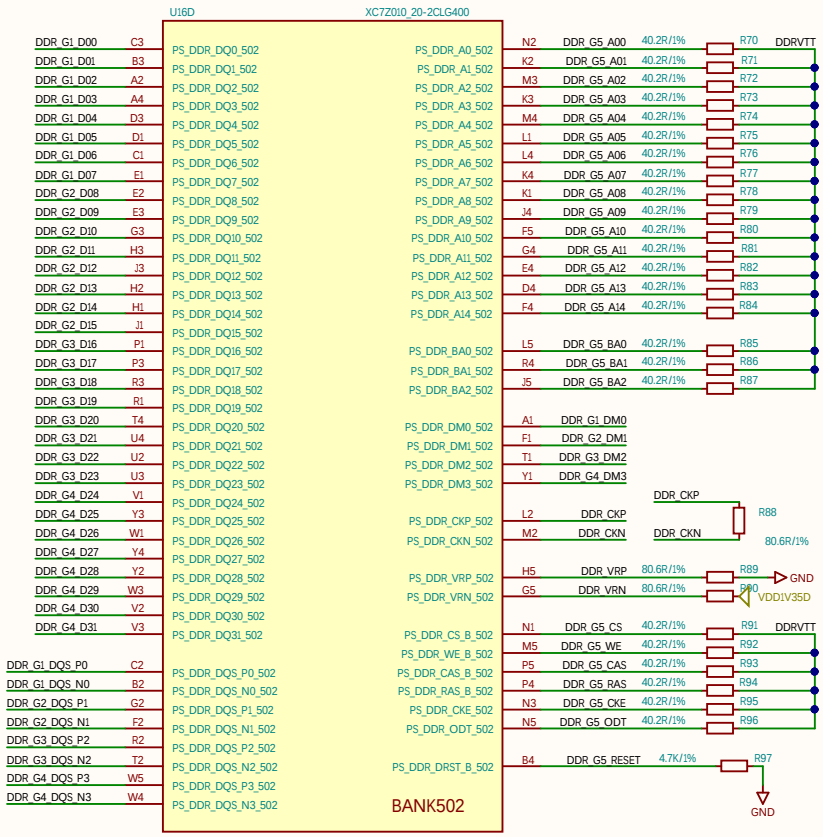


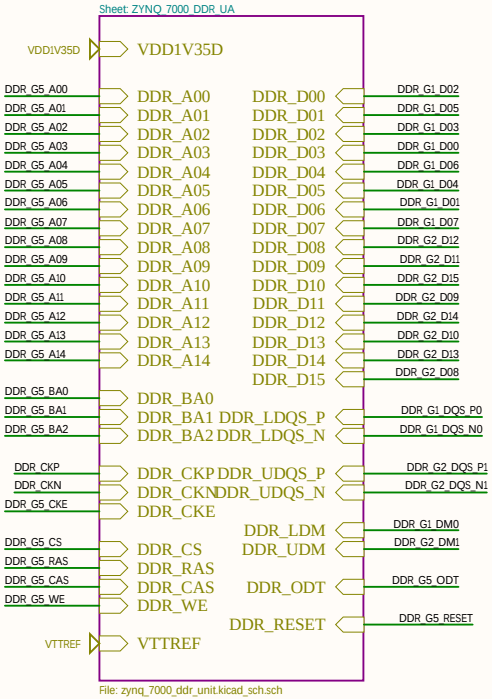

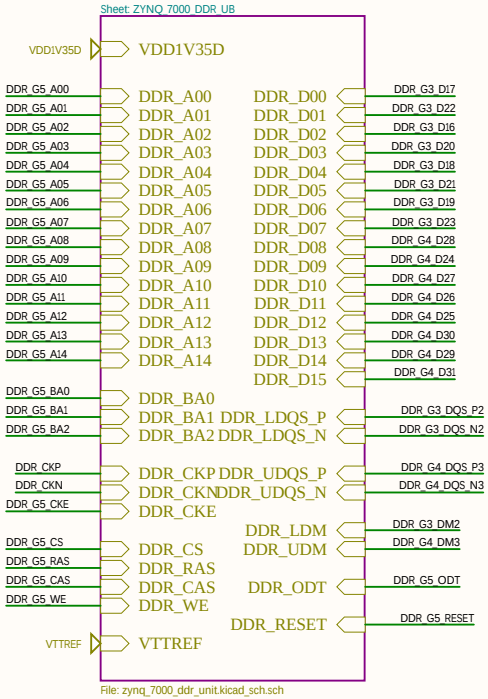

fly-by scheduling

GROUP6：Clock CLKP、CLKN

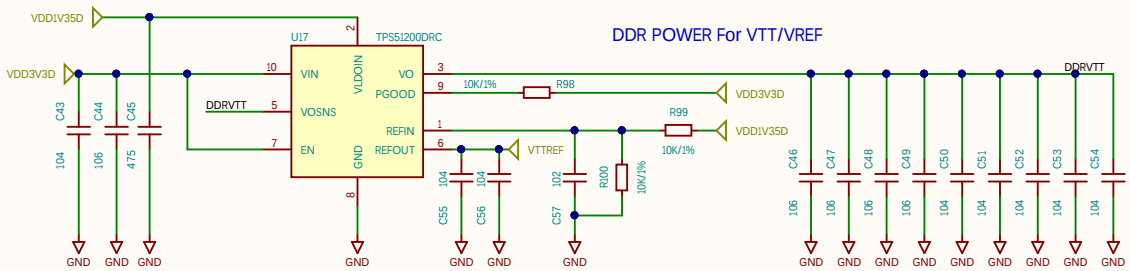

GROUP1：LANE0
DQ0-DQ7、DQM0、DQS0P/DQS0N；

GROUP2：LANE1
DQ8-DQ15、DQM1、DQS1P/DQS1N；

GROUP3：LANE2
DQ16-DQ23、DQM2、DQS2P/DQS2N；


GROUP4：LANE3
DQ24-DQ31、DQM3、DQS3P/DQS3N；

GROUP5：ADDR、CONTROL
ADDR0-ADDR14
CLKE、WE、CAS、RAS、CS、ODT、RST、BA0-2；

Sheet: /
File: zynq_7000_ddr.kicad_sch

Title: ZYNQ_DDR


Size: A4	Date:	Rev:
KiCad E.D.A. kicad (5.1.4)-1		Id: 1/1

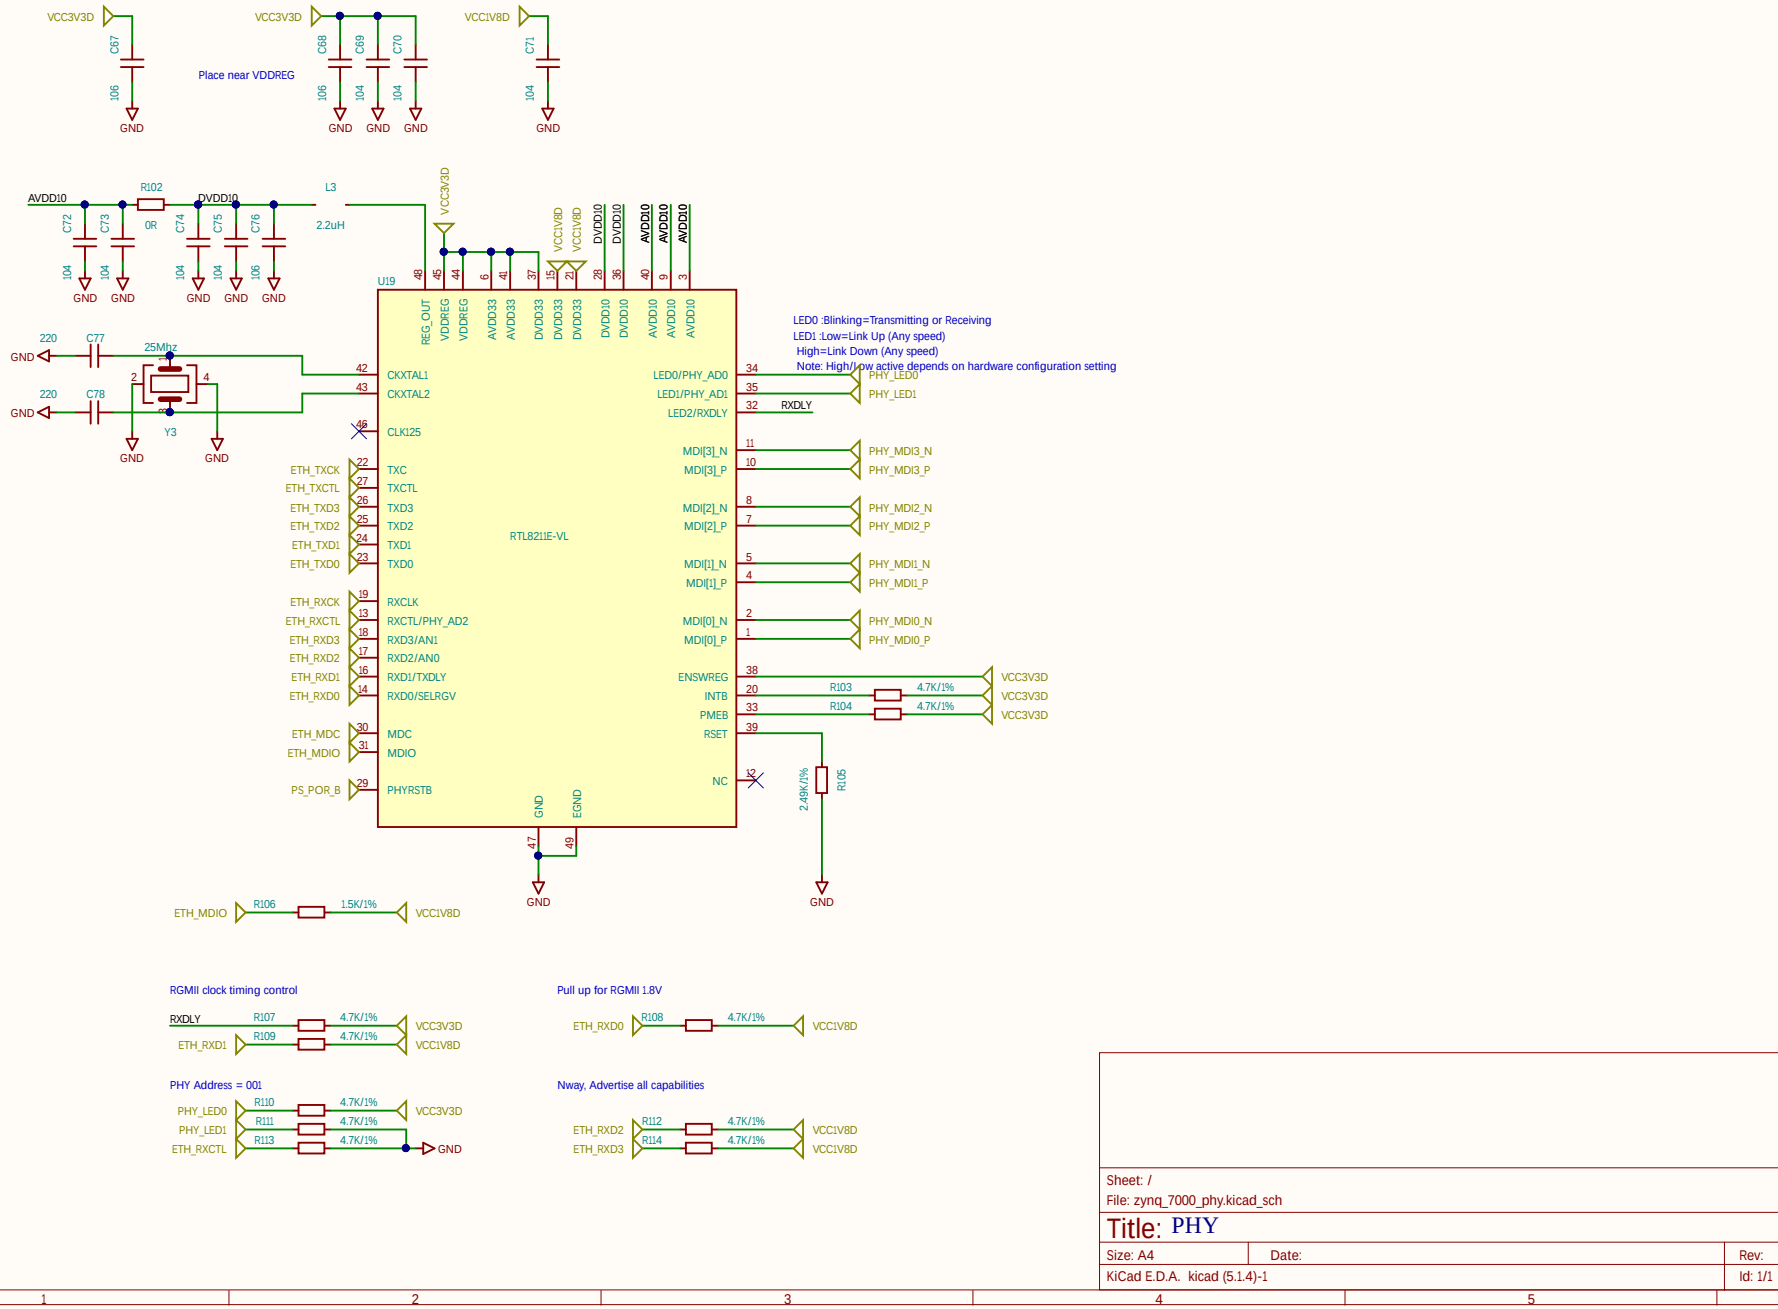


Sheet: /
File: zynq_7000_phy.kicad_sch

Title: PHY


Size: A4	Date:	Rev:
KiCad E.D.A. kicad (5.1.4)-1		Id: 1/1

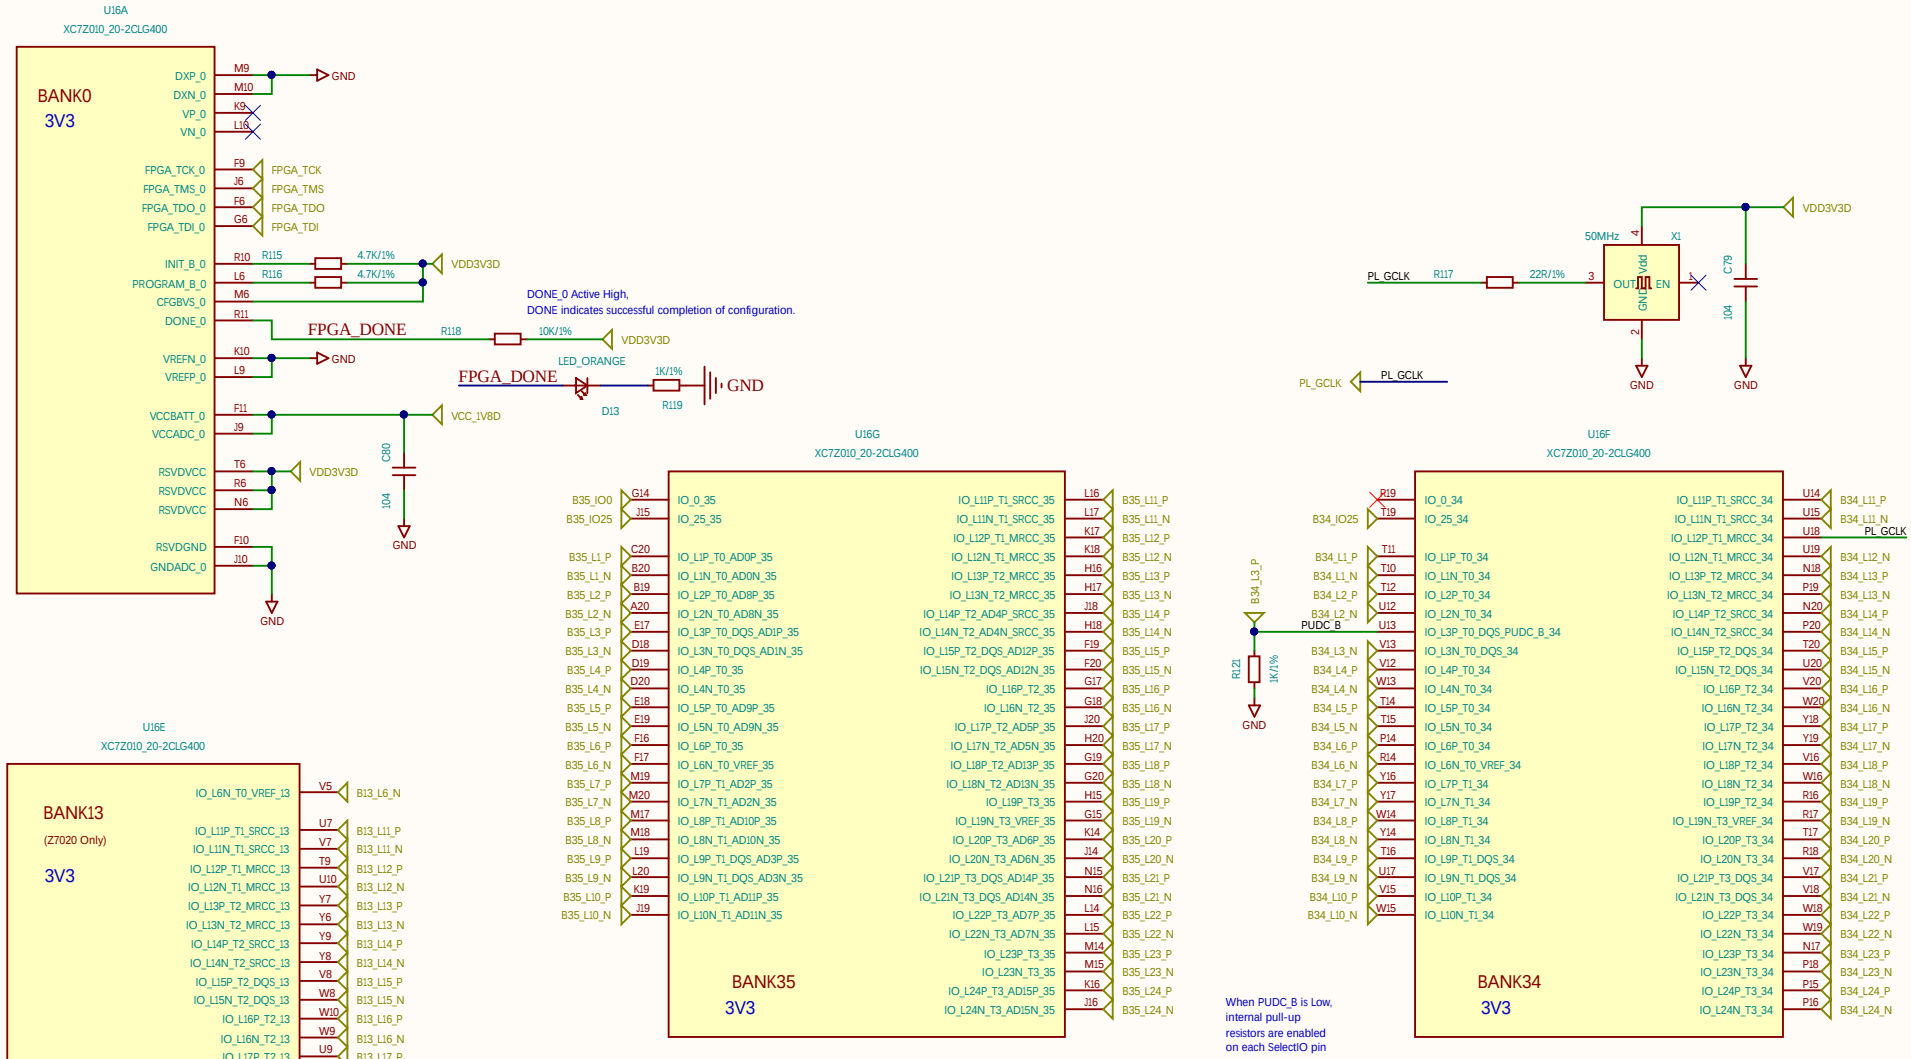

Sheet: /		
File: zynq_7000_pl.kicad_sch		
Title: ZYNQ_PL		
Size: A4	Date:	Rev:
KiCad E.D.A. kicad (5.1.4)-1		Id: 1/1

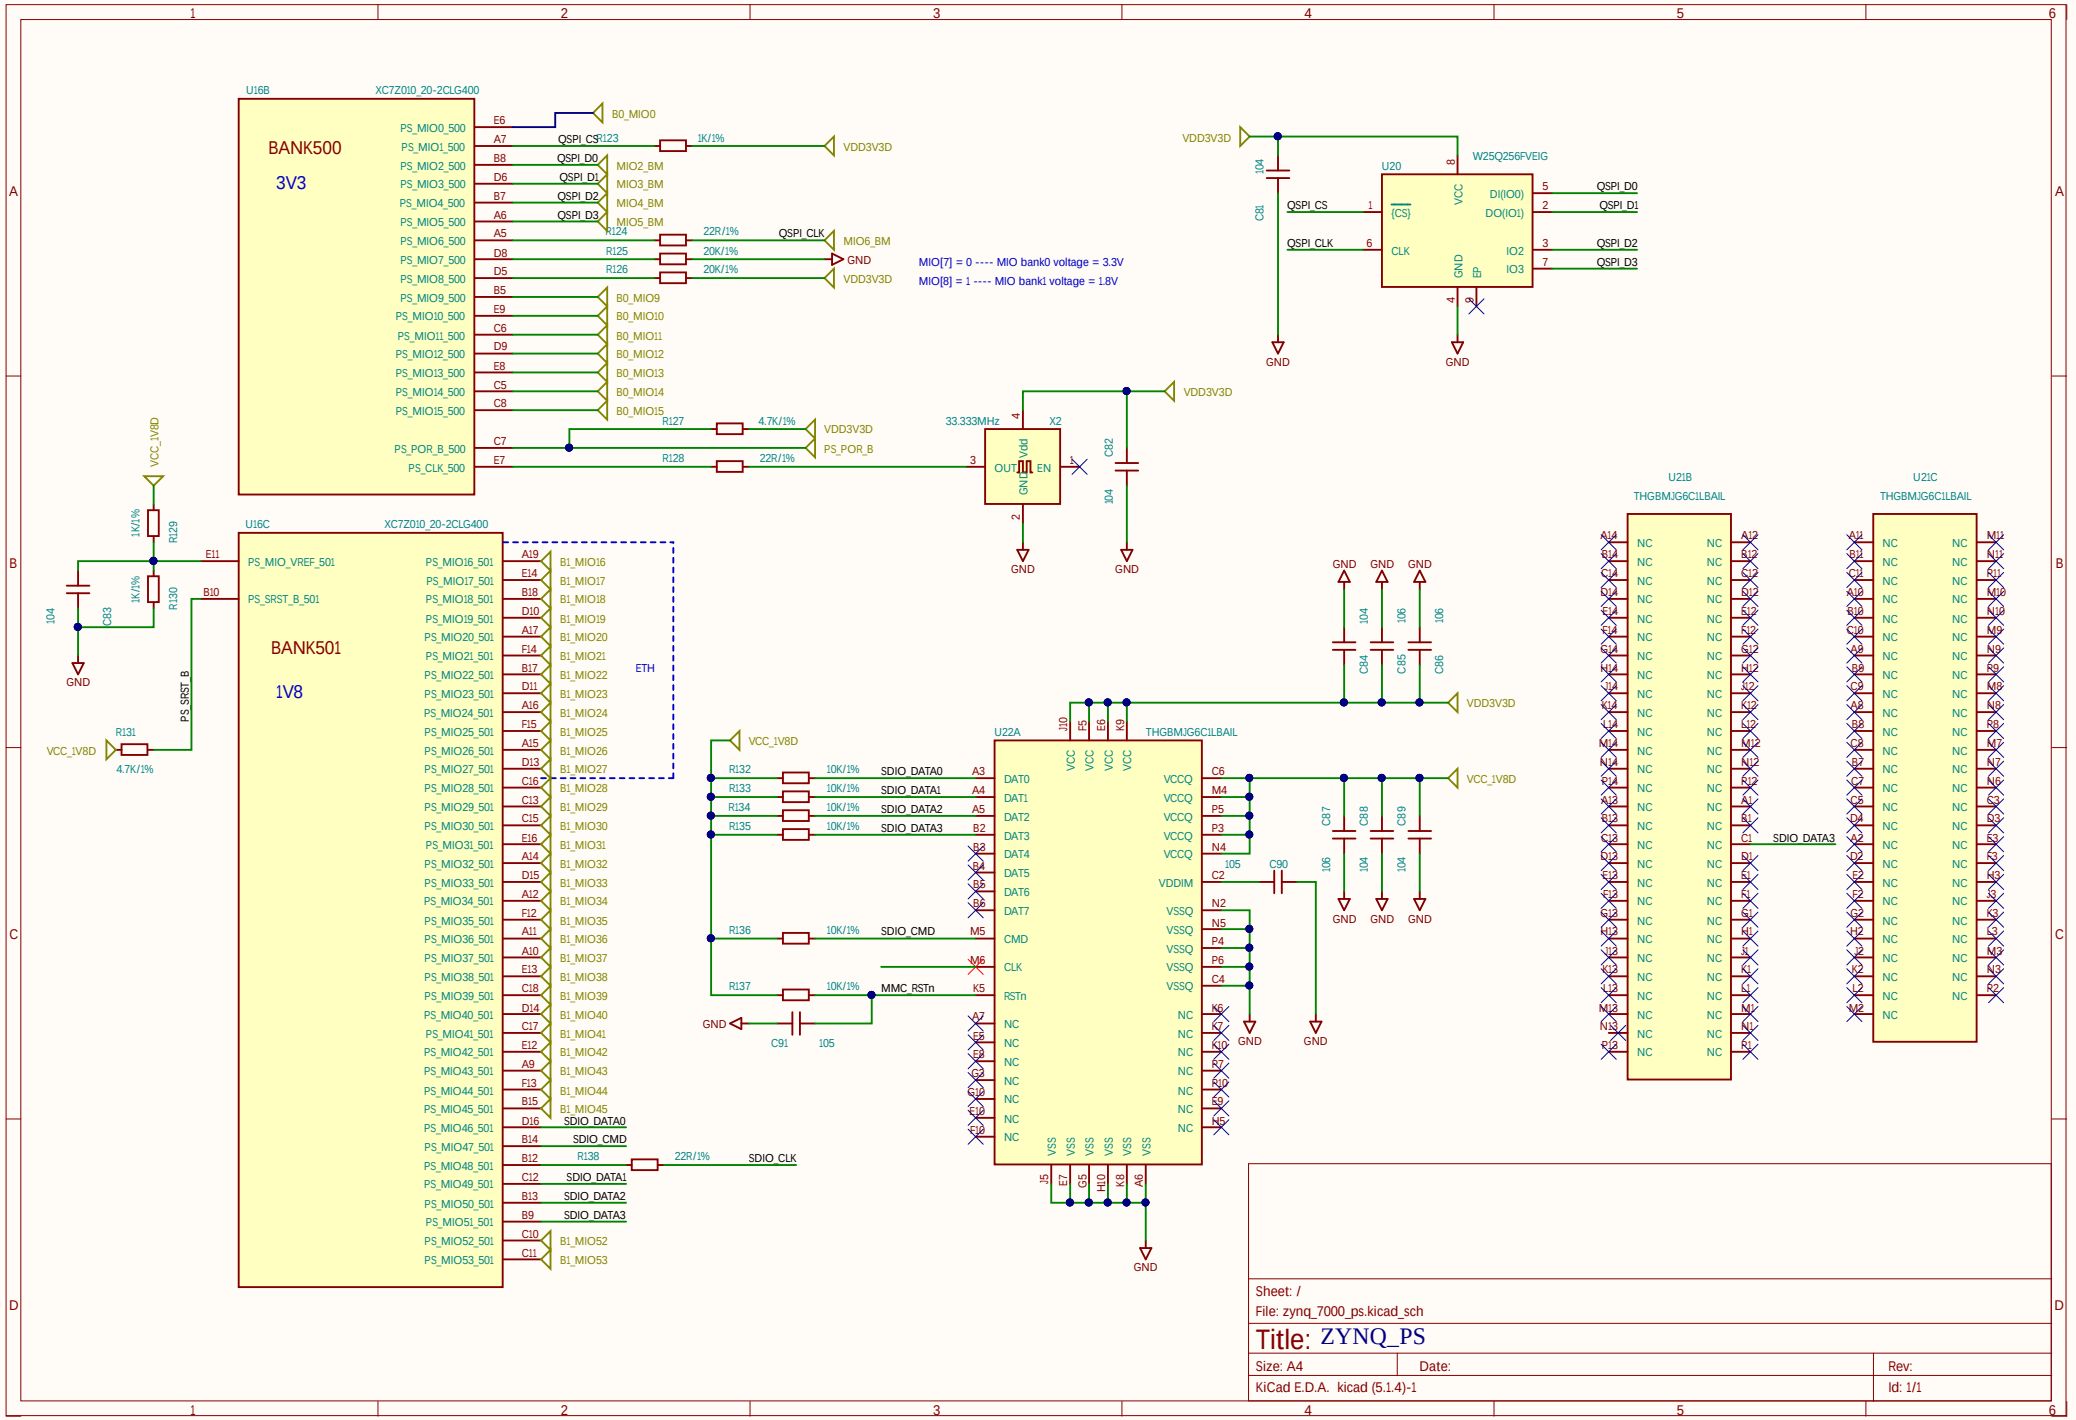


Sheet: /		
File: zynq_7000_ps.kicad_sch		
Title: ZYNQ_PS		
Size: A4	Date:	Rev:
KiCad E.D.A. kicad (5.1.4)-1		Id: 1/1

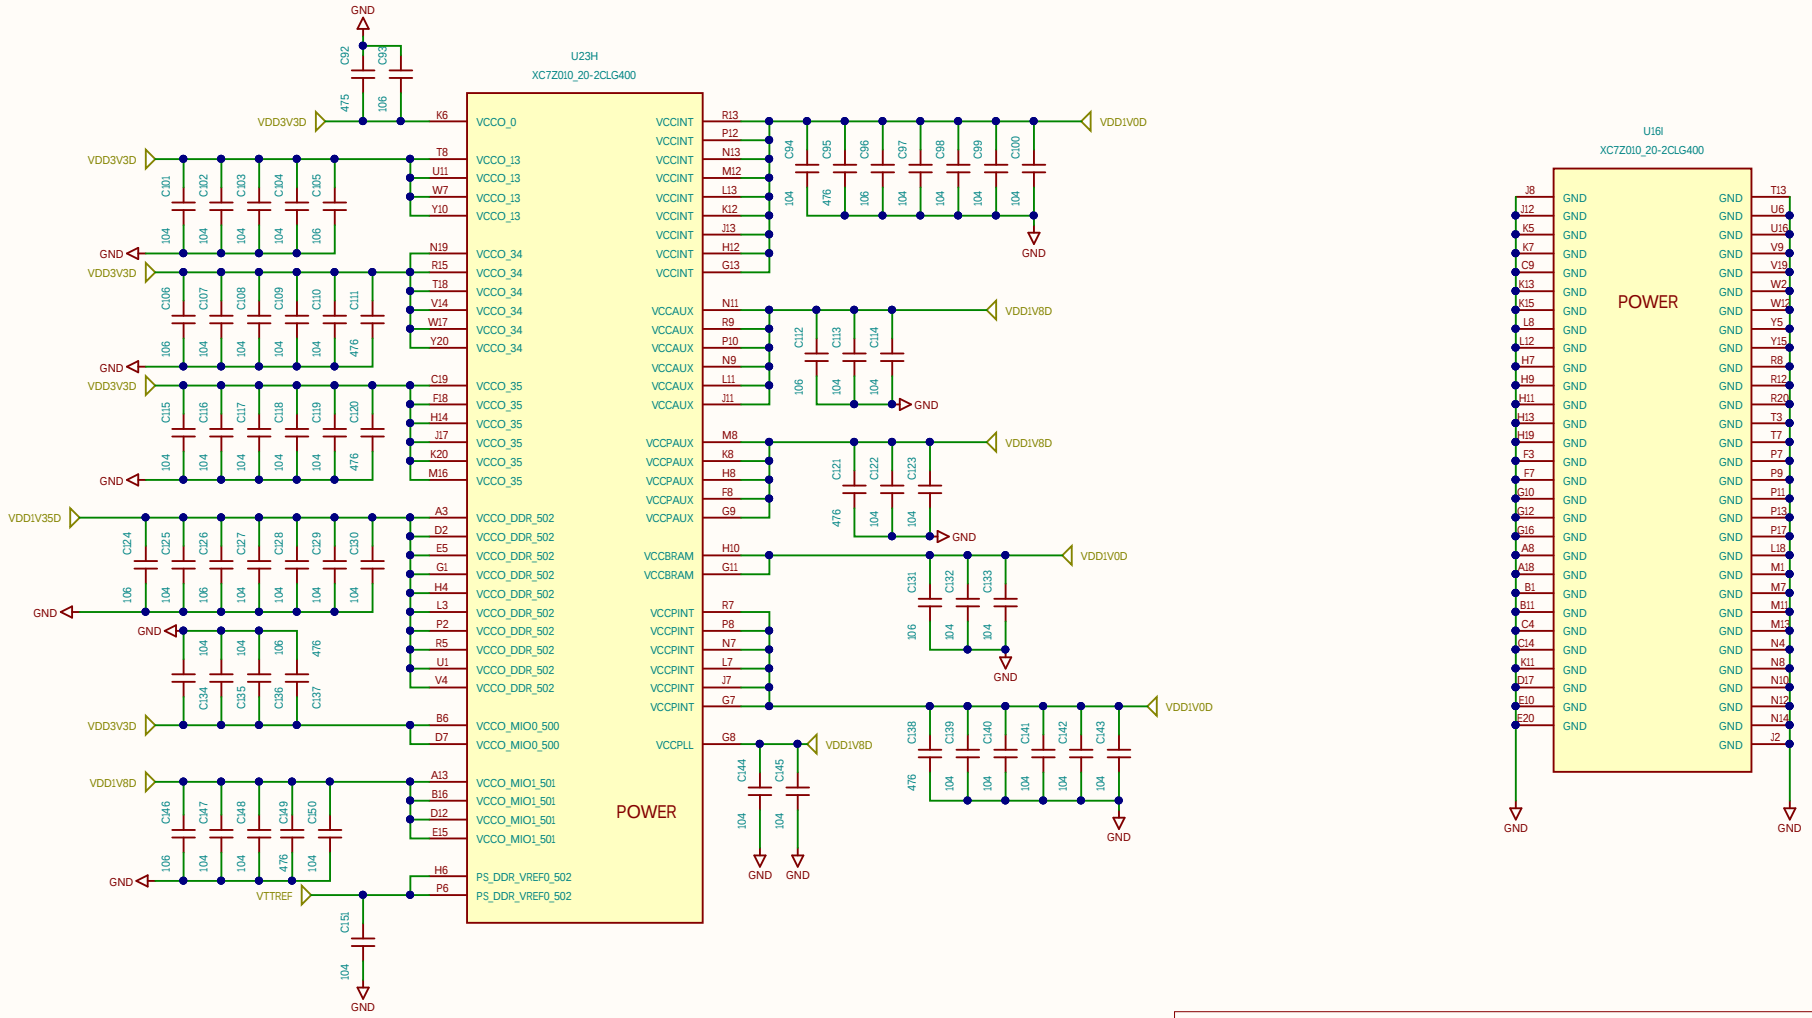



Sheet: /		
File: zynq_7000_pwr.kicad_sch		
Title: ZYNQ_power		
Size: A4	Date:	Rev:
KiCad E.D.A. kicad (5.1.4)-1		Id: 1/1


TLV62130RGT EN High Level Input Threshold Voltage=0.9V


((R1/R2)+1)*0.8V=VOUT

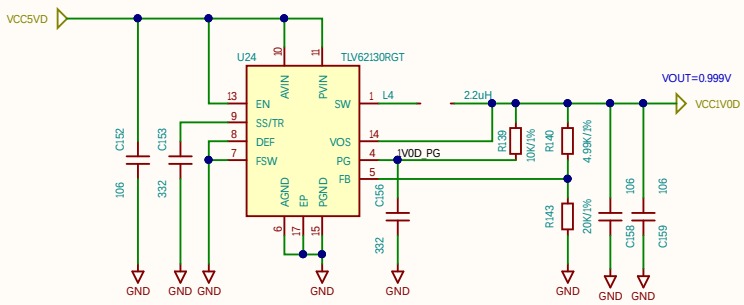


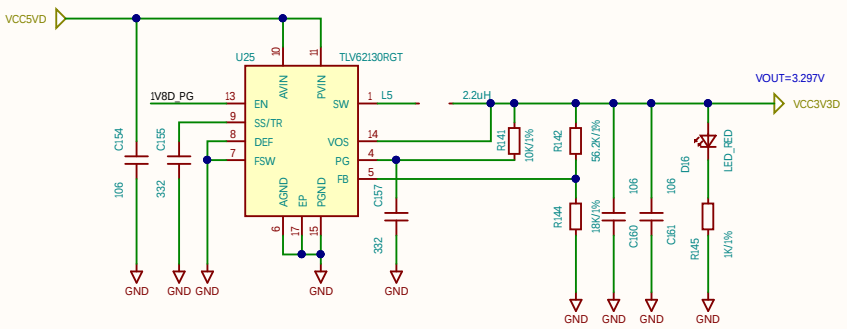

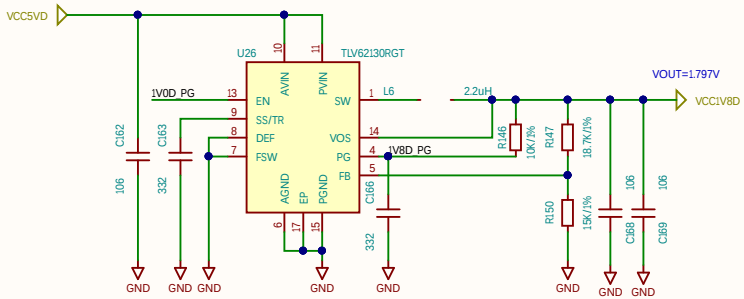

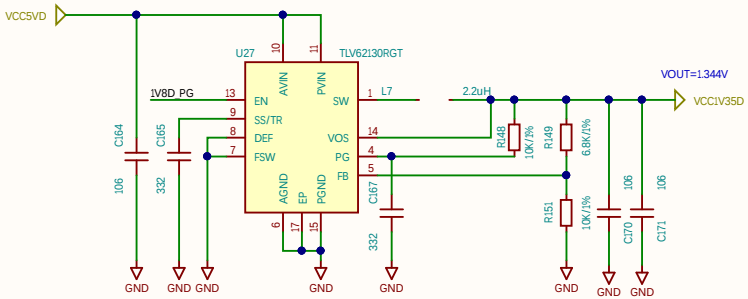




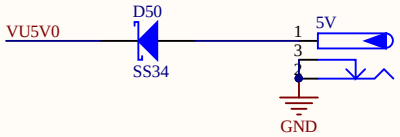





1.0V>1.8V>1.35V&3V3V

Sheet: /		
File: zynq_power.kicad_sch		
Title: PMIC		
Size: A4	Date:	Rev:
KiCad E.D.A. kicad (5.1.4)-1		Id: 1/1

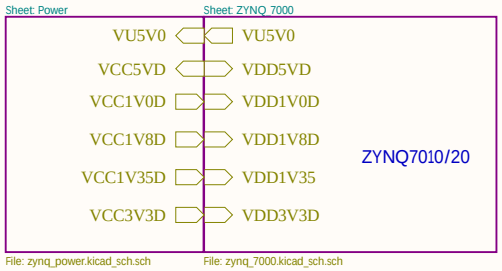

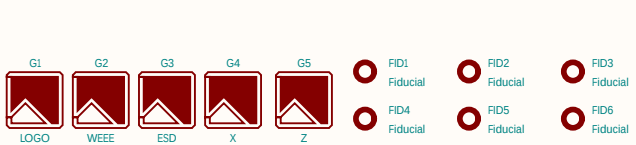





ZYNQ 7010/20

Sheet: /
File: ZYNQ7000_10_20_core.kicad_sch

Title:

Size: A4	Date:	Rev:
KiCad E.D.A. kicad (5.1.4)-1		Id: 1/1

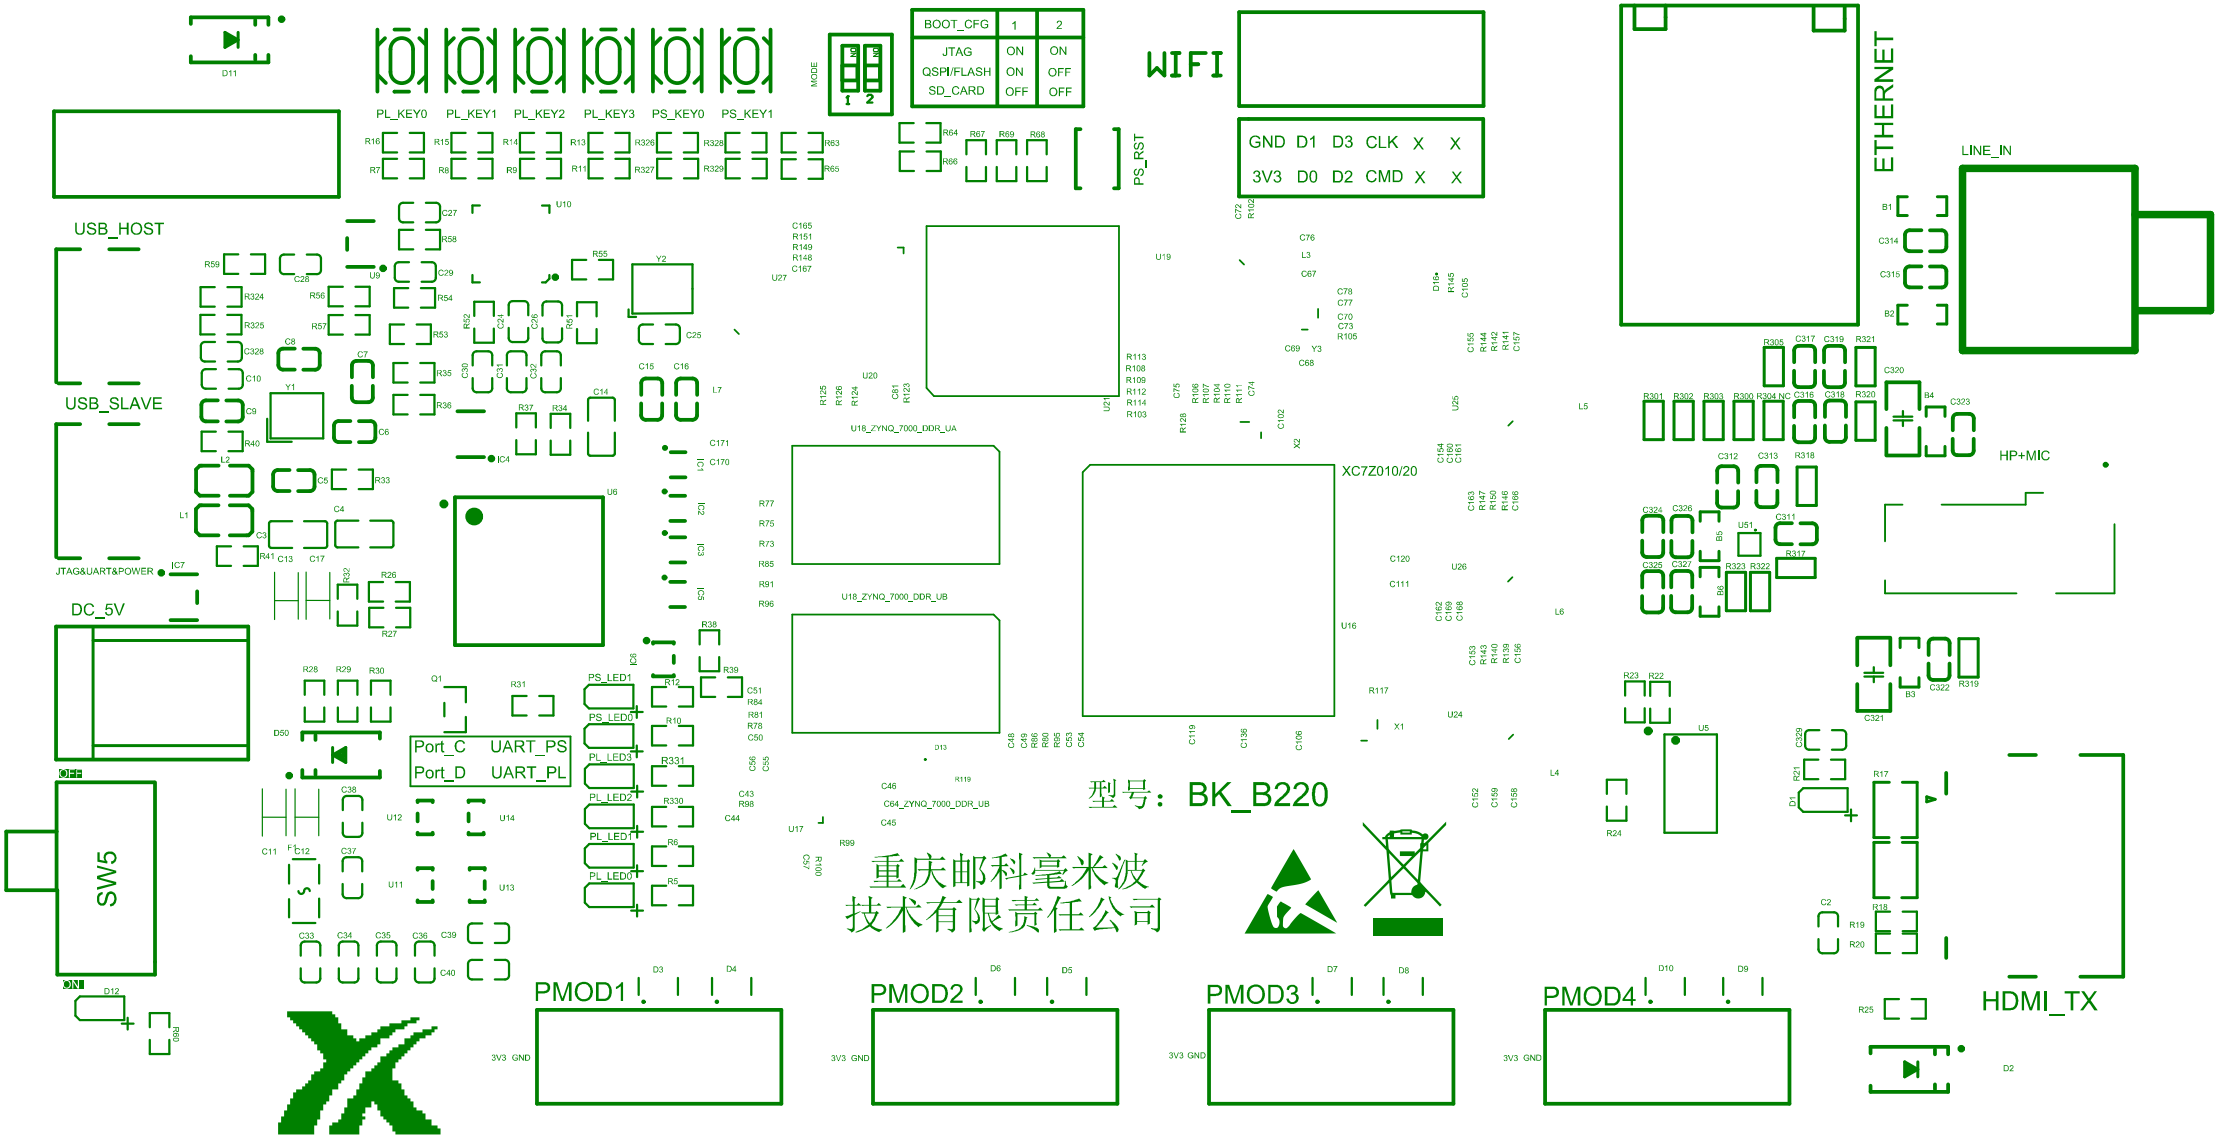
BOOT_CFG 1 2
JTAG ON ON
QSPI/FLASH ON OFF
SD_CARD OFF OFF
WIFI
GND D1 D3 CLK X X
3V3 D0 D2 CMD X X
ETHERNET
LINE_IN
HP+MIC
HDMI_TX
USB_HOST
USB_SLAVE
JTAG&UART&POWER
DC_5V
SW5
PL_KEY0 PL_KEY1 PL_KEY2 PL_KEY3 PS_KEY0 PS_KEY1
PS_RST
XC7Z010/20
U18_ZYNQ_7000_DDR_UA
U18_ZYNQ_7000_DDR_UB
C64_ZYNQ_7000_DDR_UB
Port_C UART_PS
Port_D UART_PL
PS_LED1 PS_LED0 PL_LED3 PL_LED2 PL_LED1 PL_LED0
PMOD1 PMOD2 PMOD3 PMOD4
3V3 GND
型号：BK_B220
重庆邮科毫米波
技术有限责任公司

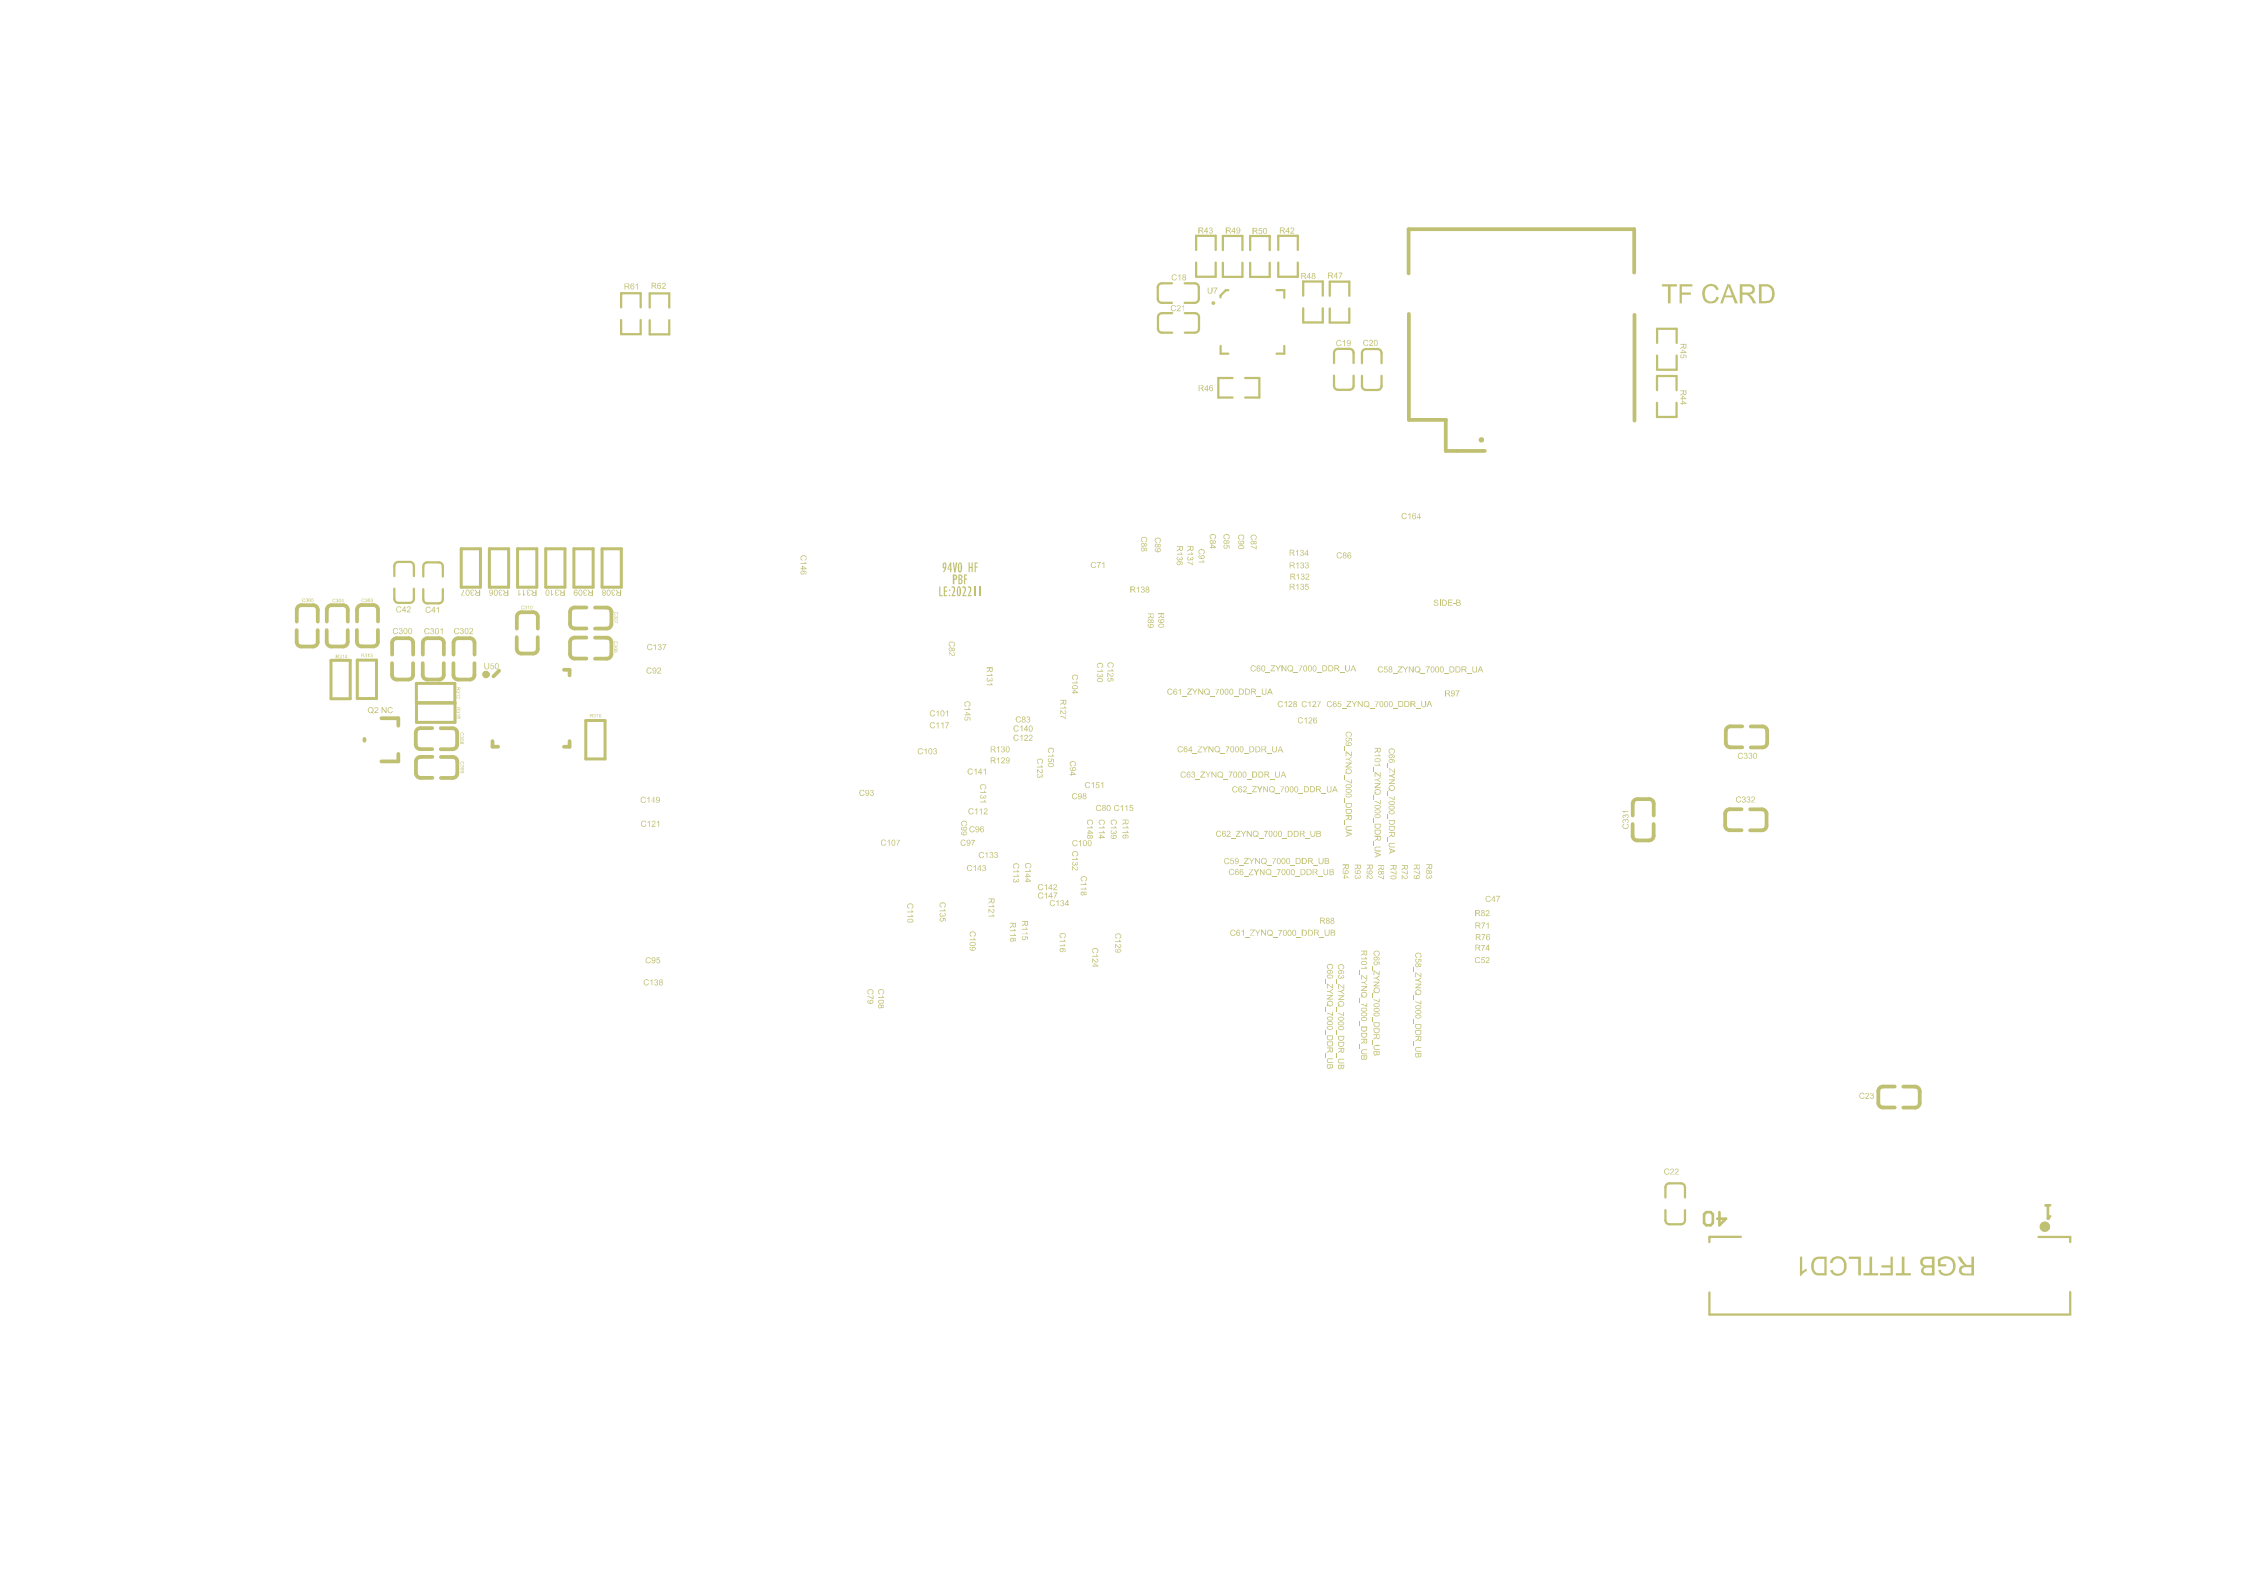
TF CARD
RGB TFTLCD1
40
1
94V0 HF
PBF
LE:202211
SIDE-B
C60_ZYNQ_7000_DDR_UA
C58_ZYNQ_7000_DDR_UA
C61_ZYNQ_7000_DDR_UA
C65_ZYNQ_7000_DDR_UA
C64_ZYNQ_7000_DDR_UA
C63_ZYNQ_7000_DDR_UA
C62_ZYNQ_7000_DDR_UA
C62_ZYNQ_7000_DDR_UB
C59_ZYNQ_7000_DDR_UB
C66_ZYNQ_7000_DDR_UB
C61_ZYNQ_7000_DDR_UB
C65_ZYNQ_7000_DDR_UB
C58_ZYNQ_7000_DDR_UB
C63_ZYNQ_7000_DDR_UB
C60_ZYNQ_7000_DDR_UB
Q2 NC
U50
U7

Comment	Description	Designator	Footprint	LibRef	Quantity	DesignItemId	FootprintDescription
P-DC	低压DC头	SV	DC005	P-DC	1	P-DC	
FCM1608KF-121T06	磁珠 120Ω@100MHz	B1, B2, B3, B4, B5, B6	B 0603	FCM1608KF-121T06	6	FCM1608KF-121T06	
TS3425BA		BTN1, BTN2, BTN3, BT	TS3425BA 3×4×2.5	TS3425BA	6	TS3425BA	
104		C1_ZYNQ_7000_DD	C_0402_1005Metric	C_Small	79	C_Small	
104	贴片电容	C7, C18, C20, C21, C2	LC-0603-C	0603 100nF (104) 10% 50V	14	0603 100nF (104) 10% 50V	
4.7uF	贴片电容	C3, C14	C0805	0603 10uF (106) 10% 10V	2	0603 10uF (106) 10% 10V	
0.1uF	贴片电容	C4	C0805	0603 10uF (106) 10% 10V	1	0603 10uF (106) 10% 10V	
4.7uF	贴片电容	C5	LC-0603_C	0603 10uF (106) 10% 10V	1	0603 10uF (106) 10% 10V	
0.1uF	贴片电容	C6, C7, C15, C16, C3(	LC-0603_C	0603 10uF (106) 10% 10V, C	13	0603 10uF (106) 10% 10V, C	
20pF	贴片电容	C8, C9	LC-0603_C	0603 10uF (106) 10% 10V	2	0603 10uF (106) 10% 10V	
10uF	贴片电容	C10, C328	LC-0603-C	0603 10uF (106) 10% 10V	2	0603 10uF (106) 10% 10V	
4.7uF		C11	CASE-A_3216	TC212A106M010Y	1	TC212A106M010Y	
0.1uF		C12, C13, C17	CASE-A_3216	TC212A106M010Y	3	TC212A106M010Y	
106	贴片电容	C19, C28, C33, C34, (	LC-0603-C	0603 10uF (106) 10% 10V	7	0603 10uF (106) 10% 10V	
1uF		C22	LC-0603-C	CAP	1	CAP	
104		C23	LC-0603_C	CAP	1	CAP	
18pF	贴片电容	C24, C25	LC-0603-C	0603 18pF (180) 5% 50V	2	0603 18pF (180) 5% 50V	
475	贴片电容	C27, C29	LC-0603-C	0603 4.7uF (475) 10% 16V	2	0603 4.7uF (475) 10% 16V	
106		C44, C46, C47, C48, (	C_0603_1608Metric	C_Small	35	C_Small	
475		C45	C_0603_1608Metric	C_Small	1	C_Small	
102		C57	C_0402_1005Metric	C_Small	1	C_Small	
103		C65_ZYNQ_7000_DD	C_0402_1005Metric	C_Small	4	C_Small	
220		C77, C78	C_0402_1005Metric	C_Small	2	C_Small	
105		C90, C91	C_0402_1005Metric	C_Small	2	C_Small	
475		C92	C_0805_2012Metric	C_Small	1	C_Small	
476		C95, C111, C120, C12	C_0805_2012Metric	C_Small	7	C_Small	
332		C153, C155, C156, C1	C_0402_1005Metric	C_Small	8	C_Small	
10uF	贴片电容	C301, C302, C303, C3	LC-0603_C	C	10	C	
47pF NC	贴片电容	C310	LC-0603_C	C	1	C	
0.47uF	贴片电容	C311	LC-0603_C	C	1	C	
100pF	贴片电容	C314, C315, C322, C3	LC-0603_C	C	6	C	
4700pF	贴片电容	C318, C319	LC-0603_C	C	2	C	
100uF 25V	贴片电容	C320, C321	C_1206_L	C	2	C	
Diode	Default Diode	D1	LC-0603-LED	Diode	1	Diode	
SS34	肖特基二极管	D2, D11, D50	SMA(DO-214AC)	SS34	3	SS34	
AZ1045-04F.R7G		D3, D4, D5, D6, D7, D	DFN2510-10_L2.5-W	AZ1045-04F.R7G	8	AZ1045-04F.R7G	
LED	发光二极管	D12	LC-0603-LED	0603 红灯	1	0603 红灯	
LED_ORANGE		D13	LED_0402_1005Metr	LED_Small	1	LED_Small	
LED_RED		D16	LED_0402_1005Metr	LED_Small	1	LED_Small	
FUSE0805		F1	F0805	FUSE0805	1	FUSE0805	
Fiducial		FID1, FID2, FID3, FID4	Fiducial_0.5mm_Mask	Fiducial	6	Fiducial	
LOGO		G1	LOGO-4x4	LOGO	1	LOGO	
WEEE		G2	WEEE-Logo_5.6x8mm	LOGO	1	LOGO	
ESD		G3	ESD-Logo_6.6x6mm	LOGO	1	LOGO	
X		G4	LOGO_X	LOGO	1	LOGO	
Z		G5	LOGO_Z	LOGO	1	LOGO	
M2_Pad		H1, H2, H3, H4	MountingHole_2.2mm	MountingHole_Pad	4	MountingHole_Pad	
SN74LVC1T45DRLR		IC1, IC2, IC3, IC5	SOT-5X3-6_W1.6-L1	SN74LVC1T45DRLR	4	SN74LVC1T45DRLR	
93LC56BT-I_OT		IC4	SOT-23-6_L2.9-W1.6	93LC56BT-I_OT	1	93LC56BT-I_OT	
MCP6541T-I LT		IC6	SC-70-5_L2.1-W1.3-H	MCP6541T-I LT	1	MCP6541T-I LT	
ME6211C30M5G-N		IC7	SOT-23-5_L3.0-W1.7	ME6211C30M5G-N	1	ME6211C30M5G-N	
HDMI-A		J1	USB-SMD_HDMI-A	HDMI-A	1	HDMI-A	
PMOD_A		J2	PMOD	PMOD	1	PMOD	
PMOD_B		J3	PMOD	PMOD	1	PMOD	
PMOD_C		J4	PMOD	PMOD	1	PMOD	
PMOD_D		J5	PMOD	PMOD	1	PMOD	
TYPE-C 16PIN 2MD(073)		J6, USB1	USB-C-SMD_TYPE-C	TYPE-C 16PIN 2MD(073)	2	TYPE-C 16PIN 2MD(073)	
USB04-212-17-10		J7	USB_A	USB04-212-17-10	1	USB04-212-17-10	
SJ-43515TS	4 conductor 3.5 mm	J10	CUI_SJ-43515TS-SM	SJ-43515TS-SMT-TR	1	SJ-43515TS-SMT-TR	
PJ-343B		J11	PJ-343B	PJ-343B	1	PJ-343B	
600Ω		L1, L2	L0805	CBW201209U601T	2	CBW201209U601T	
2.2uH		L3	L_0603_1608Metric	L_Small	1	L_Small	
2.2uH		L4, L5, L6, L7	MWSA0402S	L_Small	4	L_Small	
LED-0603_R		LED1, LED2, LED3, LE	LC-0603-LED	LED-0603_R	6	LED-0603_R	
NCE3400-VB		Q1	SOT-23-3_L2.9-W1.3	NCE3400-VB	1	NCE3400-VB	
PMBS3904	NPN型三极管	Q2	SOT-23	PMBS3904	1	PMBS3904	
330R	Resistor	R5, R6, R10, R12, R33	LC-0603-R	Res2	6	Res2	
10K	Resistor	R7, R8, R9, R11, R13, R	LC-0603-R	Res2	12	Res2	
49.9Ω		R17, R18	RES-ARRAY-SMD_0(	RC-ML08W103JT	2	RC-ML08W103JT	
2.2KΩ	贴片电阻	R19, R20, R22, R23, R2	R0603	0603 2.2KΩ (2201) 1%	5	0603 2.2KΩ (2201) 1%	
27KΩ	贴片电阻	R21	R0603	0603 27KΩ (2702) 1%	1	0603 27KΩ (2702) 1%	
100KΩ	贴片电阻	R25, R58	R0603	0603 100KΩ (1003) 1%	2	0603 100KΩ (1003) 1%	
4.7KΩ	贴片电阻	R26, R27, R28, R29, R3	LC-0603_R	0603 20KΩ (2002) 1%	5	0603 20KΩ (2002) 1%	
10KΩ	贴片电阻	R31, R34, R35, R36	LC-0603_R	0603 20KΩ (2002) 1%	4	0603 20KΩ (2002) 1%	
1KΩ	贴片电阻	R32, R39	LC-0603_R	0603 20KΩ (2002) 1%	2	0603 20KΩ (2002) 1%	
12K	贴片电阻	R33	LC-0603_R	0603 20KΩ (2002) 1%	1	0603 20KΩ (2002) 1%	
2KΩ	贴片电阻	R37, R38	LC-0603_R	0603 20KΩ (2002) 1%	2	0603 20KΩ (2002) 1%	
5.1KΩ	贴片电阻	R40, R41, R324, R325	R0603	0603 5.1KΩ (5101) 1%	4	0603 5.1KΩ (5101) 1%	
4.7KΩ	贴片电阻	R42, R43, R47, R48, R4	R0603	0603 4.7KΩ (4701) 1%	7	0603 4.7KΩ (4701) 1%	
330Ω	贴片电阻	R44, R61, R62	R0603	0603 330Ω (3300) 1%	3	0603 330Ω (3300) 1%	
10KΩ	贴片电阻	R45, R57, R59, R63, R6	R0603	0603 10KΩ (1002) 1%	5	0603 10KΩ (1002) 1%	
33Ω	贴片电阻	R46, R55	R0603	0603 33Ω (3380) 1%	2	0603 33Ω (3380) 1%	
1.5KΩ	贴片电阻	R51	R0603	0603 1.5KΩ (1501) 1%	1	0603 1.5KΩ (1501) 1%	
1MΩ	贴片电阻	R52	R0603	0603 1MΩ (1004) 1%	1	0603 1MΩ (1004) 1%	
8.06K		R53	R0603	0603WAF80615TE	1	0603WAF80615TE	
1KΩ	贴片电阻	R54, R56	R0603	0603 1KΩ (1001) 1%	2	0603 1KΩ (1001) 1%	
20KΩ	贴片电阻	R65, R66, R67, R69, R(	R0603	0603 20KΩ (2002) 1%	5	0603 20KΩ (2002) 1%	
40.2R/1%		R70, R71, R72, R73, R(	R_0402_1005Metric	R_Small	24	R_Small	
80.6R/1%		R88, R89, R90	R_0402_1005Metric	R_Small	3	R_Small	
4.7K/1%		R97, R103, R104, R10	R_0402_1005Metric	R_Small	15	R_Small	
10K/1%		R98, R99, R100, R118	R_0402_1005Metric	R_Small	15	R_Small	
240R/1%		R101_ZYNQ_7000_D(	R_0402_1005Metric	R_Small	2	R_Small	
0R		R102	R_0402_1005Metric	R_Small	1	R_Small	
2.49K/1%		R105	R_0402_1005Metric	R_Small	1	R_Small	
1.5K/1%		R106	R_0402_1005Metric	R_Small	1	R_Small	
22R/1%		R117, R124, R128, R1	R_0402_1005Metric	R_Small	4	R_Small	
1K/1%		R119, R121, R123, R1	R_0402_1005Metric	R_Small	6	R_Small	
20K/1%		R125, R126, R143	R_0402_1005Metric	R_Small	3	R_Small	
4.99K/1%		R140	R_0402_1005Metric	R_Small	1	R_Small	
56.2K/1%		R142	R_0402_1005Metric	R_Small	1	R_Small	
18K/1%		R144	R_0402_1005Metric	R_Small	1	R_Small	
18.7K/1%		R147	R_0402_1005Metric	R_Small	1	R_Small	
6.8K/1%		R149	R_0402_1005Metric	R_Small	1	R_Small	
15K/1%		R150	R_0402_1005Metric	R_Small	1	R_Small	
10K	贴片电阻	R300, R301, R315, R3	R 0603_L	R	5	R	
2.2K	贴片电阻	R302, R303, R304, R3	R 0603_L	R	5	R	
0	贴片电阻	R305, R306, R307, R3	R 0603_L	R	7	R	
50	贴片电阻	R312	R 0603_L	R	1	R	
10K NC	贴片电阻	R313, R314	R 0603_L	R	2	R	
0 NC	贴片电阻	R316	R 0603_L	R	1	R	
1M	贴片电阻	R317	R 0603_L	R	1	R	
1K	贴片电阻	R320, R321	R 0603_L	R	2	R	
RGBLCD	FPC-40P-0.5mm	RGB TFTLCD1	FPC-TCP40	FPC-40	1	FPC-40	
SW_DIP_x01		SW3	KEY-SMD_L4.0-W2.9	SW_DIP_x01	1	SW_DIP_x01	
SW_DIP_x02		SW4	CSW1.27 SMD-2P	SW_DIP_x02	1	SW_DIP_x02	
SS-12D15		SW5	SW-TH_3P-P4.70_L1	SS-12D15	1	SS-12D15	
TXS0108EPWR		U5	TSSOP-20_L6.5-W4.4	TXS0108EPWR	1	TXS0108EPWR	
NO		U6	QFP-64_L10.0-W10.0	NO	1	NO	
TXS02612RTWR		U7	WQFN-24_L4.0-W4.0	TXS02612RTWR	1	TXS02612RTWR	
TF CARD		U8	TF-SMD_TF-PUSH	TF PUSH	1	TF PUSH	
TPS2051BDBVR		U9	SOT-23-5_L3.0-W1.7	TPS2051BDBVR	1	TPS2051BDBVR	
USB3320C-EZK		U10	QFN-32_L5.0-W5.0-H	USB3320C-EZK	1	USB3320C-EZK	
74LVC1G125GW		U11, U12, U13, U14	SOT-353_L2.0-W1.2-H	74LVC1G125GW	4	74LVC1G125GW	
H8911130A		U15	RJ45-TH_H8911130A	H8911130A	1	H8911130A	
XC7Z010_20-2CLG400		U16, U23	BGA400C80P20X20_	XC7Z010_20-2CLG400, XC7Z	2	XC7Z010_20-2CLG400, XC7Z010_20-2CLG400_1	
TPS51200DRC		U17	VSON-10-1EP_3x3m	TPS51200DRC	1	TPS51200DRC	
MT41K256M16TW-107		U18_ZYNQ_7000_DD	BGA96C80P9X16_80(	MT41K256M16TW-107	2	MT41K256M16TW-107	
RTL8211E-VL		U19	QFN40P600X600X10(	RTL8211E-VL	1	RTL8211E-VL	
W25Q256FVEIG		U20	W25Q256FVEIG	W25Q32JVZP	1	W25Q32JVZP	
THGBMJG6C1LBAIL		U21, U22	BGA153C50P14X14	THGBMJG6C1LBAIL_1, THGB	2	THGBMJG6C1LBAIL_1, THGBMJG6C1LBAIL	
TLV62130RGT		U24, U25, U26, U27	VQFN-16-1EP_3x3m	TLV62130RGT	4	TLV62130RGT	
ADAU1761BCPZ	音频接口芯片	U50	LFCSP-32_L5.0-W5.0	ADAU1761BCPZ	1	ADAU1761BCPZ	
TS3A226AEYFFR	音频功放	U51	DSBGA-9_L1.4-W1.3	TS3A226AEYFFR	1	TS3A226AEYFFR	
PMOD		WIFI	PMOD	PMOD	1	PMOD	
50Mhz		X1	Crystal_SMD_3225-4	ASE-xxxMHz	1	ASE-xxxMHz	
33.333MHz		X2	Crystal_SMD_3225-4	ASE-xxxMHz	1	ASE-xxxMHz	
12MHz		Y1	CRYSTAL-SMD_4P-L	CRYSTAL:CRYSTAL_SMD_322	1	CRYSTAL:CRYSTAL_SMD_3225-4PIN_3.2X2.5MM	
24MHZ		Y2	OSC-SMD_4P-L3.2-W	CRYSTAL:CRYSTAL_SMD_322	1	CRYSTAL:CRYSTAL_SMD_3225-4PIN_3.2X2.5MM	
25Mhz		Y3	Crystal_SMD_3225-4	Crystal_GND24	1	Crystal_GND24	