


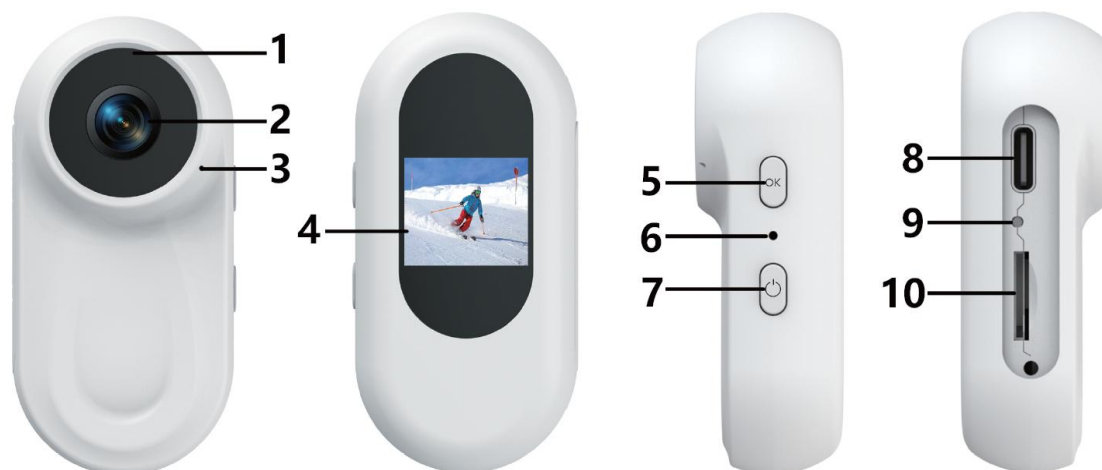

1. Infrared night vision light 2.lens 3.microphone head 4.screen 5.confirm button
 6. Indicator light 7.power button 8 .USB 9. Reset button 10.TF card

matters needing attention:

Automatic shutdown: In any state other than video recording and playback, if there is no operation for 3 minutes, the machine will automatically shut down.

Screen on/off: In any state during video playback, if there is no operation on the machine buttons for 1 minute, the screen will automatically turn off. After the screen goes off, press any key to turn on the screen again.

Infrared night vision lamp: The machine automatically turns on/off the infrared night vision lamp. When weak light is detected, the machine will turn on the infrared night vision to supplement the light. After turning on infrared night vision, both the video and camera images are black and white. When infrared night vision is turned on and sufficient light is detected, it will be turned off. After turning off infrared night vision, the video and photo images will be in color.

Machine charging: The red light will flash slowly, and when fully charged, the red light will light up.

Reset: When an unknown fault occurs in the machine, press the reset button once with the reset pin to reset the machine.

1. Power on/off:

Press and hold the power button for 2 seconds, the blue light will remain on, and the device will enter standby mode. Press and hold the power button for 2 seconds in standby mode, the blue light will turn off and the device will shut down.

2. Video recording/photography:

Video recording: In standby mode after booting up. Press and hold the OK button for 2 seconds, and the machine's blue light will flash slowly to start recording work. When recording, save a video every 5 minutes. To stop the current recording, simply press the OK button once. The machine saves the current recording file and exits the recording work, entering standby mode. When recording work until the memory card is full, (the machine can be set to turn on and off loop recording in the text. The default setting is to turn on loop recording) the machine will loop over the previous video and continue recording work. Until the battery runs out, the machine's red light will flash rapidly 10 times before saving the current video file and shutting down. When the machine is recording, when the memory card is full, the red and blue lights of the machine will flash rapidly 10 times at the same time, and the current recording file will be saved and the

machine will be turned off.

Photography: In standby mode, press the OK button once to take a photo. Return to standby mode after taking a photo.

3. View files:

Press the power button once while the machine is in standby mode to enter viewing mode. Now press the power button to switch between selecting video files/photo files. Press and hold the power button for 2 seconds while in view mode to exit view mode and enter standby mode.

Video playback: Select the video file on the viewing mode page and press the OK key to enter the video file playback page. Now press the OK button and the power button to select the previous or next video. Press and hold the OK button for 2 seconds to play the selected video. Pressing the OK button once during playback pauses the playback, and pressing the OK button again resumes the playback. Press and hold the power button for 2 seconds on the video playback page to exit the video playback page and return to the viewing mode page.

Photo playback: Select the photo file on the viewing mode page and press OK to enter the photo playback page. Now press the OK button and the power button to select the previous or next photo. Press and hold the power button for 2 seconds on the photo playback page to exit the video playback page and return to the viewing mode page.

4. Charging/Recording While Charging:

Charging: The machine can be charged in both on and off states. Connect an external 5V power supply to charge the machine. The red light flashes slowly during charging, and remains on after being fully charged.

Charging while recording: Charge the machine while it is turned on, and at the same time, operate the machine's recording, photography, and viewing functions. Charge the machine while it is turned off, and the red light flashes slowly to charge the machine. Now press and hold the power button for 2 seconds to turn on the machine and enter standby mode. Now you can operate the machine for recording, taking photos, viewing, and all functions.

5.Time setting:

The device will automatically generate a time.txt document, which can be modified according to the document format.

Year-Month-Date

2024-11-21

Hour:Minutes:Second

18:47:13

Waterstamp:Y

(it's mean that time water stamp,Y means open time water stamp,N means turn off time water stamp)

Loop:Y

(it's mean that loop recording,Y means turn on loop recording,N means turn off loop recording)