


Operation

Power

With the toggle Power Switch set to the Off position and Speed Control Dial set to minimum setting (0) Plug the power supply cord into a properly wired and grounded outlet.

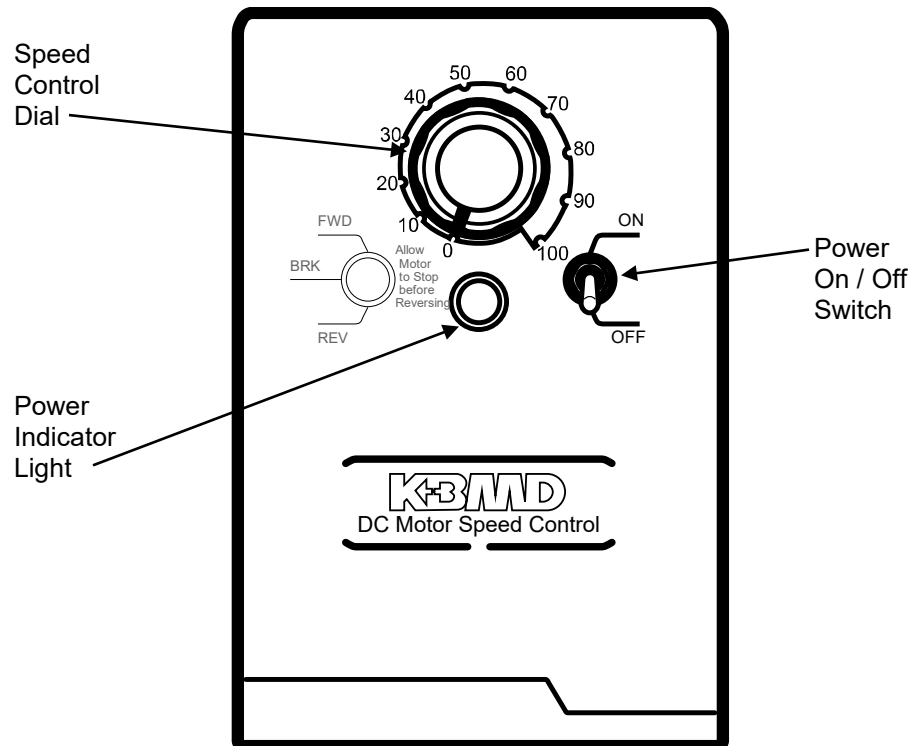


Toggle the Power Switch to the On position. The Power indicator light will illuminate.

CAUTION! When the power is turned on keep clear of the moving belt.

Gradually increase conveyor speed using the Speed Control Dial to adjust the conveyor speed to required speed.

Control Box

The conveyor control box is held in place by magnets and is repositionable. It can be repositioned anywhere along the metal surface of the conveyor frame side rail where it will be most convenient for operation.

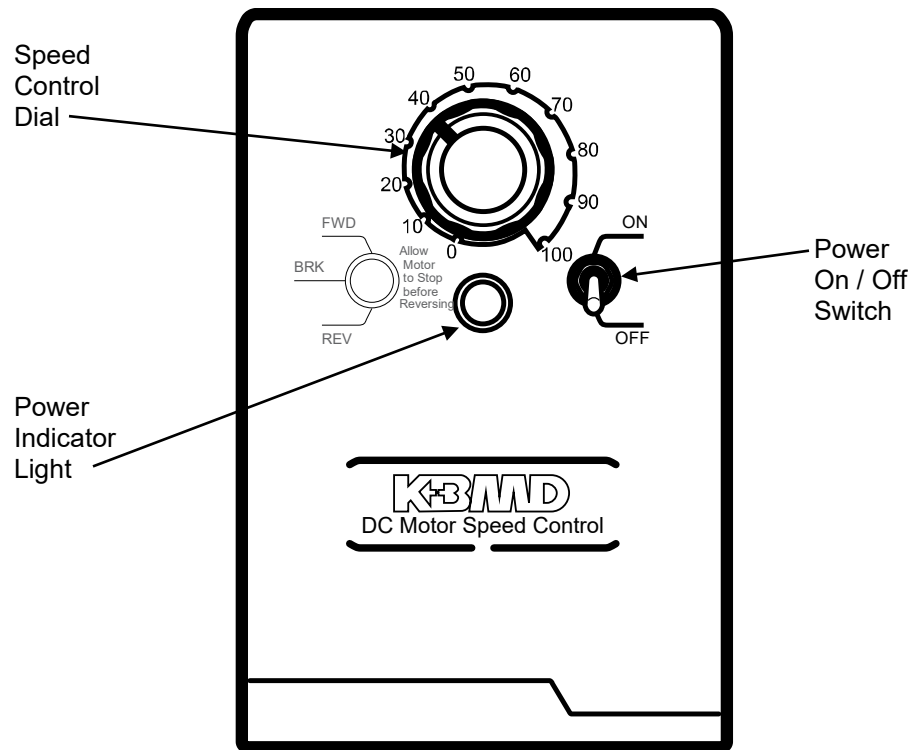

Power On / Off Switch

The Power On / Off is a toggle switch to turn the power on or off. Power is switched off when the switch is in the down position: power is on when the switch is in the up position. Switch the power on by flipping the lever up; switch the power off by flipping the lever down.

Power Indicator Light

Illuminates when power is On; is unlit when power is Off.

Speed Control Dial

Adjust conveyor speed using the Speed Control Dial to bring the conveyor to the required speed. The level gradations from 0 to 100 represent percentage from minimum (0) to maximum (100) available speed and are otherwise arbitrary and likely will not correspond to any specific units of linear velocity.

To stop the conveyor, turn the Speed Control Dial to minimum setting (0), and toggle the Power Switch to the Off position. The conveyor will slow down and stop.