

StageFlow - User guide

Windows v2027.0.4 · Edition 2027.4

Prepare the show's patch, print group sheets and connect the tools you need. StageFlow is free, with no licence or activation. Use it on its own, without a network or other applications.

Your first patch in five steps

- 1. Click **New** and name the show.
- 2. Choose pair and group counts. Presets in steps of 20 do not restrict custom counts.
- 3. In **Common to all groups**, enter reusable sources.
- 4. Open a group, add its specific content, then **Save**.
- 5. **Export Excel** creates the workbook; choose paper size and pagination, then check the preview in Excel.


Finding your way around

Left: groups. Centre: the patch table. Right: show details and printing. Bottom: the application console. In the header, **StageFlow connection** groups LIVE, workstations and remotes; its text and counters show the current state.

Contents

1. Patch and Excel · 2. Projects and exchange · 3. LIVE and alerts · 4. Console and remotes · 5. Printing and troubleshooting · 6. OSC, MIDI and Stream Deck commands

Guide opens this manual. **Help** opens practical help; **Help** → **Suite guide** explains the workflow across applications. Language and theme are available in the header.

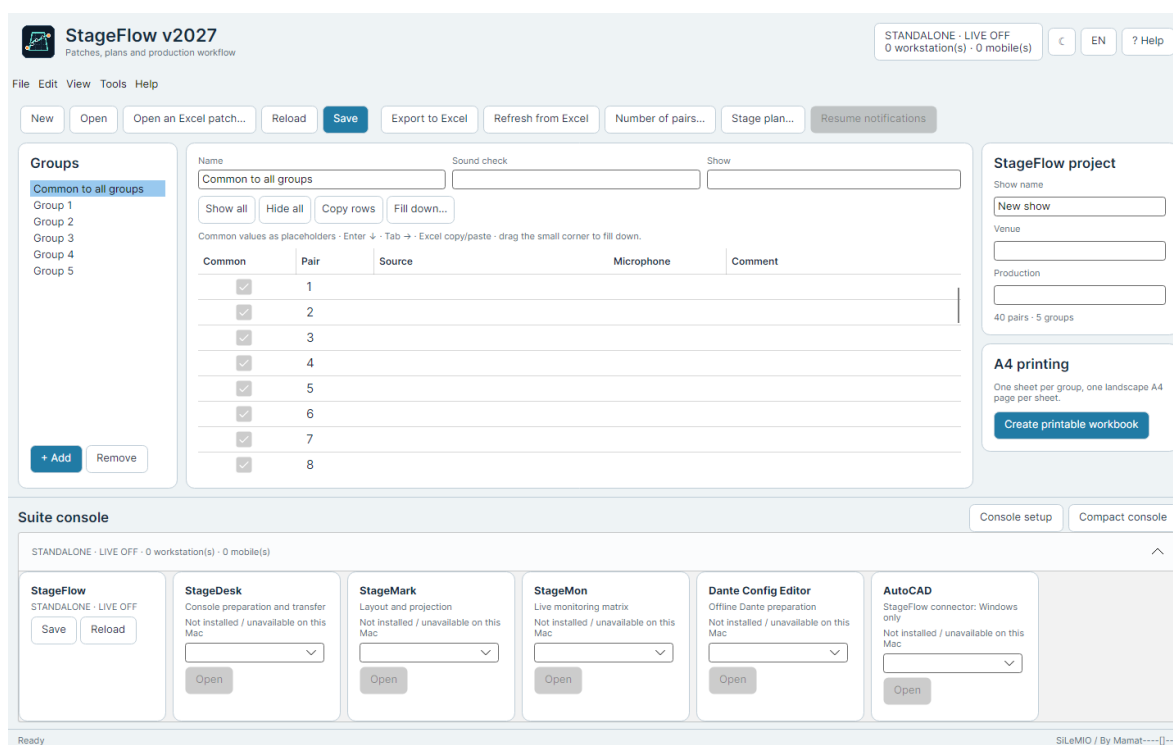

2027 reference view: groups, patch and console. Guide and Connection buttons have since been reorganized.

1. Patch, common values and Excel

Numbered pairs represent the stage patch. This is not the entire audio console: effects, buses and other channels can be prepared separately in StageDesk.

Common or group-specific value

Common values can be reused in every group, pair by pair. A value entered in a group replaces only that field in that group. Inherited values are grey and italic. **Soundcheck** and **show** are group information, not patch overrides.

- **Show all:** reuse every common pair in the current group.
- **Hide all:** hide common values here without removing them from other groups.
- For an exception, change only that pair. A hidden pair without group-specific content stays blank in the group and its export.

Fast entry


Enter commits and moves down. **Tab** moves right for immediate entry. **Ctrl+C / Ctrl+V** exchange cells with Excel. Drag the selection's small corner down to copy or extend a list. Pair count can be changed; check any reduction warning before confirming.

Start or continue in Excel

For a new project, use **Open an Excel patch**. To bring workbook edits back into the current show, use **Refresh from Excel**, then save the project. In the workbook, **Commun** centralizes common and group-specific values; group sheets prepare the printed output.

Keep the workbook's technical sheets and identifiers for round-trips. Excel is not a LIVE connection: edits must be imported. An older patch without metadata may require checking pair counts, names and groups after import.

2. Projects and exchange

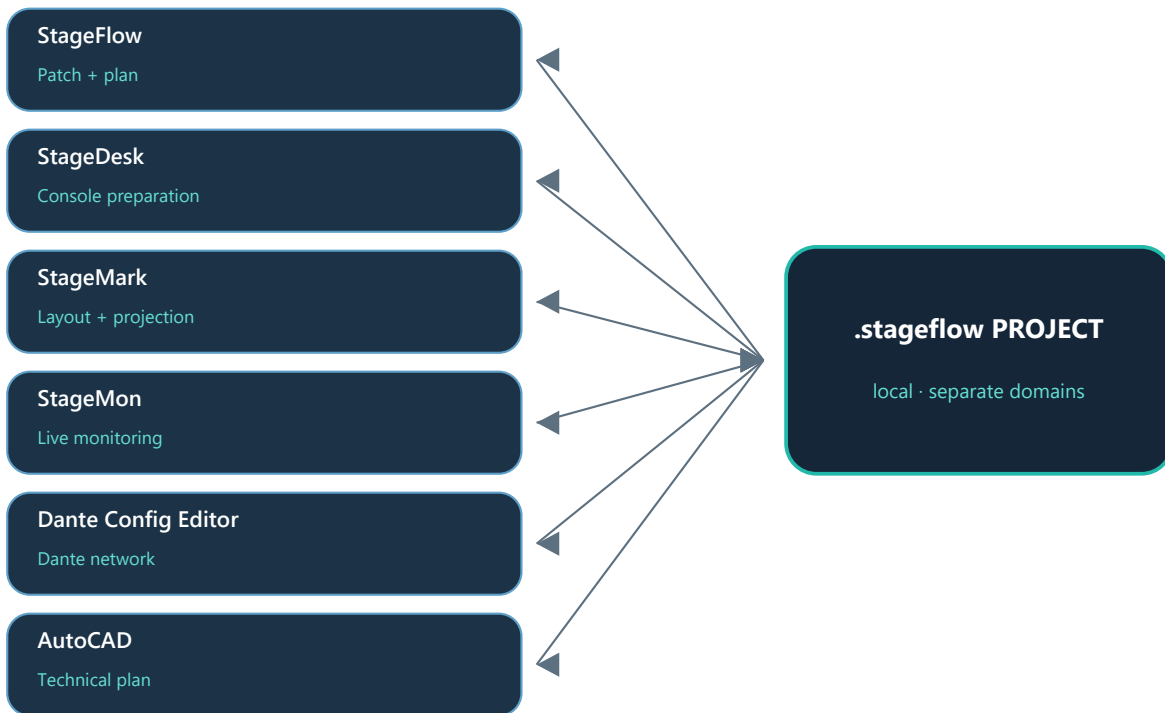

A **.stageflow project is a folder**. Keep it together. Each application stores its own data: StageFlow prepares the patch and show, StageDesk console preparation, StageMark layout, StageMon monitoring and Dante Config Editor offline Dante configuration.


A project created in StageDesk or StageMon can later be opened in StageFlow. Identifiers link the same pairs and groups; a label such as “Kick” remains distinct from a physical input such as “SB1-01”. Saving must preserve work from the other tools.

Save and transfer

Save updates the current folder. **Save as** creates a persistent project copy, not a new LIVE connection. To transfer one file, create a **.stageflowpack**, then import it on the other computer. Temporary connection leases are not part of the archive.

On conflict, compare or reload the latest version before reapplying your edit. Do not force repeated saves. Older applications may ignore unknown modules but must preserve them. An incompatible format version must be explicitly refused.

3. LIVE and label alerts

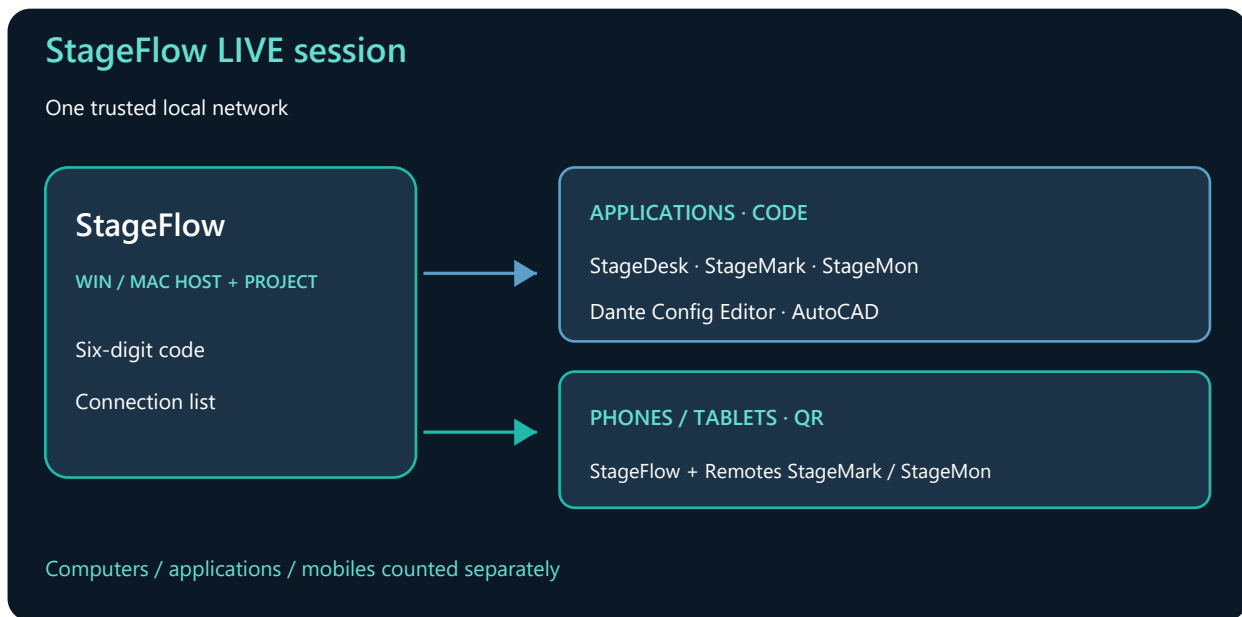

Opening the same folder does not mean being LIVE. Outside LIVE, **Save** and **Reload** remain manual. To follow the show together, open **StageFlow connection** → **StageFlow LIVE**: the master hosts and other applications join voluntarily.

- On the host, open and save the project, select the network, then **Allow and broadcast**.
- In each other application, choose **StageFlow LIVE session**, check the show and host, then enter all six code digits.
- Check connected status and counters. Computers, applications and mobiles are counted separately. Disconnecting remains a local choice; there is no automatic reconnection.

Alert without blocking synchronization

Every **new LIVE session** enables alerts. An intentional pause is preserved during that same session. Only label edits trigger these notifications, never microphones, notes or soundcheck. The banner shows old and new names, origin, time and count.

Acknowledge clears the alert on your workstation, not for others, and does not undo the edit. Disabling reception or pausing emission does not block labels: data continues to synchronize. Alerts ignored during a pause are not replayed. In StageMark, linked labels follow the patch without overwriting custom text or moving objects.

4. Console and remotes

Open the tools you need

The console order is **StageFlow**, **StageDesk**, **StageMark**, **StageMon**, **Dante Config Editor**, **AutoCAD**. Each card reports installed, closed, another project or LIVE connected. Commands depend on the target's advertised capabilities. Hide unused cards in Settings; **Compact console** keeps shortcuts in a small window.

StageMark offers cues and SHOW/BLACKOUT when its state permits. StageMon offers Clear Cue A/B among other actions. A refusal or missing response is not success: check the application before trying again. Old commands are not replayed after reconnection. Application safety and local controls keep priority.

One QR for the suite portal

- Save the show, then open **StageFlow connection** → **StageFlow remote control**.
- Choose the Wi-Fi or Ethernet used by the phone/tablet, then create the QR.
- Scan the QR. The StageFlow page can select groups, edit the patch and save. Multiple controllers can connect within the displayed limit.
- For StageMark/StageMon, also start their local remote and connect them to the same session. An unavailable card explains what is missing.

StageMark and StageMon tabs open their normal remotes with their own permissions. On a phone/tablet or a different network address, the page may open full-screen; browser Back returns to the portal. Session loss removes the old embedded controller. Stopping the portal revokes its access without claiming to stop a standalone remote.

OSC, MIDI, Stream Deck

In **Tools** → **OSC · MIDI · Stream Deck**, choose OSC reception, MIDI inputs and mappings. Install the bundled Stream Deck package and assign a command to a key. The log shows reception, refusals and state feedback. Shared addresses are listed at the end; unavailable commands remain refused.

5. Printing and troubleshooting

One or multiple pages per group

Click **Create workbook** or **Export Excel**. Choose A4, A3 or a format offered by your printer, then pagination. Paper remains landscape. **One page per group** shrinks the whole table: dense patches may become very small even on A3. **Multiple pages** keeps rows more readable and repeats headers. This is recommended for large patches and long notes.

Open the workbook in Excel, select the required group sheets, then **File** → **Print**. Check every page. For PDF, choose Microsoft Print to PDF or Excel's PDF export while keeping print areas. Do not print the technical sheet. Results also depend on printer and text: pair count alone never guarantees readability.

I cannot see common values

Check the pair in the common group, then its Common checkbox in the group. A group-specific value may replace the common value. Hide all does not delete common data.

A mobile or application cannot connect

Check the same local network, selected interface and host state. Guest Wi-Fi may isolate devices. Allow only the trusted private network through the firewall. Never publish the code or QR link on the Internet. After a session change, explicitly join the new session.

Limits and help

StageFlow is not an audio console and cannot prove cabling, gains, Dante clocking or real projection. Test hardware before operation. AutoCAD 2026 Windows is required for the optional connector; StageFlow's simple plan remains usable without AutoCAD. Local projects work offline; LIVE and QR connections need a trusted local network.

[StageFlow manuals and resources on silemio.com](#)

6. Command reference

The same identifiers are used by MIDI and Stream Deck mappings. OSC listens locally on 127.0.0.1:18040 by default. To change groups, send the value expected by the selection command; actions without parameters need no group name. The receiving application always validates the command and permissions.

StageFlow

Command	Label	OSC address
stageflow.project.save	Save project	/silemio/stageflow/project/save
stageflow.project.reload	Reload project	/silemio/stageflow/project/reload
stageflow.group.select	Select group	/silemio/stageflow/group/select
stageflow.group.next	Next group	/silemio/stageflow/group/next
stageflow.group.previous	Previous group	/silemio/stageflow/group/previous
stageflow.common.show-all	Show all common pairs	/silemio/stageflow/common/show-all
stageflow.common.hide-all	Hide all common pairs	/silemio/stageflow/common/hide-all
stageflow.live.enable	Enable LIVE	/silemio/stageflow/live/enable
stageflow.live.disable	Stop LIVE	/silemio/stageflow/live/disable
stageflow.live.toggle	Toggle LIVE	/silemio/stageflow/live/toggle

StageMark

Command	Label	OSC address
stagemark.output.show	SHOW	/silemio/stagemark/output/show
stagemark.output.blackout	BLACKOUT	/silemio/stagemark/output/blackout
stagemark.cue.select	Select cue	/silemio/stagemark/cue/select
stagemark.cue.next	Next cue	/silemio/stagemark/cue/next
stagemark.cue.previous	Previous cue	/silemio/stagemark/cue/previous

StageMon

Command	Label	OSC address
monitoring.cue.clear-a	Clear Cue A	/silemio/stagemon/cue/clear-a
monitoring.cue.clear-b	Clear Cue B	/silemio/stagemon/cue/clear-b
monitoring.patch.select	Select patch	/silemio/stagemon/patch/select
monitoring.patch.next	Next patch	/silemio/stagemon/patch/next
monitoring.patch.previous	Previous patch	/silemio/stagemon/patch/previous
monitoring.audio.start	Start audio	/silemio/stagemon/audio/start
monitoring.audio.stop	Stop audio	/silemio/stagemon/audio/stop
monitoring.monitor-a.mute-toggle	Toggle monitor A mute	/silemio/stagemon/monitor-a/mute-toggle
monitoring.monitor-b.mute-toggle	Toggle monitor B mute	/silemio/stagemon/monitor-b/mute-toggle

Values and configuration example

stageflow.group.select expects text: group ID, name or number (0 is the common group). OSC example: address **/silemio/stageflow/group/select**, text argument **1** for the first group. **next**, **previous**, **clear-a** and **clear-b** need no argument. **stagemark.cue.select** uses the ID of a cue prepared in StageMark; see its manual for permissions and state requirements.

For a MIDI key, select the command, then learn the message or define its channel and Note/CC/Program Change number. Prefer parameterless actions such as Next, Previous or Clear Cue. MIDI sends the message's numeric value: this mapping has no field for a group name or cue ID. For selection by name or ID, use OSC or the Stream Deck action's value. Enable state feedback only to the intended destination to avoid command loops.