


How to install the CJMCU-KZQ board into the Arduino IDE

Step1:


Under File/ Preferences open the Preferences Dialog and add the following URL in the Field Additional Boards Manager URL's:

https://github.com/dieter-l-git/CJMCU-KZQ-Documentation/raw/master/package_CJMCU-KZQ_index.json

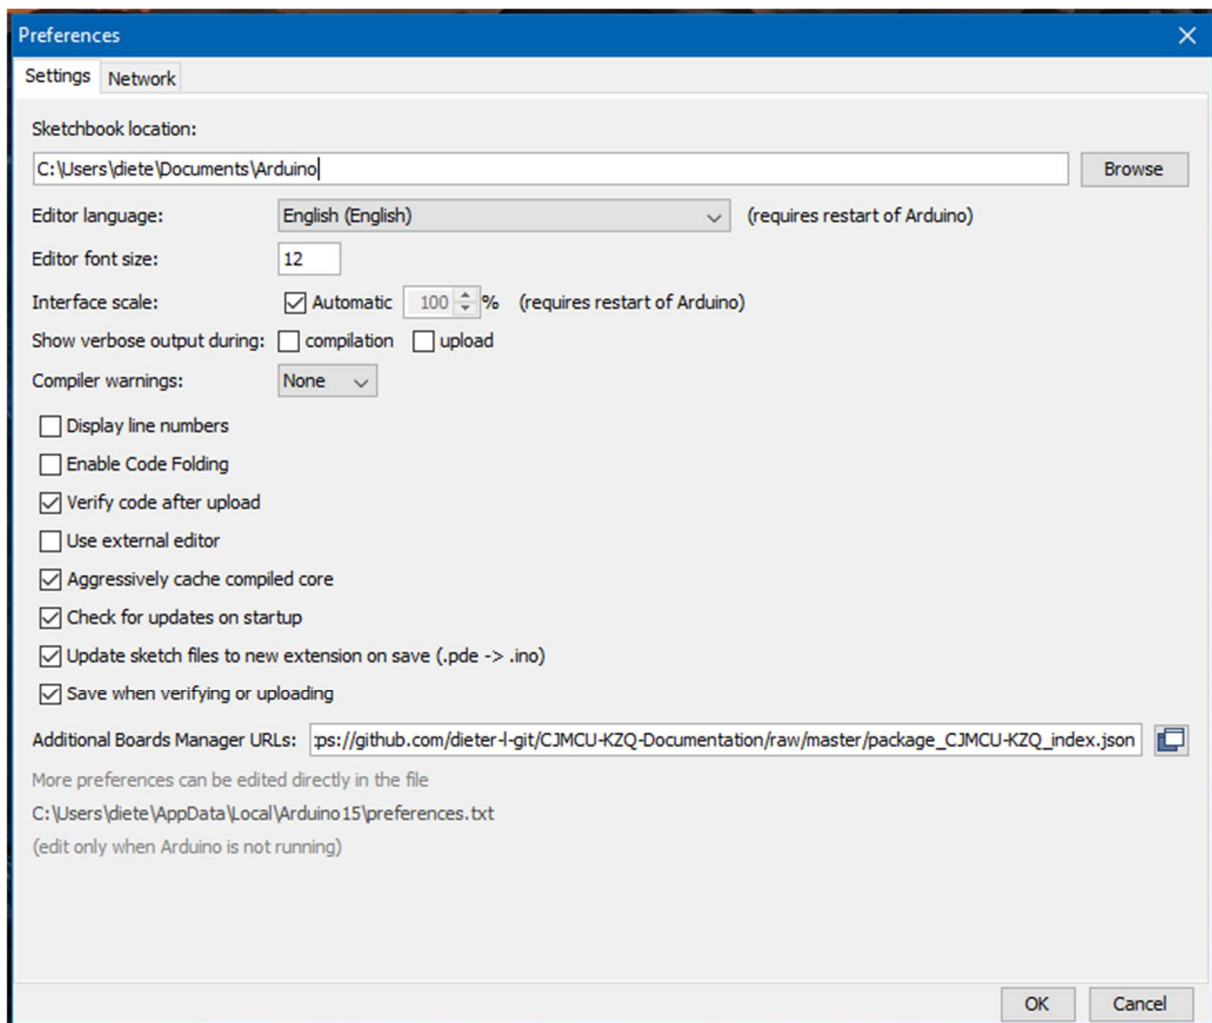


Step2:

Open the Boards Manager under Tools/Board and select the entry Boards Manager

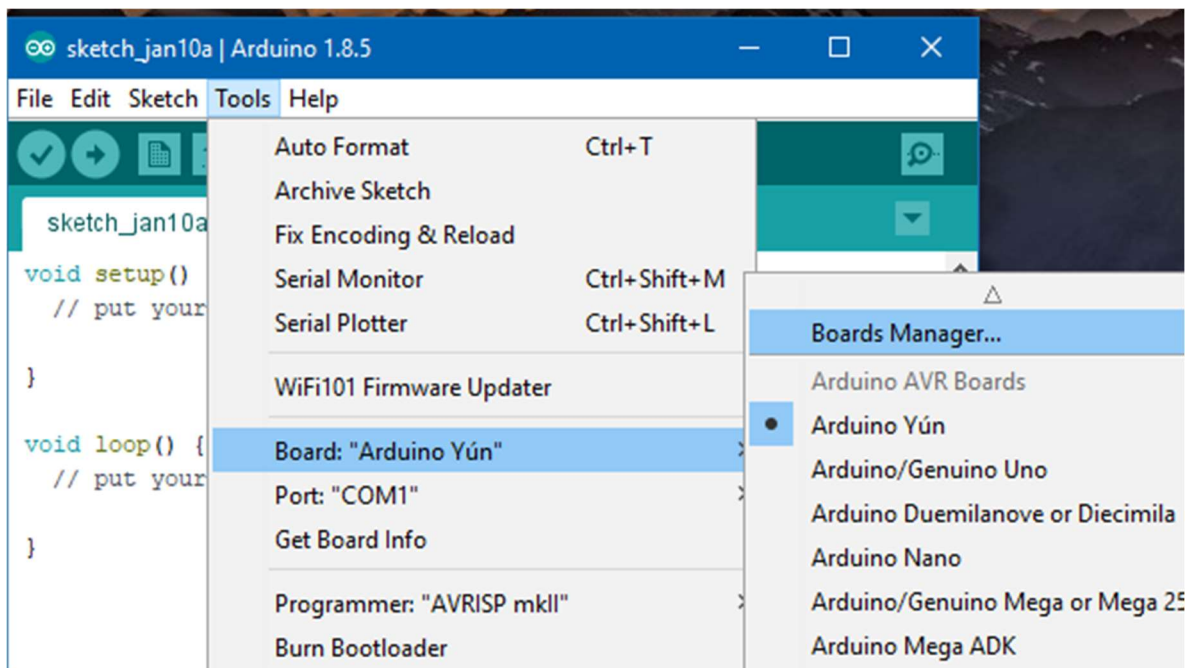


Step 3:

In the Boards Manager Dialog select Type Contributed and you will see the entry CJMCU-KZQ by dieter-l-git. Select the entry and you will get the button install on the lower right corner. Press the install button and the install will begin (This will download the zip file and install it to the IDE).

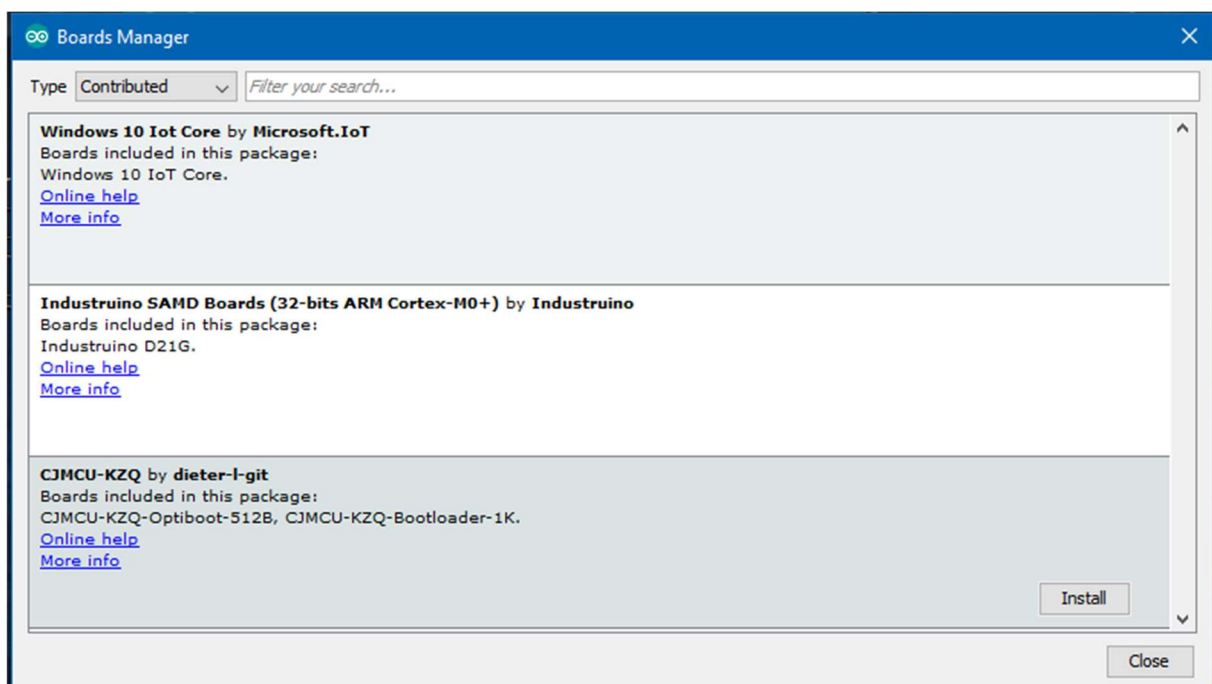


Step 4:

After finishing the installation, you will be able to select the new installed board in Tools/Board.

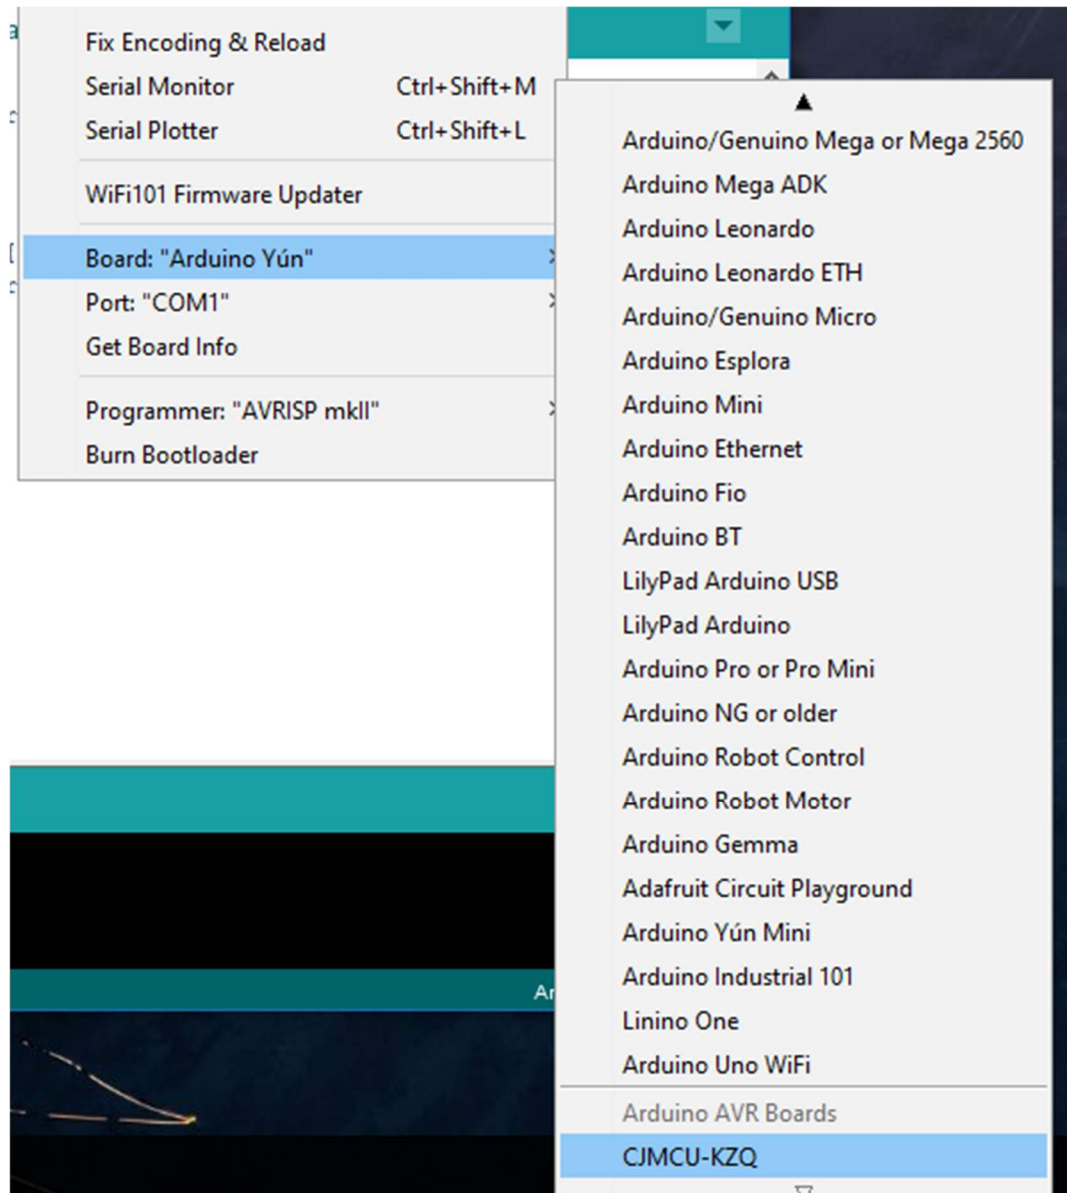

Step 5:

Choose the right bootloader. The original has 1K size. I prefer Optiboot with 512b size to get more space free for coding.

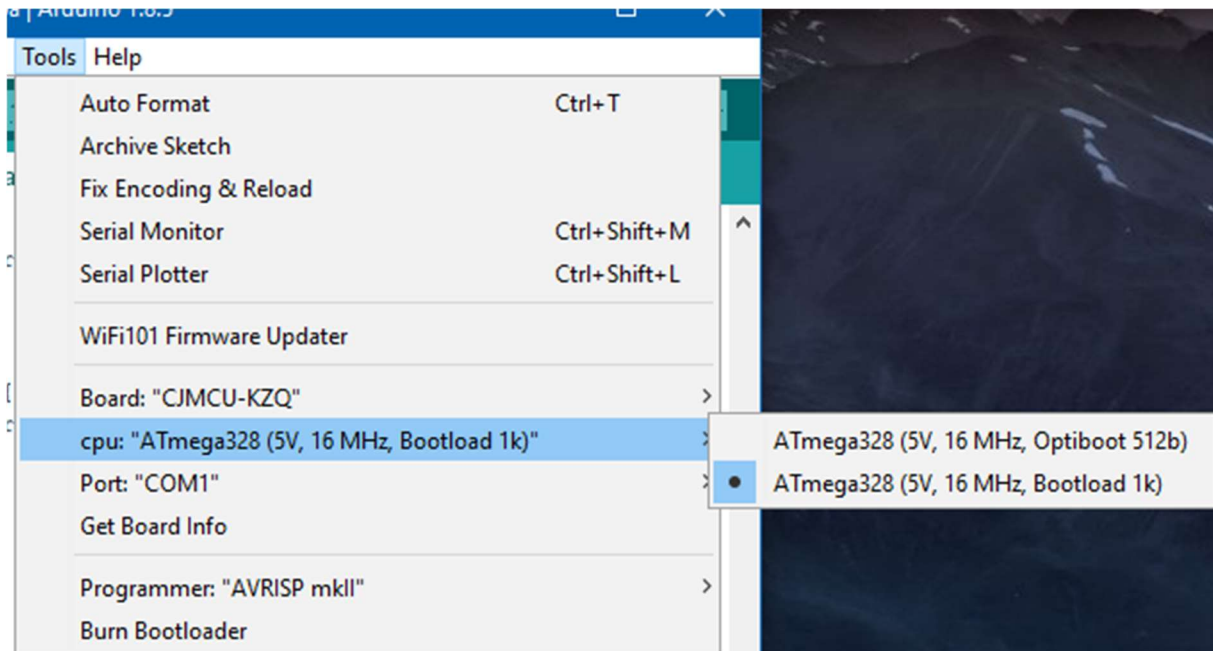

That's it Have fun!

Dieter