

Avery Dennison®

TrafficJet™ Xpress Operator Training

Instructional Bulletin : # 9.83
Revision : # 04
Last Updated : June 2024

Documents to supply along with this Operator Training guide:

- ☐ Safety Data Sheet, appropriate for your region.
- ☐ Clear Maintenance Document

Safety First!

Explain all labels and hazards before starting the training.



Cover Hazard

When opening or closing the cover, hold it until the end



Moving Hazard

Moving parts can crush and cut



Electrical Hazard

Dangerous voltage inside



Burn Hazard

Hot surface, do not touch




Cutting Hazard

Keep hands away from sharp parts



UV Radiation Hazard

Protect your eyes and skin from exposure

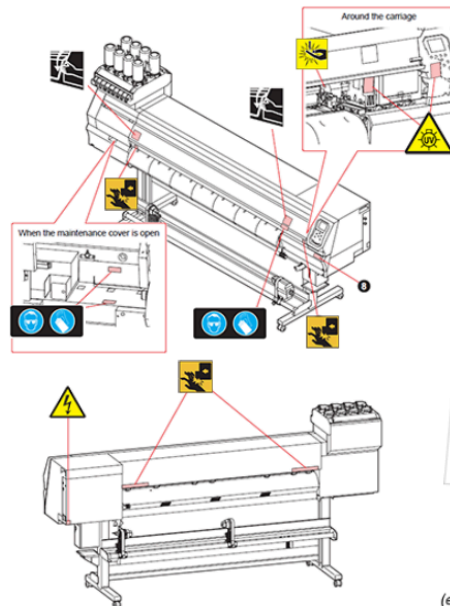

(example)

Talk about precautions while handling the machine before starting the training.

	UV light:	When working with a UV printer, do NOT look into the UV light with the naked eye. Close the covers and use the UV glasses which are included with the printer.
	Heaters:	Do not touch Media Transfer Surface heaters with bare hand while it is hot; otherwise you can get burned.
	Cutter:	Most Roll to Roll machines come with a built-in sheet cutter. Be careful with this during feeding, or when removing a jammed printing medium.
	Replacing media:	When replacing a printing media, be careful not to pinch your fingers or get injured.
	Foreign objects:	If a foreign object such as a small piece of metal or a liquid like water gets inside the machine, turn OFF the machine and unplug the power cord immediately. Contact a service technician.
	Cleaning inside:	Leaving the machine with dust inside without cleaning for a long time may cause a fire or printer failure. Train end-user for cleaning inside the equipment according the 'Care & Maintenance' document delivered with the printer.
	Movement of printer:	Explain clearly to end-user that equipment movement needs to be done by local distributor or dealer.

Hand over Safety Data Sheets for the ink and explain precautions and emergency procedures when coming in contact with ink. Check if all PPE is available as well as an eye wash station before starting the training.

		Eyes	If you get ink in your eyes, immediately wash your eyes with a lot of clean water for at least 15 minutes. Then consult a doctor as soon as possible
		Mouth	If anyone drinks ink by mistake, seek medical advice immediately and show the container or label. Do NOT induce vomiting.
		Nose	If you inhale a great deal of vapour and feel ill, immediately move to a location with plenty of fresh air, and keep yourself warm and calm. Make sure that somebody is nearby to assist you.
		Skin	If the ink adheres to your skin, use a large amount of water and soap or special detergent for skin to remove the ink. Pay extra attention when using UV ink.
		ink	The safety evaluation of a machine assumes that the ink, recommended by MIMAKI, is used.
		Expiration date	Keep in mind the expiration date of inks, when expired replacement is required to ensure the quality. Ink used for more then 2 months after expiration date can damage the printer.
		Refill	Never refill the ink pack with ink. Refilled ink pack can damage the printer and cause a trouble.
		Shaking	Neither pound the ink pack nor shake it violently, as doing so can cause leakage of ink.
		Dispose	When you dispose ink or ink packs by yourself, follow the regulations stipulated by the industrial waste disposer or the country or region you live in.

General Instructions

Explain the following:

- ☐ Altering or bypassing the safety features of the printer (safety) and can void warranty on the machine
- ☐ We do not recommend unattended printing. It is not advised or supported by Avery Dennison and can void the warranty on the machine


Walk around the machine and explain the parts and functions

- ☐ Explain to always leave the power cord plugged in and power always switched on. Explain why (auto-cleaning cycles)
- ☐ Pinch rollers.
 - ☐ Different pressure levels/options and our recommendation for reflective sheeting.
- ☐ Front panel.
 - ☐ Local, Remote
 - ☐ Maintenance
 - ☐ Clearing Remaining Data
 - ☐ Show 3 different main screens and how to switch between them.
- ☐ Waste ink (explain that the ink shows full on the screen and not on the waste tank. This is critical to look out for.
- ☐ Print heads and explain to never touch the nozzle plate.

Loading/unloading media

- ☐ Show the process.
- ☐ Explain the unwinding lock.
- ☐ Explain the importance of edge guards.
- ☐ Let all operators do and repeat this several times.
- ☐ Show Feed Compensation and explain importance

Loading new ink and placing chips

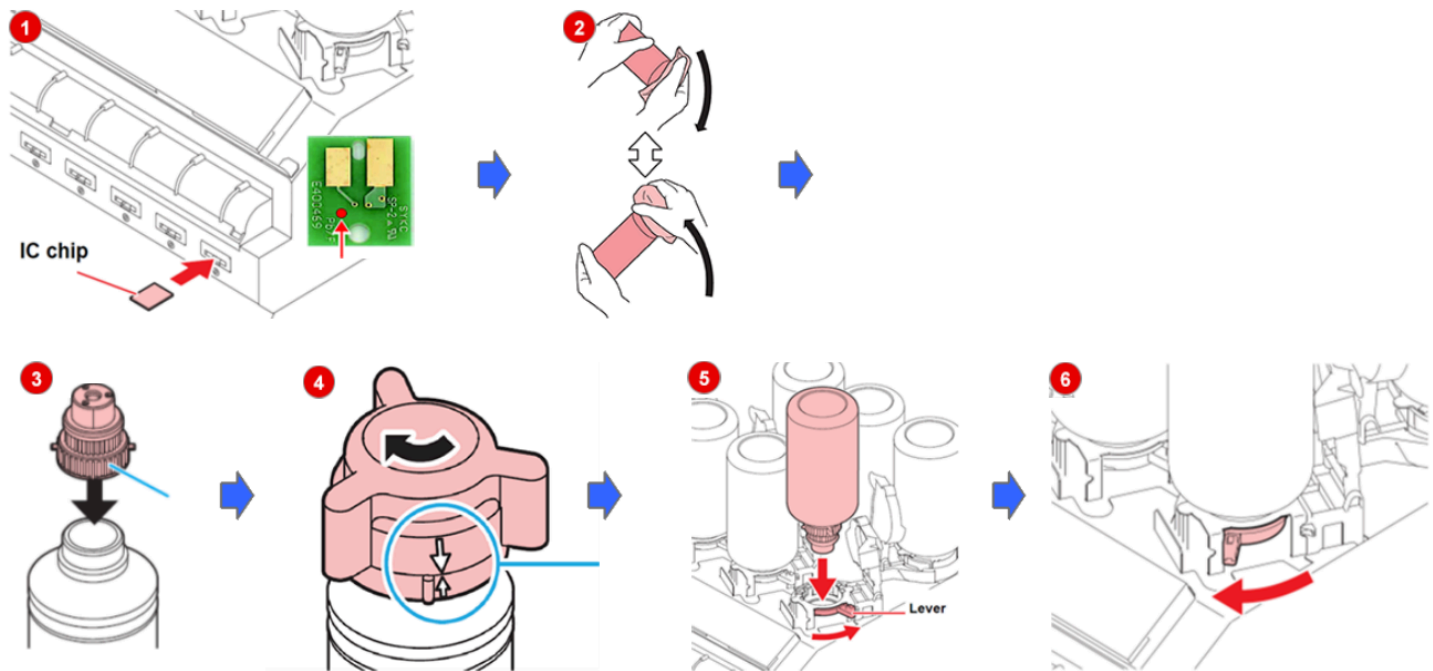

Maintenance

- ☐ Re-emphasize safety and safety equipment (glasses, gloves).
- ☐ Explain why maintenance is required and risks if not done (properly).
- ☐ Explain to always use maintenance items suitable to maintain digital UV printing equipment (foam swabs, lint-free or microfiber UV cloth, etc.).
- ☐ Explain why LED glass needs to stay clean (reduction of intensity will cause issues with curing).
- ☐ Go through the maintenance steps and let every operator practice.
- ☐ Hand over a printed version of the maintenance document.
- ☐ Explain Maintenance Videos and where to find them on our website.
- ☐ Explain SDS Sheets, Hand the set over and explain where to find them on our website, Ensure the printed version should be stored in a safe place. - Provide folder if required.

Flexi

- ☐ Explain the Flexi portal and license.
- ☐ Explain the difference between Production Manager and Designer.
- ☐ Explain Color Swatches and True Traffic Spot Colors.
- ☐ How to design a Traffic Sign.
- ☐ Sending a file directly using RIP & PRINT and/or exporting to EPS first.
- ☐ Explain Production Manager (Hold, RIP, Print, Queues, Default Job Settings, and Job Settings).
- ☐ Sending a file from the RIP to the printer and show what happens if the printer is not set/set to Local.
- ☐ Explain how the customer can install the backup (settings and presets) after re-installing Flexi.

Illustrator or CorelDraw

- ☐ Install the swatches. - If Unsure, provide the customer with the guide.

Lamination

- ☐ Explain why a heated top roller is required
- ☐ Explain silvering and negative effects
- ☐ Advised settings for Kala (113F/45C, Pressure 5, Speed 1-2)

Holiday procedure

- ☐ Explain Holiday procedure with the above link and ensure they are aware that continual printing is always recommended.

Training sign off

You, the representative of the company, acknowledge that you received training and understand how to operate and maintain the printer.

Date :

Name Operator 1 :

Signature Operator 1 :

Name Operator 2 :

Signature Operator 2 :

Name Operator 3 :

Signature Operator 3 :

Notes:

.....

.....

.....

.....

.....

Installation sign off

You, the representative of the company, acknowledge that the printer was installed and is functioning correctly.

Date :

Technician :

Company :

Company Representative :

Signature :

For technical questions or support, please contact:

<https://reflectives.averydennison.com>

North America

reflective.tech.na@averydennison.com

+1 877 214 0909, Extension 2

Europe

reflective.tech.eu@eu.averydennison.com

+31 (0)85 0002415

Latin America

reflective.tech.la@la.averydennison.com

+55.19.3876.7767

Asia Pacific

reflective.tech.ap@ap.averydennison.com

+61 (0) 9271 0300

The above Avery Dennison literature provides information to the user for proper application, storage, and other requirements. Please refer to Product Data Bulletins or your local Avery Dennison Representative for warranty information. Find the latest information on the Avery Dennison website, www.reflectives.averydennison.com. We encourage you to check our website periodically for updates.

All statements, technical information, and recommendations about Avery Dennison products are based upon tests and information believed to be reliable but do not constitute a guarantee or warranty of any kind. All Avery Dennison products are sold with the understanding that the Purchaser has independently determined the suitability of such products for their intended and other purposes. ch.sa@averydennison.com