

Blue Carbon

AC/DC Inverter

AC 6kW Output+DC 6kW Output

12KW



9 Inverters in Parallel



Built-in 80A
Solar Charger



Wide MPPT
Range:120-500V

DUAL
DC AC

DC+AC Dual
Output

BMS

Compatible with Lithium
/ Lead-Acid batteries



Feed-in Grid




Lithium Battery
Starting



Removable Dust
Cover



Wifi Monitoring

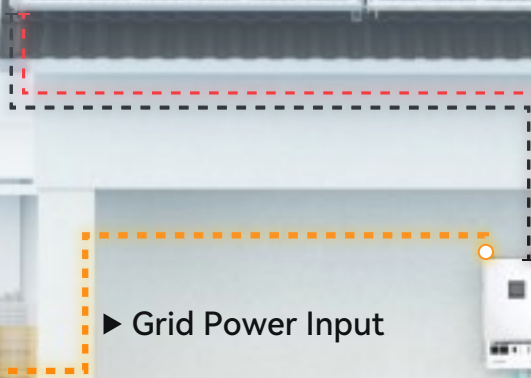

► Photovoltaic Input

► Grid Power Input



Multi-Source Output Support

Integrated inverter can simultaneously connect to PV power generation (DC), energy storage battery (DC) and grid (AC), and intelligently allocate power sources according to demand. AC 6kW output power + DC 6kW output power can support the simultaneous use of high-power electrical appliances.

Energy Storage Battery Connection

Blue Carbon



220V/6kW AC Output

6kW DC Output



AC TV



AC Dishwasher



AC Vacuum Cleaner



AC Washing Machine



AC Fan



DC Kettle



DC Electromagnetic Oven



DC Rice Cooker



DC Air Conditioner



DC Freezer

DC+AC Dual Output-meeting diverse market needs

AC/DC Inverter

AC 6kW Output+DC 6kW Output

Parallel Quantity: 9

AC INPUT	Rated Input Voltage(VAC)	208/220/230/240;L+N+PE
	Voltage Range(VAC)	90~280±3(normal mode);170~280±3 (UPS mode)
AC OUTPUT	Max Power (kw)	6
	Voltage (VAC)	208/220/230/240
	Frequency	50/60Hz±0.1%
	Switch Time (ms)	10 (normal mode) / 10 (UPS mode)
	Wave Form	Pure Sine Wave
	Overload Capacity (Battery Mode)	60s@102%~110% load;10s@110%~130% load; 3s@130%~150%load; 0.2s@>150% load
	Max. Efficiency (Battery Mode)	93%@48VDC

DC Output (Simultaneous support)	Voltage (VAC)	48V	24V	12V	5V
	Max Power (kw)	5kW	500W	100W	10W
	Output Current (A)	104A	20A	8A	2A
CHARGER (PV / AC)	Solar Charger Type	MPPT			
	Max PV Input Current / input Power	18A/6000W			
	MPPT Range@Operating Voltage (VDC)	120~450			
	Max PV Open Circuit Voltage (VDC)	500			
	Max. Charge Current (PV + AC)(A)	80			
BATTERY	Rated Voltage (VDC)	48			
	Battery Type	LiFePO4 lithium			
INTERFACE	HMI	LCD			
	Interface	RS485 /RS232 / USB / Dry Contact			
	Monitoring	WiFi (Optional)			