


[Control Switches]

Function

- Changes the ON/OFF state of a specified switch.

Settings

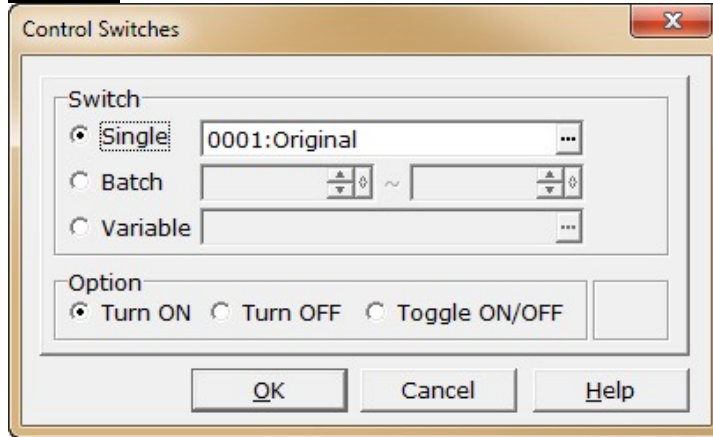

- Carries out [Operation] on the switch specified in [Switch to operate].

- Under [Switch to operate], choose the switch to operate using one of the 3 following methods.

Single Operates on a single switch. Click the [...] button to display the [Switch] window, and specify the switch to operate.

Batch Enter the start and end points of the range of switches to modify. All switches within this range will be operated upon.

The switch with the same number as the value stored in the given variable will be operated on.

Variable For example, if variable no. 2 is specified which contains “5” at the time the command is processed, switch no. 5 will become the target of this command.

The variable to be used can be specified by clicking the [...] button to open the [Variables] window, from which the number of the variable can be chosen.

- Under [Operation], choose one of the following operations to perform on the switch specified in [Switch to operate].

Turn ON Turn the switch ON.

Turn OFF Turn the switch OFF.

Toggle ON/OFF If the switch is ON, it will be turned OFF and vice versa.