

[illegible]

			Creator	M.Wetzel	21.07.2021	circuit-diagram control-panel BR2000-ECU9 / DEIF AGC-4-A10	 A Rolls-Royce solution	Revisions overview	Drawing No.	XZ54634000004 (ZNG00040682)	Order No	--					
			Editor	M.Wetzel	21.10.2021				Material No	XZ54634000028 (ZNG00040684)	Department	TEEC	XZ54634000004 (ZNG00040682)	Page	0	Total Pages	71
Revision	Date	Name	Norm	M.Prinz	22.07.2021				Customer Description	Project Description	Project template with identifier structure to IEC 81346						



A Rolls-Royce
solution

project-description

circuit-diagram control-panel BR2000-ECU9 / DEIF AGC-4- A10

order number

--

material number

X54634400028 (ZNG00040684)

drawing-number

XZ54634000004 (ZNG00040682)

serial number

type-of-system

BR2000-ECU9

			Creator	M.Wetzel	21.07.2021	circuit-diagram control-panel BR2000-ECU9 / DEIF AGC-4- A10	 A Rolls-Royce solution	Cover sheet	Drawing No. XZ54634000004 (ZNG00040682)	Order No --	EAA			
			Editor	M.Wetzel	21.10.2021									
			Appr	F.Jäger	22.07.2021									
Revision	Date	Name	Norm	M.Prinz	22.07.2021	Customer Description	Project Description	Project template with identifier structure to IEC 81346	Material No X54634400028 (ZNG00040684)	Department TDEC	XZ54634000004 (ZNG00040682)	Page 1	Total Pages 71	

Table of contents

Page Structure				Page	Page description	Date	Edited by
				0	Revisions overview	22.07.2021	M.Wetzel
		EAA		1	Cover sheet	23.07.2021	M.Wetzel
		EAB		2	Table of contents	06.10.2021	M.Wetzel
		EAB		3	Table of contents	06.10.2021	M.Wetzel
		EDB		4	Structure identifier overview	06.10.2021	M.Wetzel
		EDB		5	Technical data	06.10.2021	M.Wetzel
		EDB		6	Technical data	06.10.2021	M.Wetzel
	BSF	EFS	HWC	7	Coolant water preheating	06.10.2021	M.Wetzel
	BSF	EFS	FUL	8	Fuel water separator 1-4	06.10.2021	M.Wetzel
	ENG	EFS	CON	9	Engine-Control-Unit ECU9 Plug -X1	06.10.2021	M.Wetzel
	ENG	EFS	CON	10	Engine-Control-Unit ECU9 Plug -X1	06.10.2021	M.Wetzel
	ENG	EFS	STR	11	Power unit battery + starter	06.10.2021	M.Wetzel
	ENG	EFS	STR	12	Power unit battery + starter	06.10.2021	M.Wetzel
	ENG	EFS	STR	13	Power unit battery + starter	06.10.2021	M.Wetzel
	GEN	EFS	EKW	14	Generator heater Customer 500/1000W	06.10.2021	M.Wetzel
	GEN	EFS	CON	15	Generator Signal Automatic voltage regulator	06.10.2021	M.Wetzel
	GEN	EFS	CON	16	Generator winding and bearing temperature	06.10.2021	M.Wetzel
	MIP	EFS	CON	17	Supply 24VDC Charger	06.10.2021	M.Wetzel
	MIP	EFS	CON	18	Supply 24VDC Charger	06.10.2021	M.Wetzel
	MIP	EFS	CON	19	General signals	06.10.2021	M.Wetzel
	MIP	EFS	CON	20	Module control enclosure	06.10.2021	M.Wetzel
	MIP	EFS	EES	21	emergency-stop	06.10.2021	M.Wetzel
	MIP	EFS	PLC	22	Controller DEIF AGC4	06.10.2021	M.Wetzel
	MIP	EFS	PLC	23	SPS-Kontroller DEIF AGC-4	06.10.2021	M.Wetzel
	MIP	EFS	PLC	24	SPS-Kontroller DEIF AGC-4	06.10.2021	M.Wetzel
	MIP	EFS	COM	25	Bus-overview DEIF AGC4	06.10.2021	M.Wetzel
	MIP	EFS	MCC	26	Control cabinet cooling	06.10.2021	M.Wetzel
	MIP	ETL		27	Switch-cabinet front outside	06.10.2021	M.Wetzel
	MIP	ETL		28	Switch-cabinet front and MPL	06.10.2021	M.Wetzel
	MIP	ETL		29	Switch-Cabinet Side outside	06.10.2021	M.Wetzel
	MIP	ETL		30	Mounting plate overview	06.10.2021	M.Wetzel
	MIP	ETL		31	Cabinet drilling diagram	06.10.2021	M.Wetzel
	GCB	EFS	CON	32	GCB-Generator circuit breaker	06.10.2021	M.Wetzel
	MCB	EFS	CON	33	MCB-Mains circuit breaker	06.10.2021	M.Wetzel
	FAN	EFS	ECC	34	FAN-Engine fan	06.10.2021	M.Wetzel
	TNK	EFS	FUL	35	Fuel transfer pump	06.10.2021	M.Wetzel
	EXT	EFS	CON	36	Customer page	06.10.2021	M.Wetzel
	EXT	EFS	CON	37	Customer page	06.10.2021	M.Wetzel
	DOK	ETL		38	layout legend	06.10.2021	M.Wetzel

Use and reproduction only permitted with express permission!

EPLAN P8 2.8.3

This drawing set is the property of MTU onsite energy GmbH

Table of contents

Page Structure				Page	Page description	Date	Edited by
	DOK	ETL		39	layout legend	06.10.2021	M.Wetzel
	DOK	ETL		40	layout legend	06.10.2021	M.Wetzel
	DOK	ETL		41	layout legend	06.10.2021	M.Wetzel
	DOK	EMA		42	Terminal-overview	06.10.2021	M.Wetzel
	DOK	EMA		43	Terminal-overview	06.10.2021	M.Wetzel
	DOK	EMA		44	Terminal-overview	06.10.2021	M.Wetzel
	DOK	EMA		45	Terminal-overview	06.10.2021	M.Wetzel
	DOK	EMA		46	Terminal-overview	06.10.2021	M.Wetzel
	DOK	EMA		47	Terminal-overview	06.10.2021	M.Wetzel
	DOK	EMA		48	Terminal-overview	06.10.2021	M.Wetzel
	DOK	EMA		49	Terminal-overview	06.10.2021	M.Wetzel
	DOK	EMA		50	Terminal-overview	06.10.2021	M.Wetzel
	DOK	EMA		51	Terminal-overview	06.10.2021	M.Wetzel
	DOK	EMA		52	Terminal-overview	06.10.2021	M.Wetzel
	DOK	EMA		53	Terminal-overview	06.10.2021	M.Wetzel
	DOK	EMA		54	Terminal-overview	06.10.2021	M.Wetzel
	DOK	EMA		55	Terminal-overview	06.10.2021	M.Wetzel
	DOK	EMA		56	Terminal-overview	06.10.2021	M.Wetzel
	DOK	EMA		57	Terminal-overview	06.10.2021	M.Wetzel
	DOK	EMA		58	Terminal-overview	06.10.2021	M.Wetzel
	DOK	EMA		59	Terminal-overview	06.10.2021	M.Wetzel
	DOK	EMA		60	Terminal-overview	06.10.2021	M.Wetzel
	DOK	EMA		61	Terminal-overview	06.10.2021	M.Wetzel
	DOK	EMA		62	Terminal-overview	06.10.2021	M.Wetzel
	DOK	EMB		63	Harness-overview	06.10.2021	M.Wetzel
	DOK	EPC		64	Bill of material	06.10.2021	M.Wetzel
	DOK	EPC		65	Bill of material	06.10.2021	M.Wetzel
	DOK	EPC		66	Bill of material	06.10.2021	M.Wetzel
	DOK	EPC		67	Bill of material	06.10.2021	M.Wetzel
	DOK	EPC		68	Bill of material	06.10.2021	M.Wetzel
	DOK	EPC		69	Bill of material	06.10.2021	M.Wetzel
	DOK	EPC		70	Bill of material	06.10.2021	M.Wetzel

TECHNICAL DATA AND CONSTRUCTION DETAILSIEC 61355

Full designation	Structure description
mounting-location	
+BSF	Baseframe
+ENG	Engine
+GEN	Generator incl. terminal box
+MIP	MTU Genset interface panel
+MMC	MTU Genset control
+GCB	Generator circuit breaker
+MCB	Mains circuit breaker
+FAN	Fan control
+TNK	Fuel tank
+EXT	Devices and enclosures outside any other enclosure, not delivered by MTU
+CPL	Other control panel enclosure
+DOK	documents
+CUS	Customer page

Full designation	Structure description
document-type	
&EAA	Electrical cover sheet
&EAB	Electrical table of contents
&EDB	Description
&EFS	Wiring diagram
&ETL	Layout
&EMA	Electrical terminal diagram
&EMB	Electrical cable plan
&EPC	Bill of material

Full designation	Structure description
system	
=EKW	Electrical power
=CON	Control voltages
=EES	Engine emergency stop
=PLC	Programable logic controller
=COM	Communication
=STR	Engine starting
=MCC	Mixture cooling circuit
=ECC	Engine/jacket water circuit
=HWC	Heating water circuit
=FUL	Fuel supply

TECHNICAL DATA AND CONSTRUCTION DETAILS

line and color definition for potential tracing		
(Colors are only visible if you use colored print out)		
Supply, Line and measure voltage	L1, L2, L3 (120V, 230V, 400V ,690V, ...)	
Supply, Line and measure voltage	N	
Protective earth	Ground	
Control voltage + 24VDC, 12VDC L+	L+	
Control voltage - 0VDC L-	L-	
Shield	SH	
Starter battery cabling +24V	L-	
Starter battery cabling -24V	L-	

line and color definition for potential tracing		
(Colors are only visible if you use colored print out)		
Control voltage 24VAC 24VAC L		
Control voltage 24VAC 24VAC N		
External source voltage		
Analog signals	QSOLL+, QSOLL-	
Current transformer	L1-l-Geno, L1-k-Geno	
Emergency stop	L+	
All other connections EPLAN standard		

TECHNICAL DATA AND CONSTRUCTION DETAILS

Wire colors within enclosure

According
IEC EN 60204-1

Rated voltage	Above 48VAC	black
Neutral wire	N	light blue
Protective earth	PE	green/yellow
Control voltage	24-240V AC	red
	0V AC	red/white
	24-110V DC	dark blue
	0V DC	grey
PLC-Controller		white
Measuring technique		grey
wires before Mainswitch		orange


Main power before main switch
Main power main switch on
Neutral wire
Protective conductor

L1 - L2 - L3
1L1 - 1L2 - 1L3
N
PE

Power supply	400VAC	-XD01
Power supply	230VAC	-XD02
Auxiliary drives		-XD03
Emergency stop		-XD06
Module signals digital		-XD10
Module signals analog		-XD11
Supply DC	24VDC	-XDL+
Supply DC	0VDC	-XDL-
Signals external DC		-XD100.x
Harness W010-ECU7 / W011-ECU9 Digital		-1XD01
Harness W010-ECU7 / W011-ECU9 Analog		-1XD02
Harness W020 Engine		-2XD01
Harness W030 Generator signal		-3XD01/-3XD02
Harness W031 Generator PT100		-3XD03
Option		
Harness W050 Power panel		-5XD01
Control cable WD06.1 Generator circuit breaker		-6XD01
Control cable WD07.1 Mains circuit breaker		-7XD01
Control cable WD08.1 Fan control enclosure		-8XD01
Control cable WD09.1 Fuel control		-9XD01
CAN bus		-XF01
MOD bus		-XF02

Tightening torque

Power relay	75A	M3,5x5 M5x8	1,1-1,2 Nm 3,2-3,5 Nm
Starter	Prestolite 9KW	M5 M12	2,0-3,0 Nm 27-33 Nm
Starter	Prestolite 15KW	M5 M10	1,5-1,7 Nm 9-10 Nm
Starter	Delco 9KW	Housing 10-32 INCH 1/2-13 INCH	18-23 Nm 1,8-3,4 Nm 27-34 Nm
Battery disconnect switches		M10 M12	15-20 Nm 18-22 Nm
Battery terminals	DIN 72331	Cable M6 M8	5-6 Nm Class 4,6 / 3,5 Nm Class 4,6 / 8,4 Nm
Grounding		M8 M10 M12 M14	Class 8,8 / 28 Nm Class 8,8 / 54 Nm Class 8,8 / 93 Nm Class 8,8 / 148 Nm

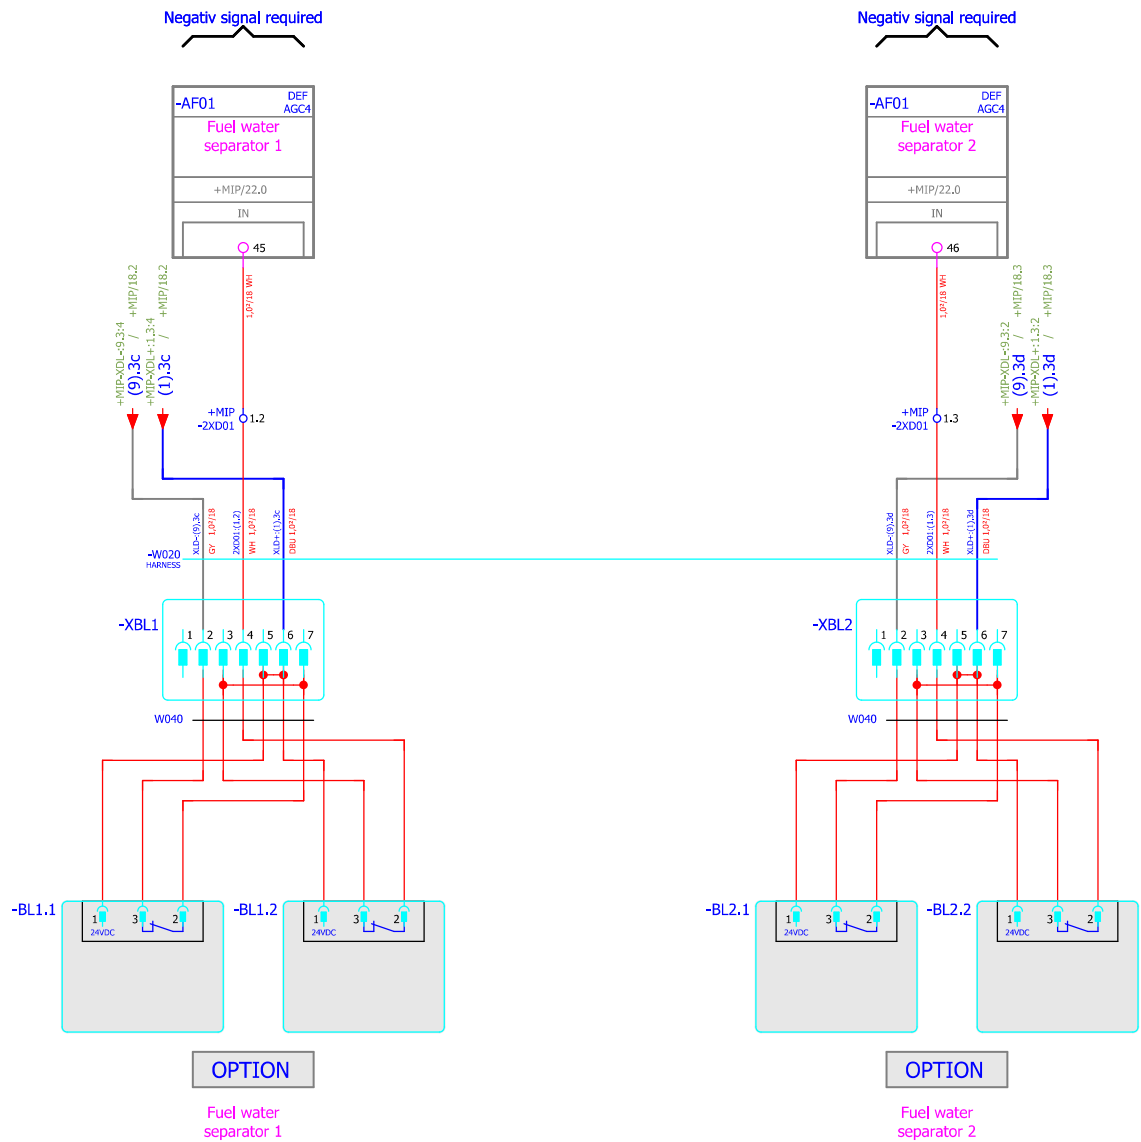

This drawing set is the property of MTU onsite energy GmbH
Use and reproduction only permitted with express permission!

EPLAN P8 2.8.3

ECU9

+BSF/8

