


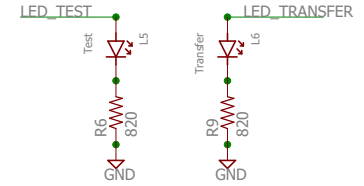
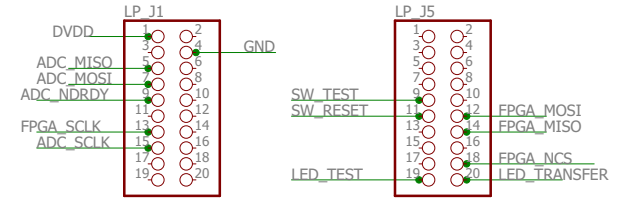


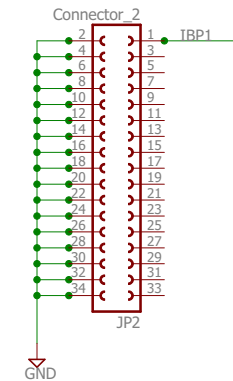

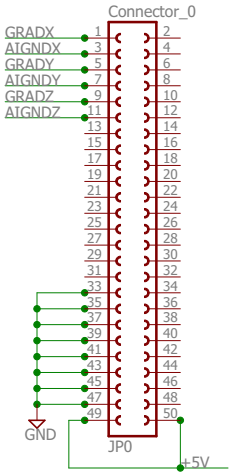




RC filter is prevent
antialiasing effects on gradients

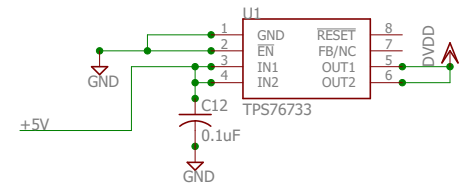

Launchpad pins have built-in pulldown/pullup resistors



To conserve power, the nDRDY signal is sent inverted.

