


TABLES OF CONTENTS

PAGE	CONTENT
01	Reversion_History_Schematic
02	System_Block_Diagram
03	USB_and_Power
04	MCU_and_Antenna
05	Display
06	EEPROM
07	SD_Card


REVISION HISTORY

VER#	DATE	REVERSION	DESCRIPTION OF CHANGES	AUTHOR
V1.0	17/07/2026	ESP32 S3_USB Dongle		nq_minh_

Title: *		Author: *	
Size: A3	Project:		CheckedBy: *
			Modified Date: 17/07/2026
			Revision: *
Date: 17/07/2026	3:59:01 CH	Sheet 1 of 5	SW Version: 24.6.1.21

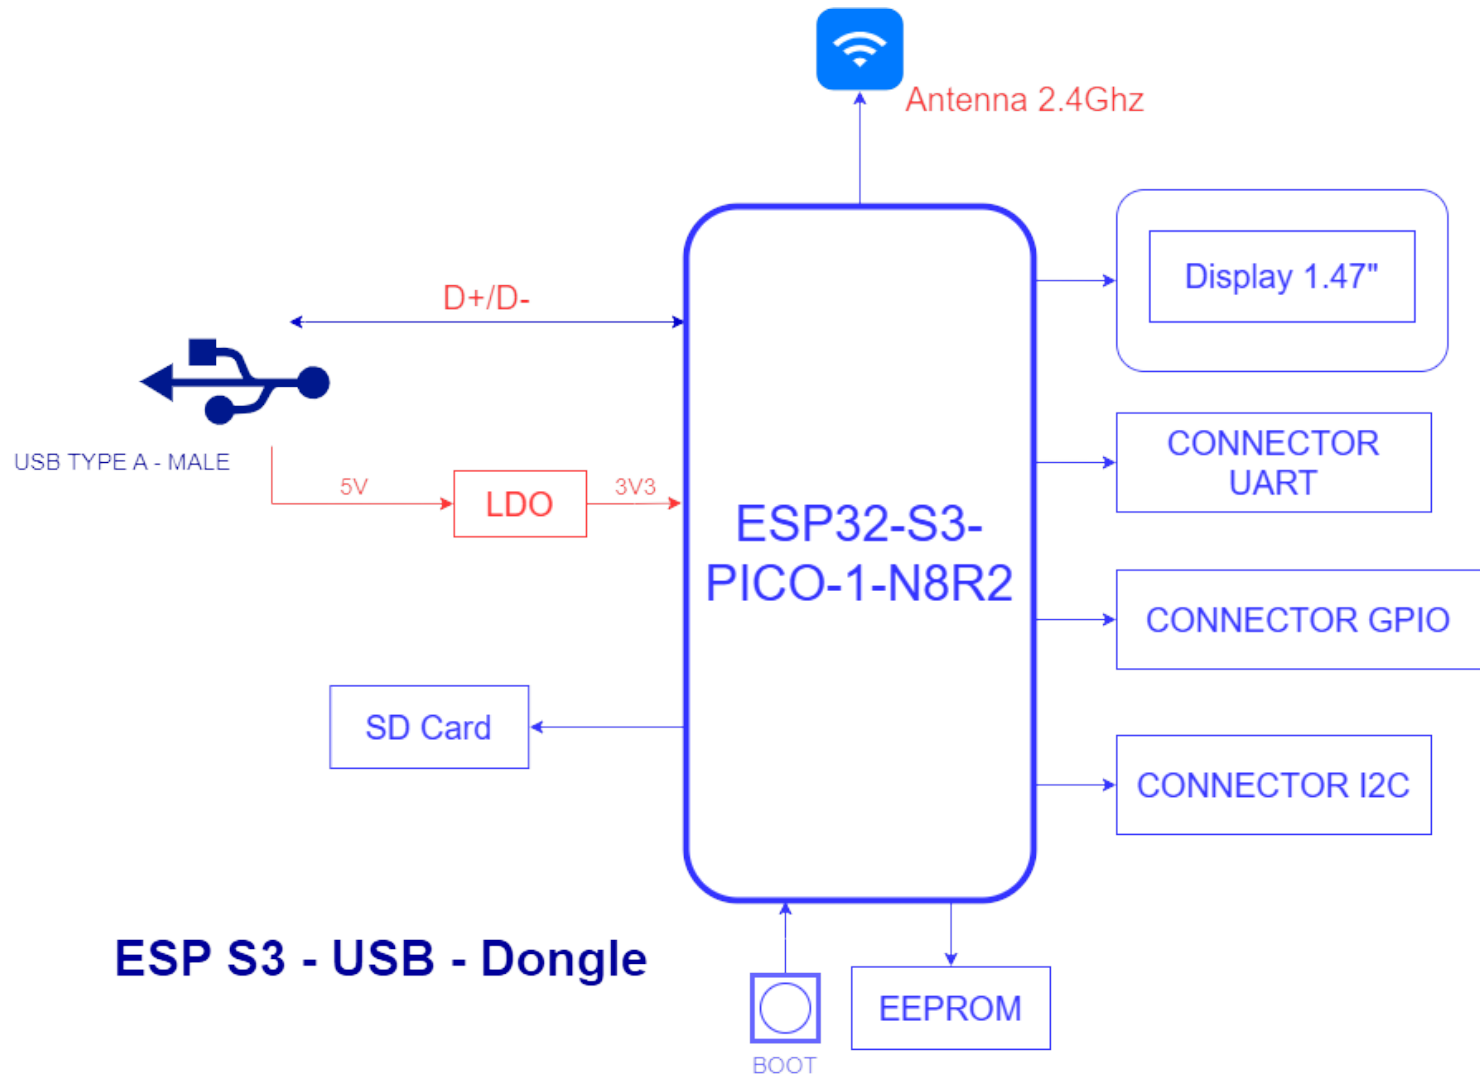


Title		
Size A4	Number	Revision
Date: 7/17/2026	Sheet of	
File: D:\Minh\...\System Block Diagram.SchDoc Drawn By:		

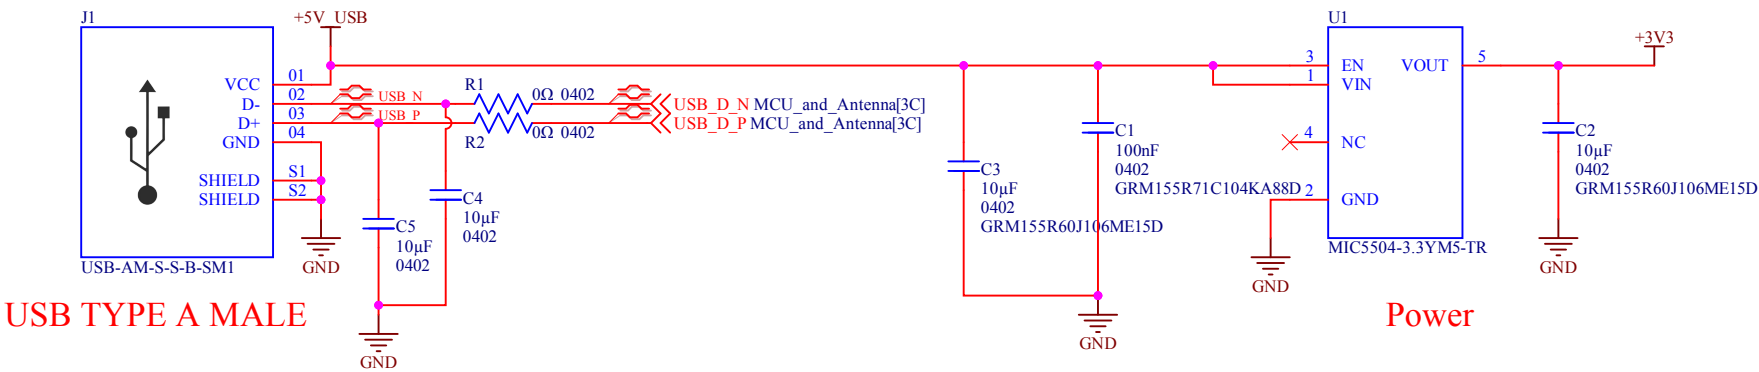


USB TYPE A MALE

Power

Title:			Author:	Cannot open file D:\Admin\Github\IOT SOLUTIONS
Size: A4			Approved:	
Project:			CONFIDENTIAL	
Date: 17/07/2026			Modified Date: 17/07/2026	
3:59:01 CH			Revision:	
Sheet 3 of 6			SW Version: 24.6.1.21	

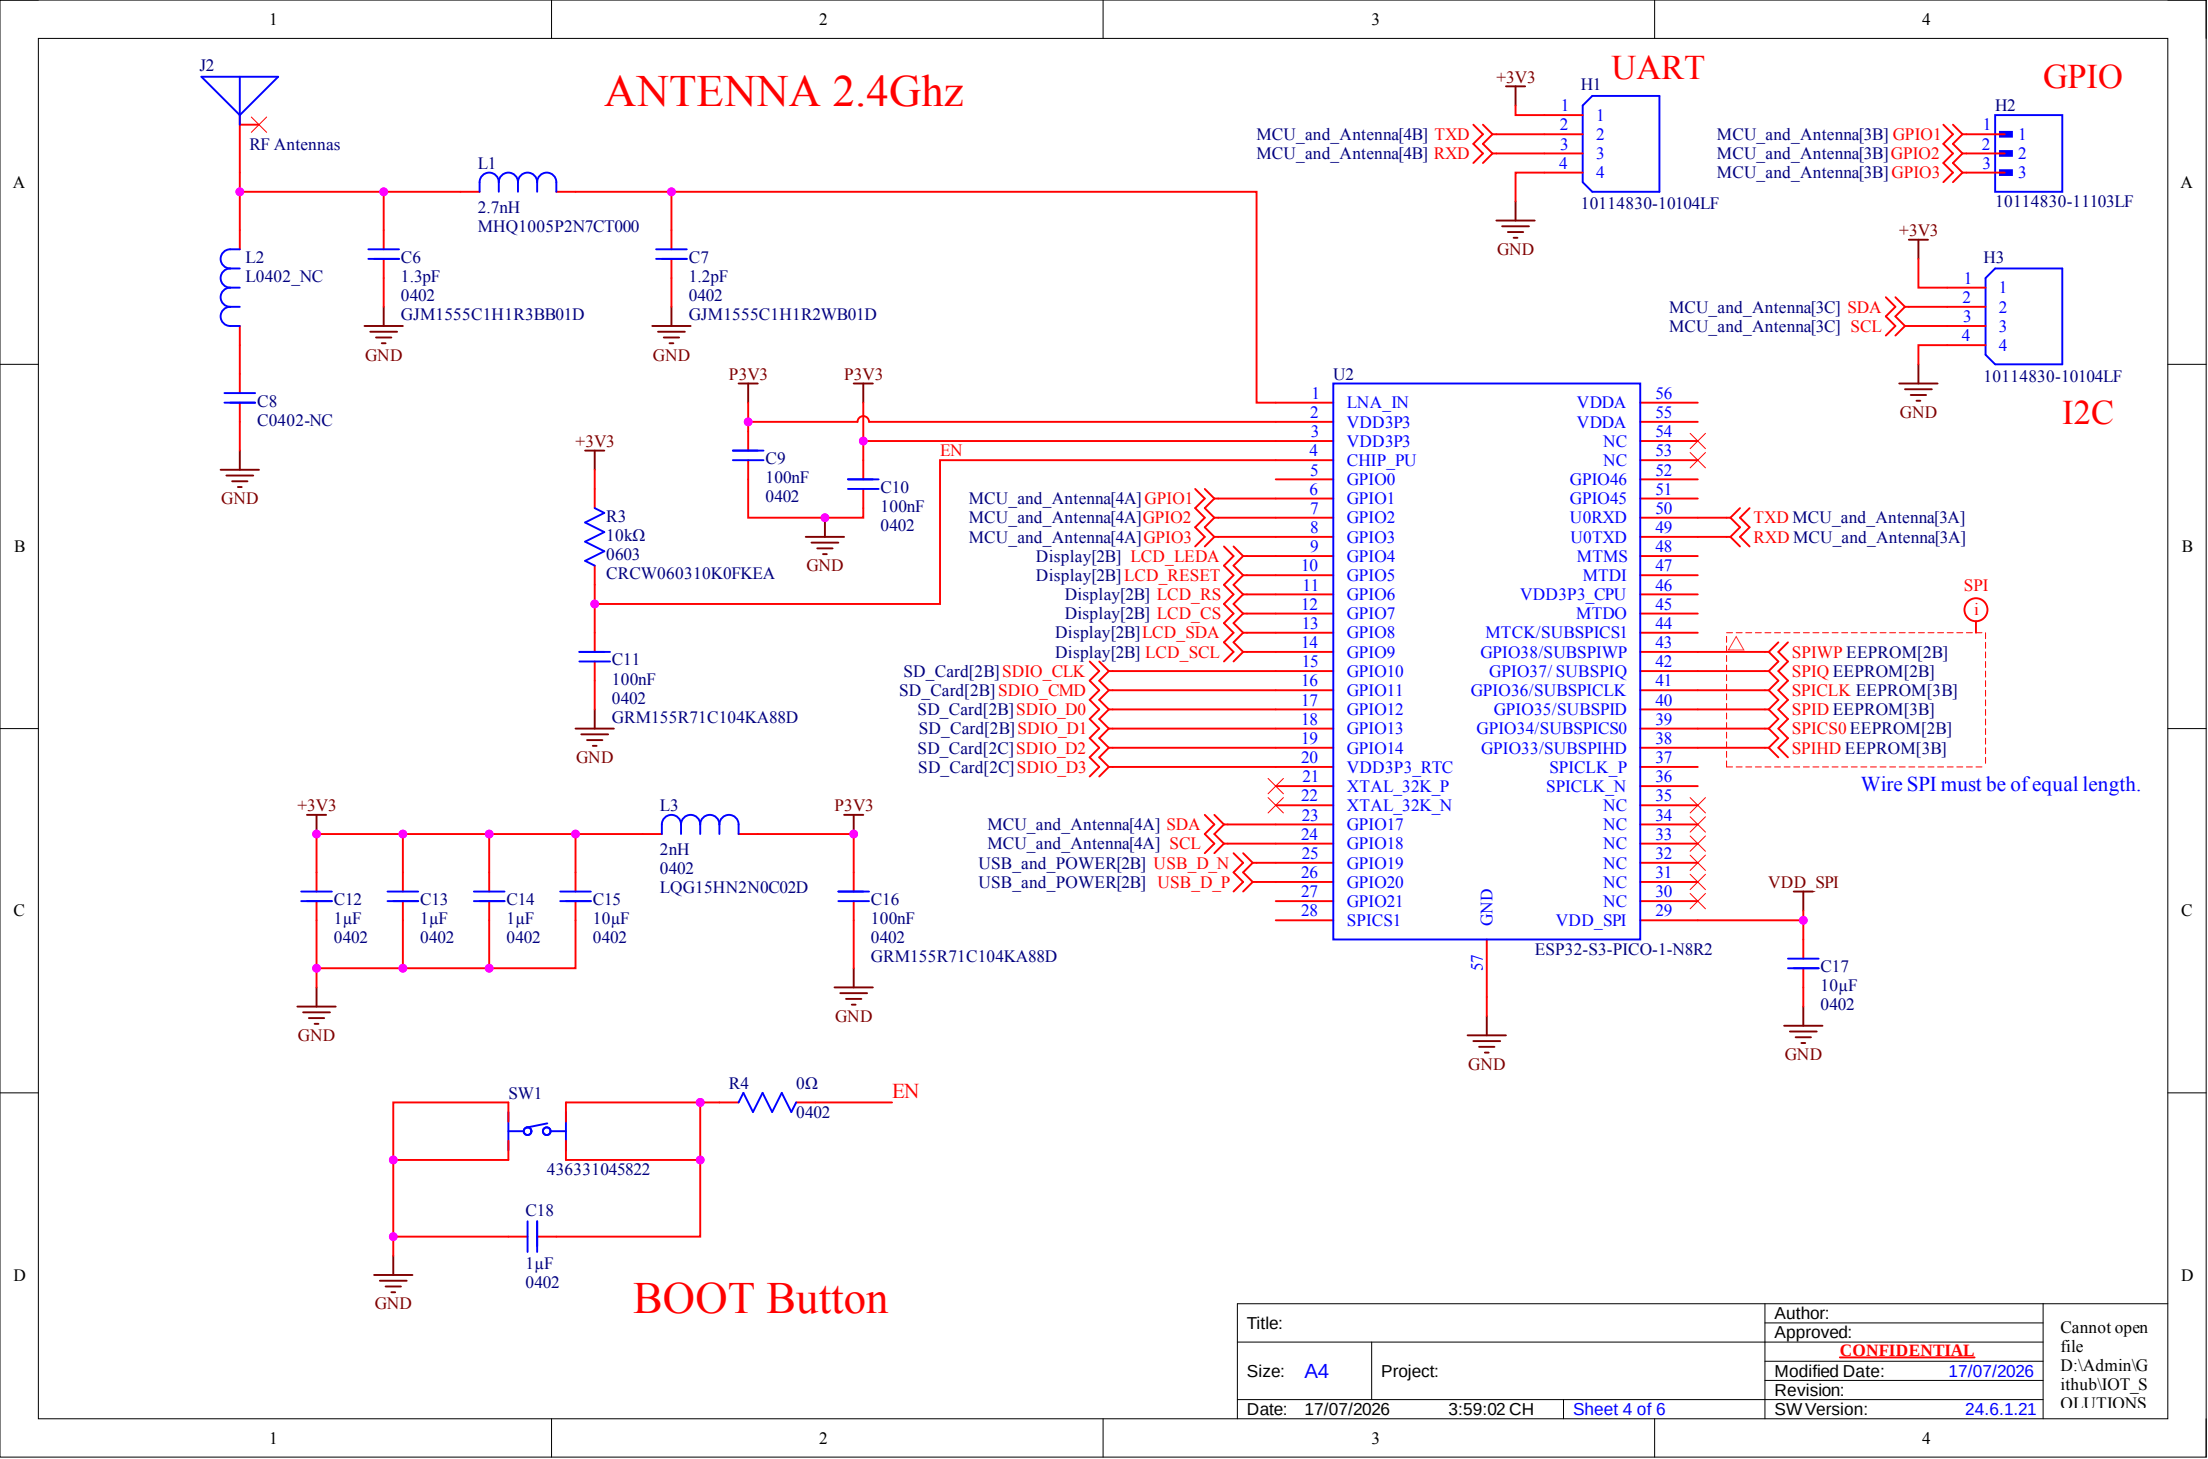

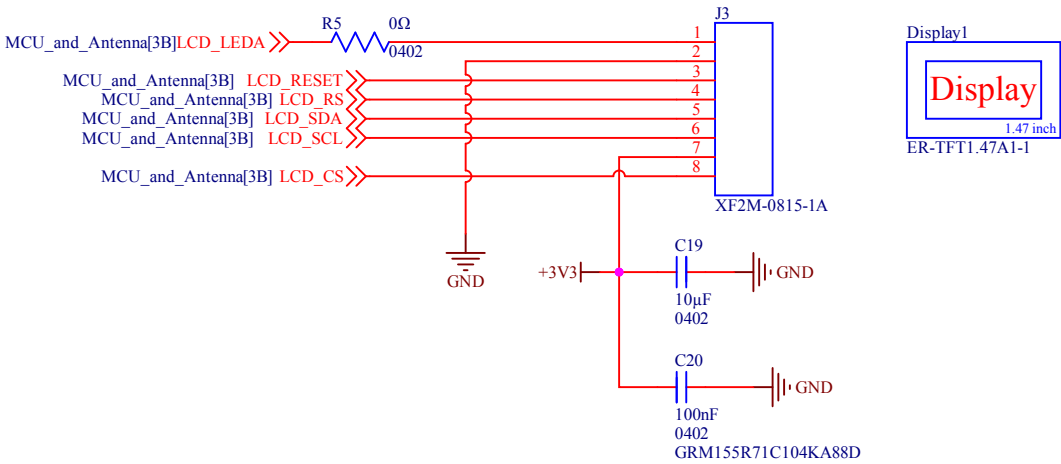

Title		
Size	Number	Revision
A4		
Date:	7/17/2026	Sheet of
File:	D:\Minh\...\Display.SchDoc	Drawn By:

A

B

C


D

A

B

C

D

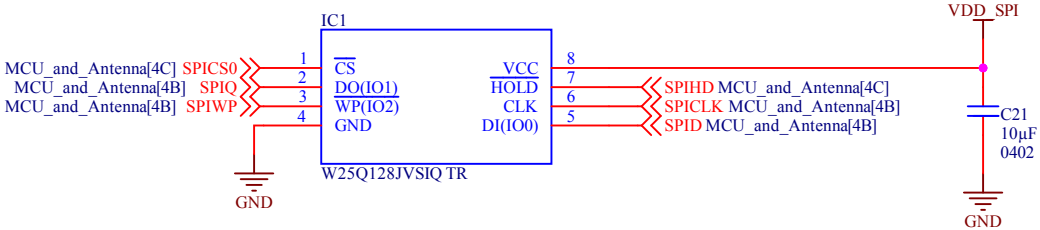

Title		
Size	Number	Revision
A4		
Date:	7/17/2026	Sheet of
File:	D:\Minh\...EEPROM.SchDoc	Drawn By:

A

B

C


D

A









B

C

D

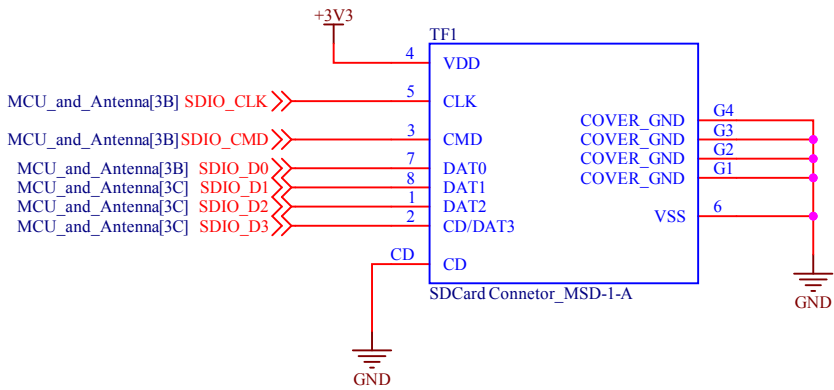

Title		
Size	Number	Revision
A4		
Date:	7/17/2026	Sheet of
File:	D:\Minh\SD Card.SchDoc	Drawn By:

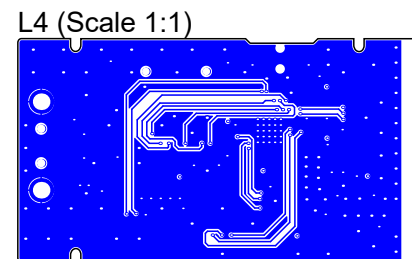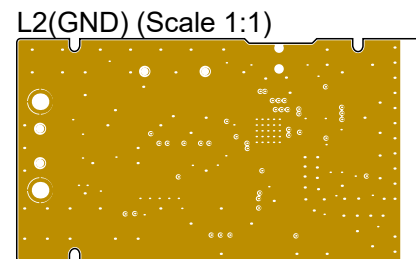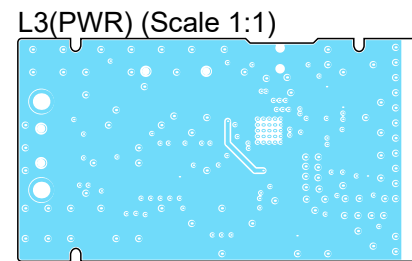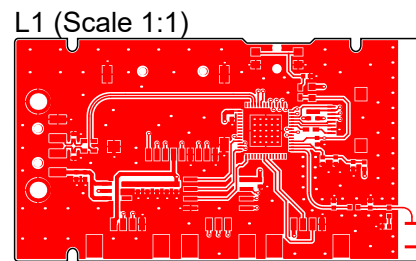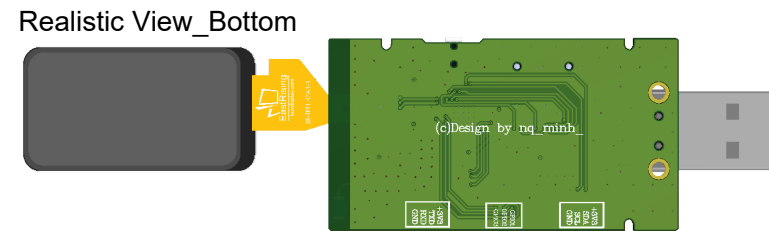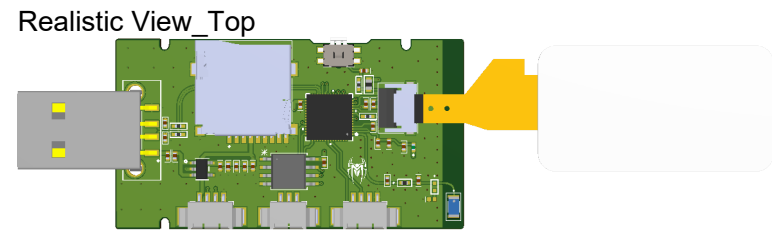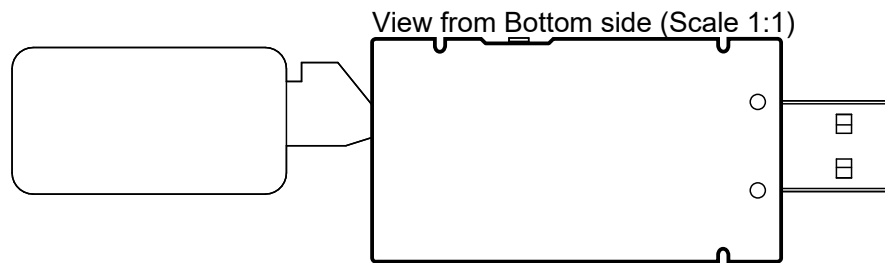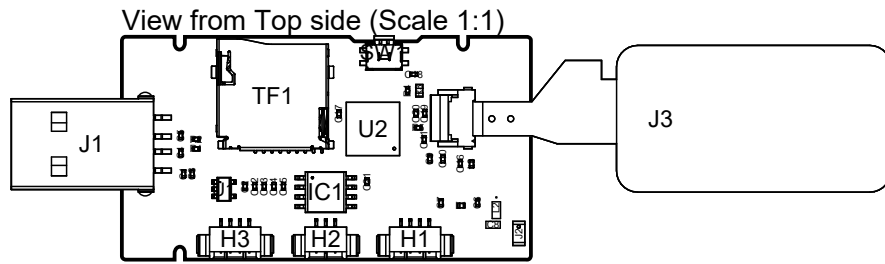

Layer Stack Legend

Material	Layer	Thickness	Dielectric Material	Type	Gerber
	Top Overlay			Legend	GTO
Surface Material	Top Solder	0.01mm	Solder Resist	Solder Mask	GTS
Copper	L1	0.04mm		Signal	GTL
Prepreg		0.21mm	7628	Dielectric	
Copper	L2(GND)	0.02mm		Signal	G1
Core		1.07mm	FR-4	Dielectric	
Copper	L3(PWR)	0.02mm		Signal	G2
Prepreg		0.21mm	7628	Dielectric	
Copper	L4	0.04mm		Signal	GBL
Surface Material	Bottom Solder	0.01mm	Solder Resist	Solder Mask	GBS
	Bottom Overlay			Legend	GBO

Total thickness: 1.61mm

Bill Of Materials

Line #	Designator	Comment	Quantity	LCSC Part	Manufacturer Part Number	Manufacturer
1	C1, C9, C10, C11, C16, C20	GRM155R71C104KA88D	6	C71629	GRM155R71C104KA88D	Murata
2	C2, C3, C4, C5, C15, C17, C19, C21	GRM155R60J106ME15D	8	C412251	GRM155R60J106ME15D	Murata
3	C6	GJM1555C1H1R3BB01D	1	C161309	GJM1555C1H1R3BB01D	Murata
4	C7	GJM1555C1H1R2WB01D	1	C76899	GJM1555C1H1R2WB01D	Murata
5	C8	C0402-NC	1			
6	C12, C13, C14, C18	CL05A105KP5NNNC	4	C14445	CL05A105KP5NNNC	Samsung Electro-Mechanics
7	Display1	ER-TFT1.47A1-1	1			
8	H1, H3	10114830-10104LF	2	C5407185	10114830-10104LF	Amphenol Communications Solutions
9	H2	10114830-11103LF	1	C5407064	10114830-11103LF	Amphenol Communications Solutions
10	IC1	W25Q128JVS1Q TR	1	C97521	W25Q128JVS1Q TR	Winbond
11	J1	USB-AM-S-S-B-SM1	1	C7374540	USB-AM-S-S-B-SM1	Samtec
12	J2	RF Antennas	1	C22423581	ANT3216LL00R2400A	Yageo Group
13	J3	XF2M-0815-1A	1	C3195305	XF2M-0815-1A	Omron Electronics Inc-EMC Div
14	L1	MHQ1005P2N7CT000	1	C434841	MHQ1005P2N7CT000	TDK
15	L2	L0402_NC	1			
16	L3	LQG15HN2N0C02D	1	C2043639	LQG15HN2N0C02D	Murata
17	R1, R2, R4, R5	RC0402JR-070RL	4	C60485	RC0402JR-070RL	Yageo Group
18	R3	CRCW060310K0FKEA	1	C844918	CRCW060310K0FKEA	Vishay
19	SW1	436331045822	1	C5143619	436331045822	Wurth Elektronik
20	TF1	SDCard Connetor_MSD-1-A	1	C20619272	MSD-1-A	Same Sky
21	U1	MIC5504-3.3YM5-TR	1	C88419	MIC5504-3.3YM5-TR	Microchip
22	U2	ESP32-S3-PICO-1-N8R2	1		ESP32-S3-PICO-1-N8R2	Espressif Systems