



# 0.05A 48V ATE 10 06

# **Subminiature Toggle Switch**

**RoHS Compliant** 

UL

#### **F**eatures

- 1. Twin-contact clip mechanism for high reliability.
- 2. Process sealed structure
- 3. Gold-plated contacts.
- 4. Terminal pin pitch: 2.54 mm.
- 5. Independent detent mechanism ensures light operational feel.
- UL recognized (Excluding ATE-J series with plastic cap/rocker)

#### Specifications

	Max.	50mA 60VAC/DC	0.4VA AC/DC	
Rating	Min.	1 μ A 20mVAC/DC		
	UL	48VAC/DC 50mA		
Initial contact resistance		50mΩ Max.	(1.5mA 200µVAC)	
Dielectric strength		250VAC 1 minute		
Insulation resistance		500MΩ min.	(500VDC)	
Electrical life		10,000 cycles at 0.4V/ 50,000 cycles at 0.4V/ 30,000 cycles at 0.4V/	A rating. ( <b>D.E</b> type)	
Mechanical life		D.E type 50,000 cycles F.G.H type 30,000 cycles		
Operating temperature range		-20°C∼+85°C		
Storage temperature range		-40°C∼+85°C		

#### ■Part Numbering Bracket style Series code Actuator shape Number of poles Switching function Terminal style Actuator shape Clip mechanism Fig. Terminal style Fig. Number of poles Code Switching function Fig. Code Actuator shape Bracket Code Type D ON Standard Without bracket Toggle type 1 pole 2 М 1 PC Straight Ε ON-OFF-ON 5 Right angle (0.2 inch pitch) 2 F 2 poles Flat toggle F ON (ON) Right angle (0.3 inch pitch) (ON)-OFF-(ON)Н ON - OFF - (ON)

Space between terminal rows (Double pole): 2.54 mm

### ■ Right Angle Terminals

1—pole

2—poles

(0.2—inch pich)

(0.3—inch pich)

2.54

2.54

2.54

2.54

2.54

0.2 R/A

0.3 R/A

●The space between the terminal rows are available in two dimensions: 0.2 inches (5.08 mm) and 0.3 inches (7.62 mm).


[Example] 0.2-inch pitch: **ATE1D-5M3-10-Z** 0.3-inch pitch: **ATE1D-6M3-10-Z** 

## **■**Optional Accessories


Refer to P.371 for PC Hole Layouts.

Part name	Bracket			
Poles	Single pole	Double	e poles	
Box size	5 mm	7.5 mm	5 mm	
Туре	ATE-2M · 2F			
Dimensions	10,15 0 4.12 2 8 8 9 9.5 11.5	10.15	10.15 ©4.12 9.5 11.5 0.7 2.54 0.7 2.54	
Part number	140000640314	140000640315	140000640318	


Туре	ATE-2M·5M·6M
Part name	Color Cap
Dimensions	Gloss finish
White	140000470174
Red	140000470175
Black	140000470173
Gray	140000470179

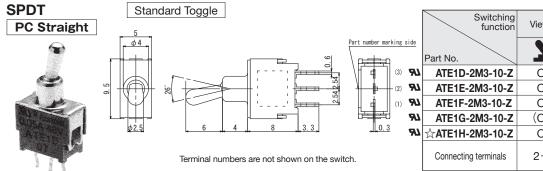


	Switching function	Viewed from part No. marking side		
ide	Part No.	7	1	1
<i>9</i> 7	ATE1D-2M3-10-Z	ON	_	ON
<i>8</i> 7	ATE1E-2M3-10-Z	ON	OFF	ON
<i>8</i> 7	ATE1F-2M3-10-Z	ON	_	(ON)
<i>8</i> 7	ATE1G-2M3-10-Z	(ON)	OFF	(ON)
87	☆ATE1H-2M3-10-Z	ON	OFF	(ON)
	Connecting terminals	2-3	_	2-1

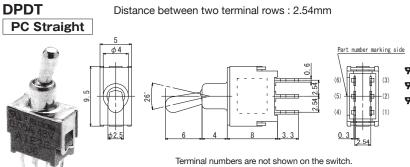


	function	Viewed from part No. marking side		
<u>e</u>	Part No.	7	4	1
<i>9</i> 1	ATE2D-2M3-10-Z	ON	_	ON
<i>9</i> 1	<b>☆ATE2E-2M3-10-Z</b>	ON	OFF	ON
<i>9</i> 1	<b>☆ATE2G-2M3-10-Z</b>	(ON)	OFF	(ON)
	Connecting terminals	2-3 5-6		2-1 5-4

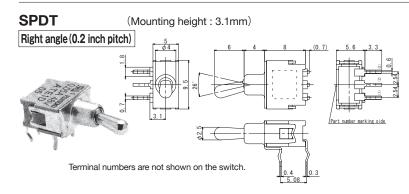


	Switching function	Viewed from part No. marking side		
	Part No.	7	1	
<i>9</i> 1	ATE1D-5M3-10-Z	ON	_	ON
<i>9</i> 1	<b>☆ATE1E-5M3-10-Z</b>	ON	OFF	ON
<i>9</i> 1	<b>☆ATE1G-5M3-10-Z</b>	(ON)	OFF	(ON)
<i>9</i> 1	★ATE1H-5M3-10-Z	ON	OFF	(ON)
	Connecting terminals	2-3	_	2-1

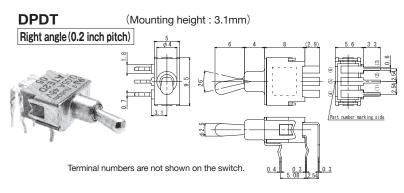


	Switching function	Viewed from part No. marking side		
	Part No.	7	1	
<i>R</i> J	<b>☆ATE2D-5M3-10-Z</b>	ON	_	ON
<i>R</i> J	☆ATE2G-5M3-10-Z	(ON)	OFF	(ON)
	Connecting terminals	2-3 5-6	_	2-1 5-4

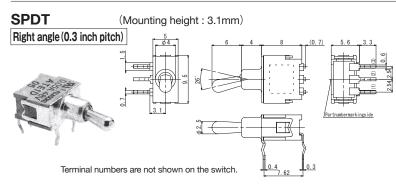

	Switching function	Viewed from part No. marking side		
	Part No.	7	4	1
<b>R</b>	ATE1D-6M3-10-Z	ON	_	ON
<b>R</b>	ATE1E-6M3-10-Z	ON	OFF	ON
<b>R</b>	ATE1F-6M3-10-Z	ON	_	(ON)
<b>IR</b>	☆ATE1G-6M3-10-Z	(ON)	OFF	(ON)
<b>IR</b>	<b>☆ATE1H-6M3-10-Z</b>	ON	OFF	(ON)
	Connecting terminals	2-3	-	2-1

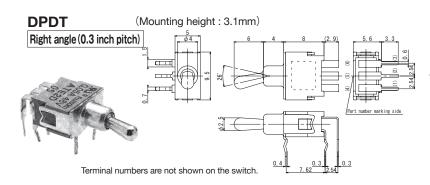


	Switching function	Viewed from part No. marking side		
	Part No.	7	4	1
<b>R</b>	ATE2D-6M3-10-Z	ON	_	ON
	Connecting terminals	2-3 5-6	-	2-1 5-4

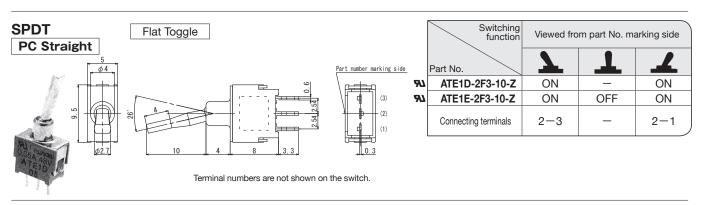


#### **ATE**


#### **DPDT** (Space between terminal rows (Double pole): 2.54 mm) PC Straight

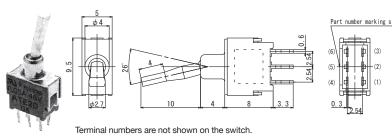


	Switching function	Viewed from part No. marking side		
	Part No.	7	1	1
77	<b>☆ATE2D-2F3-10-Z</b>	ON	_	ON
77	☆ATE2G-2F3-10-Z	(ON)	OFF	(ON)
	Connecting terminals	2-3 5-6	_	2-1 5-4

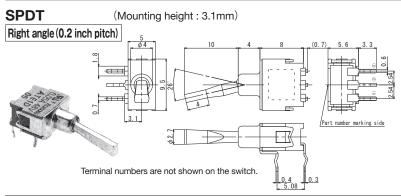


	Switching function	Viewed from part No. marking side		
	Part No.	7	1	1
<i>9</i> 7	★ATE1G-5F3-10-Z	(ON)	OFF	(ON)
<i>9</i> 1	★ATE1H-5F3-10-Z	ON	OFF	(ON)
	Connecting terminals	2-3	_	2-1

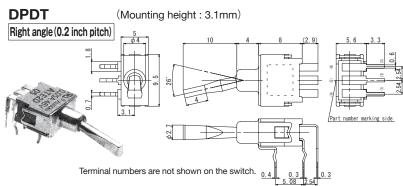


	Switching function	Viewed from part No. marking side		
	Part No.	7	1	1
977	★ATE2D-5F3-10-Z	ON	_	ON
	Connecting terminals	2-3 5-6	_	2-1 5-4

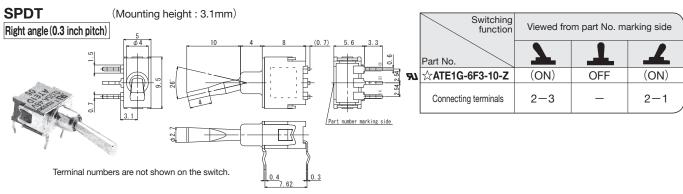

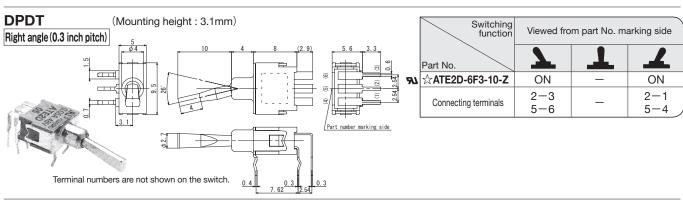

## ■Part Numbering(Plastic cap•Rocker type)

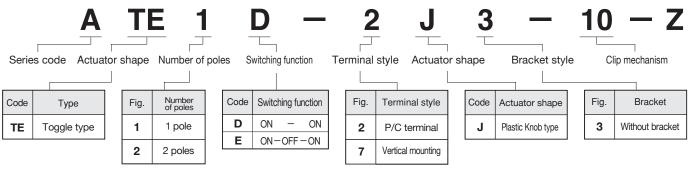


#### **SPDT** Switching function Viewed from part No. marking side PC Straight Part No. ☆ATE1D-2J3-10-Z ON ON ★ATE1E-2J3-10-Z ON OFF ON Connecting terminals 2-3 2 - 1Mount with CAP

(ON): Momentary.

## **SPDT**

Vertical mounting



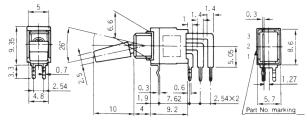

Switching function	Viewed from part No. marking side		
Part No.	1	1	1
★ATE1D-7J3-10-Z	ON	_	ON
Connecting terminals	2-3	_	2-1

Mount with CAP


Terminal numbers are not shown on the switch.

### **■**Optional Accessories

《Sold separately》

Туре	ATE-2J·7J	ATE-2J·7J	
Part name	Color Cap	Rocker	
Dimensions	8.6 2.5 Matte finish 3.5 4.8 ABS resin	13.4 12 20.2 9.7 ABS resin	
White	140000050884	140000481541	
Red	140000050886	140000481543	
Black	140000050885	140000481542	

## **■**Color Cap and Rocker -Installation Procedure for ATE-J type

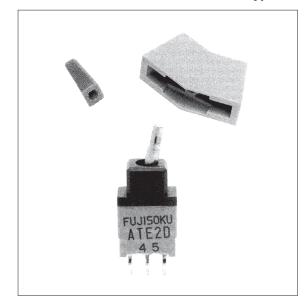

## **■PC Hole Layouts**

#### PC terminal (Top voew)

Series code	ATE-2M·2F·2J	ATE-2M·2F		
Installation	\\/hithaut bracket	When optional bracket is used		
installation	Whithout bracket	140000640314	140000640315	140000640318
1—pole	3- ¢ 1 2.54 2.54	2.54 2.54 2.54 2.54	2.54 2.54 2.54 2.54 7- \$1	2.54 2.54 2.54 2.54 7- \( \psi \) 1
2—poles 2.54mm Tow terminal rows	2.54 2.54 G- #1	2.54 2.54 2.54 8-\$1	2.54 2.54 2.54 10. \$\phi\$ 1	2.54 2.54 2.54 2.54 10-#1

## Right Angle terminal · Vertical Mount terminal

(Top view)

Series code	ATE-5M · 5F	ATE-6M · 6F	ATE-7J
Terminal	R/A 0.2—inch pich	R/A 0.3—inch pich	Vertical mount
1—pole	5.08 5.08 5.41	7.62	7.62 2.54 2.54 5-#1
2-poles	5.08 2.54 8- \$1	7.62 2.54 8-\$1	

## **■**Bracket Mounted Dimensions.

Tuna	ATE-2M	ATE-2F	
Туре	Standard	Flat	
Dimensions	8.3 3.7.6 9	8.3 3.7	


#### ■ Soldering Specifications

(1)Manual Soldering

Device: Soldering iron 380°C, Max.; 3 seconds, Max.

(2)Auto Soldering

Device: Jet wave type or dip type 275°C, Max.; 6 seconds, Max.



●Pre-heating should be done at temperatures ranging from 80°C to 120°C and within 120 seconds


(3)Install the cap/rocker accessory after soldering and cleaning.

#### Flux Cleaning

(1)Solvent: Fluorine or Alcohol type.

(2)Cleaning after soldering should be done after the terminal temperature falls to 90°C or below, or after leaving the switch for five minutes or longer at room temperature.

#### ■ Packaging Specifications

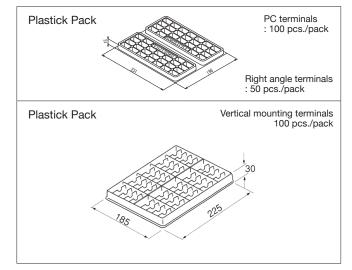

#### ■ Mounting of Switch -

- •Use PC boards with hole diameter of 1mm.
- Do not bend the terminal pins before mounting the switch on the PC board.
- After mounting the switch, do not place the device in such a way that the device weight will be applied on to the actuator of the switch.
- ●Do not apply load exceeding 12.7 N to the actuator.

