
User Guide


You can run the application using Typesafe Activator (<http://typesafe.com/activator>) or Play framework command line tool (<http://downloads.typesafe.com/play/2.2.1/play-2.2.1.zip>).

After running the application you can access the admin console using the following URL.

`http://<ip address>:9000`

E.g. <http://localhost:9000>


Following diagram shows the main admin UI.

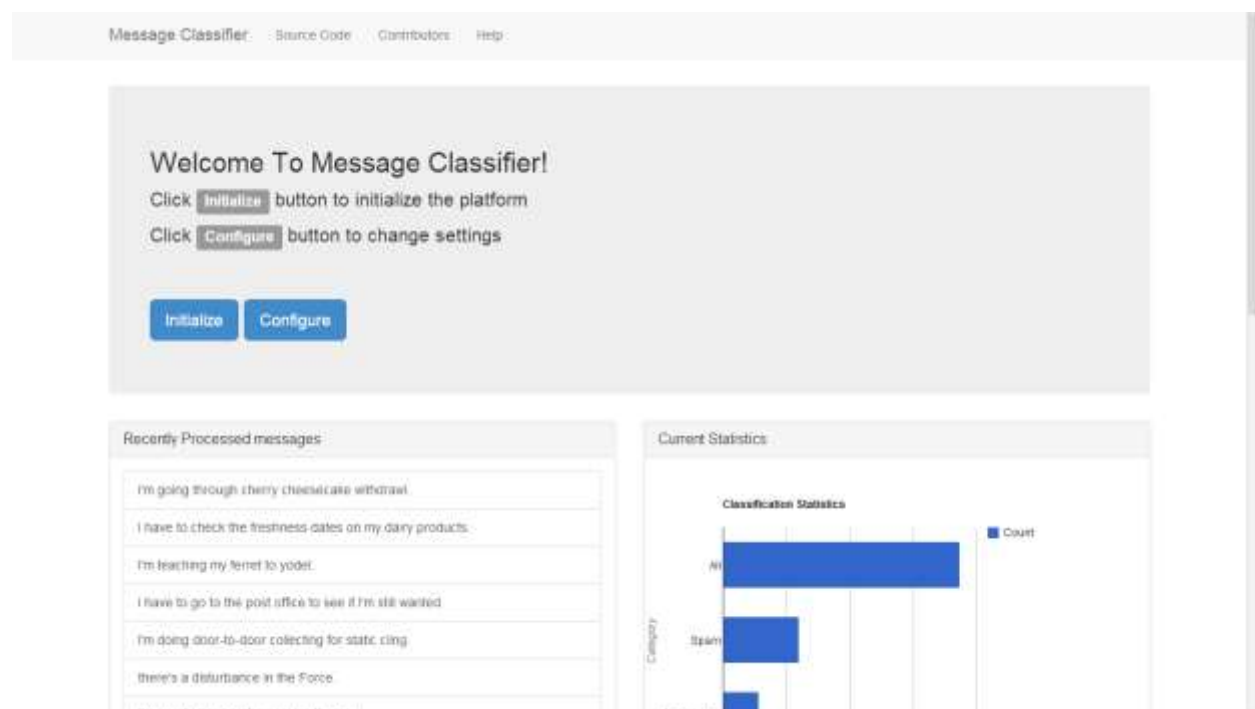

You can start the platform by clicking the initialize button to start the platform.

To change the configuration click the configure button.

In addition to that you can view the latest processed messages and statistics of the processed messages using the UI.

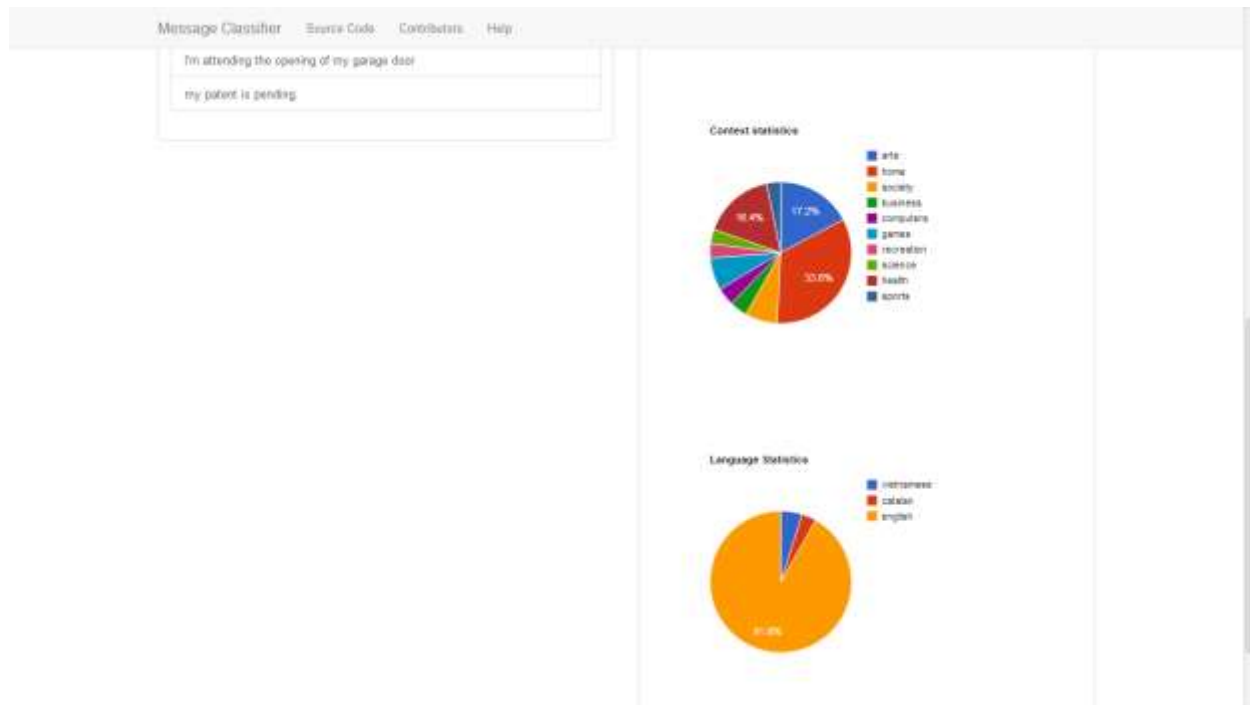

To send messages you can send http get requests as following URL

`http://<ip address>:9000/process/<msg>`

In the configurations section you can dynamically add workers to the system. Initially system starts with only one worker and you can increase the number of workers using add workers button. Note that system has to be initialized to add workers. In addition to that you can change the following configurations.

Define a timeout until uClassify service reply comes (default value is 5 seconds)

Enabling/Disabling classifiers

Edit Configurations

You can change the platform configurations here.

Edit configurations

Context Service :

Gender Service :

Language Service :

Spam Service :

Service Timeout : Seconds

Use Context Classifier :

Use Gender Classifier :

Use Language Classifier :

Use Spam Classifier :

Manage Workers

Current no of workers is 1

Click [New worker](#) button to add a new worker to the pool.

[New worker](#)