

power_meter

This sample is based on the NCS SDK v2.9.0, it's a power meter application.
It supports FTP and UART upgrade, TCP client and TCP server.
please refer to bellow test procedure to test the features.


FTP upgrade test

FTP upgrade test must wait for the LTE connect success, you can check from the log "Network registration status: Connected - home".

After LTE connected, you can send below command through UART to trigger the FTP upgrade task (HEX send).

```
64 6F 77 6E 6C 6F 61 64 EF BF BD EF BF BD C0
```

Then wait for the upgrade to complete, you can check the uart log.

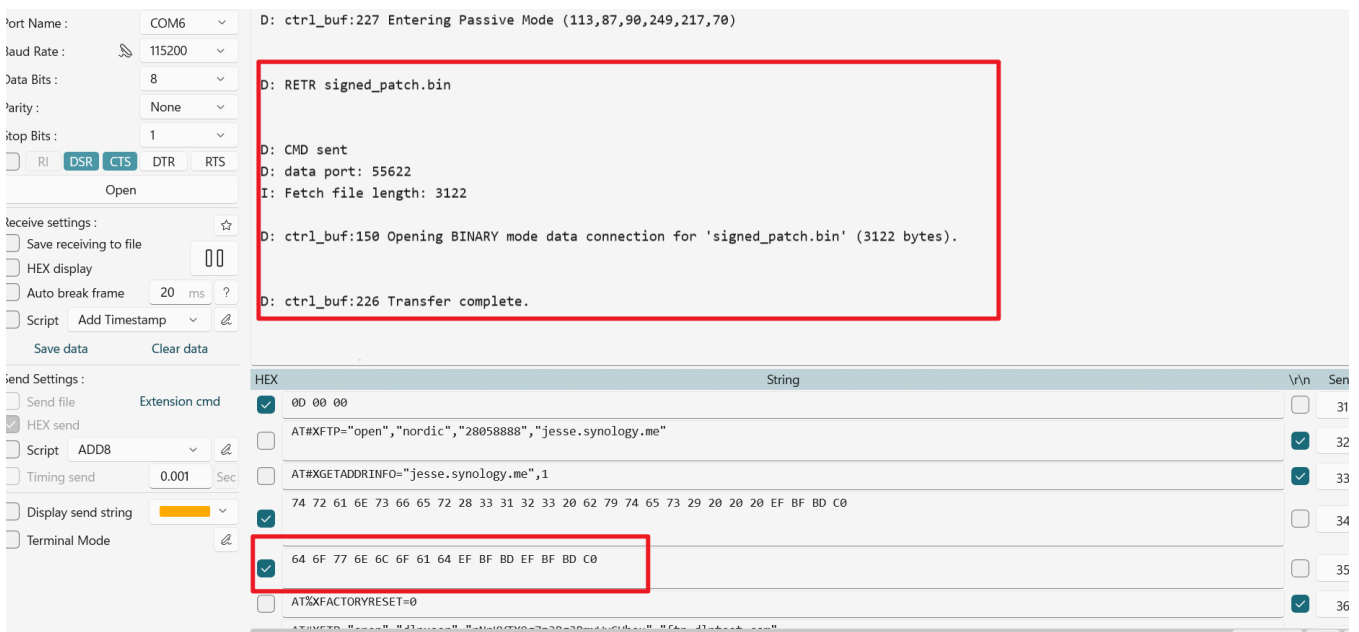

UART upgrade test

UART upgrade needs a PC tool to send image data to device, I've design a python tool for your test, it is `serial_upgrade.py` in the `scripts` folder.

First, open the uart terminal to check the log, when you found `I: UART init!` log, it means that the UART has initialized, you can start uart upgrade task.

Then you need to close the uart terminal, and enter the `scripts` folder to run the upgrade scripts, input below command in python environment.

```
python serial_upgrade.py COM6 115200 ../binaries/patches/signed_patch.bin
```

README

