

Ditoo-Plus By Divoom

The **Ditoo-Plus** is your all in one desktop accessory. It's a fun **pixel art display**, where you can create your own designs and share them with a huge online community. Its also a great **Bluetooth Speaker** for music. With the **Divoom application**, you get features like notifications, alarms, FM radio, and pixel art. Plus, regular updates with **new features**.

Product Diagram

Figure 1 and Figure 2 Illustrates the Ditoo-Plus and showcases its buttons features



Figure 1: Front Button Functions

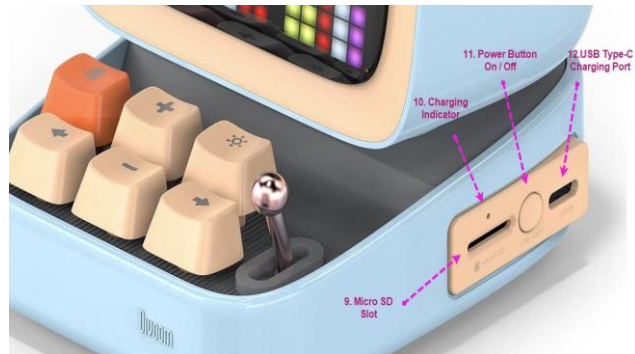


Figure 2 : Side Functions

Functions Features Description

1. Pixelated image appears on screen
2. ✨ Button: Changes lighting features
 - Hold: Changes lighting effects
 - ***Hold for 15 secs resets device**
3. Lever: Pull to play, pause, and answer/end calls
Hold: Active voice memo/reject calls
4. Right Arrow Key Button: Forward key
Hold: Forward to next keyboard lighting effect
5. - Button: Decreases volume
Hold : Decreases brightness
6. Left Arrow Key Button: Back arrow key
Hold: Previous keyboard lighting effect
7. m : Increases volume
Hold: Increases brightness
8. + Button: Increases volume
Hold: Increases brightness
9. Micro SD Slot
10. Charging indicator
11. Power Button On/ Off
12. USB Type-C Charging Port

Connecting to Bluetooth using iOS Divroom App

1) Turn On the Ditoo-Plus

Press and hold the power button on the side until the screen lights up

2) Bluetooth Pairing Mode

The Ditoo-Plus enters pairing mode automatically when turned on

If not:

- Press the power button twice quickly to manually enter pairing mode
- The screen will show a Bluetooth icon

3) Open Settings on iPhone

- Go to **Settings** → **Bluetooth**
- Make sure **Bluetooth** is turned **ON**

4) Find & Select Ditoo-Plus

- Wait for your iPhone to detect nearby devices
- Tap on **Ditoo-Plus** when it appears under Other Devices

5) Complete Pairing

- The iPhone will connect, you will see a confirmation on Ditoo-Plus screen
- Once paired, it will move to **My Devices** and say **Connected**

Setting An Alarm Clock

1. Press the m button to enter the **Alarm Setting** menu
2. Pull the lever to confirm and open alarm settings.
3. Use + and – buttons to set desired time. Pull the lever to confirm each value.
4. Pull the lever to confirm/activate alarm. To delete alarm, pull and hold the lever

Note: Only one alarm can be set on the device. For more option, use the **Divoom Application**

Product Details	
Model Number	Ditoo-Plus
Dimensions / Weight	90 x 113.8 x 121.2 mm / 505g
Colour	Pink
Display	16 x 16 RGB LED pixel screen
Material	ABS plastic, LED panel, Keycaps, and Lever

Safety Guide

- **Warning:** Do not disassemble or modify the device
- Avoid exposing the Ditoo-Plus to extreme temperatures
- Keep away moisture and water

Technical Details	
Speaker Output Power/ Speaker Size	10 DSP full range speaker / 45 mm
Battery Capacity/Life	3,000 mAh rechargeable lithium battery / up to 8 hours (depending on storage)
Charging Time	4 hours
Charging Connection	USB Type-C
Connectivity	Bluetooth 5.0, AUX input, microSD
Application Compatibility	Divoom App (iOS / Android)
Wireless Range	10 M / 33 ft