
CRT ADAPTER



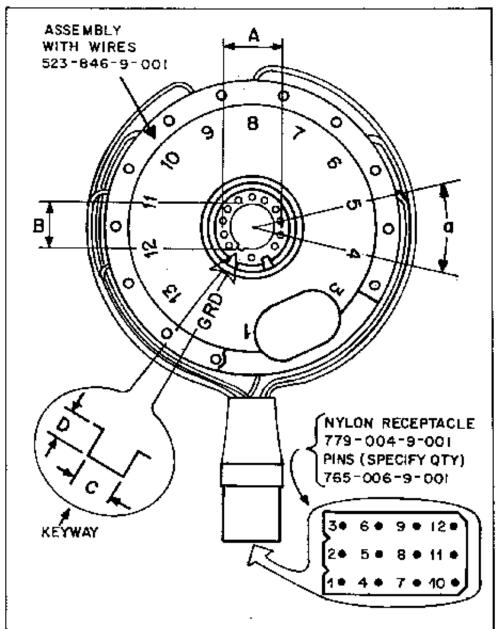

WIRING SCHEME		
CRT SOCKET PIN	WIRE COLOR	NYLON RECEP- TACLE
1	WHT	12
2	_	·
3	YEL/BLU	8
4	BLU	5
5	WHT/BLU	11
6	BLK	1
7	BRN	2
8	YEL/RED	6
9	RED	3
10	WHT/RED	9
11	WHT/GRN	10
12	YEL/GRN	7
13	GRN	1
14	keyway	

FITS CRT DIMENSIONS:

A = pin circle diameter = 15.24 mm/0.600" nom.

 $a = angular pin spacing = 25-5/7^{\circ}$

B = post diameter = 11.4 mm/0.449" max.

C = keyway width = 2.00 mm/0.079" max.

D = keyway depth = 1.70 mm/0.067" max.



B & K-Precision, Sactory Service Department Maxtee International Corporation 6476 West Contland Sincet Chicago, Illinois 90633 Telephone: (312) 889-1448

481-167-9-014D