
CRT ADAPTER



SOCKET WITH WIRES - 527-049-9-001

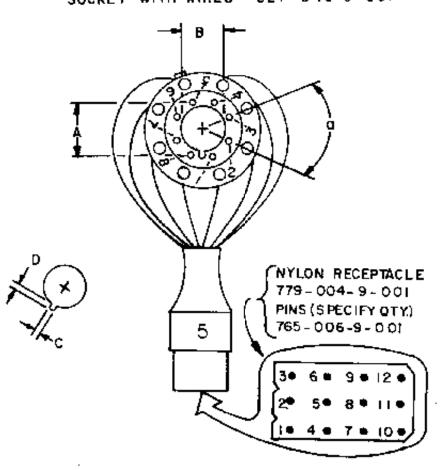

WIRING SCHEME		
CRT SOCKET PIN	WIRE COLOR	NYLON RECEP- TACLE
1	ньк	1
2	WHT	12
3	YEL/BLU	8
4	YEL/GRN	7
5	WHT/RED	10
6	YEL/RED	6
7	GRN	3
8	BRN	2

FITS CRT DIMENSIONS:

- A = pin circle diameter.
- a = angular pin spacing
- B = post diameter
- C = keyway width
- D = keyway depth
- = 15.24 mm/ 0.600" nom.
- . 45[©]
- $= 11.15 \text{ mm/}0.439^{\prime\prime} \text{ max.}$
- = 2.36 mm/0.093" max.
- $\approx 1.778 \text{ mm}/0.070^{\circ} \text{ max}.$



Maxted International Corporation 6470 West Cortland Street Chicago, Illinois 60635 Telephone: (312) 889-1448