


frequently asked questions

Wiring details for using the KVH Gyro Sensor Cable to B&G Gyro Processor

Wiring Conversion Table

Gyro Processor Terminal	B&G Cable Colour	KVH Cable Colour	Function
18	Black	Blue/Red	HGSC Supply 0V
19	Red	Red/Blue	HGSC Supply +12V
20	White	White/Orange	HGSC Data In +
21	Yellow	Orange/White	HGSC Data In -
22	Green	White/Blue	HGSC Data Out +
23	Blue	Blue/White	HGSC Data Out -

B&G Gyro Cable 13-Pin connector

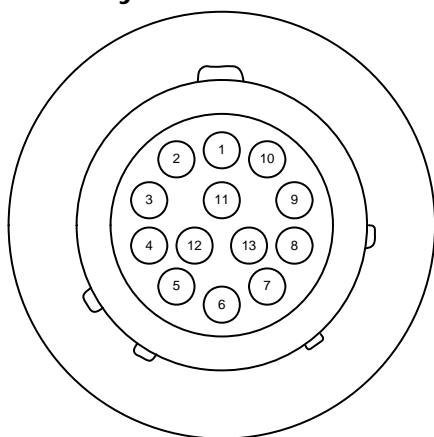

Pin 1	Blue
Pin 2	Green
Pin 3	White
Pin 4	Yellow
Pin 5	n/c
Pin 6	n/c
Pin 7	n/c
Pin 8	n/c
Pin 9	n/c
Pin 10	Black
Pin 11	Red
Pin 12	n/c
Pin 13	n/c
