

AX-Synth Librarian

on-line manual

©2009 Roland Corporation

** All rights reserved. No part of this publication may be reproduced in any form without the written permission of Roland Corporation.*

** Microsoft and Windows are registered trademarks of Microsoft Corporation.*

** The screen shots in this document are used in compliance with the guidelines of the Microsoft Corporation.*

** Windows® is known officially as: "Microsoft® Windows® operating system."*

** All product names mentioned in this document are trademarks or registered trademarks of their respective owners.*

1. Introduction

AX-Synth Librarian is an application that lets you use your computer to manage AX-Synth tone settings as "libraries." This allows you to manage numerous Tones efficiently with your computer.

NOTE


"SuperNATURAL™" and "Special" Tones cannot be handled by AX-Synth Librarian.
When using AX-Synth Librarian, select a "regular" tone on the AX-Synth beforehand.
The "Tones" of the AX-Synth are equivalent to the "Patches" in the AX-Synth Librarian.

MEMO

The AX-Synth features a sound generating engine that is derived from the Fantom-X (However, it is not multitimbral). This means that the parameters handled by this librarian are a subset of those on the Fantom-X. When using AX-Synth Librarian, substitute the terms as shown below.

	AX-Synth	AX-Synth Librarian (Fantom-X)
Tone group	Tone Family	Bank
Tone color	Tone	Patch
Tone elements	-	Tone

The illustration below shows the correspondence between the AX-Synth and AX-Synth Librarian.

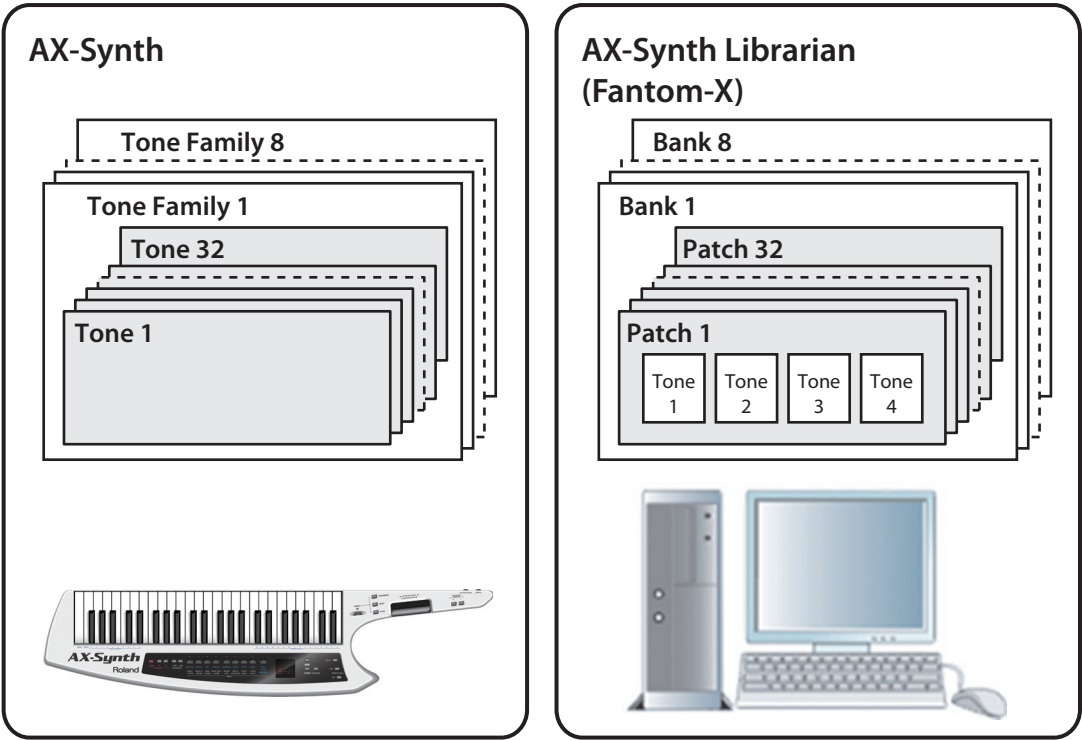

2. Connections and Settings

Connect the AX-Synth and your computer as described in AX-Synth owner’s manual.
AX-Synth Librarian may not operate correctly if these connections are not made correctly.

2-1.Connecting via USB cable

If the AX-Synth is connected to your computer by a USB cable, you must power up the AX-Synth before you start up AX-Synth Librarian.

NOTE

Do not disconnect the USB cable connected to the AX-Synth while AX-Synth Librarian is running.

Specify the input/output devices :

Make settings for the MIDI device you’ll be using.

- 1. From the menu, choose [Setup] - “Set Up MIDI Devices” to open the “Set Up MIDI Devices” dialog box.
- 2. Set AX-Synth Input/Output to the following settings.

Windows Vista Users :

Input	Roland AX-Synth
Output	Roland AX-Synth

Windows XP Users :

Input	USB Audio Device (or USB Speakers)
Output	USB Audio Device (or USB Speakers)

- 3. Click [OK].

2-2.Connecting via MIDI cables


A separate MIDI interface is required in order to connect the AX-Synth with your computer using MIDI cables. Connect both the MIDI IN and MIDI OUT connectors on the MIDI interface connected to your computer to the MIDI connectors on the AX-Synth.

When using the software for the first time, you must choose the menu command [SETUP] - “Set Up MIDI Devices” to open the dialog box, and for AX-Synth Input/Output, choose the port to which AX-Synth is connected.

3. Overview of AX-Synth Librarian

3-1.Data path

The following diagram illustrates the relationship between the AX-Synth, AX-Synth Librarian, and the computer, and shows the commands used for exchanging data between these components.

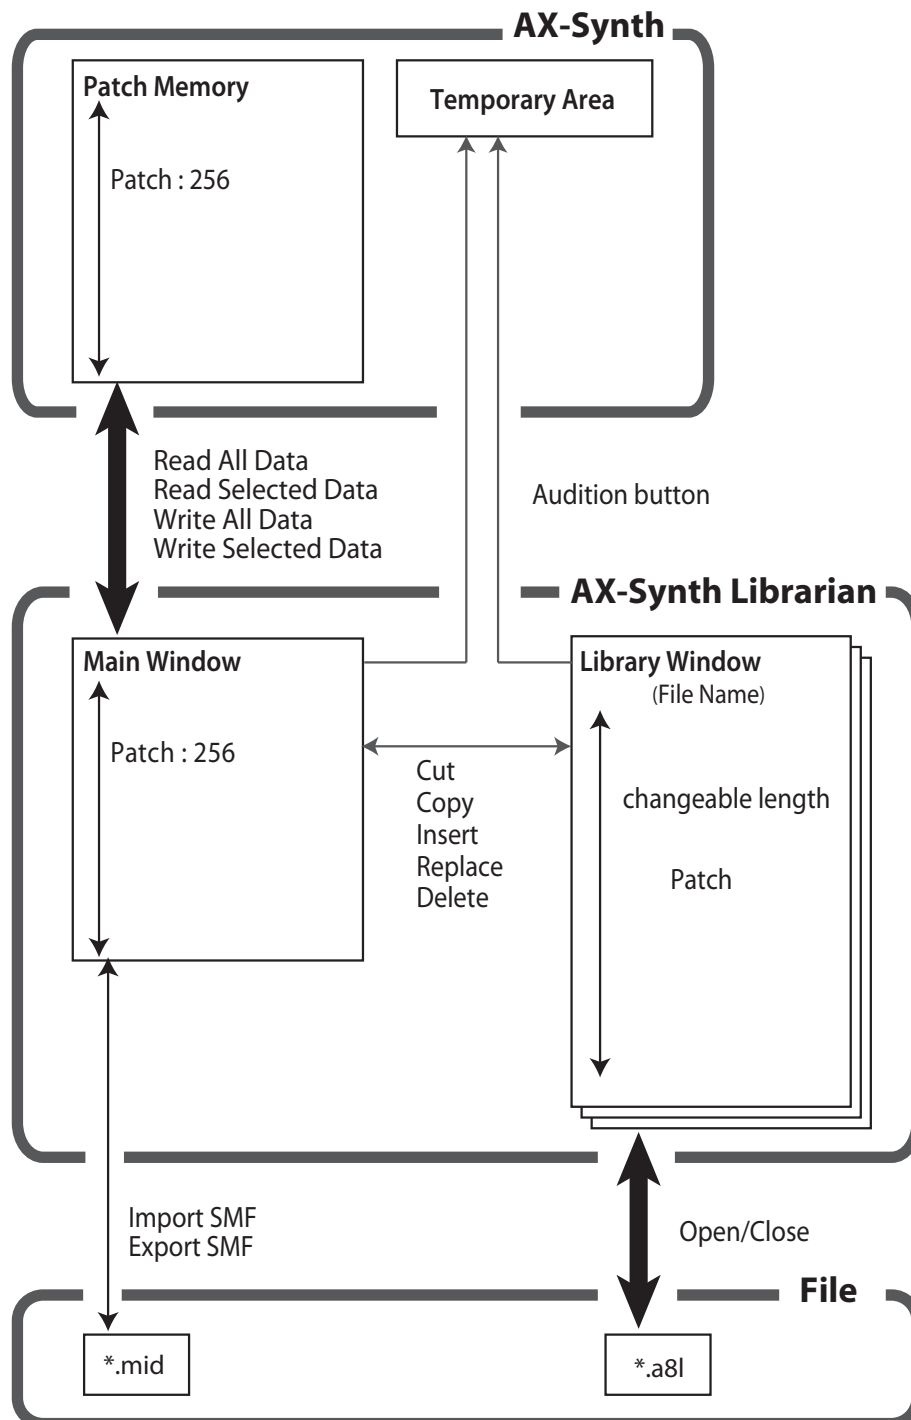

3. Overview of AX-Synth Librarian

3-2.Main Window

This is a graphic display window.


The window displays Patches in the AX-Synth as lists, and it includes categories where you can edit names, add comments, and change the order in which information appears according to keywords.

The Main Window is the primary window used when data is being exchanged with the AX-Synth.

It corresponds to the AX-Synth's Patch Area (Patch Memory).

The AX-Synth can store up to 256 patches.

All of these patches are organized according to Bank (1-8) and Number (1-32).

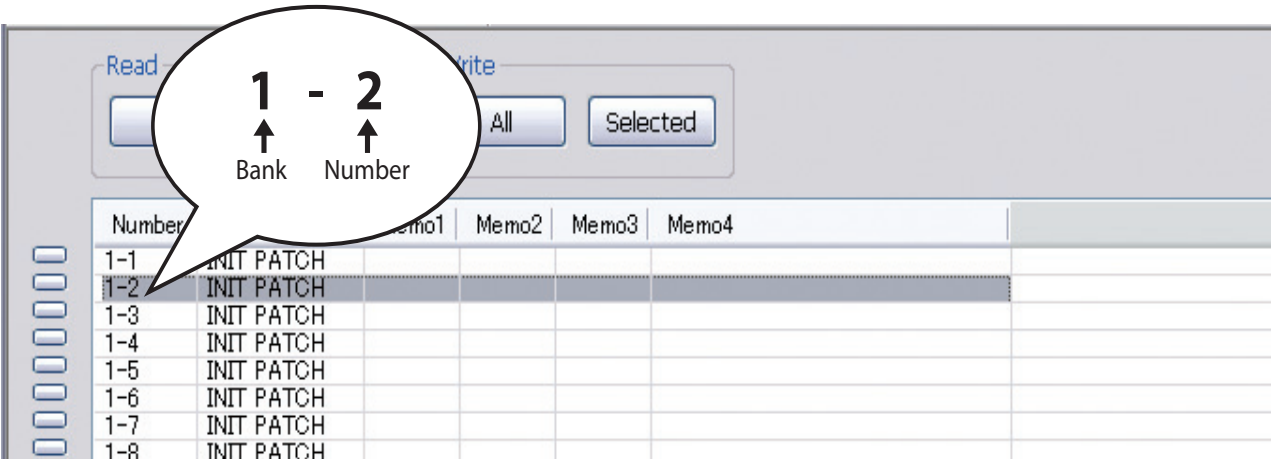

For example, a patch saved to "1-2" of the AX-Synth Librarian will be stored in the second location of the AX-Synth's Bank 1.

3-3.Library Window

This is a graphic display window.

Just as with the Main Window, Patches are displayed as lists, and you can edit names and change the order in which the information appears.

You can have multiple Library Windows open at the same time.

You can copy and paste the data in one Library Window to and from the Main Window and other Library Windows.

Data you intend to use for a particular purpose can be collected and arranged in one window. The data you include there might belong to a certain musical genre, or might have been created by a certain artist.

Afterwards, simply by saving the content of the window in a file, you can create your own library.

4. About the Menus

4-1.File

New

Creates a new library (Library Window) in the default state.

Duplicate

When the Main Window is active, copies Patch and creates a new library with the data.

When a Library Window is active, then that library is duplicated.

Open

Opens a library saved by AX-Synth Librarian.

Close

Closes the currently selected library.

Save/Save As

Saves a file that preserves the current library.

Export SMF

Saves the currently selected patches or all the patches in SMF format.

Import SMF

Writes patches saved in SMF format to the Main Window.

Exit

Closes AX-Synth Librarian.

4-2.Edit

Undo

Returns things to the state prior to the previously executed operation.

Cut

Deletes the selected Patch and moves it to the clipboard. INIT data (data having standard values) in the same amount as the deleted data is added to the highest numbered position in the Main Window.

Copy

Copies the currently selected Patch to the clipboard.

Insert

Places the content of the clipboard immediately ahead of the selected point.

At this time, in the Main Window, data is deleted sequentially, beginning with the data in the highest numbered position, commensurate with the amount of data in the clipboard.

Replace

Overwrites the contents of the clipboard onto the selected location.

Delete

Deletes the selected Patch.

At this point, INIT data (data having standard values) in the same amount as the deleted data is added to the highest numbered position in the Main Window.

Initialize

Initializes the settings of the currently selected Patch.

This command is useful when you want to create data from scratch.

Select All

Selects all data in the currently selected window.

4-3.View

Tool Bar

Switches the tool bar between visible and hidden.

Status Bar

Switches the status bar between visible and hidden.

4. About the Menus

4-4.MIDI

Write All Data

Writes all of the Patch data indicated in the Main Window to the AX-Synth's Patch Area.

The **[Write All]** button in the upper part of the Main Window performs the same function.

Write Selected Data

Writes the data selected in the Main Window to the identically numbered data location in the AX-Synth's Patch Area.

The **[Write Selected]** button in the upper part of the Main Window performs the same function.

Read All Data

Reads all of the Patch data indicated in the Main Window from the AX-Synth's Patch Area.

The **[Read All]** button in the upper part of the Main Window performs the same function.

Read Selected Data

Loads the data under the same number in the AX-Synth's Patch Area to the selected point in the Main Window.

The **[Read Selected]** button in the upper part of the Main Window performs the same function.

4-5.Setup

Set Up MIDI Devices

Sets the AX-Synth Input/Output to the port to which the AX-Synth is connected.

** Through provides a thru-connection from the MIDI OUT of any desired MIDI device to the MIDI IN of any other MIDI device.*

Set Up Font

Sets the font to be used in displaying information on the screen.

Set Up Grid

Sets whether the ruled grid is displayed in the window or hidden from view.

4-6.Window

Move to Top

Use this command when you want to display the foremost currently open window.

Maximize Height/Maximize Width

Allows you to match the window size to the size of the screen.

Save Current Position

Saves the placement of the currently active windows. The placement of the Main Window and the Library Window are saved independently.

If you save the position of the Main Window :

The Main Window will open in the saved position the next time you start AX-Synth Librarian.

If you save the position of the Library Window :

The Library Window will open in the saved position when you open a new Library Window or when you restart AX-Synth Librarian.

Cascade Windows/Tile Windows Horizontally/Tile Windows Vertically

Arranges the placement of windows on the screen.

Arrange Icons

Organizes the placement of windows that have been minimized.

4-7.Help

AX-Synth Librarian Manual

Displays the AX-Synth Librarian Manual.

About AX-Synth Librarian

Displays the software version.

5. Using AX-Synth Librarian

5-1. Reading data

- Load Patches into AX-Synth Librarian from the AX-Synth's Patch Area.
- When you run [MIDI] - "Read All Data" or click the [Read All] button in the upper part of the Main Window, all Patches in the AX-Synth's Patch Area are read into the Main Window.
 - You can use the "Read Selected Data" command or the [Read Selected] button to have only the selected data be read from the AX-Synth's Patch Area.

5-2. Editing and saving data

Whether you are in the Main Window or the Library Window, you can rename or sort the entries in the patch list. You can also save the content of Library Windows as files.

Using the Mouse for Editing Data

To select a row	Click
To select a range of rows	Hold the Shift key and click
Add or cancel selection	Hold the Ctrl key and click
To select a cell for keyboard input	Right-click

If you select a range of rows and then right-click, you can simultaneously input the same character string in all of the selected rows.

To confirm the input, either press the Enter key or click somewhere on the screen other than the input box. Right-click or press the Esc key to cancel the input.

Keyboard Functions When Editing Data

You can input using only the keyboard by using the following keys.

To move cells	↑, ↓, ←, →
<i>* Press ↑, ↓ to move the input row up and down. When you press → or ←, the asterisk ("*") appearing in the top row of the window moves to the right or left to indicate the row to which information is to be input.</i>	
To select a cell for keyboard input	[Enter]
To confirm the input	[Enter]
To cancel the input	[Esc]

Audition button

When you click the button at the left end of each row (**Audition button**) in the Patch list, you can have the corresponding data be sent to the AX-Synth's Temporary Area, allowing you to audition the sound in the AX-Synth.

You can achieve the same result by double-clicking in the row.

Patch Name

Provides of entry of the Patch names.

Patch names of up to twelve characters can be entered.

You can use the following characters,

space ! " # \$ % & ' () * + , - . / 0-9 : ; < = > ? @ A-Z [\] ^ _ ` a-z { | } ~

Memo 1--4

This allows you to enter up to four comments of your choice.

Here you may want to include information such as the data's creator and date it was created.

This information is not saved to the AX-Synth itself.

Arrange Data

When you click on the boxes in the top row of the display (Number, Patch Name, Memo 1--4), the data is listed in the sequence corresponding to the clicked box.

5-3.Writing Data

Write the Patches in the Main Window to the AX-Synth's Patch Area.

- When you issue the command [MIDI] - "**Write All Data**" or click the [Write All] button in the upper part of the Main Window, all Patches in the Main Window are written to the AX-Synth's Patch Area.
- By using "**Write Selected Data**" or the [Write Selected] button, you can write just the selected data to the AX-Synth's Patch Area.

6. Notes Concerning Use of AX-Synth Editor Together with AX-Synth Librarian

NOTE

If the AX-Synth is connected to your computer using a USB cable, you may not be able to use AX-Synth Editor together with AX-Synth Librarian. In such cases, try installing the Roland original driver.
For details, refer to the AX-Synth owner's manual.

You may experience some of the problems below if AX-Synth Librarian and AX-Synth Editor are used at the same time.

- When you click the **Audition button** in AX-Synth Librarian, the correspondence between the values in AX-Synth Editor and the data in the AX-Synth's Temporary Area may be lost.
- After you've issued the "**Write All Data**" or "**Write Selected Data**" commands in AX-Synth Librarian, the names of items and their sequence in AX-Synth Editor may no longer match the data in the AX-Synth's Patch Area.

If you have performed one of the above operations in AX-Synth Librarian and then move to AX-Synth Editor, you must be sure to click the [SYNC] button located in the top line of AX-Synth Editor's Main Window before you begin editing. This executes the following actions, allowing the AX-Synth Editor and AX-Synth settings to be synchronized.

- The values of settings in AX-Synth Editor are written to the AX-Synth's Temporary Area.
- The name lists of Patch in the AX-Synth's Patch Area are read into AX-Synth Editor.

7. If the Display Indicates “Unable to read/write data.”

In cases such as following, the display may indicate “Unable to read/write data.”

- When the AX-Synth and the computer are not connected properly
- When a large number of notes are being sounded
- When AX-Synth Editor and AX-Synth Librarian simultaneously attempt to read (or write) data
- When the driver you’re using is the generic MIDI driver included with the OS, and you’ve attempted to use both AX-Synth Editor and AX-Synth Librarian at the same time.