Smart Energy Controller







Active Safety

Al Powered Active Arcing Protection



Higher Yields

Up to 30% More Energy with Optimizer ¹




Battery Ready


Plug & Play battery interface ²



Flexible Communication

WLAN, Fast Ethernet, 4G Communication Supported

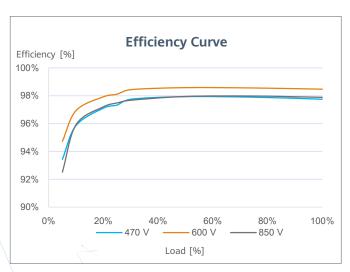

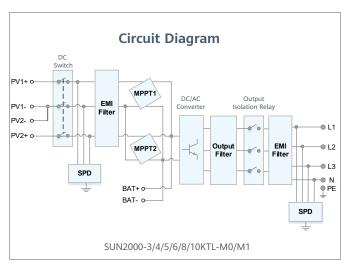

^{*1} Only applicable to SUN2000-3/4/5/6/8/10KTL-M1 smart energy center.
*2. SUN2000-3/4/5/6/8/10KTL-M0 will be compatible with HUAWEI smart string ESS in Q1, 2021

Technical Specification

	Technical Specification						
Technical Specification	SUN2000	SUN2000	SUN2000	SUN2000	SUN2000	SUN2000	
reclinical specification	-3KTL-M1	-4KTL-M1	-5KTL-M1	-6KTL-M1	-8KTL-M1	-10KTL-N	
			Effici	ency			
Max. efficiency	98.2%	98.3%	98.4%	98.6%	98.6%	98.6%	
European weighted efficiency	96.7%	97.1%	97.5%	97.7%	98.0%	98.1%	
			Longit	(D\/)			
Recommended max. PV power ¹	4,500 Wp	6,000 Wp	Input 7,500 Wp	9,000 Wp	12,000 Wp	15,000 W	
Max. input voltage ²	4,500 Wp	0,000 γγρ	7,500 Wp		12,000 VVP	15,000 00	
Operating voltage range ³	140 V ~ 980 V						
Start-up voltage	200 V						
Rated input voltage	600 V						
Max. input current per MPPT Max. short-circuit current							
Number of MPP trackers	2						
Max. input number per MPP tracker			1				
			Innut (DC	Pattoni			
Commential a Detterm		Input (DC Battery) HUAWEI Smart String ESS 5kWh – 30kWh					
Compatible Battery Operating voltage range	600 V ~ 980 V						
Max operating current	16.7 A						
Max charge Power			10,00				
Max discharge Power	3,300 W	4,400 W	5,500 W	6,600 W	8,800 W	10,000 W	
			Output (On Grid)			
Grid connection	Output (On Grid) Three-phase						
Rated output power	3,000 W	4,000 W	5,000 W	6,000 W	8,000 W	10,000 W	
Max. apparent power	3,300 VA	4,400 VA	5,500 VA	6,600 VA	8,800 VA	11,000 VA	
Rated output voltage		22	0 Vac / 380 Vac, 230 V		+PE		
Rated AC grid frequency Max. output current	5.1 A	6.8 A	50 Hz / 8.5 A	10.1 A	13.5 A	16.9 A	
Adjustable power factor	J.174	5.0 A	0.8 leading		15.5 A	10.57	
Max. total harmonic distortion			≤ 3				
			Output (Off Grid)			
Backup Box	Output (Off Grid) Backup Box – B1						
Maximum apparent power	3,000 VA	3,300 VA	3,300 VA	3,300 VA	3,300 VA	3,300 VA	
Rated output voltage			220 V /	/ 230 V			
Maximum output current Power factor range	13.6 A	15 A	15 A	15 A	15 A	15 A	
Tower ractor range			0.8 leading				
			Features &	Protections			
Input-side disconnection device	Yes						
Anti-Islanding protection	Yes						
DC reverse polarity protection Insulation monitoring	Yes Yes						
DC surge protection	Yes, compatible with TYPE II protection class according to EN/IEC 61643-11						
AC surge protection	Yes, compatible with TYPE II protection class according to EN/IEC 61643-11						
Residual current monitoring	Yes						
AC overcurrent protection AC short-circuit protection	Yes Yes						
AC overvoltage protection	Yes						
Arc fault protection	Yes						
Ripple receiver control	Yes						
Integrated PID recovery ⁵ Battery reverse charging from grid	Yes Yes						
battery reverse charging from grid							
			Genera				
Operating temperature range	-25 ~ + 60 °C (-13 °F ~ 140 °F)						
Relative operating humidity	0 %RH ~ 100 %RH						
Max. operating altitude Cooling	4,000 m (13,123 ft.) (Derating above 2000 m) Natural convection						
Display		LED	Indicators; Integrated		Арр		
Communication	RS485; WLAN/Ethernet via Smart Dongle-WLAN-FE; 4G / 3G / 2G via Smart Dongle-4G (Optional)						
Weight (incl. mounting bracket)	17 kg (37.5 lb)						
Dimension (incl. mounting bracket) Degree of protection		Ę	525 x 470 x 146.5 mm IP6		1)		
Nighttime Power Consumption				5 W ⁶			
-							
DC MPHS compatible autimina			Optimizer Co				
DC MBUS compatible optimizer			SUN2000	7-40UVV-P			
		Standard C	ompliance (mo	re available upo	on request)		
Certificate			EN/IEC 62109-1, EN/IE				
Grid connection standards	G98, G99, EN 50)438, CEI 0-21, VDE-A	R-N-4105, AS 4777, C1	10/11, ABNT, UTE C15	5-712, RD 1699, TOR [04, NRS 097-2-1	

^{*1} Inverter max input PV power is 20,000 Wp when long strings are designed and fully connected with SUN2000-450W-P power optimizers.

*2 The maximum input voltage is the upper limit of the DC voltage. Any higher input DC voltage would probably damage inverter.

*3 Any DC input voltage beyond the operating voltage range may result in inverter improper operating. *4 C10 / 11:10,000 VA

*5 SUN2000-3~10KTL-M1 raises potential between PV- and ground to above zero through integrated PID recovery function to recover module degradation from PID. Supported module types include: P-type (mono, poly).

*SOLAR.HUAWEI.COM/EU/