

🚩 Clearance Sale Week is here! 40-60% off select items 🛒

[Shop](#) [Learn](#) [Blog](#) [Forums](#) [IO](#) [LIVE!](#) [AdaBox](#)



Robotics & CNC / Servos

Standard servo - TowerPro SG-5010 - 5010

Product ID: 155

\$12.00



1

Add to Cart

Qty	Discount
1-9	\$12.00
10-99	\$10.80
100+	\$9.60

In stock

Add to Wishlist ▾

Description

This high-torque standard servo can rotate approximately 180 degrees (90 in each direction). You can use any servo code, hardware, or library to control these servos. Good for beginners who want to make stuff move without building a motor controller with feedback & gearbox. Comes with 3 horns, as shown. They aren't the highest quality servo (which is why they are less expensive) and so are not suggested for hobby planes. We now carry the Tower-Pro SG-5010.

To control with an Arduino, we suggest connecting the orange control wire to pin 9 or 10 and using the [Servo library](#) included with the Arduino IDE ([see here for an example sketch](#)). Position "0" (1.5ms pulse) is middle, "90" (~2ms pulse) is all the way to the right, "-90" (~1ms pulse) is all the way to the left.

Note that the default servo pulse widths (usually 1ms to 2ms) may not give you a full 180 degrees of motion. In that case, check if you can set your servo controller to custom pulse lengths and try 0.75ms to 2.25ms. You can try shorter/longer pulses but be aware that if you go too far you could break your servo!


Technical Details

Specifications:

- Power: 4.8V - 6V DC max (5V works well)
- Average Speed: 0.2sec/60degree (@ 4.8V), 0.16sec/60degree (@ 6V)
- Weight: 47g (1.65 oz)
- Torque: At 5V, 5.5kg-cm / 76oz-in, and at 6V 6.5kg-cm / 90oz-in.
- Dimension mm: (L x W x H) 40.6 x 20.5 x 38 mm
- Size in: (L x W x H) 1.87 x0.80 x1.49
- Gear Type: POM Gear
- Dead Band Width: 1 us
- Temp Range: 0 - 55°C
- Spline Count: 25
- CE & RoHS Approved: Yes




Learn

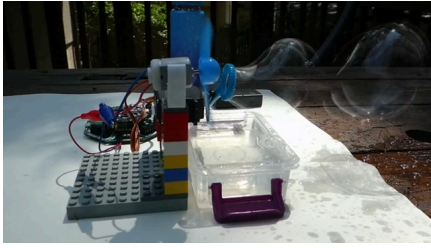


[Make It Bubble](#)

Make a soap bubble blowing robot for bubbly fun

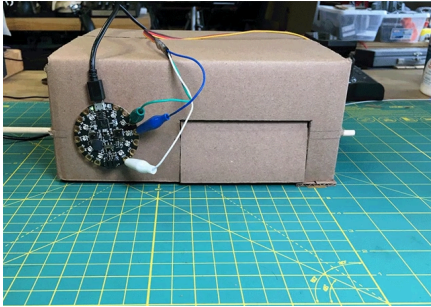


[Pushrod Garage](#)

Build a cardboard garage with working garage door for your tiny cars or robots!

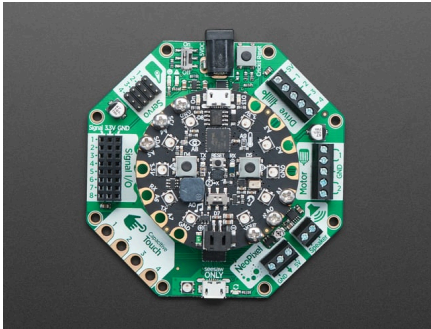

[Introducing Adafruit Crickit #MakeRobotFriend](#)

Make your robot pal who's fun to be with using Crickit!

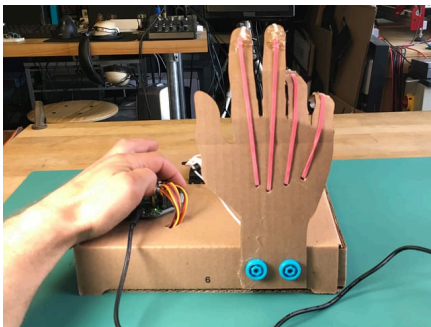

[Animatronic Hand](#)


Build a cardboard animatronic hand with independent finger control using CRICKIT robotics controller board!

[See All Guides](#) 

May We Also Suggest...



Servo Extension Cable - 30cm / 12" long -

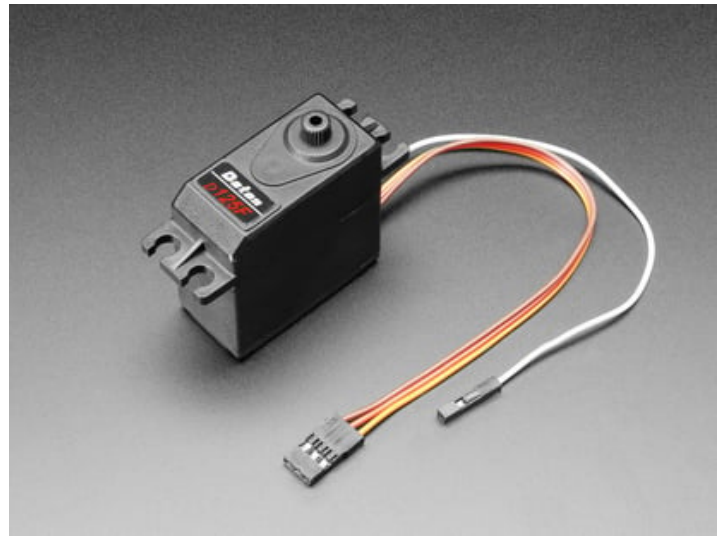

Analog Feedback Standard-Size Servo




Standard Size - High Torque - Metal Gear Servo



Micro Servo - High Powered, High Torque Metal Gear - TowerPro MG92B - TowerPro MG92B



Continuous Rotation Micro Servo - FS90R - FS90R

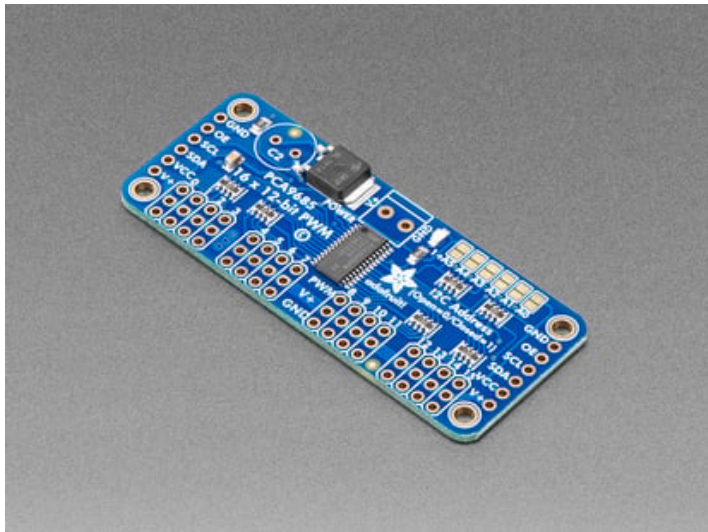


Adafruit 16-Channel 12-bit PWM/Servo Driver - I2C interface - PCA9685 - PCA9685

Micro Servo - MG90D High Torque Metal Gear



Feedback 360 Degree - High Speed Continuous Rotation Servo

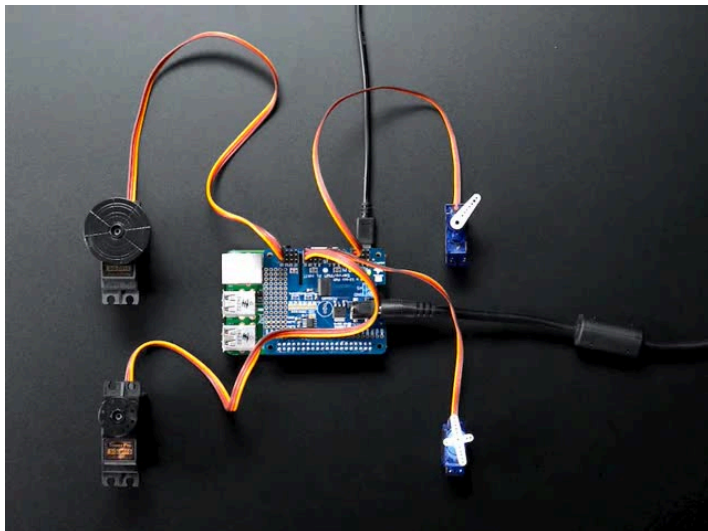

Adafruit 16-Channel PWM / Servo HAT for Raspberry Pi - Mini Kit



Machined Aluminum Servo Arm



Standard Servo Arm and Horn Set - 25 Spline

Distributors



[Mouser Electronics](#)
United States

[Nano Tech Elements](#)
Canada

[DigiKey Electronics](#)
United States

[BuyaPi.ca](#)
Canada

[Letmeknow](#)
France

See our [Distributors page](#) for a complete list of distributors.

Contact Us

Tech Support Forums

FAQs

Shipping & Returns

Freebies

Terms of Service

Privacy & Legal

Website Accessibility

[About Us](#)

[Press](#)

[Educators](#)

[Distributors](#)

[Jobs](#)

[Gift Cards](#)



A Minority and Woman-owned Business Enterprise (M/WBE)