

AMENDMENT NO. 2 APRIL 1987
TO
IS : 3347 (Part 2 Sec 2)-1979 DIMENSIONS FOR
PORCELAIN TRANSFORMER BUSHINGS FOR
USE IN NORMAL AND LIGHTLY
POLLUTED ATMOSPHERES

PART 2 3.6 kV BUSHINGS


Section 2 Metal Parts

(First Revision)

(Page 17, Fig. 13, informal table, column headings of col' 2 to 19) — Substitute the following for the existing column headings:

'C, D_1 , D_2 , D_{10} , G, H_{11} , H_{12} , H_{12} S, W, N, T, P, Q, R_4 , R_6 , U, V'

(Page 18, Fig. 14) — Substitute the figure given on page 2 for the existing figure.

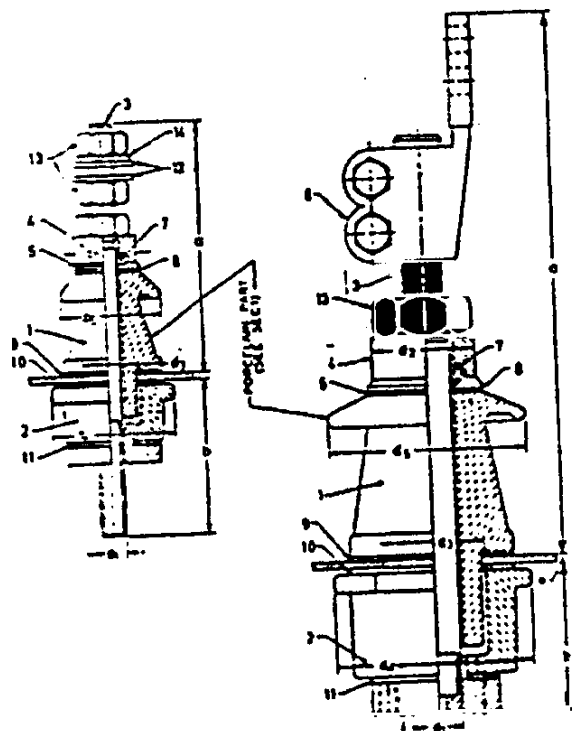

144 250 and 330 A

148 1 000, 2 000 and 3 150 A

1. Insulate (top)
2. Insulate (bottom)
3. Stem
4. Washer (top end)
5. Washer (stem)
6. Connecting lug
7. Sealing washer (stem)

8. Sealing washer M type
9. General purpose washer
10. Gasket X
11. Gasket R
12. Washer in accordance with IS : 2014-196**
13. Nut
14. Spring washer (Type B as per IS : 5003-1972)

TYPE OF STEM	BUSHING RATING kV	a Max	b Max	d ₁	d ₂	d ₃	d ₄	d ₅
Insulation	2.5-27	180	94	M12	23	39	73	75
	3.3-33	240	100	M20 x 2	24	54	110	110
	3.3-40	372	86	M16 x 3	70	70	125	125
	3.3-50	402	92	M16 x 3	80	90	150	145
	3.3-125	—	—	—	—	—	—	—
Copper	2.5-27	180	94	M12	23	39	73	75
	3.3-33	210	110	M20	44	45	15	90
	3.3-40	244	80	M20 x 2	34	54	110	110
	3.3-50	372	86	M16 x 3	70	70	125	125
	3.3-125	404	92	M16 x 3	90	90	150	145

*4 to 8 up to and including 1 000A, 6 to 10 above 1 000A.

**Specification for max washers (first revision).

***Specification for square coil rectangular section spring washers for bolts, nuts and screws (first revision).

FIG. 14 ASSEMBLY OF BUSHING

(ETDC 3)