

Tusass TopUp Talk [230026]

PASS
5m 20s

32 of 32 steps completed

Balance Before Top-Up

The screenshot shows the Tusass Mobile app interface. On the left is a sidebar with navigation options: Accounts, Contacts, and Tags. The main content area is titled 'Tusass Mobil - Data1GB'. It displays account information in three columns: Service, Usage, and Contact. The Service column includes External ID (299230026), Phone (23 90 26), ICC (8929901090507268), IMSI (29001100268900), eSIM (No), PIN/PUK (2071 / 27093255), Status (Active), Activated (10.06.26), and Links (Product, Selfcare). The Usage column shows Data used (0 / 1.000 MB), RLH Data (0 / 0 MB), Extra Data (0 / 0 MB), Balance (1.550,00 kr), Throttled (No), Auto-refill (Off), and Payment card (visa****08 10/2027 act). The Contact column lists Name (Automation Testing Don't Use This C), Phone (56 26 17), Email (prabhakaran.sekar@promon.co.in), Language (English), and RC Exemption (Amount: 91,00 kr, Valid Until: 30.06.26). Below this is an Installation address (Street: 0004, 0004, City: 3922 nanortalk) and a Note section with the text 'test QA'. At the bottom, there are links for Operations and Payments.

Payment Receipt

tusass



Receipt Amount:

200,00 kr.

Your refill to Tusass has succeed.

You can always visit [Tusass.gl](https://tusass.gl) to refill whenever needed


Enter your Tusass

Balance After Top-Up


This screenshot is identical to the one above, showing the same Tusass Mobile app interface with account details. The balance remains 1.550,00 kr, and all other account information is unchanged.

Screenshots


Screenshot 1

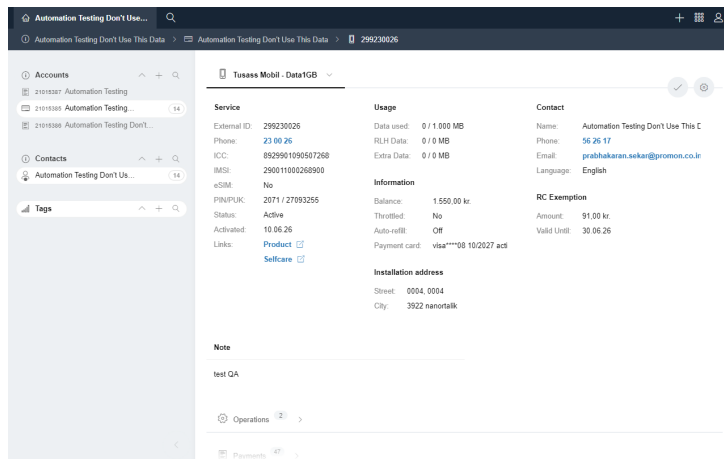

Screenshot 2

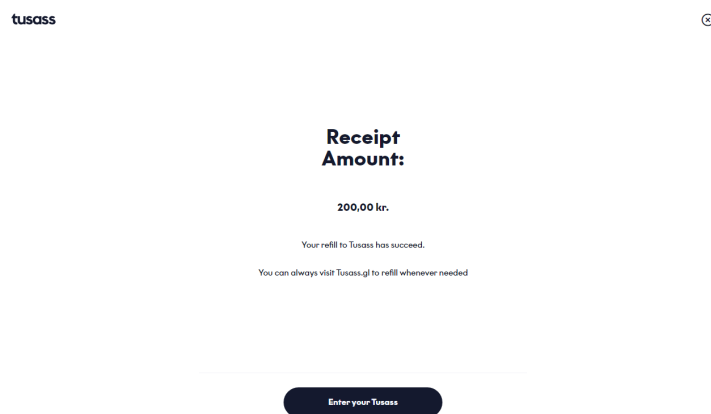

Screenshot 3

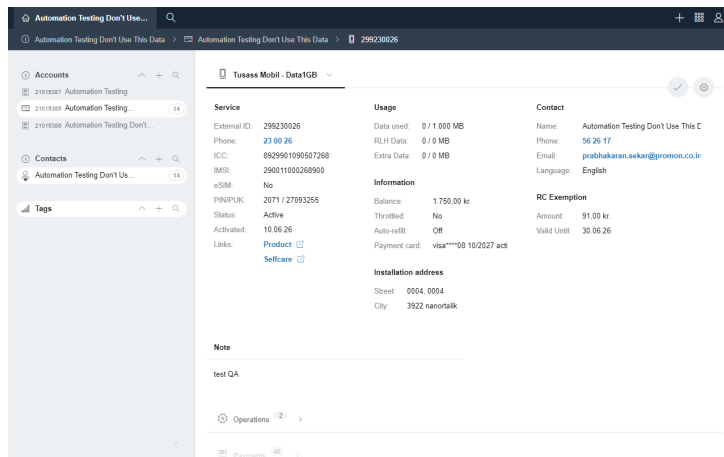

Tusass topup talk flow is executed successfully. 299230026 is topped up with amount 200. Balance before: 1.550,00 kr. — Balance after: 1.750,00 kr.