ER diagram

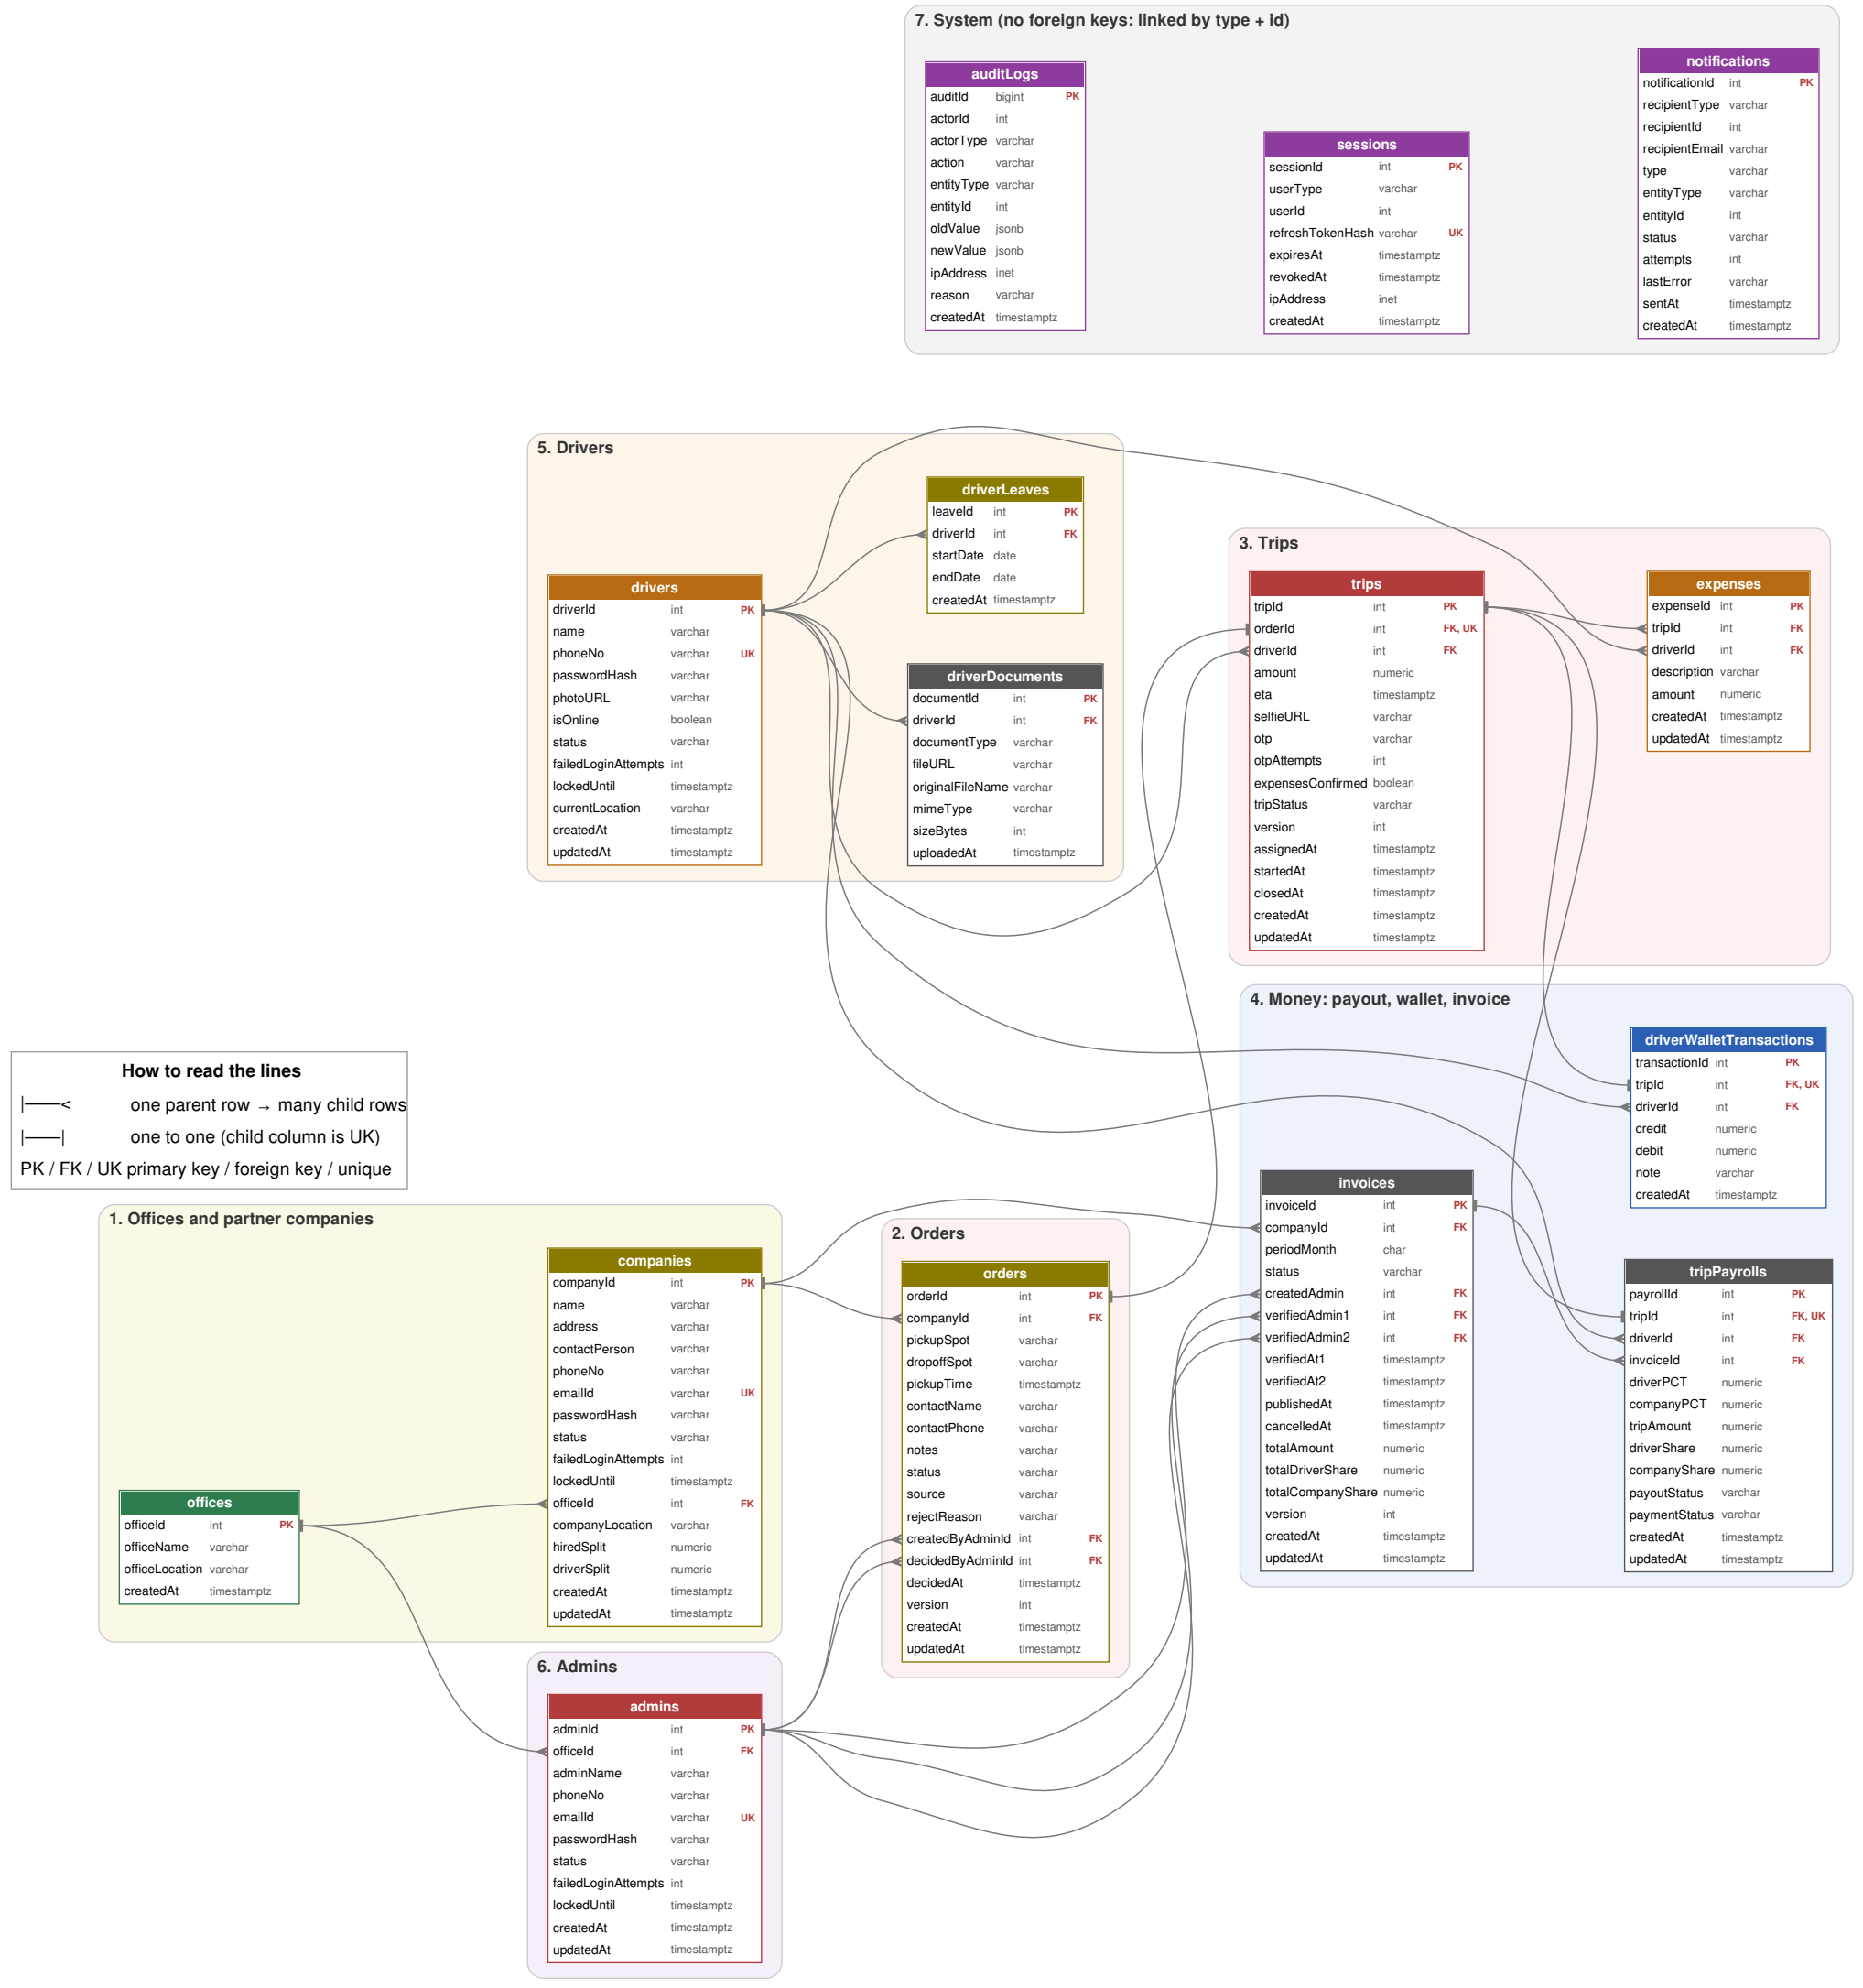
7. System (no foreign keys: linked by type + id)
auditLogs
auditId bigint PK
actorId int
actorType varchar
action varchar
entityType varchar
entityId int
oldValue jsonb
newValue jsonb
ipAddress inet
reason varchar
createdAt timestamptz
sessions
sessionId int PK
userType varchar
userId int
refreshTokenHash varchar UK
expiresAt timestamptz
revokedAt timestamptz
ipAddress inet
createdAt timestamptz
notifications
notificationId int PK
recipientType varchar
recipientId int
recipientEmail varchar
type varchar
entityType varchar
entityId int
status varchar
attempts int
lastError varchar
sentAt timestamptz
createdAt timestamptz
5. Drivers
drivers
driverId int PK
name varchar
phoneNo varchar UK
passwordHash varchar
photoURL varchar
isOnline boolean
status varchar
failedLoginAttempts int
lockedUntil timestamptz
currentLocation varchar
createdAt timestamptz
updatedAt timestamptz
driverLeaves
leaveId int PK
driverId int FK
startDate date
endDate date
createdAt timestamptz
driverDocuments
documentId int PK
driverId int FK
documentType varchar
fileURL varchar
originalFileName varchar
mimeType varchar
sizeBytes int
uploadedAt timestamptz
3. Trips
trips
tripId int PK
orderId int FK, UK
driverId int FK
amount numeric
eta timestamptz
selfieURL varchar
otp varchar
otpAttempts int
expensesConfirmed boolean
tripStatus varchar
version int
assignedAt timestamptz
startedAt timestamptz
closedAt timestamptz
createdAt timestamptz
updatedAt timestamptz
expenses
expenseId int PK
tripId int FK
driverId int FK
description varchar
amount numeric
createdAt timestamptz
updatedAt timestamptz
4. Money: payout, wallet, invoice
driverWalletTransactions
transactionId int PK
tripId int FK, UK
driverId int FK
credit numeric
debit numeric
note varchar
createdAt timestamptz
invoices
invoiceId int PK
companyId int FK
periodMonth char
status varchar
createdAdmin int FK
verifiedAdmin1 int FK
verifiedAdmin2 int FK
verifiedAt1 timestamptz
verifiedAt2 timestamptz
publishedAt timestamptz
cancelledAt timestamptz
totalAmount numeric
totalDriverShare numeric
totalCompanyShare numeric
version int
createdAt timestamptz
updatedAt timestamptz
tripPayrolls
payrollId int PK
tripId int FK, UK
driverId int FK
invoiceId int FK
driverPCT numeric
companyPCT numeric
tripAmount numeric
driverShare numeric
companyShare numeric
payoutStatus varchar
paymentStatus varchar
createdAt timestamptz
updatedAt timestamptz
How to read the lines
|——< one parent row → many child rows
|——| one to one (child column is UK)
PK / FK / UK primary key / foreign key / unique
1. Offices and partner companies
companies
companyId int PK
name varchar
address varchar
contactPerson varchar
phoneNo varchar
emailId varchar UK
passwordHash varchar
status varchar
failedLoginAttempts int
lockedUntil timestamptz
officeId int FK
companyLocation varchar
hiredSplit numeric
driverSplit numeric
createdAt timestamptz
updatedAt timestamptz
offices
officeId int PK
officeName varchar
officeLocation varchar
createdAt timestamptz
2. Orders
orders
orderId int PK
companyId int FK
pickupSpot varchar
dropoffSpot varchar
pickupTime timestamptz
contactName varchar
contactPhone varchar
notes varchar
status varchar
source varchar
rejectReason varchar
createdByAdminId int FK
decidedByAdminId int FK
decidedAt timestamptz
version int
createdAt timestamptz
updatedAt timestamptz
6. Admins
admins
adminId int PK
officeId int FK
adminName varchar
phoneNo varchar
emailId varchar UK
passwordHash varchar
status varchar
failedLoginAttempts int
lockedUntil timestamptz
createdAt timestamptz
updatedAt timestamptz