Statement

To
Quyền Nguyễn Duy
128 Pioneer Road
Singapore 639586

Details

Cloud account ID	0121A5-F69DA3-20C9E5
Payments account ID	6610-4936-1573-7764
Payments profile ID	9532-0493-4336
Statement issue date	Aug 31, 2026

Google Cloud

Summary for Aug 1, 2026–Aug 31, 2026

Starting balance as of Aug 1, 2026	SGD 0.00
Total new activity	SGD 13.60
Total adjustments	SGD 11.40
Total payments received	-SGD 25.00
Ending balance in SGD	SGD 0.00
Amount available to spend as of Sep 1, 2026	SGD 11.40

This is not a bill.
This is a summary of billing activity for the time period stated above.


Google Statement


Use the Google AI Studio Dashboard for more details: ai.studio/billing?billing=0121A5-F69DA3-20C9E5


PAYMENTS RECEIVED


Date	Description	Amount (SGD)
Aug 21	Manual payment: Visa ••••7067. V3598647656715482. CLOUD w7BFKH	-25.00
	Total payments received in SGD	**-SGD 25.00**


Type-C Interface






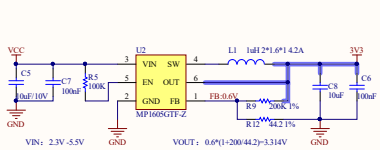


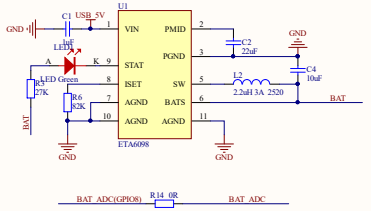






ESP32-S3-Touch-LCD-1.85C-Box




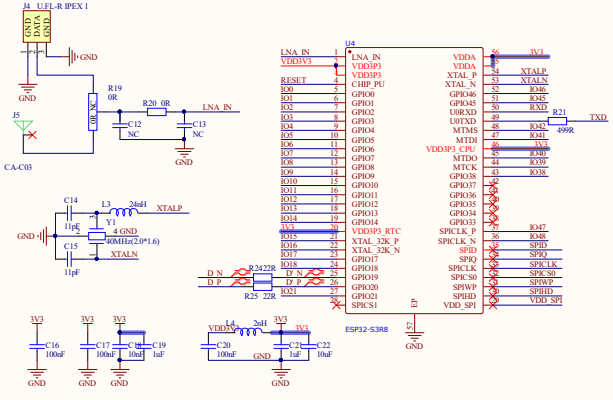



GPIO	LCD	SD Card	RTC	UART	I2C	Speak	MIC	Extraction
IO0								GPIO0
IO1								GPIO1
IO2							MIC_WS	
IO3								GPIO3
IO4	TP_INT(GPIO4)							TP_INT(GPIO4)
IO5	BL_PWM							
IO6								GPIO6
IO7								GPIO7
IO8								BAT_ADC(GPIO8)
IO9								GPIO9
IO10	TP_SCL		RTC_SCL		SCL			EXIO_SCL
IO11	TP_SDA		RTC_SDA		SDA			EXIO_SDA
IO12								GPIO12
IO13								GPIO13
IO14		SD_SCK						
IO15							MIC_SCK	
IO16		SD_D0						
IO17		SD_CMD						
IO18	LCD_TE							
IO19								D_N
IO20								D_P
IO21	LCD_CS							
IO33								Internal occupancy
IO34								Internal occupancy
IO35								Internal occupancy
IO36								Internal occupancy
IO37								Internal occupancy
IO38						I2S_LRCK		
IO39							MIC_SD	
IO40	LCD_SCK							
IO41	LCD_SDA3							
IO42	LCD_SDA2							
TXD				UART_TXD				GPIO43
RXD				UART_RXD				GPIO44
IO45	LCD_SDA1							
IO46	LCD_SDA0							
IO47						I2S_DIN		
IO48						I2S_BCK		
Extend_IO1	TP_RST							
Extend_IO2	LCD_RST							
Extend_IO3		SD_D3						
Extend_IO4			RTC_INT					
Extend_IO5								EXIO5
Extend_IO6								EXIO6
Extend_IO7								EXIO7
Extend_IO8								EXIO8

To use this GPIO, you need to remove the 0R resistor

To use this GPIO, you need to remove the 0R resistor

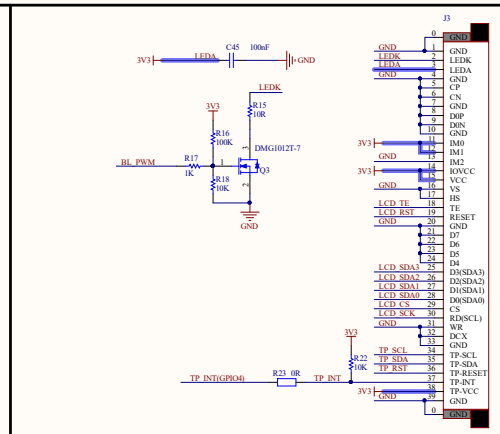

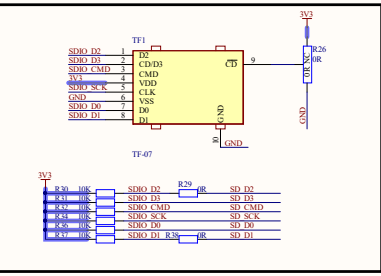



IO Extension

