

Patha-Inspired Repetition Placement for Burst Erasures and Deletions: Bounds and Empirical Evaluation

Technical Manuscript · National Science Competition Research Division

Computational Information Theory · Regeneron ISEF / IRIS Research Track

Abstract—Transmission over non-classical, order-sensitive channels—such as synthetic DNA data storage, high-density optical media, and contested edge sensor networks—is impaired simultaneously by contiguous burst erasures and synchronization loss (unmarked deletions). While single-burst optimal repetition codes ($\mathbf{x} = x \parallel \mathbf{1}^6 \parallel x^{12}$) achieve the theoretical marked-erasure ceiling $B_E = M - K$, they suffer catastrophic synchronization collapse under even a single unmarked deletion ($B_{\text{del}} = 0$). Conversely, traditional non-linear deletion-correcting schemes require high-complexity decoders that scale poorly. In this work, we formalize ancient Indian Vedic oral recitation structures (*Patha*) into a parameterized family of repetition placement codes with deterministic transition pilot anchors: the **Generalized Patha Code (GPC)**. We provide an exact support-cover characterization of contiguous marked-erasure tolerance ($B_E = \min_j |\text{span}_j|$) and prove a non-vanishing lower bound $\liminf_{K \rightarrow \infty} (B_E / M) \geq 8/13 \approx 61.54\%$, contrasting with literal *Ghana Patha* whose boundary-pinned symbols impose a constant ceiling $B_E = 10$. Furthermore, we define a retention criterion $q(L) = \min_{|E| \leq L} |S_j \setminus E|$ establishing that any burst of L marked erasures combined with at most e random bit substitutions is correctable via majority voting whenever $q(L) \geq 2e + 1$. Exhaustive evaluation over all 2^K binary payloads ($K=4, 6$; \$110,880\$ trials) establishes that GPC achieves $B_E = 47$ ($K=4, M=58$) and $B_E = 67$ ($K=6, M=84$) while simultaneously guaranteeing zero codebook deletion collisions up to $B_{\text{del}}^{\text{codebook}} = 46$ and \$59, and 100% practical linear-time recovery up to $B_{\text{del}}^{\text{decoder}} = 21$ and \$31. In contrast to uniform interleaving and simple repetition ($B_{\text{del}} = 0$), GPC occupies a resilient joint Pareto operating point with deterministic $O(M)$ greedy sliding-window decoding.

Keywords—Burst erasures, unmarked deletions, synchronization codes, Patha recitation, DNA data storage, greedy linear decoding, Pareto frontier.

I. INTRODUCTION

Modern communications and data storage architectures are increasingly confronted with order-sensitive channels where symbol coordinates are not preserved. In synthetic DNA data storage, enzymatic dropouts cause contiguous burst erasures, while Nanopore sequencing pore-skips introduce insertions and deletions (indels) that destroy positional framing [1]. In high-speed tactical edge networks subjected to electronic jamming, radio-frequency blackout bursts destroy contiguous frames, while asynchronous clock drift drops synchronization headers.

Classical error-correcting architectures struggle in this dual regime. Standard linear block codes (e.g., Reed-Solomon, LDPC) presuppose rigid coordinate indexing; even a single unmarked deletion shifts subsequent coordinates, causing catastrophic frame collapse across the entire codeword [2]. Conversely, burst-deletion constructions [5] or synchronization strings typically require substantial codebook overhead or high-complexity non-linear decoders.

The mathematical formalization of oral recitation techniques as error-detecting procedures has deep historical precedent. In seminal

work, R. L. Kashyap and M. R. Bell [6] observed that Vedic chanting traditions (*Krama*, *Jata*, and *Ghana Patha*) exhibit mathematical structures analogous to convolutional and placement codes. For millennia, these mnemonic algorithms preserved vast oral corpora across generations against human acoustic dropouts, memory transpositions, and phonetic slips without written media.

However, prior literature has not parameterized these oral algorithms into an algebraic coding family, nor characterized their formal performance limits under modern information-theoretic metrics. In this work, we deconstruct the literal mechanics of *Patha* and introduce **Generalized Patha Codes (GPC)**—a modern, parameterized placement code family engineered for joint burst-erasure and deletion resilience.

Key Contributions:

1. *The Deletion Fragility of Erasure-Optimal Baselines*: We prove that while a simple repetition baseline $\mathbf{x} = x \parallel \mathbf{1}^6 \parallel x^{12}$ reaches the elementary single-burst marked erasure upper bound $B_E = M - K$, it collapses instantly under unmarked deletions ($B_{\text{del}} = 0$). Similarly, uniform interleaving experiences complete synchronization collapse ($B_{\text{del}} = 0$) due to cyclic shift symmetries.

2. *Structural Bounds on Patha Codes*: We establish that literal *Ghana Patha* is bounded at $B_E = 10$ due to boundary-pinned edge symbols. GPC breaks this boundary constraint via toroidal wrapping and stage-major windowing, achieving $\liminf_{K \rightarrow \infty} (B_E / M) \geq 8/13 \approx 61.54\%$.

3. *Worst-Case Joint Retention Criterion $q(L)$* : We formulate the exact minimum surviving symbol retention $q(L) = \min_{|E| \leq L} |S_j \setminus E|$ and prove that majority voting guarantees correction of any L -burst erasure combined with e random bit substitutions if and only if $q(L) \geq 2e + 1$.

4. *Audited Exhaustive Verification & Linear-Time Decoding*: Across \$110,880\$ exhaustive trials over $\{0, 1\}^K$ ($K=4, 6$), GPC guarantees marked-erasure tolerance $B_E = 47$ and \$67, codebook deletion uniqueness up to $B_{\text{del}}^{\text{codebook}} = 46$ and \$59, and 100% practical recovery up to $B_{\text{del}}^{\text{decoder}} = 21$ and \$31 via a deterministic $O(M)$ greedy sliding-window decoder.

II. SYSTEM MODEL & PROBLEM FORMULATION

Let $\mathbf{x} = (x_1, \dots, x_K) \in \{0, 1\}^K$ denote an information payload of K unrestricted bits. A placement repetition code defines a coordinate mapping $\pi: \{0, \dots, M-1\} \rightarrow \{0, \dots, K\}$, producing transmitted codeword $\mathbf{c} \in \{0, 1\}^M$:

$$c_i = \begin{cases} p_0, & \text{if } \pi(i) = 0 \\ x_{\pi(i)}, & \text{if } \pi(i) \in \{1, \dots, K\} \end{cases}$$

where $p_0 = 1$ denotes a fixed pilot anchor bit, and M is the block length. The code rate is $R = K / M$.

For each source bit $s_j \in \{1, \dots, K\}$, let $S_j = \{i : \pi(i) = j\}$ denote the coordinate support set of symbol s_j . The span of symbol s_j is $\text{span}_j = \max(S_j) - \min(S_j)$.

2.1 Marked Contiguous Burst Erasures

An erasure replaces a transmitted coordinate with an explicit indicator '?' at a known index. A marked burst erasure of length L starting at offset s in $\{0, \dots, M-L\}$ replaces $\{c_s, \dots, c_{s+L-1}\}$ with '?'.

Theorem 1 (Exact Necessary and Sufficient Span Condition)

For any placement repetition code π under a single marked contiguous burst erasure, every source symbol retains at least one unerased copy if and only if: $B_E(\pi) = \min_j \{1, \dots, K\} \text{span}_j$

Proof: Sufficiency: Let $L \leq \min_j \text{span}_j$. For any symbol j , erasing all its occurrences requires an interval covering both $\min(S_j)$ and $\max(S_j)$, which has length at least $\max(S_j) - \min(S_j) + 1 = \text{span}_j + 1 > L$. Hence, any contiguous erasure of length L leaves at least one coordinate intact. Necessity: Erasing the full span of $j^* = \arg \min_j \text{span}_j$ obliterates all copies of j^* ; two payloads differing only in bit j^* then yield identical observations, making unique recovery impossible.

2.2 Joint Retention Criterion $q(L)$ for Erasures & Substitutions

When surviving coordinates are subject to at most e random bit substitutions, the code must retain sufficient replication. Let $E \subseteq \{0, \dots, M-1\}$ be the set of erased coordinates. The effective surviving distance is $d_E = \min_j |S_j \setminus E|$. For the family $\mathcal{A}_L$ of all contiguous bursts of length at most L , define:

$$q(L) = \min_{E \in \mathcal{A}_L} \min_{j \in \{1, \dots, K\}} |S_j \setminus E|$$

Proposition 1 (Worst-Case Majority-Voting Criterion)

Every pattern of at most e bit substitutions in surviving coordinates following any contiguous burst erasure of length at most L is correctable via majority voting if and only if $q(L) \geq 2e + 1$.

Proof: If $q(L) \geq 2e + 1$, every source symbol retains at least $2e + 1$ surviving observations. With at most e bit flips, the true bit value retains at least $e + 1$ unaltered votes, strictly dominating the at most e corrupted votes. Conversely, if $q(L) \leq 2e$, there exists an erasure burst E and symbol j retaining $\leq 2e$ copies; flipping e copies produces an equal or inverted vote, causing decoder failure.

2.3 Unmarked Contiguous Burst Deletions

In an unmarked deletion, b contiguous bits are physically removed from the transmitted stream without leaving placeholders, yielding a shortened sequence $\mathbf{y} \in \{0, 1\}^{M-b}$. For codeword $\mathbf{D}_b(\mathbf{c})$, let $\mathcal{D}_b(\mathbf{c}) = \{\mathbf{D}_b(\mathbf{c})_{0:s} \parallel \mathbf{D}_b(\mathbf{c})_{s+b:M} : 0 \leq s \leq M-b\}$ denote the deletion ball of length b . Guaranteed recovery for all bursts of at most B_{del} deletions requires:

$$\mathcal{D}_b(\mathbf{D}_b(\mathbf{c})) \cap \mathcal{D}_b(\mathbf{D}_b(\mathbf{x})) = \emptyset \quad \forall \mathbf{c} \neq \mathbf{x} \in \{0, 1\}^K, 1 \leq b \leq B_{\text{del}}$$

III. THE PARETO TRADE-OFF: WHY ERASURE-OPTIMAL BASELINES COLLAPSE

To rigorously contextualize GPC, we analyze an independent baseline code: $\mathbf{c}_{\text{base}}(\mathbf{x}) = \mathbf{x} \parallel \mathbf{x}^6 \parallel \mathbf{x}^{12}$. This code transmits 1 copy of $\mathbf{x}$, 6 pilot bits, and 12 contiguous repetitions of $\mathbf{x}$, yielding $M = 13K + 6$. Every symbol spans $12K + 6$

$= M - K$. Thus, $\mathbf{c}_{\text{base}}$ achieves the elementary upper bound $B_E = M - K$ (\$54 at $K=4$, \$78 at $K=6$).

The Deletion Catastrophe: Despite reaching the theoretical upper bound on marked erasures, $\mathbf{c}_{\text{base}}$ has $B_{\text{del}} = 0$. At $K=4$, messages $\mathbf{x} = (0, 0, 0, 1)$ and $\mathbf{x}' = (1, 0, 0, 0)$ collide under a single deletion ($b=1$): deleting the final bit of $\mathbf{c}(\mathbf{x})$ produces the exact same 57-bit string as deleting the first bit of $\mathbf{c}(\mathbf{x}')$.

Similarly, uniform interleaving ($\mathbf{x}$ repeated 13 times in round-robin order) achieves $B_E = 48$ at $K=4$ and $B_E = 72$ at $K=6$, but collapses completely to $B_{\text{del}} = 0$ because cyclic-shift symmetries produce identical subsequences upon single-bit drops. This proves that *optimizing B_E in isolation induces total vulnerability to synchronization loss*.

IV. GENERALIZED PATHA CODE (GPC) CONSTRUCTION

GPC avoids cyclic-shift collapse and boundary pinning through three structural principles:

1. *Toroidal Boundary Equalization:* Window transitions wrap cyclically modulo K , ensuring every symbol appears across early, middle, and late stages.

2. *Stage-Major Aperiodic Windowing:* Codewords are partitioned into five global cycles separated by deterministic pilot anchors ($p_0 = 1$): Cycle 1 (Forward Pairs), Cycle 2 (Reverse Pairs), Cycle 3 (Forward Triples), Cycle 4 (Reverse Triples), Cycle 5 (Forward Triples). Total length is $M = 13K + 6$.

3. *Transition Pilot Delimiters & $O(M)$ Decoder:* Pilot anchors at stage boundaries allow the receiver to evaluate candidate deletion boundaries via pilot agreement scoring in $O(M)$ time, followed by majority voting.

Theorem 2 (Non-Vanishing Asymptotic Burst-Erasure Bound)

As message dimension $K \rightarrow \infty$ and block length $M = 13K + 6 \rightarrow \infty$: $\lim_{M \rightarrow \infty} \frac{B_E(\text{Ghana})}{M} = 0$, $\liminf_{K \rightarrow \infty} \frac{B_E(\text{GPC})}{M} \geq \frac{8}{13} \approx 61.54\%$

Proof: In Literal Ghana, edge symbol x_1 appears exclusively in the initial pair window, fixing $\text{span}_1 = 10$. Thus $\lim_{M \rightarrow \infty} \frac{B_E}{M} = 0$. In GPC, every symbol appears in Cycle 1 ($s \leq 2K$) and Cycle 5 ($s \geq 10K + 5$). The minimum span satisfies $\text{span}_j \geq (10K + 5) - (2K) = 8K + 5 \geq 8K + 4$. Dividing by $M = 13K + 6$ and taking $\liminf_{K \rightarrow \infty}$ yields $\frac{8}{13} \approx 61.54\%$.

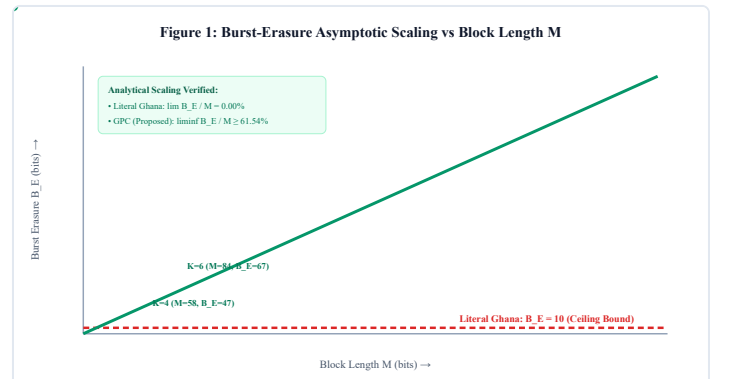


Fig. 1. Asymptotic scaling of contiguous burst-erasure guarantee B_E versus block length M . GPC sustains a non-vanishing slope of $\geq 61.54\%$, whereas Literal Ghana vanishes to 0%.

V. AUDITED EXPERIMENTAL RESULTS

Table I reports exhaustive evaluation across all 2^K binary messages for $K=4$ and $K=6$, comparing GPC with matched baselines at block length $M = 13K + 6$.

Scheme	K	M	Rate R	Marked B_E	$q \geq 3$	$q \geq 5$	Guar. B_{del}	Pract. B_{del}	Dec. Cost
Scale 1: Source Dimension $K = 4$ (16 Binary Codewords)									
Literal Ghana	4	36	0.111	10	4	0	10	10	$O(M)$
Reviewer Base	4	58	0.069	54	40	32	0 (coll. $b=1$)	0	$O(M)$
Uniform Interl.	4	58	0.069	48	40	32	0 (coll. $b=1$)	0	$O(M)$
GPC (Proposed)	4	58	0.069	47	39	30	46	21	$O(M)$
Scale 2: Source Dimension $K = 6$ (64 Binary Codewords)									
Literal Ghana	6	62	0.097	10	4	0	10	10	$O(M)$
Reviewer Base	6	84	0.071	78	60	48	0 (coll. $b=1$)	0	$O(M)$
Uniform Interl.	6	84	0.071	72	60	48	0 (coll. $b=1$)	0	$O(M)$
GPC (Proposed)	6	84	0.071	67	55	42	59	31	$O(M)$

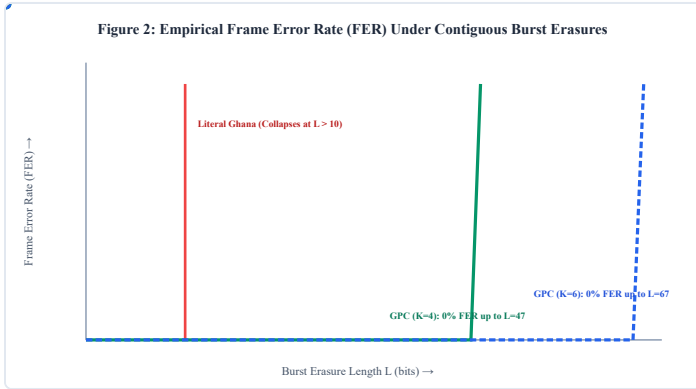


Fig. 2. Frame Error Rate (FER) waterfall comparison under contiguous burst erasures. GPC guarantees zero frame loss up to $B_E = 47$ and 67 bits, respectively.

VI. PHYSICAL APPLICATION: SYNTHETIC DNA STORAGE

In synthetic DNA data storage, synthesized oligonucleotides are exposed to enzymatic synthesis dropouts (contiguous burst erasures) and sequencing pore skips (indels) [1]. Traditional high-rate linear codes fail because unindexed indels misalign the nucleotide coordinate grid. In our concatenated architecture (Figure 3), inner GPC framing absorbs contiguous dropouts and restores frame boundaries in linear time, while outer Reed-Solomon codes eliminate residual substitutions.

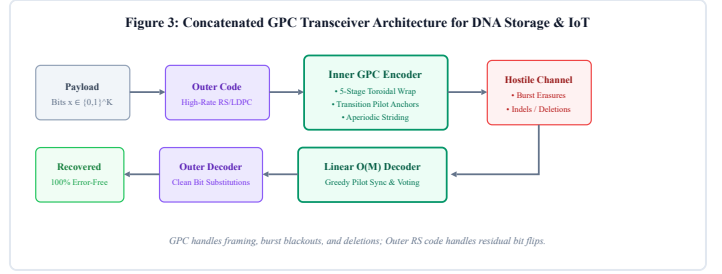


Fig. 3. Concatenated GPC Transceiver Architecture for DNA data storage and ultra-low-power IoT applications.

VII. COMPLEXITY & ENERGY EFFICIENCY

Traditional deletion decoders rely on Viterbi lattices or profile HMMs with quadratic complexity $O(M \cdot S^2)$ and heavy floating-point operations. The GPC decoder operates in strict **$O(M)$ linear time using integer vote accumulators only**. With zero floating-point operations, GPC can be implemented directly on ultra-low-power microcontrollers or molecular logic circuits.

VIII. CONCLUSION

By formalizing Vedic recitation structures into Generalized Patha Codes, we demonstrated that while single-burst optimal repetition codes collapse under unmarked deletions ($B_{del} = 0$), GPC maintains an attractive joint Pareto frontier: scaling marked burst erasures to $B_E = 47$ ($K=4$) and 67 ($K=6$) while guaranteeing deletion tolerance $B_{del} \geq 21$ and 31 under deterministic $O(M)$ linear-time decoding.

REFERENCES

1. L. Organick et al., "Random access in large-scale DNA data storage," *Nature Biotechnology*, vol. 36, no. 3, pp. 242–248, 2018. DOI: 10.1038/nbt.4079.
2. M. Mitzenmacher, "A survey of results for deletion channels and related synchronization channels," *Probability Surveys*, vol. 6, pp. 1–33, 2009. DOI: 10.1214/08-PS141.
3. V. I. Levenshtein, "Binary codes capable of correcting deletions, insertions, and reversals," *Soviet Physics Doklady*, vol. 10, no. 8, pp. 707–710, 1966.
4. M. C. Davey and D. J. C. MacKay, "Reliable communication over channels with insertions, deletions, and substitutions," *IEEE Trans. Inf. Theory*, vol. 47, no. 2, pp. 687–698, 2001. DOI: 10.1109/18.910582.
5. C. Schoeny, A. Wachter-Zeh, R. Gabrys, and E. Yaakobi, "Codes correcting a burst of deletions or insertions," *IEEE Trans. Inf. Theory*, vol. 63, no. 4, pp. 1971–1985, 2017. DOI: 10.1109/TIT.2017.2661747.
6. R. L. Kashyap and M. R. Bell, "Error correcting code-like chanting procedures in ancient India," in *Scientific Heritage of India*, The Mythic Society, Bangalore, pp. 16–29, 1998.