


InstaShare 2 User Manual

Wireless screen sharing software

V 5





Copyright and disclaimer

Copyright

Copyright 2026 BenQ Corporation. All rights reserved. No part of this publication may be reproduced, transmitted, transcribed, stored in a retrieval system or translated into any language or computer language, in any form or by any means, electronic, mechanical, magnetic, optical, chemical, manual or otherwise, without the prior written permission of BenQ Corporation.

All other logos, products, or company names mentioned in this manual may be the registered trademarks or copyrights of their respective companies, and are used for informational purposes only.

Disclaimer

BenQ Corporation makes no representations or warranties, either expressed or implied, with respect to the contents of this document. BenQ Corporation reserves the right to revise this publication and to make changes from time to time in the contents thereof without obligation to notify any person of such revision or changes.

The screenshots in this document are for reference only and may differ from the actual design.

This document aims to provide the most updated and accurate information to customers, and thus all contents may be modified from time to time without prior notice. Please visit the website for the latest version of this document.






Table of contents




Copyright and disclaimer.....	i
Introduction	1
Knowing your devices	1
Before you start.....	2
1. Downloading InstaShare 2	2
2. Checking network connection.....	2
3. Launching InstaShare 2.....	3
Settings	5
Changing name and password for Host device.....	5
Filter inappropriate contents with AI Guardian/AI Guardian Pro	6
Export connecting log.....	7
Check for updates.....	7
Managing the session	8
Interface of Host Controls window	8
Floating Window mode.....	10
Smart split screen mode	11
Full screen mode.....	13
Identify plants and insects with AI Lens.....	13
Managing projecting devices	15
Managing synchronizing devices.....	16
Board-to-board sharing.....	17
Finding your grouped displays	18
Disconnecting grouped displays.....	19
Casting contents without installing InstaShare 2 app	20
Casting with InstaShare Button.....	20
Casting by AirPlay	21




Casting by Windows Miracast.....	22
Casting by Android Miracast	23
Casting by ChromeOS devices	24
Casting from the Chromebook desktop	24
Casting from Google Chrome.....	24
Web casting from your laptop	26
Casting contents with InstaShare 2 app.....	27
Interface overview.....	27
Connecting and pairing.....	29
NFC sharing	31
Share media files	32
Share photos and videos from computer	32
Share photos and videos from mobile devices	34
Sharing documents from mobile devices.....	36
Quick media sharing for mobile devices	38
Sharing contents through camera	39
Share your screen to the display	40
Casting entire screen or apps	41
Annotate on your screen.....	41
Synchronizing the display screen.....	42
Annotate on the display from your screen	43
Bring Your Own Meeting (BYOM)	44
Casting contents with InstaShare2 Chrome extension.....	45
Installing the InstaShare 2 Chrome extension	45
Casting through the Chrome extension.....	46
Recommended specifications for personal devices	47
Compatibility with different BenQ Board models	48



Smart Split mode	48
Port table	48
For InstaShare 2 app on IFP and Windows	48
For setting up Miracast.....	50
For setting up Google Cast.....	50
For setting up AirPlay.....	50






Introduction

InstaShare 2 is a software-based solution for multi-user collaboration. Users can present wirelessly using their mobile devices without installing any software.

With InstaShare 2 app, presenters can control displayed contents remotely from any personal devices while other participants are allowed to join the discussion by synchronizing the display screen for hands-on annotation.

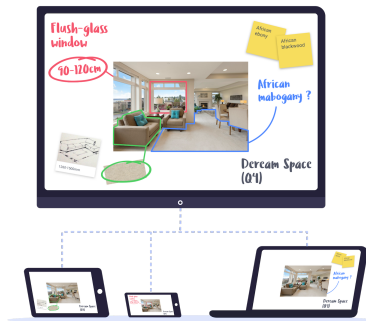

Note

- Images and menu options in this document are for reference only and may look different according to different BenQ products or the operating system of your device. The user interface may subject to change without prior notice.
- InstaShare 2 enables direct editing of casted content. Simply use your device's keyboard, a connected display keyboard, or the BenQ display for remote control editing.

Knowing your devices

BenQ display and BenQ projector will hereinafter be referred to as Host device.



Host device
(BenQ display/projector)



Personal devices

Before you start

1. Downloading InstaShare 2

For BenQ display

Watch [how-to video](#).

If InstaShare 2 is not preloaded in your display, visit **Apps**  > **BenQ App Store**  to download it manually.

For Mac and Windows users

Go to [InstaShare 2 website](#) for the latest version of **InstaShare 2**.

For iOS and Android users


Follow either way to install **InstaShare 2** on your smartphone:

- Go to the App Store in your device and search "**InstaShare 2**".
- Open **InstaShare 2** on your [Host device](#) and select **Install App**. Follow the instructions to download **InstaShare 2**.



2. Checking network connection

In order to cast contents using **InstaShare 2**, you need to connect your personal device and the [Host device](#) to the same Internet.



- For BenQ display, go to **Settings > Network**.
- For BenQ projector, go to **Settings > General**.

Connect via Wi-Fi

1. Select an available network.
2. Enter the Wi-Fi password when prompted.

Connect via Hotspot

1. Enable **Portable Wi-Fi Hotspot/Hotspot**.
2. Set your Internet to 5G.
 - For BenQ display, select **Set up Wi-Fi Hotspot**, then set **Band** to **5 GHz**.
 - For BenQ projector, under **Internet Quality**, select **Higher(5G)**.



3. Launching InstaShare 2

Available on BenQ display & projector


Note


- For the optimal performance of InstaShare 2, make sure you are in an ideal wireless connection environment with strong and stable Wi-Fi signal.
- The language of the software follows the language settings of your operating system. English will be used if the selected display language is not supported by the software.

1. Use either way to access InstaShare 2 on your **Host device**:
 - A. Select the wireless projection icon on the home screen.
 - B. Go to **Apps**  > **InstaShare 2**  to launch the software.

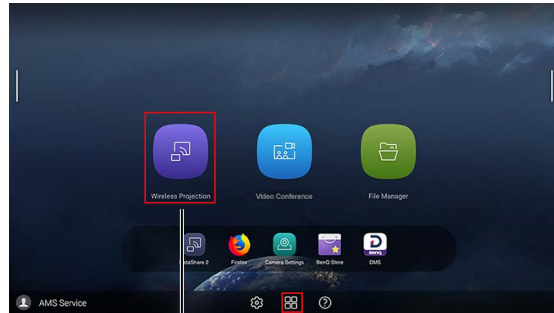

2. Follow the instructions on the tutorial window to connect your device with the display.

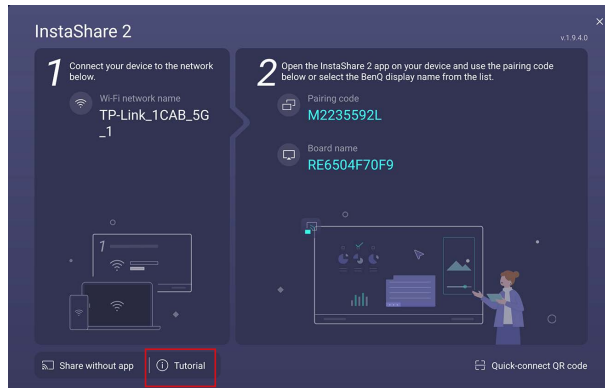




Settings


Changing name and password for Host device

1. Select the settings icon (⚙️) to access **Settings**:


BenQ display

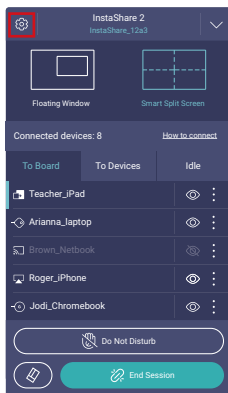


BenQ projector

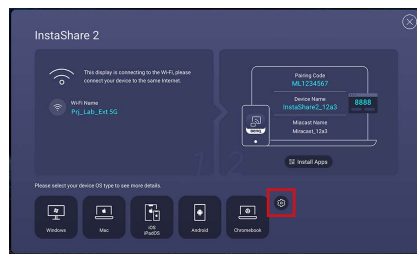

2. In **Settings > General > Board name**, set your display name no longer than 32 characters.
3. In **Settings > Permissions > Connection Password**, enable/disable password for connection. Tap on ↻ to load a new random password.

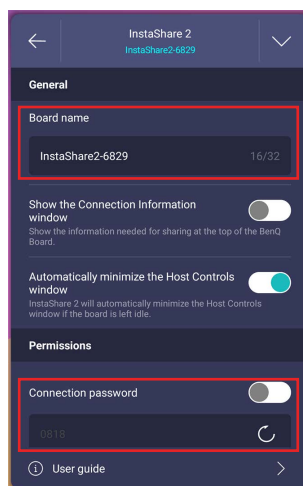



Filter inappropriate contents with **AI Guardian/AI Guardian Pro**

Note


Models with AI Guardian support content casting through **Media Sharing** in **InstaShare 2** app. For models with AI Guardian Pro, all casted contents will be filtered.

With AI Guardian/AI Guardian Pro, **InstaShare 2** automatically censor content when users attempt to share inappropriate images and videos on screen.

To enable this setting, go to  **Settings > Advanced** and switch on **AI Guardian/AI Guardian Pro**.

When inappropriate contents are detected, **InstaShare 2** blocks the contents and shows the screen as below instead.







Export connecting log

To browse activity log after logging in:

1. Go to  **Settings** > **Help** and tap **Export connecting log**.
2. In the AMS File window that appears, choose your desired export path and tap **Save**.

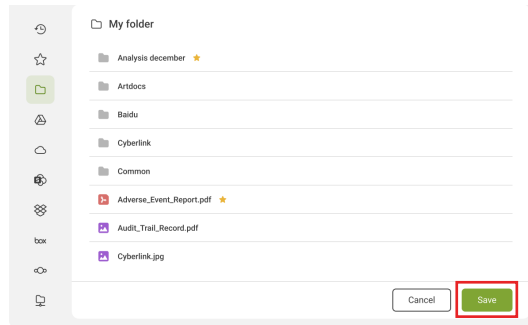

3. Once the export is successful, tap **Confirm** to close the window or tap **Show in AMS Files** to view the document.

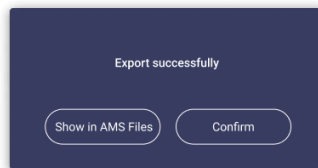


Note

Activity records are retained for one week only.

Check for updates

Go to  **Settings** > **Help** and tap **Check for updates**. A window will appear displaying whether the system is up to date or if a update is required.




Managing the session

Interface of Host Controls window

Available on BenQ display & InstaShare 2 mobile app

Tip

BenQ projector users need to download InstaShare 2 app on their mobile device to access the Host Controls window.

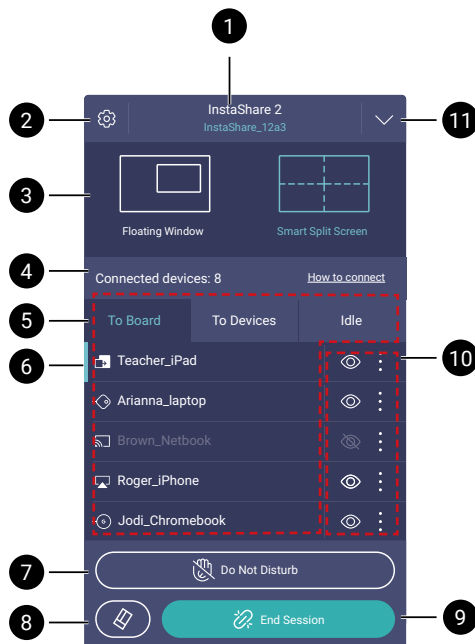

1. Display name

You can change the name of the display in **Settings**.

2. Settings


Modify settings such as the display name, connection password, or mirroring confirmation message.

3. Screen-sharing modes

Toggle between **Floating Window mode/Full screen mode** and **Smart split screen mode**.

4. Information bar

- **Connected devices:** View total number of connected device.
- **How to connect:** Tap to open the connection instruction page.



5. Connection categories

Tap each category (**To Board/To Devices/Idle**) to see the status of all connected device.

-  : Projecting via Miracast
-  : Projecting via AirPlay
-  : Projecting via InstaShare Button (**BenQ display only**)
-  : Projecting via InstaShare 2 App
-  : Projecting via Google Cast

6. Host of this session

Marked the Host of the session. Click on the  icon of each device to revoke the host permission or assign a new one.

7. Do Not Disturb

Tap to disable incoming projection requests from the participants.

8. Eraser

Tap to clear all annotation notes

9. End session

Tap to close the entire session.

10. Permission settings


Manage or allow certain action on selected devices.


-  /  : Show/hide projecting content for devices in **To Board**.
-  : Allow to touch the display remotely for devices in **To Devices**.
-  : Allow to annotate on the display for devices in **To Devices**.
-  >  : Remove/assign as Host.
-  >  : Disconnect with the device.

11. Minimize window

Minimize the **Host Controls window**.

Next to the minimized window illustration icon , the status of devices in use is displayed through the following icons:

-  : BYOM camera is activated.
-  : BYOM microphone is activated.
-  : The number of synchronizing devices.




Floating Window mode


Available on BenQ display

In **Floating Window** mode, presenters can use other software along with their shared screen.


1. In **Host Controls** window, select **Floating Window**.

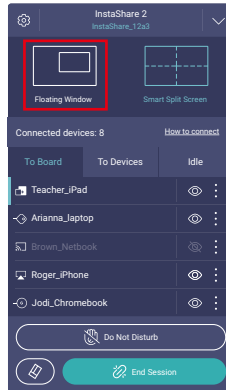

2. To manage the **Floating Window**, the following actions can be performed:

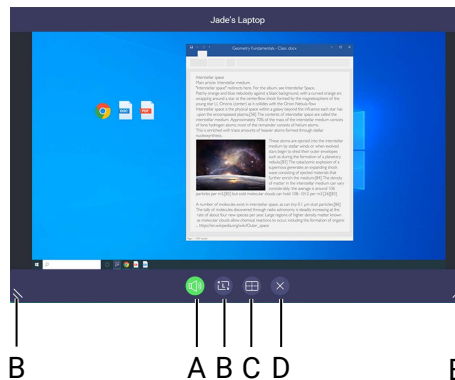

- A. Tap to mute/unmute the sound of the device.
- B. Tap to resize the window to small, medium, large, extra large, or adjust any size by dragging the bottom edge of the floating window.
- C. Tap to switch to the **Smart Split Screen** mode to automatically lay out the shared screens.
- D. Tap to close the current floating window.



Smart split screen mode


Available on BenQ display & projector

In **Smart Split Screen** mode, simultaneously share up to nine screens on BenQ display for synchronized discussions. Share up to four screens on BenQ projector.


Note


Depending on different BenQ Board models, the maximum number of split screens varies. See [Compatibility with different BenQ Board models](#) for more information.

1. In **Host Controls** window, select **Smart Split Screen**.

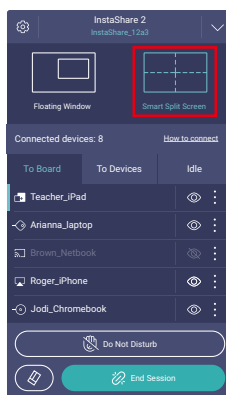


2. To manage the split windows, the following actions can be performed:
 - For display:

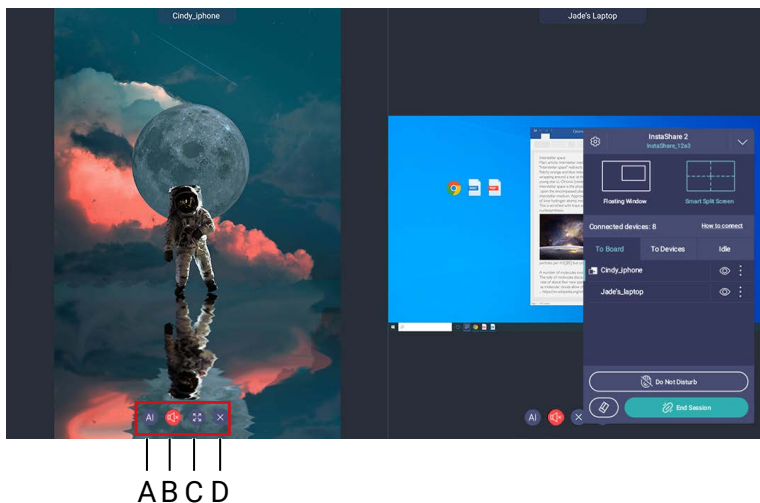




- For projector:

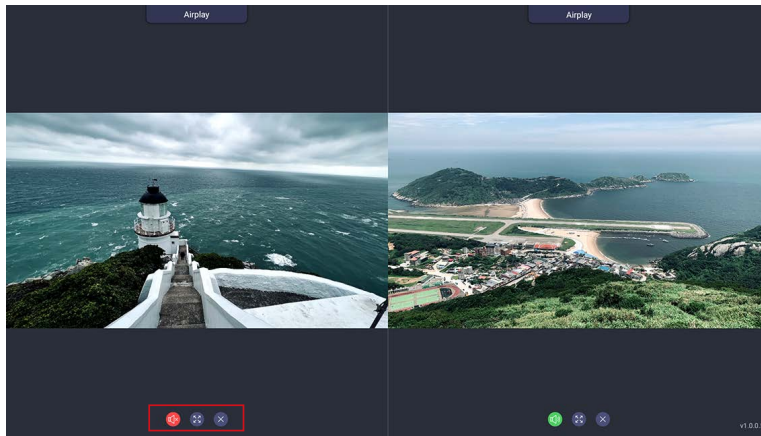

B C D

- A. **(Display only)** Tap to identify plants and insects with AI. See [Identify plants and insects with AI Lens](#).
- B. Mute/Unmute the sound of the device.
- C. Toggle between full screen mode or smart split mode.
- D. Close the certain split window.




Full screen mode

Available on **BenQ projector**

Select **Full Screen** mode to leave only one screen to display.

1. In **Host Controls** window, select **Full Screen**.

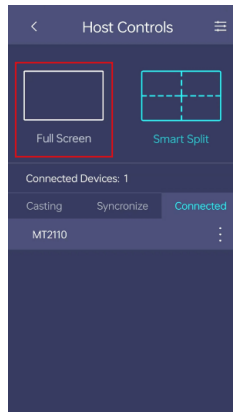

2. Choose a shared screen you want to keep.


Identify plants and insects with **AI Lens**

Available on **BenQ display**


Note

To use this function, ensure the BenQ display is connected to a Wi-Fi network.


InstaShare 2 integrates professional identification library to identify plants and insects through cloud AI. This function is available for all types of casting.




1. On the BenQ display, tap  from a shared screen.

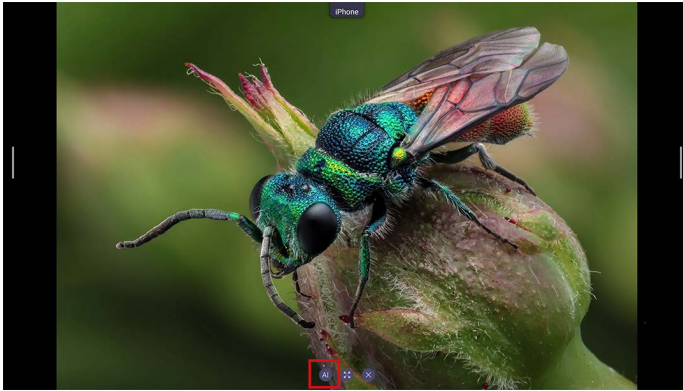


2. Choose to identify as  plants or  insects.

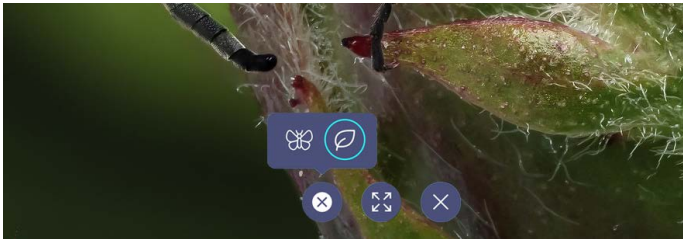


3. Once the image is successfully identified, a pop up window appears and displays the corresponded introduction of the plant/insect.
 - Tap **+**/**-** to adjust the text size.
 - Tap **OK** to exit.

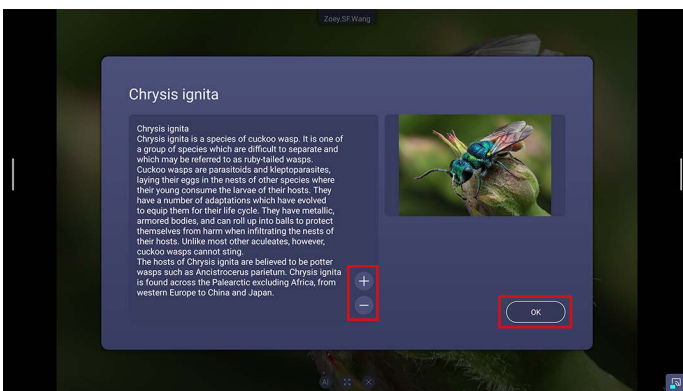




Managing projecting devices

You can view the lists of connected devices on the **Host Controls window** as shown below, divided by connecting status including **To Board**, **To Devices** and **Idle**.

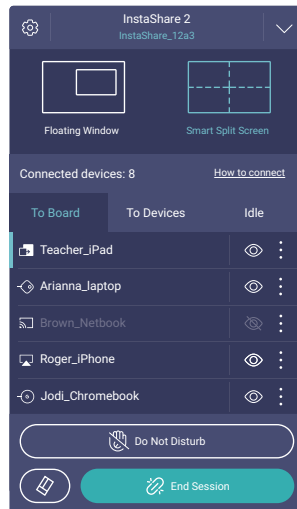


Tips on managing devices in **To Board**:

- In Smart Split mode, choose  /  to show or hide projecting contents from the specific device.
- If the projecting devices have reached the maximum number or you want to end the sharing of a certain user, go to  >  to disconnect with the device.
- Select  >  to remove or assign a participant as Host.
- When you need the room to focus on the current sharing, select **Do Not Disturb** to temporarily disable incoming presentation requests.
- If you need the participants to receive permission from the Host before casting contents, you can enable **Confirm before devices share content** in **Settings** .




Managing synchronizing devices

You can view the lists of connected devices on the **Host Controls window** as shown below, divided by connecting status including **To Board**, **To Devices** and **Idle**.

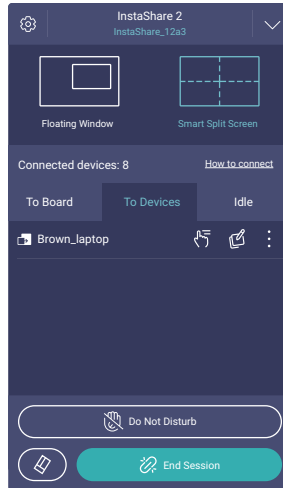

Tips on managing devices in **To Devices**:

- Select  to allow connected devices to control the **Host device** remotely.
- Select  to allow certain device to annotate on the Host device.
- If you want to stop a certain user from synchronizing the screen of Host device, go to  >  to disconnect with the device.
- Select  >  to remove or assign a participant as Host.
- If you want all devices to stop synchronizing the screen, go to **Settings** () to disable **Allow board-to-device screen sharing**.
- Tap on the  icon to clear all annotation notes.



Board-to-board sharing

Available on **BenQ** display

Important


Ensure the following before proceeding:

- All BenQ displays are connected to the same network.
- **InstaShare 2** is opened on all BenQ displays
- Disabled **Board-to-board sharing** on all client displays.

You can duplicate your main BenQ display screen to other client BenQ displays in the local network.

Only the main display, follow the steps below.


1. Go to  **Settings > Advanced** and tap **Board-to-board sharing**.
2. Turn on **Board-to-board sharing**.

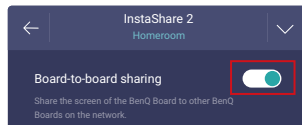



3. Click **Add** to search for available displays under the same network.

Note


Please make sure the **Board-to-board sharing** is disabled on all client displays.

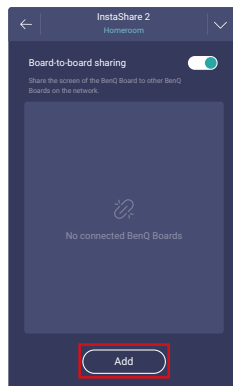

4. Check the displays you want to connect with and click **Apply**. A confirmation message appears.

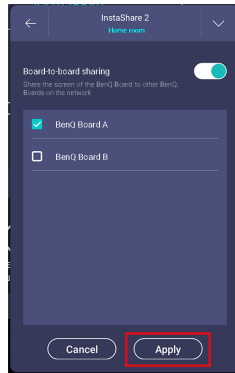


5. Tap **OK**.
6. Check the icon to ensure all selected displays are connected.




Finding your grouped displays

Available on BenQ display

1. Click the icon to search for a certain display.

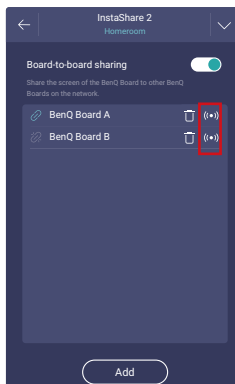

2. The selected display's border will flash and the display name will appear in the center of the screen.




Disconnecting grouped displays


Available on BenQ display

Use either methods below to disconnect grouped displays:

- On the main display, click the icon to delete displays from the casting group.

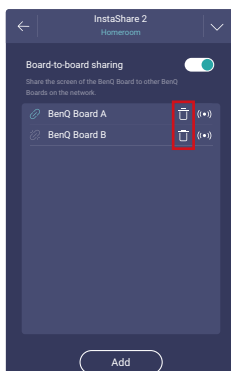

- On connected displays, click **Leave Session** to leave the casting group.

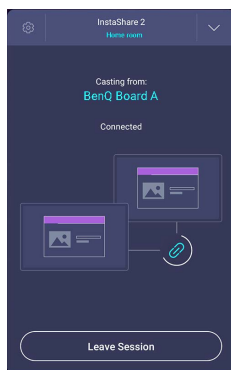

Casting contents without installing InstaShare 2 app

Note

Only users connected to the display via InstaShare 2 app can be assigned as Host. See [Casting contents with InstaShare 2 app](#) for more information.


Casting with InstaShare Button

Available on BenQ display

Watch [how-to video](#).

Select the **InstaShare Button** icon on the connection tutorial window to view a step-by-step tutorial. The system supports up to 4 Miracast screens simultaneously.





Casting by AirPlay

Supported versions: macOS, iOS


Watch how-to videos

- [For macOS users](#)
- [For iOS users](#)

1. Ensure that your Mac/iOS device and the **Host device** are connected to the same network.
2. Select the AirPlay icon ( / ) on your device and choose the display name to mirror your screen.
3. The screen will then be mirrored on the display once you've connected successfully.

To enable Touchback while casting with Airplay:

1. Pair your device with the BenQ display via Bluetooth.
2. On your device, go to **Settings > Accessibility > Touch** and enable **AssistiveTouch**.
3. Select the on-screen icon  to enable touch functionality.

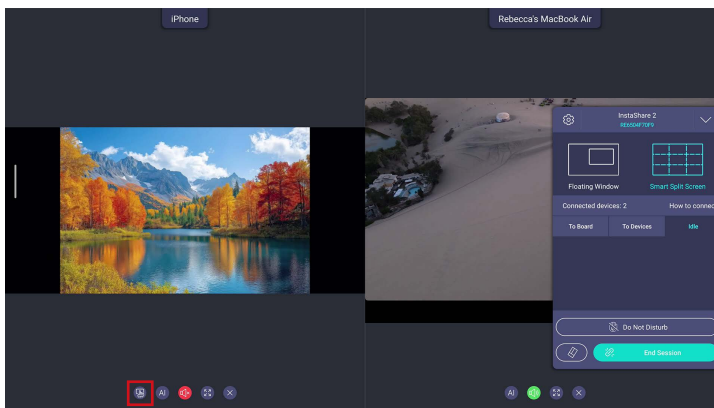

Note

When multiple iOS devices are connected, Touchback is only available for one iOS device at a time.

Casting by Windows Miracast

Supported versions: Windows

Tip


Watch [how-to video](#).

Important


Ensuring the following before proceeding:

- The Wi-Fi on the BenQ display and your Windows device are turned on and not connecting to any network.
- **Miracast** is enabled in  **Settings > Advanced > Native casting**.


1. Launch **InstaShare 2** on your **Host device**.
2. On your Windows device, select the **Connect** function in Windows or press **Windows logo key + K** to open cast options.

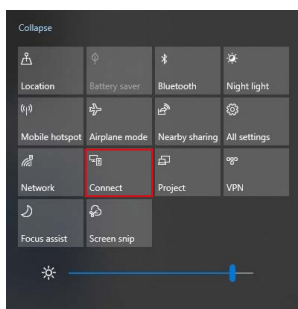


3. Select the name of the Host device as shown in **InstaShare 2** to connect.

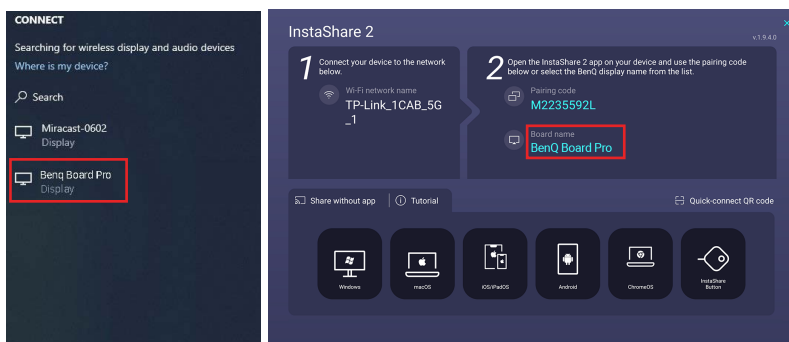

4. The screen will then be broadcast on the Host device once you've connected successfully.
5. (Optional) On your Windows device, you can enable touchback



controls by allowing touch input from this device.

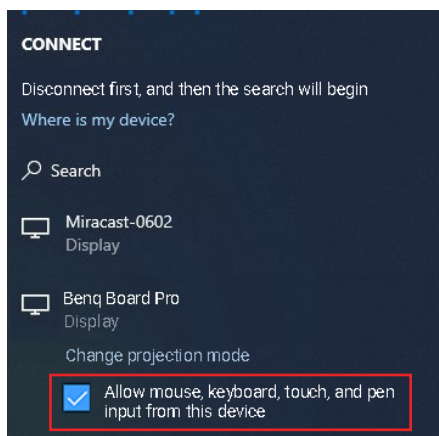

Casting by Android Miracast


Supported versions: Android

Important

Ensuring the following before proceeding:

- The Wi-Fi on the BenQ display and your Windows device are turned on and not connecting to any network.
- **Miracast** is enabled in  **Settings > Advanced > Native casting**.

1. Launch **InstaShare 2** on your **Host device**.
2. Open the **Wireless display** settings menu on your Android device and turn on screen sharing.
3. Select the Host device name in **InstaShare 2** to start sharing. You can connect up to four Miracast screens at once.



Casting by ChromeOS devices

InstaShare 2 supports casting from your Chromebook desktop, Chrome browser, or the InstaShare 2 extension.

- [Casting from the Chromebook desktop](#)
- [Casting from Google Chrome](#)
- [Casting through the Chrome extension](#)


Casting from the Chromebook desktop

Important

Ensuring the following before proceeding:

- Launch InstaShare 2 on your [Host device](#).
- The Host device and your device are connected to the same Wi-Fi network.
- **Google Cast** is enabled in  **Settings > Advanced > Native casting**.

1. At the lower-right corner of your Chromebook desktop, click the time.
2. Click **Cast screen**.

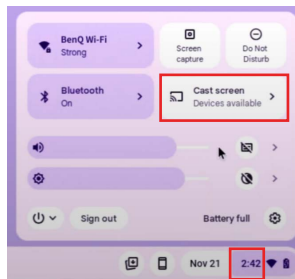

3. Select the name of the Host device as shown in **InstaShare 2** to start screen sharing.



Casting from Google Chrome

Important


Ensuring the following before proceeding:

- Launch InstaShare 2 on your [Host device](#).
- The Host device and your device are connected to the same Wi-Fi network.


1. Open the Chrome browser and click  > **Cast, save and share > Cast** or click  on the toolbar.

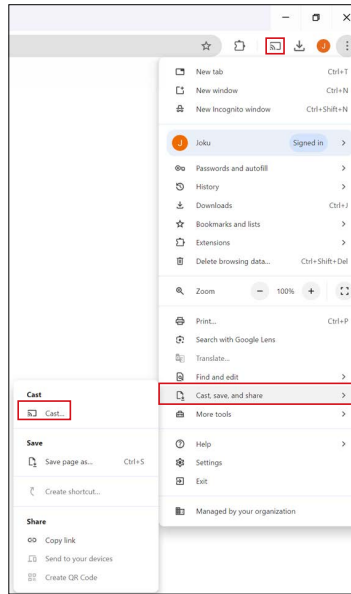

2. Click **Sources**, and select between **Cast tab** and **Cast screen**.

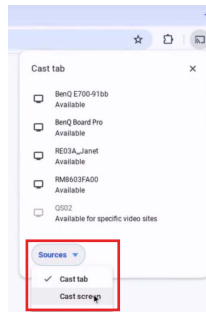

3. Select the name of the Host device as shown in **InstaShare 2** to start screen sharing.



Web casting from your laptop


Web casting allow users to share the screen without connecting to a specific network or downloading an app.

Important

Ensuring the following before proceeding:

- Launch **InstaShare 2** on your BenQ Display.
- **Webcasting** is enabled in  **Settings > Advanced > Native casting**.

1. Open a web browser on the device you want to share from and go to <https://is2.benq.com>
2. Once the page is loaded, enter a user name or use the randomly generated one.

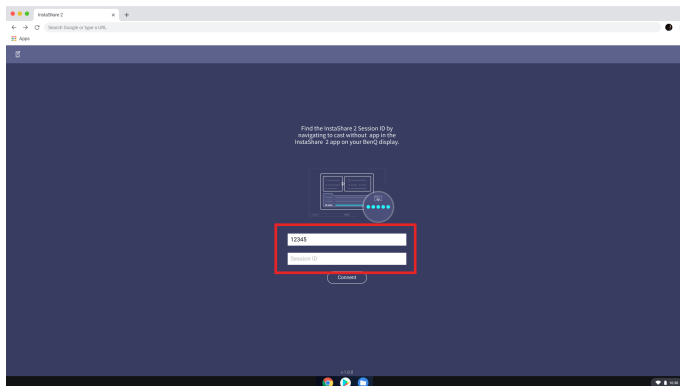


3. Enter the session ID on your BenQ display, where you can find it on the main InstaShare 2 page by tapping **Share without app**.




Casting contents with InstaShare 2 app

See [Downloading InstaShare 2](#) to get the app for your personal device.


Interface overview

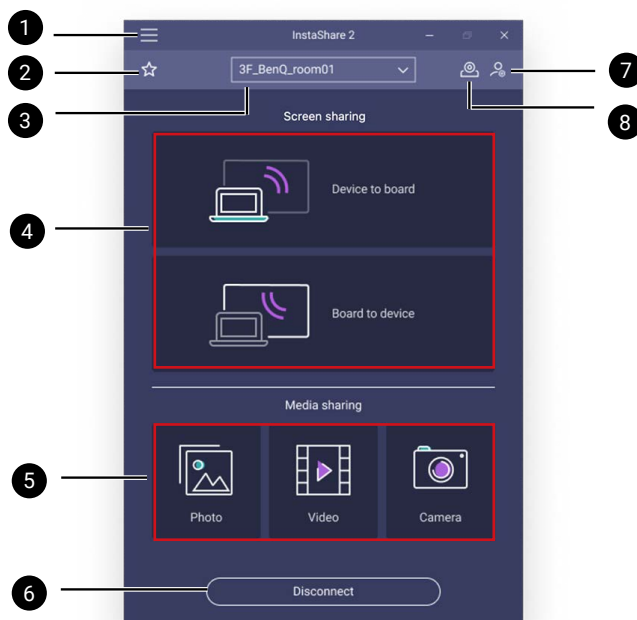

No.	Function	Descriptions
1.	Device Setting	Change the name of the device.
2.	My favorite	Select to mark the display as a favorite for quick pairing next time.
3.	Connected display	Shows a list of display available for pairing.





No.	Function	Descriptions
4.	Screen Sharing	Choose to cast your device screen to the display (Board to device) or view the Host device screen on your device, with touch-back and annotation function if allowed by the Host (Device to board). See Share your screen to the display and Synchronizing the display screen for details.
5.	Media Sharing	Select the media type to share specific contents without exposing your entire screen. See Share media files for details.
6.	Disconnect	Disconnect from the Host device.
7.	Settings	Tap to request to be the Host and adjust Host settings remotely.
8.	BYOM	Host meetings from your laptop using the display's built-in camera and microphones. See Bring Your Own Meeting (BYOM) for details.





Connecting and pairing

Follow the steps below to start sharing contents via **InstaShare 2** app:

1. Ensure that your personal device and the **Host device** are connected to the same network.

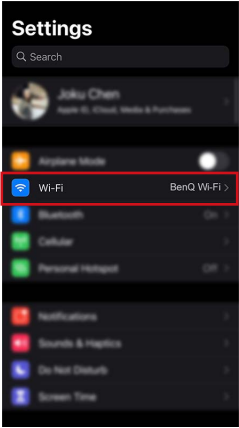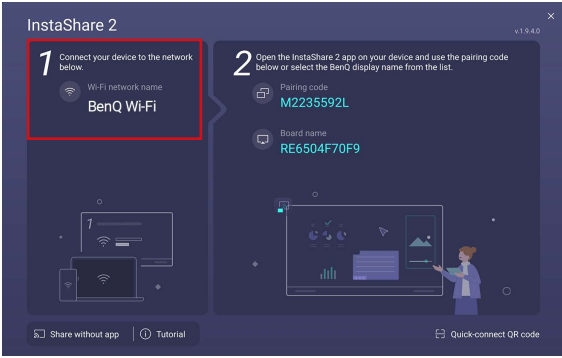
Personal device	Host device
	

2. Open **InstaShare 2** app on your device and enter the pairing code or select the display name in the **Display List**.

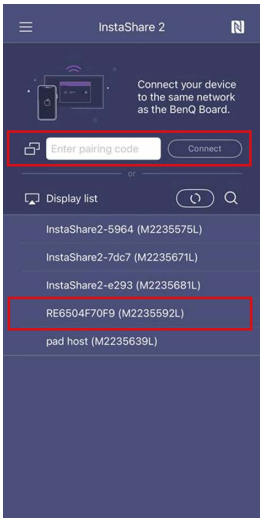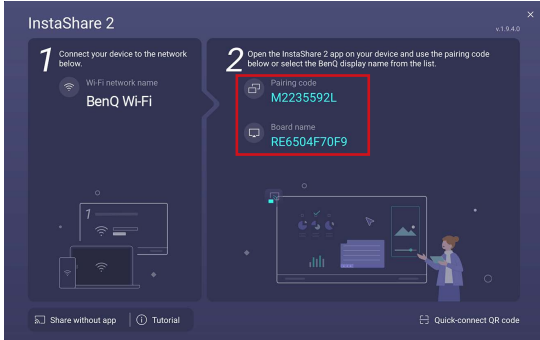
Personal device	Host device
	

3. You may be asked to enter the password to successfully pair with the Host device.

4. Once connected successfully, you can find your device in the **Idle** tab in **Host Controls** window.

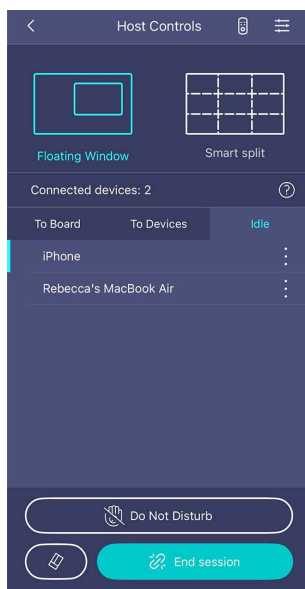

5. Now you can start using **InstaShare 2** to share your ideas.
6. To make future connections faster, add this device to your favorites.



NFC sharing

Supported version: Android, iOS

Tap your smartphone on the BenQ display's NFC sensor to instantly share your device screen.

Important

Ensure the following before proceeding:


BenQ display:

- The display is connected to a Wi-Fi network.
- **Tap and Share** is enabled in the **Settings > Advanced**.


Client device:

- **InstaShare 2** is installed.
- Wi-Fi and NFC are enabled.

1. Launch **InstaShare 2** on your mobile device.
2. (For iOS only) Tap **N** on the upper right corner.

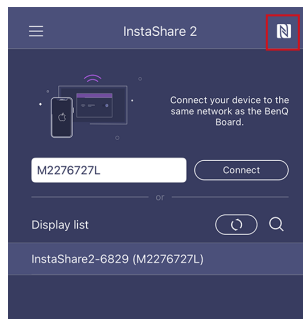

3. Tap your phone on the display's NFC sensor.
4. Depends on your device, tap **Join** or **Connect**.
5. Depends on your device, tap **Start now** or **Start Broadcast**.



Share media files

With InstaShare 2 app, you can share a single type of documents without exposing your entire screen. You can share images, videos from your devices, and also share documents for phones and tablets.

Depends on the platform and device you use, the steps and interface for sharing files may vary.

- [Share photos and videos from computer](#)
- [Share photos and videos from mobile devices](#)
- [Sharing documents from mobile devices](#)
- [Quick media sharing for mobile devices](#)
- [NFC sharing*](#)


Note

* The availability may vary depending on the compatibility of each BenQ display.



Share photos and videos from computer

Available on: macOS and Windows

1. In InstaShare 2 app, choose **Image** or **Video**.

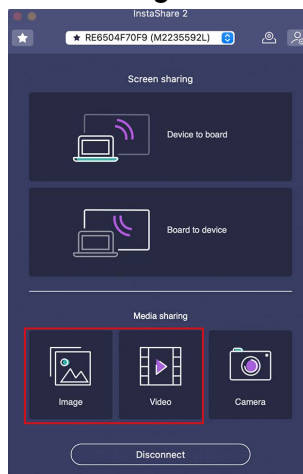

2. Select a file you want to display and perform any of the functions shown on the screen.

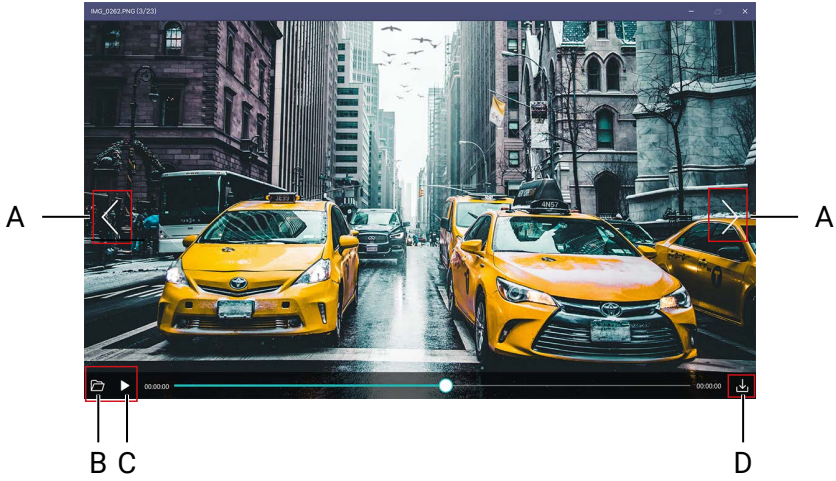


- A. Show the previous/next file within the same folder.
- B. Open the default file manager in your computer and select different files to cast.
- C. (Video only) Play/pause the current video.
- D. Take a screenshot and save the screen to your personal device.


Share photos and videos from mobile devices


Available on: Android, iOS and iPadOS

1. Under **Media Sharing**, select **Media Files**.

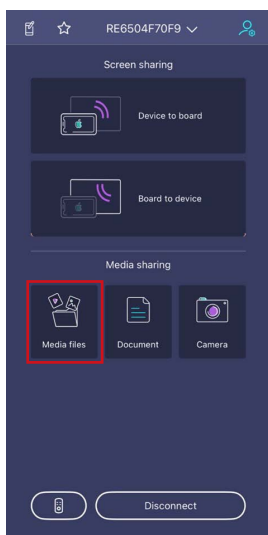


2. In your album, select the image/video to share or click **Select All** to select all files in the folder.
3. Select **Share** to start sharing contents on the Host device.

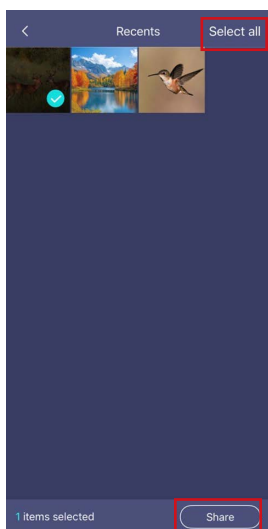



4. Wait for the Host to confirm your casting if **Confirm before device casts contents** is enabled in **Settings**.
5. If any annotation is made during your sharing, tap  to take a screenshot and save the image to your device.






Sharing documents from mobile devices

Available on: Android, iOS and iPadOS


1. Under **Media Sharing**, select **Document**.

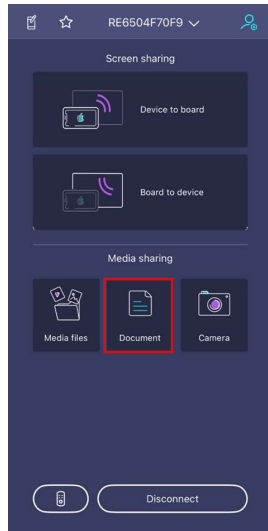

2. From your device, select the file you want to share. Select **OK** to confirm.

Note

- Select only one file at a time.
- Supported file types include Word, PowerPoint, Excel and PDF.




3. Select **OK** to start sharing contents on the Host device.

Note


Wait for the Host to confirm your casting if **Confirm before device casts contents** is enabled in **Settings**.

4. See [Document control by gesture](#) to learn how to navigate between the pages.



Document control by gesture

When a document is cast onto the BenQ display, control the document with gesture listed as follows:



1. **Scroll**

Swipe up or down to move between pages.




2. **Zoom in/out**


Pinch to zoom in or spread to zoom out the pages.

3. **Show/Hide thumbnail**

Double tap to show/hide the page preview area.
Tap a thumbnail to jump to the page.

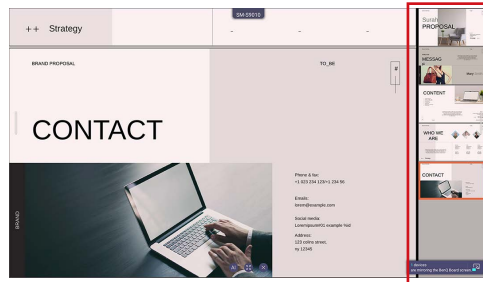

Page thumbnail



Quick media sharing for mobile devices

Supported version: Android, iOS



Share media directly from your mobile device gallery to InstaShare 2 on the BenQ display using Bluetooth.


Important

Ensure the following before proceeding:

- The BenQ display is connected to a Wi-Fi network.
- Bluetooth is enabled both on the display and your device.
- **InstaShare 2** is installed on your device.


1. On your mobile device, select the image, video or document you want to share.
2. Tap  **Share** or  **Share**.
3. On the app list, locate and tap **InstaShare 2**. The list of available BenQ displays appears.
4. Tap the name of the BenQ display. The media files will be cast onto the BenQ display.

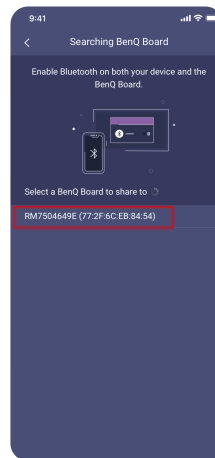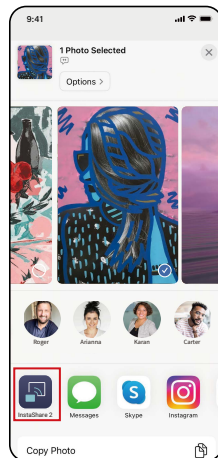





Sharing contents through camera

1. In InstaShare 2 app, tap **Camera** to capture real-time image and cast the image to the display.

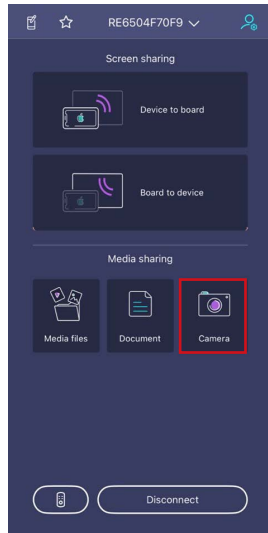

2. To adjust camera settings and manage photos taken, the following actions can be performed.

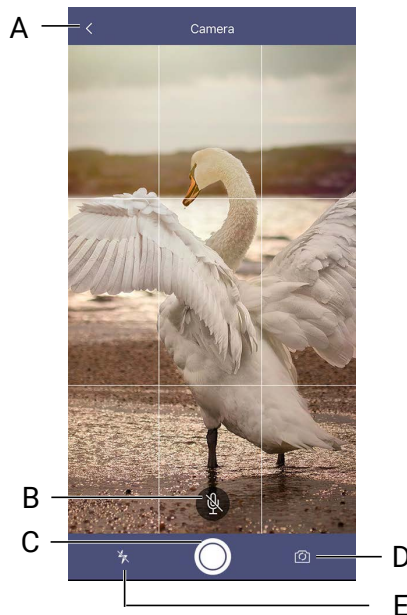



A. Leave **Camera**.

B. Play/Mute the sound of your computer/cellphone on the display.


C. Take a photo and cast image to the display.

D. Toggle between the front- and back-facing camera.

E. Enable/Disable camera flashlight.


Share your screen to the display

1. On InstaShare 2 app, click **Device to board** to share your screen to the display.

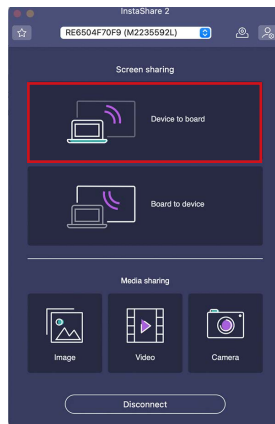

2. While sharing the screen, the laptop version of InstaShare 2 App will show a screen-sharing toolbar. Hover the cursor over  to display the complete editing tools as follows:

Supported version: macOS, Windows

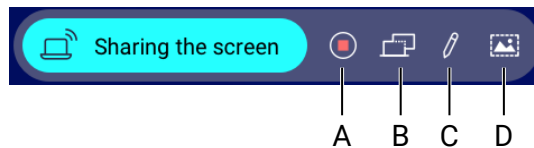

A. Stop sharing your screen


B. Casting entire screen or apps

C. Annotate on your screen

D. Take a screenshot

Note


While casting the screen, users may control the device screen from the BenQ display.



Casting entire screen or apps

Supported version: macOS, Windows

1. You can decide the way you want the content to be displayed. Select either tab below and choose a cast option.
 - A. **Entire screen**: Share the entire screen. Choose to duplicate or extend your screen.
 - B. **Apps**: Specify an app to cast onto the BenQ display.

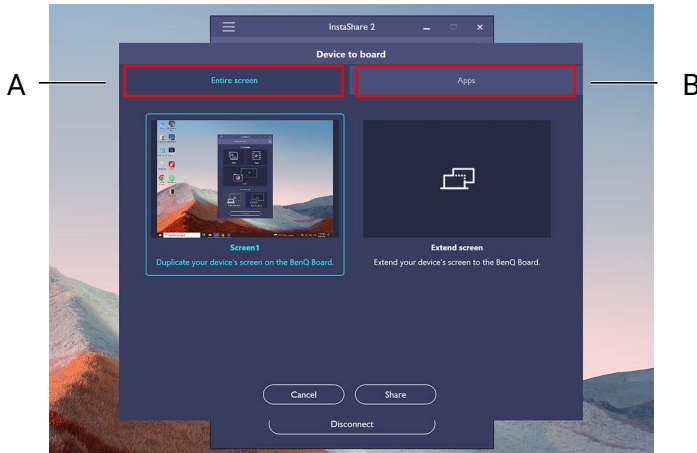


2. Select **Share** to start casting.


Annotate on your screen

Supported version: macOS, Windows

Tap on the pencil icon to start writing on your screen. The toolbar will be shown as below:

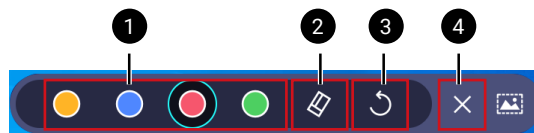


1. Color list
2. Clear all annotations on the screen.
3. Undo the previous action.
4. Close the annotation bar




Synchronizing the display screen


1. On InstaShare 2 app, click **Board to device** to view the entire display screen on your laptop or smartphone.

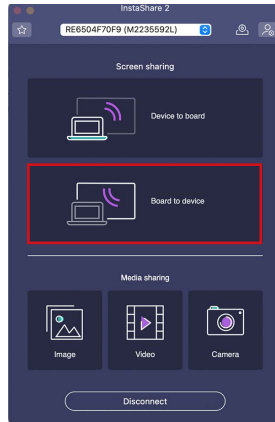

2. Once synchronized, the following actions can be performed:

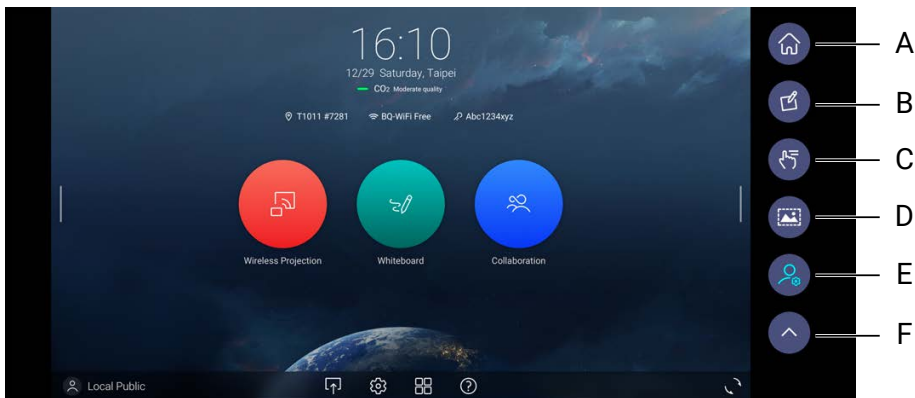


- A. Return to the home page.
- B. **Annotate on the display from your screen.**
- C. Activate two-way touch to control the display screen remotely.
- D. Take a screenshot of your screen.
- E. Accessing **Host Controls window** to control connected devices.
- F. Minimize the toolbar.




Annotate on the display from your screen

Tap on the icon to start writing on your screen. The toolbar will be shown as below:

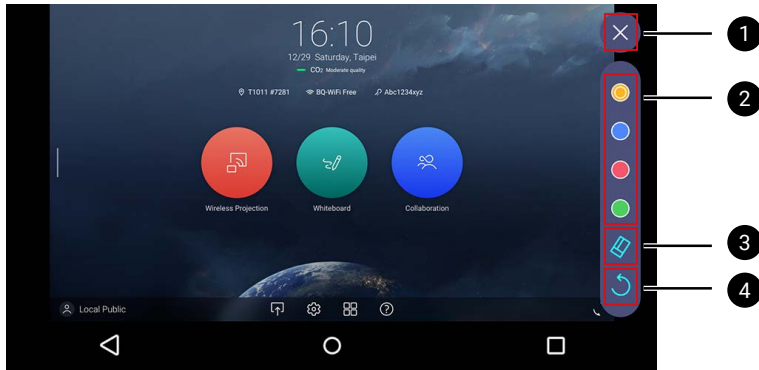



1. Close the annotation bar
2. Color list
3. Clear all annotations on the screen.
4. Undo the previous action.




Bring Your Own Meeting (BYOM)

You can wirelessly connect your laptop to the BenQ display's camera and microphones to host video conferences with superior audio and video clarity.

1. Launch InstaShare 2 on your laptop and the BenQ display.
2. From your laptop's InstaShare 2 main page, click  and enable  microphones and  camera.

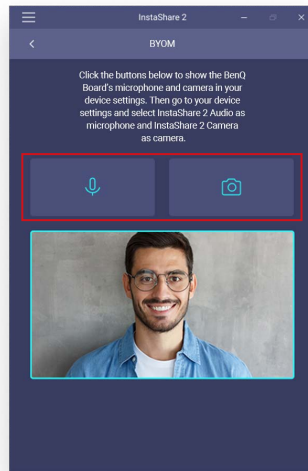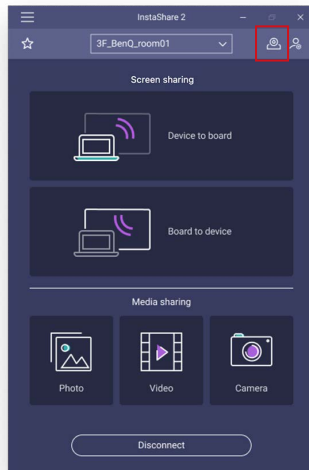


3. In your meeting app, select your preferred audio and video devices.




Casting contents with InstaShare2 Chrome extension


Installing the InstaShare 2 Chrome extension

1. On your Chromebook, open Google Chrome.
2. Click  > **Extensions** > **Visit Chrome Web Store**.

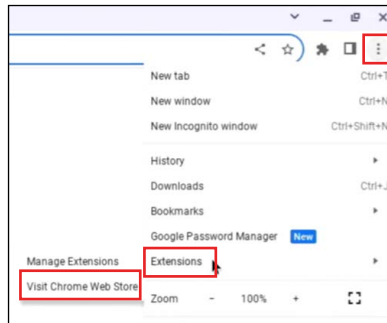

3. Search for **InstaShare 2**
4. On the **InstaShare 2** page, click **Add to Chrome** then **Add extension**.

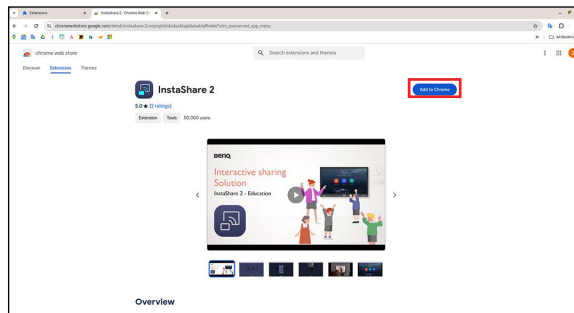




Casting through the Chrome extension

Important


Ensuring the following before proceeding:

- Finish [Installing the InstaShare 2 Chrome extension](#) first.
- Launch InstaShare 2 on your [Host device](#).
- The Host device and your device are connected to the same Wi-Fi network.


1. On your Chromebook, open Google Chrome.
2. Select  **Extensions** then **InstaShare 2**.
3. Enter the pairing code displayed on the display.

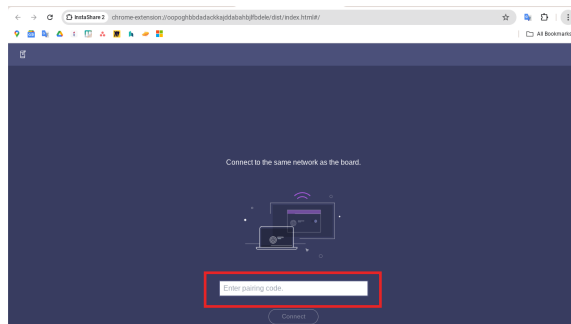

4. Click one of the five options:

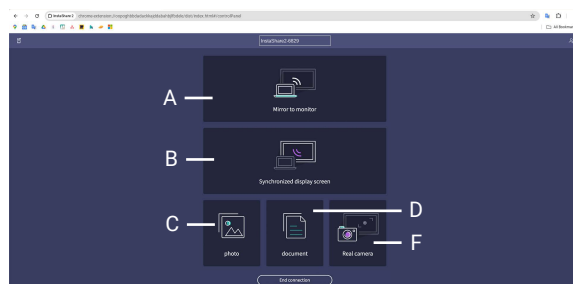


- A. **Mirror to monitor:** Mirror the BenQ display screen from your Chromebook.
- B. **Synchronized display screen:** Synchronize the BenQ display's content onto the Chromebook.
- C. **Photo:** Share photos from your Chromebook.
- D. **Document:** Share the document from your Chrombook.
- E. **Real camera:** Share a live video feed using your Chromebook's camera.



Recommended specifications for personal devices

Type	Windows	Mac	iPhone	Android
Processor	8th Generation Intel Core i5	Macs compatible with macOS 11	iPhone/iPad compatible with ios12	8 processors
RAM	8G	Macs compatible with macOS 11	iPhone/iPad compatible with ios12	3G
OS	Win 10 1803	11 (Basic support) 13 (Recommend)	iOS 12	Android 8
Disk drive	Free memory over 200M, not including log and screen cap.	Macs compatible with macOS 11	iPhone/iPad compatible with ios12	Free memory over 50M.
Other	Support Direct 3D	X	X	- Supported video format: H.264 & VP8 - Supported audio format: ISAC



Compatibility with different BenQ Board models

Smart Split mode


Due to constraints on certain BenQ Board models, the models listed below supports only up to 4 users projecting in a split screen presentation simultaneously.

- RE01 series: RE6501, RE7501, RE8601, RE9801
- RM02S series: RM6502S, RM7502S, RM8602S


Port table

For InstaShare 2 app on IFP and Windows

Function	Description	Inbound/Onbound	Protocol/Port
Self Update(OTA)	https://vod.benq.com/	Outbound (IFP)	HTTPS / 443
Connection	HTTP(S) transfer outbound	Outbound (IFP)	TCP / 80, 443, 8080
	HTTP transfer inbound	Inbound (IFP)	TCP / 8080
	TCP socket connection	Inbound, Outbound (IFP, Windows)	clients: TCP / 8888 chrome extension: TCP / 8889
Search Device	UDP listener	Outbound(windows), Inbound(IFP)	UDP broadcast (IFP) , UDP port 20002 (windows)
	UDP listener	Inbound(windows), Outbound(IFP)	UDP broadcast (IFP) , UDP port 20000 (windows)
	Search device protocol(NSD service)	Inbound, Outbound (IFP, Windows)	TCP / 8888



Function	Description	Inbound/Onbound	Protocol/Port
Board to Device & Device to Board	TCP mirror video port	Inbound, Outbound (IFP)	TCP / 6788,6790
	TCP mirror audio port	Inbound, Outbound (IFP)	TCP / 6789
	Webrtc mirror random port	Inbound, Outbound (IFP, windows)	UDP / Random port between 65435~65535
Board to Board	Video streaming and connection	Inbound, Outbound (IFP)	TCP 8888, 8889, 6790
	Broadcast	Inbound, Outbound (IFP)	UDP 20001
Media Share	HTTP transfer inbound	Inbound (Windows)	TCP / 80
BYOM	TCP video port	Inbound(windows), Outbound(IFP)	TCP / 6791
	TCP audio port	Inbound(windows), Outbound(IFP)	TCP / 6789
Webcasting	Website Connection	Inbound, Outbound (IFP, windows)	HTTPS / 443
	Signaling Server (Websocket)	Inbound, Outbound (IFP, windows)	HTTPS / 443
	coturn server (WebRTC)	Inbound, Outbound (IFP, Windows)	TCP / 80 UDP / 80



For setting up Miracast

Description	Inbound/Onbound	Port
Miracast RTSP handshake	Inbound, Outbound (IFP, Windows)	TCP / 7236
Miracast MS handshake	Inbound, Outbound (IFP, Windows)	TCP / 7250
Miracast streaming	Inbound, Outbound (IFP, Windows)	UDP / 9980-9999
Miracast touchback	Inbound, Outbound (IFP, Windows)	TCP / 50000

For setting up Google Cast

Description	Inbound/Onbound	Port
Google Cast protocol	Inbound, Outbound (IFP, Windows)	TCP / 8008,8009

For setting up AirPlay

Description	Inbound/Onbound	Port
Airplay search	Inbound, Outbound (IFP)	Multicast TCP / UDP 5353
Airplay handshake	Inbound, Outbound (IFP)	TCP 4500, 4501