MESSER
CUTTING SYSTEMS

MESSER CUTTING & WELDING GMBH
CUTTING SYSTEMS

Otto-Hahn-Strasse 2-4
D-64823 Gross-Umstadt

cutting machine
GLOBAL CONTROL

operation voltage: 400V; 3/PE
frequency: 50/60Hz
control voltage: 24VDC

control wiring without specifications has to be wired with AWG 20

			creation date 26.10.2007	MESSER CUTTING SYSTEMS 64823 GROSS-UMSTADT	286.225 MultiTherm 4000 Eurodecoupe	cover sheet	drawing number 723.85638 / page 1
			editor Hennig				assembly section = AA0 / location + S1
001	05.03.08	Hennig	printout 27.03.08				last page 1 / continuation page =AA1/1
change	date	name	revisor				
previous page		total pages 174	last editor E1A				

TABLE OF CONTENTS

MCW_EINH 18.04.02 HK

= FUNCTION	+ LOCATION	PAGE	PAGE DESIGNATION	ADDITIONALS	DATE	EDITOR	X
AA0	S1	1	cover sheet		26.10.07	KRU	
AA1	S1	1	table of contents		17.03.08	E4A	
AA1	S1	2	table of contents		17.03.08	E4A	
AA1	S1	3	table of contents		17.03.08	E4A	
AA1	S1	4	table of contents		17.03.08	E4A	
AA1	S1	5	table of contents		17.03.08	E4A	
AA1	S1	6	table of contents		17.03.08	E4A	
AA2	S1	1	general remarks		29.10.07	KRU	
AA2	S1	2	general remarks		29.10.07	KRU	
AA2	S1	3	general remarks		29.10.07	KRU	
AA3	S1	1	technology diagram legend		29.10.07	KRU	
AA3	S1	2	assembly technology diagram		29.10.07	KRU	
AA4	S1	1	bus configuration		30.10.07	KRU	
AA5	S1	1	mounting arrangement		30.10.07	KRU	
AA6	S1	1	emc grounding		30.10.07	KRU	
AA6	S1	2	connector coding		30.10.07	KRU	
AA6	S1	3	color code		30.10.07	KRU	
AB1	S1	1	block diagrams		30.10.07	WIL	
AB1	S1	2	block diagrams		17.03.08	E1A	
AB1	S1	3	block diagrams		17.12.07	WIL	
AB1	S1	4	block diagrams		30.10.07	WIL	
AB1	S1	5	block diagrams		30.10.07	WIL	
AB1	S1	6	block diagrams		30.10.07	MIK	
AB1	S1	7	block diagrams		22.02.08	MIK	
AB1	S1	8	block diagrams		30.10.07	MIK	
AB1	S1	9	block diagrams		05.03.08	WIL	
AB1	S1	10	block diagrams		05.03.08	WIL	
AB1	S1	11	block diagrams		05.03.08	KRU	
AB1	S1	12	block diagrams		30.10.07	PGA	
AB1	S1	13	block diagrams		30.10.07	WIL	

control wiring without specifications has to be wired with AWG 20

			creation date 26.10.2007	MESSER CUTTING SYSTEMS 64823 GROSS-UMSTADT GERMANY	286.225 MultiTherm 4000 Eurodecoupe	table of contents
			editor Hennig			
001	05.03.08	Hennig	printout 27.03.08			
change	date	name	revisor			
previous page =AA0/1	total pages 174	last editor E4A				

drawing number 723.85638 | page 1

assembly section = AA1 | location + S1

last page 6 | continuation page 2

TABLE OF CONTENTS

MCW_EINH 18.04.02 HK

= FUNCTION	+ LOCATION	PAGE	PAGE DESIGNATION	ADDITIONALS	DATE	EDITOR	X
AB4	S41	1	block diagrams		30.10.07	LEO	
AB4	S42	1	block diagrams		30.10.07	LEO	
BA0	S1	1	infeed transformer		30.10.07	KRU	
BA1	S1	1	main switch box		30.10.07	KRU	
BA1	S1	2	infeed 400VAC		30.10.07	KRU	
BA1	S1	3	infeed 400VAC		30.10.07	KRU	
BA1	S1	4	24VAC control voltage		05.03.08	KRU	
BA1	S1	5	0VAC		30.01.08	KRU	
BA1	S1	6	24VDC control voltage		30.10.07	KRU	
BA1	S1	7	24VDC control voltage		30.10.07	KRU	
BA1	P1	1	operation desk		30.10.07	KRU	
BA2	S1	1	distribution 24VDC		30.01.08	KRU	
BA2	S1	2	distribution 24VDC		08.01.08	KRU	
BA2	S1	3	distribution 24VDC		08.01.08	KRU	
BA2	S1	4	distribution 0VDC		30.01.08	KRU	
BA2	S1	5	distribution 0VDC		30.10.07	KRU	
BA2	S1	6	interface operation panel		30.10.07	KRU	
BA3	S1	1	watchdog		22.02.08	KRU	
BA4	S1	1	emergency stop loop		30.01.08	KRU	
BA4	S1	2	emergency stop loop		30.10.07	KRU	
BA5	S1	1	emergency stop loop		30.10.07	KRU	
BA5	S1	2	emergency cord		30.10.07	KRU	
BA6	S1	1	light barriers		22.02.08	KRU	
BA6	S1	2	light barriers		30.10.07	KRU	
CA0	S1	1	PLC USB/DVI		30.10.07	KRU	
CA0	P1	1	operation desk USB/DVI		30.10.07	KRU	
CA1	S1	1	bus terminal overview		22.02.08	KRU	
CA1	S1	2	bus terminal overview		30.01.08	KRU	
CA1	S1	3	bus terminal overview		30.01.08	KRU	
CA1	S1	4	bus terminal overview		22.02.08	KRU	

control wiring without specifications has to be wired with AWG 20

TABLE OF CONTENTS

MCW_EINH 18.04.02 HK

= FUNCTION	+ LOCATION	PAGE	PAGE DESIGNATION	ADDITIONALS	DATE	EDITOR	X
CA1	S1	5	bus terminal overview		22.02.08	KRU	
CA1	S1	6	bus terminal overview		22.02.08	KRU	
CA41	S41	1	interlock HPR 130/260		30.10.07	KRU	
CA41	S41	2	interlock HPR 130/260		30.10.07	KRU	
CA42	S42	1	interlock HPR 130/260		30.10.07	KRU	
CA42	S42	2	interlock HPR 130/260		30.10.07	KRU	
EB1	S1	1	torch touch module		22.02.08	KRU	
EB2	S1	1	torch touch module		22.02.08	KRU	
FF1	S1	1	lifting cylinder		30.01.08	KRU	
FF2	S1	1	lifting cylinder		30.01.08	KRU	
FG1	S1	1	bus terminals		22.02.08	KRU	
FG1	S1	2	height adjustment		30.01.08	KRU	
FG1	F1	1	drive regulator without sensoric		30.10.07	KRU	
FG1	F1	2	height adjustment OL200 Z		30.10.07	KRU	
FG1	F1	3	Encoder		30.10.07	KRU	
FG2	S1	1	bus terminals		22.02.08	KRU	
FG2	S1	2	height adjustment		30.01.08	KRU	
FG2	F2	1	drive regulator without sensoric		30.10.07	KRU	
FG2	F2	2	height adjustment OL200 Z		30.10.07	KRU	
FG2	F2	3	Encoder		30.10.07	KRU	
HX1	S1	1	power component		17.03.08	KRU	
HX1	S1	2	control component		22.02.08	KRU	
HX2	S1	1	power component		17.03.08	KRU	
HX2	S1	2	control component		30.10.07	KRU	
HY1	S1	1	power component		17.03.08	KRU	
HY1	S1	2	control component		30.01.08	KRU	
HY2	S1	1	power component		17.12.07	KRU	
HY2	S1	2	control component		30.01.08	KRU	
IM1	S1	1	interlock HPR 130/260		29.01.08	KRU	
IM1	S41	1	voltage supply		30.10.07	KRU	

control wiring without specifications has to be wired with AWG 20

TABLE OF CONTENTS

MCW_EINH 18.04.02 HK

= FUNCTION	+ LOCATION	PAGE	PAGE DESIGNATION	ADDITIONALS	DATE	EDITOR	X
IM1	S41	2	interlock emergency stop		30.10.07	KRU	
IM1	S41	3	interlock HPR 130/260		30.10.07	KRU	
IM1	S41	4	interlock HPR 130/260		30.10.07	KRU	
IM1	I1	1	interlock HPR 130/260		30.10.07	KRU	
IM2	S1	1	interlock HPR 130/260		30.10.07	KRU	
IM2	S42	1	voltage supply		30.10.07	KRU	
IM2	S42	2	interlock emergency stop		30.10.07	KRU	
IM2	S42	3	interlock HPR 130/260		30.10.07	KRU	
IM2	S42	4	interlock HPR 130/260		30.10.07	KRU	
IM2	I1	1	interlock HPR 130/260		30.10.07	KRU	
LD1	S1	1	laserpointer		22.02.08	KRU	
LD2	S1	1	laserpointer		22.02.08	KRU	
MB1	S1	1	periphery interface		30.01.08	KRU	
VA0	S1	1	actor-sensor-box		30.10.07	KRU	
VA0	S1	2	actor-sensor-box		17.03.08	KRU	
VA1	S1	1	actor-sensor-box		30.01.08	KRU	
VA1	S1	2	actor-sensor-box		17.03.08	KRU	
VA2	S1	1	actor-sensor-box		30.01.08	KRU	
VA2	S1	2	actor-sensor-box		17.03.08	KRU	
VNA1	M1	1	actor-sensor-box		30.10.07	KRU	
VNA2	M2	1	actor-sensor-box		30.10.07	KRU	
W1		1	cable listing		17.03.08	E4A	
W1		2	cable listing		17.03.08	E4A	
W1		3	cable listing		17.03.08	E4A	
X1		1	distribution terminals		17.03.08	E4A	
X1		2	infeed control panel		17.03.08	E4A	
X1		3	infeed control panel		17.03.08	E4A	
X1		4	ST-COMBI pluggable terminals		17.03.08	E4A	
X1		5	ST-COMBI pluggable terminals		17.03.08	E4A	
X1		6	distribution terminals		17.03.08	E4A	

control wiring without specifications has to be wired with AWG 20

TABLE OF CONTENTS

MCW_EINH 18.04.02 HK

= FUNCTION	+ LOCATION	PAGE	PAGE DESIGNATION	ADDITIONALS	DATE	EDITOR	X
X1		7	voltage distribution		17.03.08	E4A	
X1		8	24VAC distribution		17.03.08	E4A	
X1		9	distribution terminals		17.03.08	E4A	
X1		10	distribution terminals		17.03.08	E4A	
X1		11	distribution 24VDC		17.03.08	E4A	
X1		12	voltage distribution		17.03.08	E4A	
X1		13	ST-COMBI pluggable terminals		17.03.08	E4A	
X1		14	distribution 0VDC		17.03.08	E4A	
X1		15	distribution 24VDC		17.03.08	E4A	
X1		16	plug connection		17.03.08	E4A	
X1		17	ST-COMBI pluggable terminals		17.03.08	E4A	
X1		18	plug connection		17.03.08	E4A	
X1		19	ST-COMBI pluggable terminals		17.03.08	E4A	
X1		20	ST-COMBI pluggable terminals		17.03.08	E4A	
X1		21	ST-COMBI pluggable terminals		17.03.08	E4A	
X1		22	ST-COMBI pluggable terminals		17.03.08	E4A	
X1		23	ST-COMBI pluggable terminals		17.03.08	E4A	
X1		24	ST-COMBI pluggable terminals		17.03.08	E4A	
X1		25	ST-COMBI pluggable terminals		17.03.08	E4A	
X1		26	ST-COMBI pluggable terminals		17.03.08	E4A	
X1		27	ST-COMBI pluggable terminals		17.03.08	E4A	
X1		28	ST-COMBI pluggable terminals		17.03.08	E4A	
X1		29	ST-COMBI pluggable terminals		17.03.08	E4A	
X1		30	ST-COMBI pluggable terminals		17.03.08	E4A	
X1		31	ST-COMBI pluggable terminals		17.03.08	E4A	
X1		32	COMBICON socket terminals		17.03.08	E4A	
X1		33	ST-COMBI pluggable terminals		17.03.08	E4A	
X1		34	ST-COMBI pluggable terminals		17.03.08	E4A	
X1		35	ST-COMBI pluggable terminals		17.03.08	E4A	
X1		36	ST-COMBI pluggable terminals		17.03.08	E4A	

control wiring without specifications has to be wired with AWG 20

TABLE OF CONTENTS

MCW_EINH 18.04.02 HK

= FUNCTION	+ LOCATION	PAGE	PAGE DESIGNATION	ADDITIONALS	DATE	EDITOR	X
X1		37	COMBICON socket terminals		17.03.08	E4A	
X1		38	PAN connection 16 poles male		17.03.08	E4A	
X1		39	PAN connection ignition device		17.03.08	E4A	
X1		40	plug connection		17.03.08	E4A	
X1		41	connection height regulation		17.03.08	E4A	
X1		42	connection height regulation		17.03.08	E4A	
X1		43	PAN connection 16 poles male		17.03.08	E4A	
X1		44	PAN connection ignition device		17.03.08	E4A	
X1		45	plug connection		17.03.08	E4A	
X1		46	connection height regulation		17.03.08	E4A	
X1		47	connection height regulation		17.03.08	E4A	
X1		48	plug connection		17.03.08	E4A	
X1		49	distribution terminals		17.03.08	E4A	
X1		50	ST-COMBI pluggable terminals		17.03.08	E4A	
X1		51	ST-COMBI pluggable terminals		17.03.08	E4A	
X1		52	ST-COMBI pluggable terminals		17.03.08	E4A	
X1		53	ST-COMBI pluggable terminals		17.03.08	E4A	
X1		54	ST-COMBI pluggable terminals		17.03.08	E4A	
Z1		1	equipment listing		17.03.08	E1A	
Z1		2	equipment listing		17.03.08	E1A	
Z1		3	equipment listing		17.03.08	E1A	
Z1		4	equipment listing		17.03.08	E1A	
Z1		5	equipment listing		17.03.08	E1A	
Z1		6	equipment listing		17.03.08	E1A	

control wiring without specifications has to be wired with AWG 20

			creation date 26.10.2007	MESSER CUTTING SYSTEMS 64823 GROSS-UMSTADT GERMANY	286.225 MultiTherm 4000 Eurodecoupe	table of contents
			editor Hennig			
001	05.03.08	Hennig	printout 27.03.08			
change	date	name	revisor			
previous page 5		total pages 174	last editor E3A			

drawing number 723.85638 | page 6

assembly section = AA1 | location + S1

last page 6 | continuation page =AA2/1

function categories

=AA0 cover sheet
=AA1 table of contents
=AA2 general remarks
=AA3 location plan and designations
=AA4 lightbus topography
=AA5 mounting arrangement
=AA6 technical data

=AB1... block diagrams

=BA0 power infeed
=BA1 distribution 400, 230, 24VAC
=BA2 distribution 24VDC
=BA3 power on, watchdog
=BA4 emergency stop
=BA5 interface emergency stop periphery
=BA6 safety loop monitoring

=BA9 interface external voltages

=BB1 production data aquisition

=CA0 PC/central processor, touch screen
=CA1... bus coupler & bus terminals

=DA0 keyboard extension
=DA1... auxiliary control panel

=DA8 mobile stage

=EA1 Sensomat PAN with =FA1...

=EB1... torch touch modul

=EC1... Sensomat Global Libo

=ED1... Sensomat ALFA with =FA1

=EE1... water level control

=EF1... WIPC set control

=FA1... height adjustment OL200/300

=FB1... height adjustment TL 170

=FC1... PL1 lifter

=FD1... height adjustment OL 200 with ALFA

=FE1... height adjustment OL200 without sensing

=FF1... lifting cylinder

=FG1... height adjustment OL200 with encoder

=FH1... height adjustment TL 170 with ALFA

=FI1... height adjustment TL 170 PAN/ALFA combination

=GA1... main gas regulation with OMNIFLOW

=GB1... gas addressing

=GC1... powder addressing

=GD1... band clamp

=GF1... hydra

=GG1... valve addressing

=GZ1... common valve control

=HA1... a-axis
=HB1... b-axis

=HC1... c-axis

=HLL1 lateral adjustment
=HLR1 lateral adjustment

=HWL1 bevel adjustment
=HWR1 bevel adjustment

=HX1 x-axis 1
=HX2 x-axis 2

=HY1 y-axis 1
=HY2 y-axis 2
=HY3... y-axis 3

=HZ1... z-axis 1

=IA1... interlock HD 4070

=IB1... interlock HiFocus 160i

=IC1... interlock HT 4500

=ID1... interlock HT 4400

=IE1... interlock FineFocus 800

=IF1... interlock FineFocus 450

=IG1... interlock HT 2000

=IH1... interlock HD 3070

=IK1... interlock MAX 200

=IL1... interlock MAX 100/PowerMax 1650

=IM1... interlock HPR 130/260

control wiring without specifications has to be wired with AWG 20

			creation date	26.10.2007
			editor	Hennig
001	05.03.08	Hennig	printout	27.03.08
change	date	name	revisor	
previous page =AA1/6	total pages 174	last editor E1A		

MESSER CUTTING SYSTEMS
64823 GROSS-UMSTADT GERMANY

286.225
MultiTherm 4000
Eurodecoupe

general remarks

drawing number 723.85638		page	1
assembly section = AA2		location +	S1
last page 3	continuation page 2		

function categories

=JA1... felt marker

=JB1... punch marking

=JC1... plasma-marker/ArcWriter

=JD1... OMNISCRIPT/Technifor

=JE1... REA INKJET 7 jets

=JF1... REA INKJET 1 jet

=JG1... INKJET IMAGE

=JH1... SkewRotator

=JI1... DKS-MGI

=JK1... DKS-MCW

=JL1... DKS-DAFL

=KA1... changeover table

=KB1... plate position scanning

=KC1... camera

=KS1... interface external plants

=LA1 laser unit
=LA2 distance control
=LA3 light beam compensation
=LA4 gas pressure control
=LA5 PRECITEC distance control
=LA6 focus adjustment
=LA7 piercing monitoring

=LB4 add. gas pressure control
=LB6 ADOPTIC focus adjustment

=LD1... laserpointer

=LL1... line laser

=MA1... cooler unit

=MB1... exhaust

=NA1... air spray

=RA1... pipe cutter

=UA1... surface grinder

=UB1... drilling unit

=VA1... actor-sensor-box

=W1... cable listing

=X1... terminal strips

=Z1... equipment listing

control wiring without specifications has to be wired with AWG 20

			creation date	26.10.2007	
			editor	Hennig	
001	05.03.08	Hennig	printout	27.03.08	
change	date	name	revisor		
previous page 1		total pages 174	last editor E1A		

MESSER CUTTING SYSTEMS
64823 GROSS-UMSTADT GERMANY

286.225
MultiTherm 4000
Eurodecoupe

general remarks

drawing number 723.85638		page	2
assembly section =	AA2	location +	S1
last page 3		continuation page	3

locations

+A	site periphery
+A1	exhaust 1
+A2	exhaust 2
+A8	charging gear
+A9	discharging gear
+F1...	height adjustment
+I1...	plasma current source
+J1...	marker tool
+K1...	cooler unit
+L1...	laser unit
+M1	wheel housing left
+M2	wheel housing right
+O1	gantry
+P1...	operation desk
+P8	mobile stage
+P9	additional customer specified panels

housings

+S0	power infeed
+S1	drive regulators and additional units
+S2	control component
+S3	mobile box
+S4	interlock housing
+S5	special tools and units
+S6...	interface housing
+S7...	additional functions
+S8...	additional functions
+S9	auxiliary control panel
+T1...	workbench
+U1	partition wall, fences
+U2	light barrier framework
+U3...	additional operation areas
+W1...	changeover table

control wiring without specifications has to be wired with AWG 20

			creation date	26.10.2007	
			editor	Hennig	
001	05.03.08	Hennig	printout	27.03.08	
change	date	name	revisor		
previous page	2	total pages 174	last editor	E1A	


MESSER CUTTING SYSTEMS
64823 GROSS-UMSTADT GERMANY

286.225
MultiTherm 4000
Eurodecoupe


general remarks

drawing number	723.85638	page	3
assembly section =	AA2	location +	S1
last page	3	continuation page	=AA3/1


mounting variable

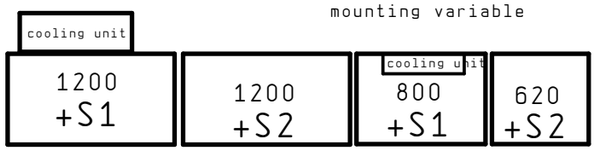


switch cabinet




power infeed



interface housing




actor-sensor-box



terminal box




ONIFLOW




cross carriage/heihgt adjustment

transversal drive




=HY1-M1

cross carriage/heihgt
adjustment with drive




cross carriage/heihgt
adjustment with printer system

INKJET



cross carriage/heihgt
adjustment with rotating printer system

INKJET



cross carriage/heihgt
adjustment with plasma marker

ArcWriter



valve



motor



limit switch




proximity
switch



indicator unit





camera zoom




auxiliary control panel








cross carriage/heihgt
adjustment with mechanically marker




cross carriage/heihgt
adjustment with plasma


PLASMA



SkewRotator
DELTA




SkewRotator



DKS

rotation unit

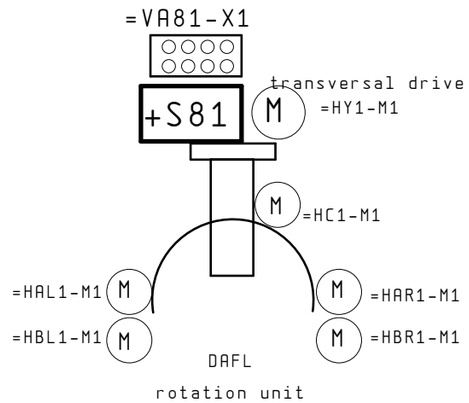

DAFL

rotation unit

control wiring without specifications has to be wired with AWG 20

			creation date	26.10.2007	
			editor	Hennig	
001	05.03.08	Hennig	printout	27.03.08	
change	date	name	revisor		
previous page =AA2/3	total pages 174	last editor E1A			

MESSER CUTTING SYSTEMS
64823 GROSS-UMSTADT GERMANY

286.225
MultiTherm 4000
Eurodecoupe

technology diagram legend

drawing number 723.85638		page	1
assembly section = AA3		location +	S1
last page 2	continuation page 2		

exhaust
=MB1+A1

plasma current source
=IM1+I1
+S41

plasma current source
=IM2+I1
+S41

=VNA1-X1

=VA0-X1

emergency cord

M =HX1-M1

1200
+S1

+01

transversal drivetransversal drive

M =HY1-M1

M =HY^2-M1

PLASMA

PLASMA

+M1

light barrier

OL 200 NZ

OL 200 NZ

+F1

+F2

=FG1
=EB1
=IM1

=FG2
=EB2
=IM2
=LD2

=VA1-X1

=VA2-X1

M =HX2-M1

=VNA2-X1

+M2

=CA0+P1
operation desk

control wiring without specifications has to be wired with AWG 20


			creation date	26.10.2007	
			editor	Hennig	
001	05.03.08	Hennig	printout	27.03.08	
change	date	name	revisor		
previous page 1		total pages 174	last editor E1A		

MESSER CUTTING SYSTEMS
64823 GROSS-UMSTADT GERMANY

286.225
MultiTherm 4000
Eurodecoupe

assembly technology diagram

drawing number 723.85638		page	2
assembly section =	AA3	location +	S1
last page 2		continuation page	=AA4/1

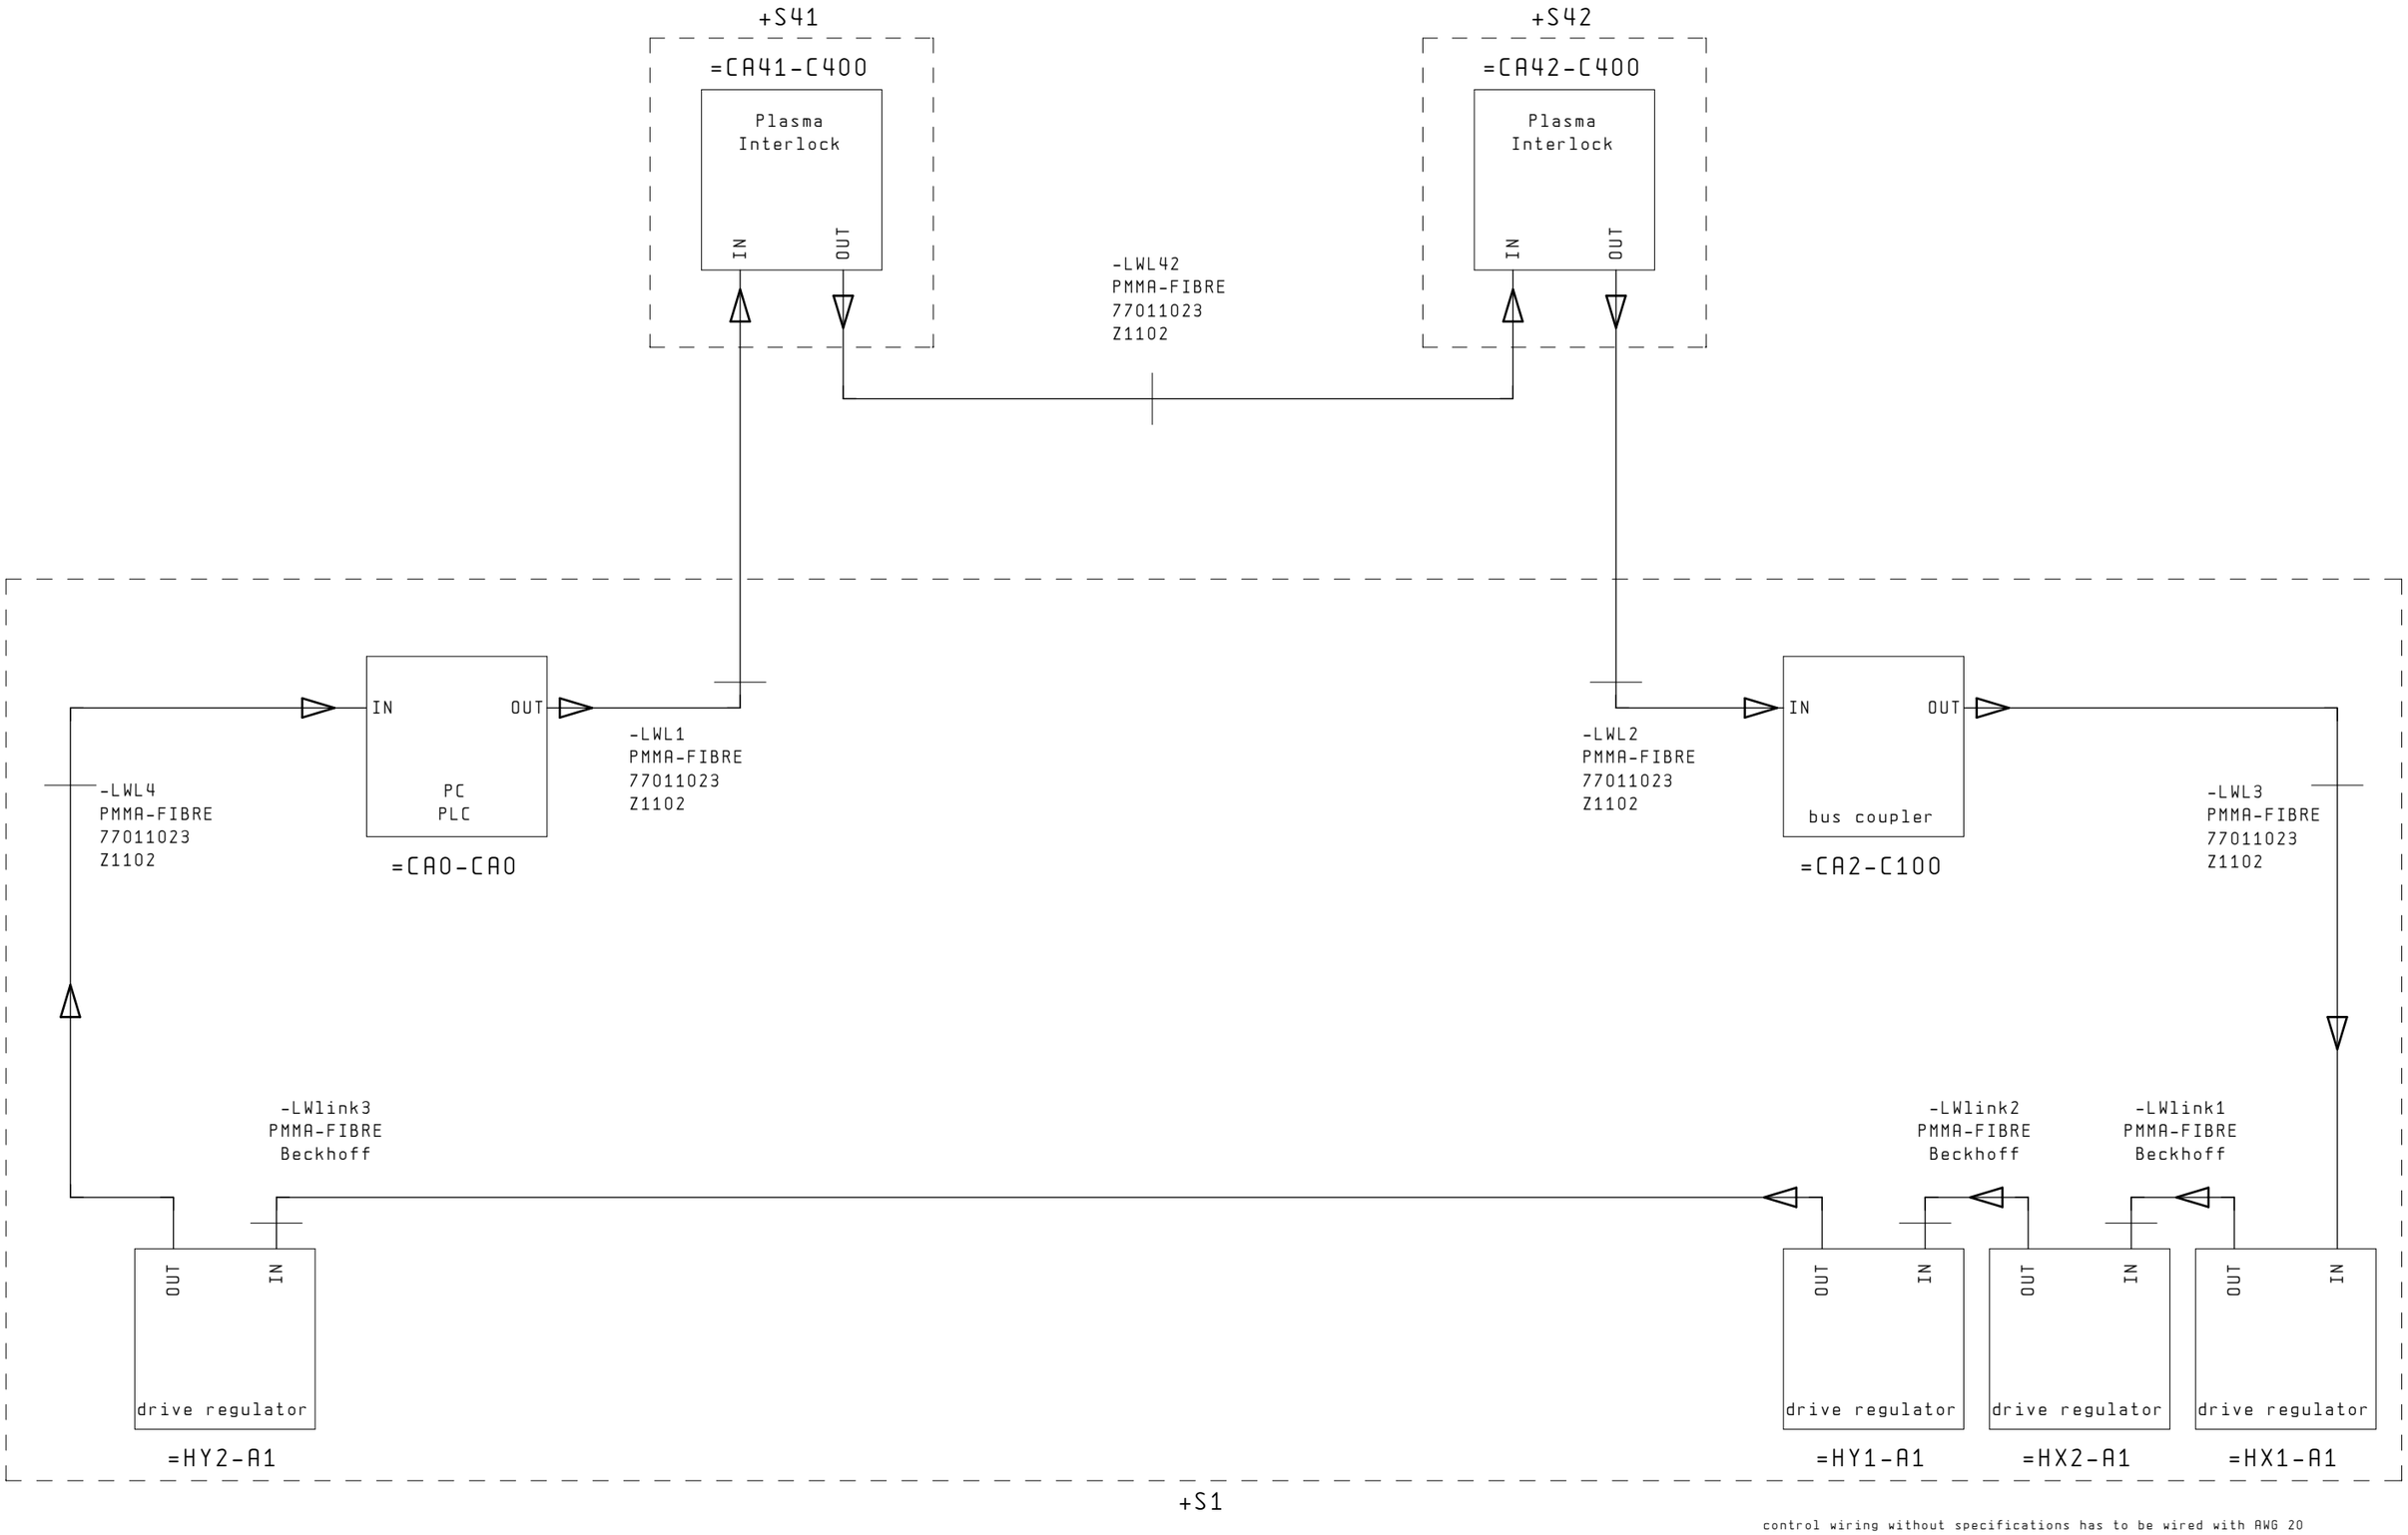

control wiring without specifications has to be wired with AWG 20


			creation date	26.10.2007
			editor	Hennig
001	05.03.08	Hennig	printout	27.03.08
change	date	name	revisor	
previous page	=AA3/2	total pages 174	last editor	KRU

MESSER CUTTING SYSTEMS
64823 GROSS-UMSTADT GERMANY

286.225
MultiTherm 4000
Eurodecoupe

bus configuration

drawing number	723.85638	page	1
assembly section =	AA4	location +	S1
last page	1	continuation page	=AA5/1

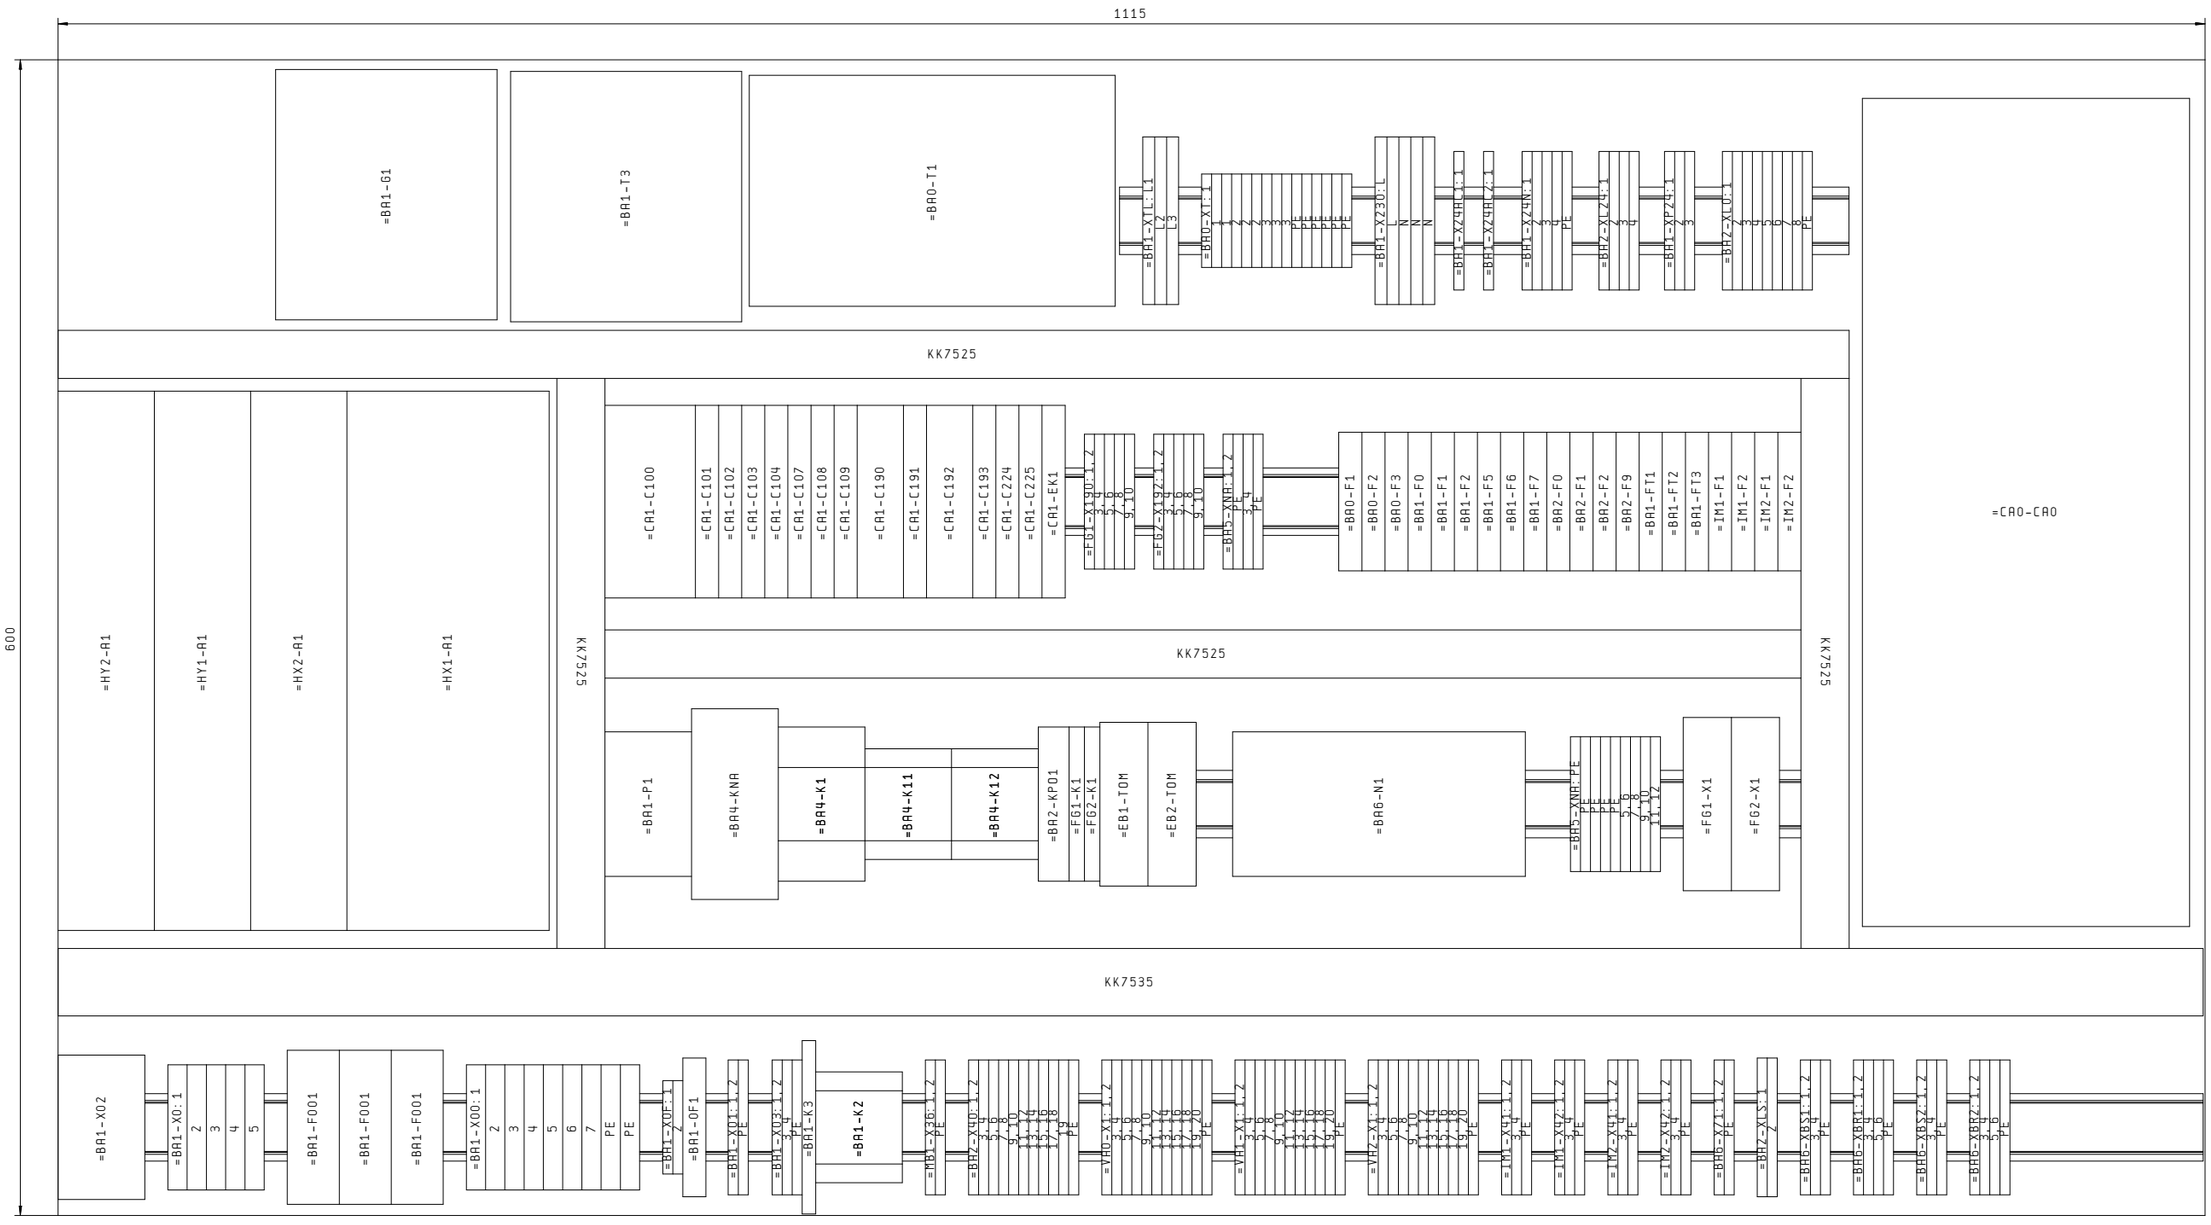

control wiring without specifications has to be wired with AWG 20

			creation date	26.10.2007
			editor	Hennig
001	05.03.08	Hennig	printout	27.03.08
change	date	name	revisor	
previous page =AA4/1		total pages 174	last editor	KRU

MESSER CUTTING SYSTEMS
64823 GROSS-UMSTADT GERMANY


286.225
MultiTherm 4000
Eurodecoupe

mounting arrangement

drawing number	723.85638	page	1
assembly section =	AA5	location +	S1
last page	1	continuation page	=AA6/1

EMV

housing links

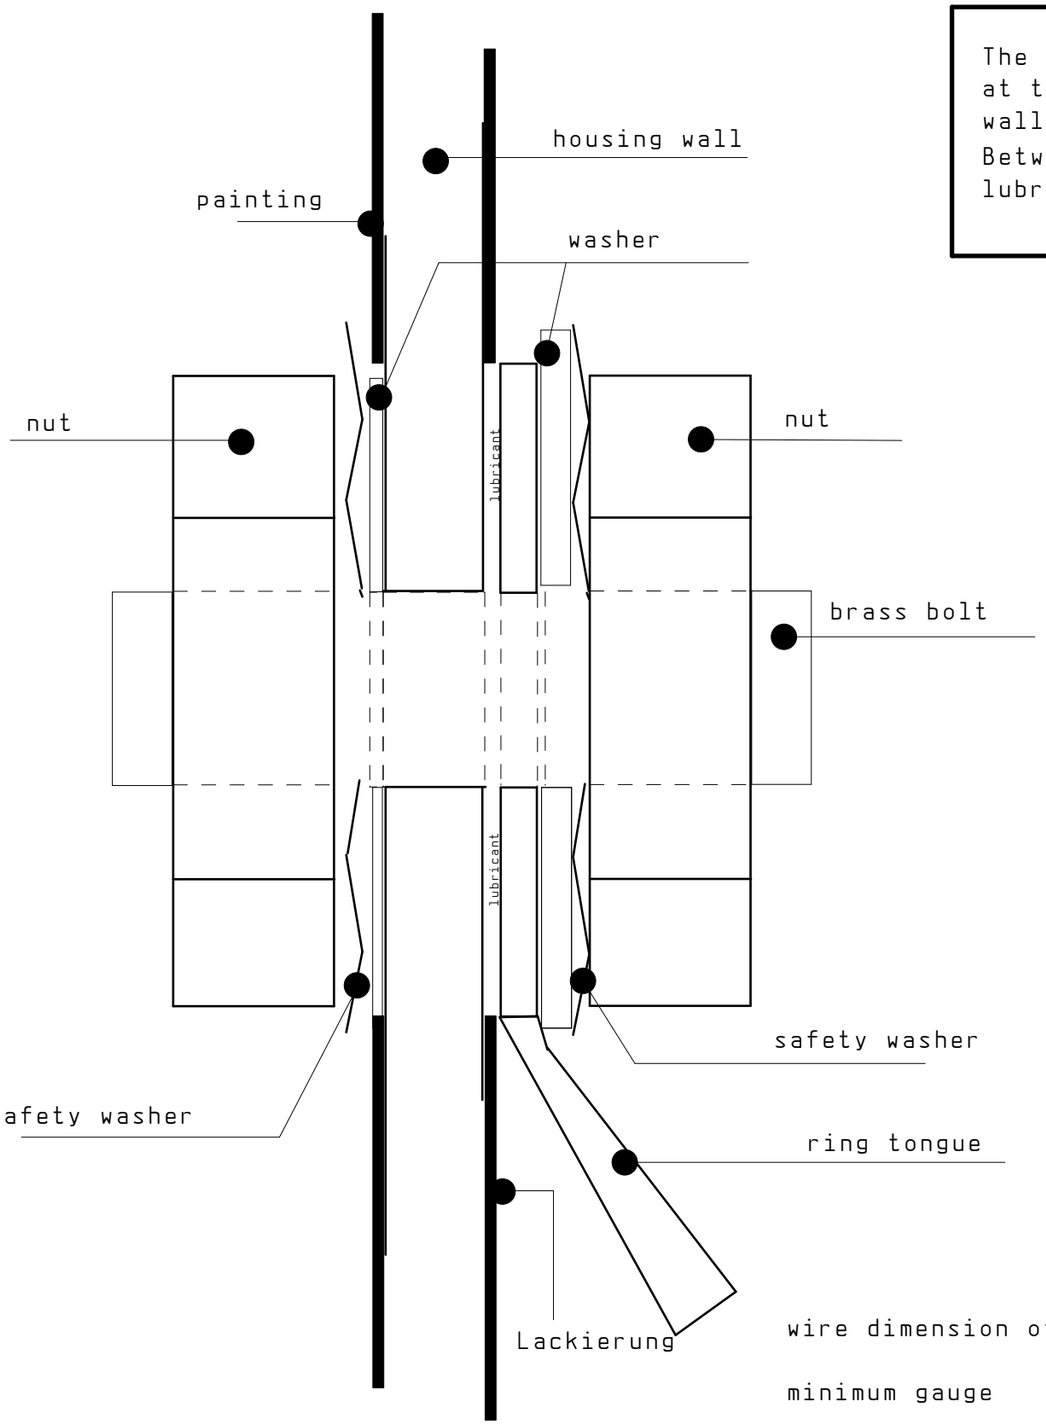

The total contact area of the contact point at the housing wall has to be bare

bare !

Between bare metal and ring tongue pole contact lubricant is allowed only...

assembly and mounting:

The housing needs a hole dimensioned to the wire gauge.

(For minimum gauge 4mm²/AWG 12 a 6 mm bolt for bigger gauges see hole of ring tongue !) !)

The surroundings of drill-hole and the contact area have to be clean of painting and corrosion

Outside housing the bolt will be fastened with washer and safety washer..

Inside housing thr tongue pole has to be contacted directly with lubricant to the blank metal of the housing and will be screwed up solid with washer, safety washer and nut..

When required assign for a contrary nut.

wire dimension of grounding: black or bare

minimum gauge 4 mm² / AWG 12

control wiring without specifications has to be wired with AWG 20

			creation date	26.10.2007
			editor	Hennig
001	05.03.08	Hennig	printout	27.03.08
change	date	name	revisor	
previous page =AA5/1	total pages 174	last editor KRU		

MESSER CUTTING SYSTEMS
64823 GROSS-UMSTADT GERMANY


286.225
MultiTherm 4000
Eurodecoupe

emc grounding


drawing number	723.85638	page	1
assembly section =	AA6	location +	S1
last page	3	continuation page	2

connector coding

connectors or pluggable terminals have to be change-proof coded, if required !

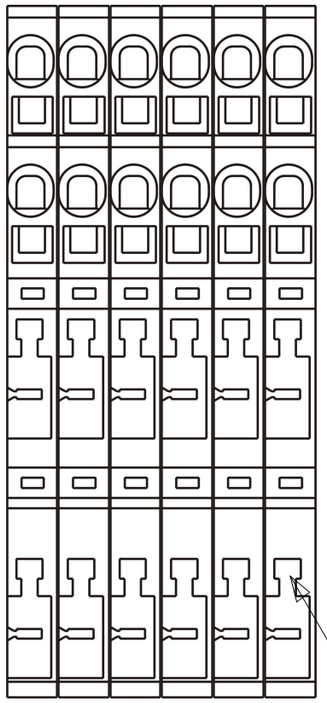

PHOENIX CONTACT ST-COMBI
Typ STTB 2,5/2P

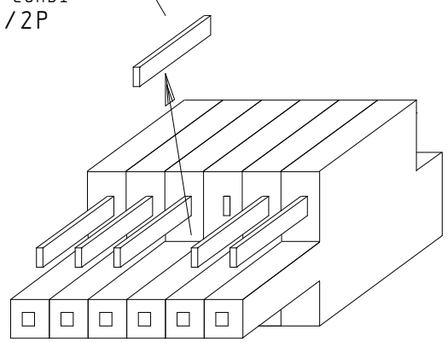

at pluggable part of
PHOENIX CONTACT ST-COMBI
the lead nibs can be broken off to pocket as lock into the terminal base.

for function-relevant allocation of pluggable items
the numbering attached to terminals and cables has primarily importance.

non-committal recommendation (*

socket connector module	upper level pin/number	lower level pin/number
-X40	11	5
-X41	3	2
-X42	4	1
-X81	1	3
-X82	2	4
-X91	3	5
-XBS		2
=GA1-XIO	15	7
=GA2-XIO	14	6
=VA0	12	19 + 3
=VA1...-Xn	12	3
=VB...-Xn	13	4
etc.		

(* plugs of identical function cvan get same coding.

control wiring without specifications has to be wired with AWG 20

			creation date	26.10.2007	
			editor	Hennig	
001	05.03.08	Hennig	printout	27.03.08	
change	date	name	revisor		
previous page 1		total pages 174		last editor KRU	

MESSER CUTTING SYSTEMS
64823 GROSS-UMSTADT GERMANY

286.225
MultiTherm 4000
Eurodecoupe

connector coding

drawing number 723.85638		page	2
assembly section =	AA6	location +	S1
last page 3		continuation page	3

extract of DIN 47100 colour-code

(without colour-repeat after wire 44))

pair No.:	a core	b core
1	white	brown
2	green	yellow
3	grey	pink
4	blue	red
5	black	violet
6	grey/pink	red/blue
7	white/green	brown/green
8	white/yellow	yellow/brown
9	white/grey	grey/brown
10	white/pink	pink/brown
11	white/blue	brown/blue
12	white/red	brown/red
13	white/black	brown/black
14	grey/green	yellow/grey
15	pink/green	yellow/pink
16	green/blue	yellow/blue
17	green/red	yellow/red
18	green/black	yellow/black
19	grey/blue	pink/blue
20	grey/red	pink/red
21	grey/black	pink/black
22	blue/black	red/black
23-44	1st repetition of color coding from pair 23	
45-66	2st repetition of color coding from pair 45	

for further information see shedule DIN 47100 47100

control wiring without specifications has to be wired with AWG 20

switch cabinet

+S1

continuation

continuation

terminal strip

-X0 X

=BA0-XT =BA0-XT

8,5m
(Spur 3600+4000+5000)

72383967

72383967

0571474

=BA1
-Q1
main switch

2 4 6
1 3 5

9.1/ =FG1+F1-XU

10.1/ =FG2+F2-XU

=AB2 =AB2

0571474

infeed 400VAC

control wiring without specifications has to be wired with AWG 20

			creation date	26.10.2007			
			editor	Hennig			
001	05.03.08	Hennig	printout	27.03.08			
change	date	name	revisor				
previous page	=AA6/3	total pages	174	last editor	KRU		

MESSER CUTTING SYSTEMS
64823 GROSS-UMSTADT GERMANY

286.225
MultiTherm 4000
Eurodecoupe

block diagrams

drawing number	723.85638	page	1
assembly section =	AB1	location +	S1
last page	13	continuation page	2

switch cabinet

+S1

continuation

=HX1-A1 AX 2513 -X6 -X5


=HX2-A1 AX 2523 -X6 -X5

=HY1-A1 AX 2523 -X6 -X5

continuation

caution !
Unterschiedliche Kabellängen
bei rechter oder linker
Bedienseite

caution !
Unterschiedliche Kabellängen
bei rechter oder linker
Bedienseite

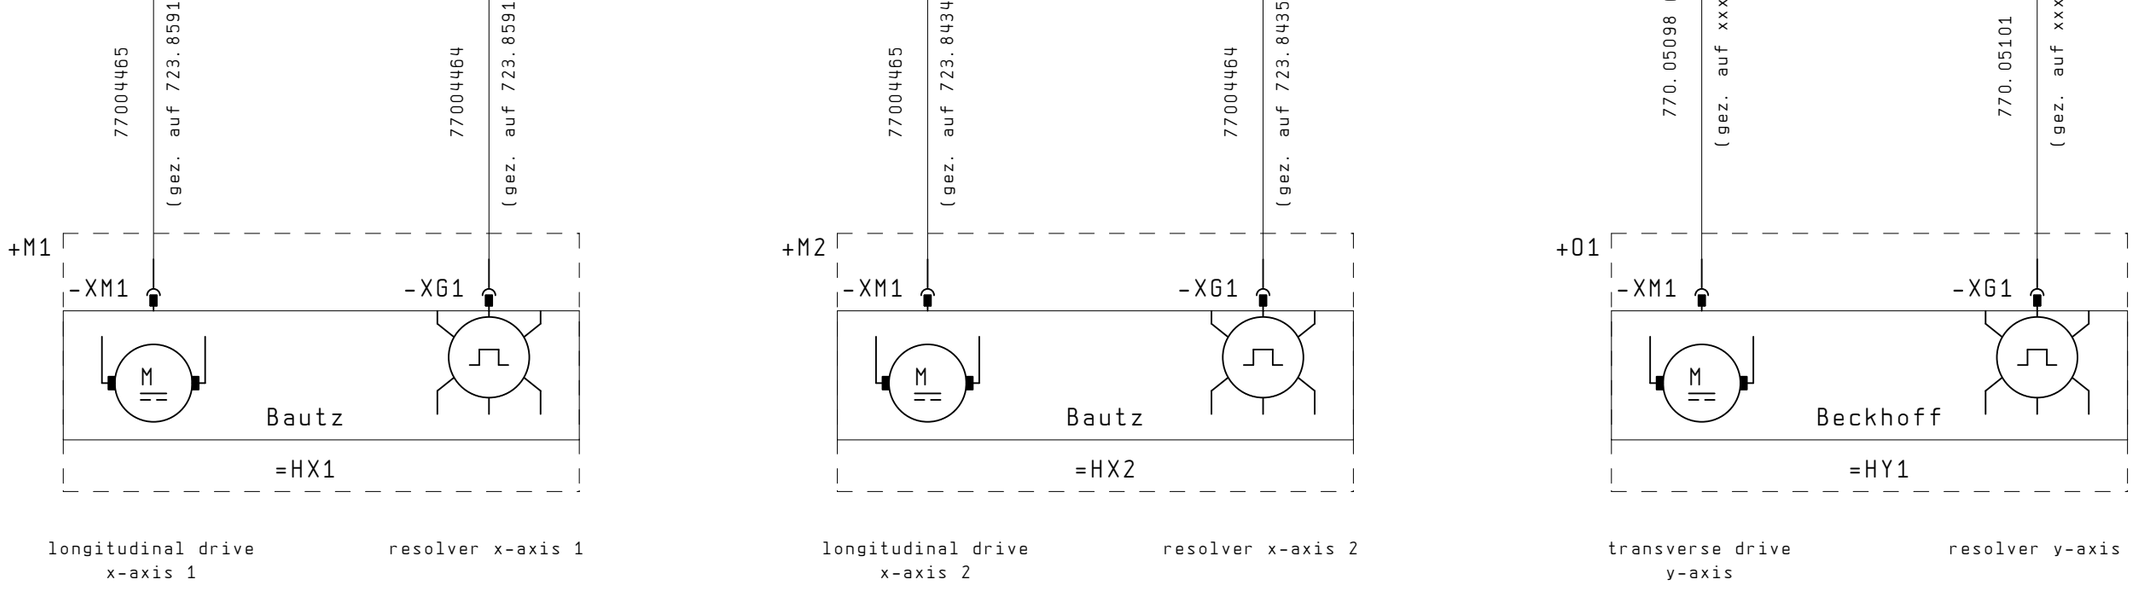

longitudinal drive x-axis 1 — resolver x-axis 1

longitudinal drive x-axis 2 — resolver x-axis 2

transverse drive y-axis — resolver y-axis

MultiTherm

control wiring without specifications has to be wired with AWG 20

			creation date	26.10.2007
			editor	Hennig
001	05.03.08	Hennig	printout	27.03.08
change	date	name	revisor	
previous page 1		total pages 174	last editor	E4A

MESSER CUTTING SYSTEMS
64823 GROSS-UMSTADT GERMANY

286.225
MultiTherm 4000
Eurodecoupe

block diagrams

drawing number	723.85638	page	2
assembly section =	AB1	location +	S1
last page	13	continuation page	3

switch cabinet

+S1

continuation

=HY2-A1

AX 2523

-X6 -X5

continuation

770.05098 (8m) (gez. auf xxx)

770.05101 (8m) (gez. auf xxx)

+01

-XM1 -XG1

M

Beckhoff

=HY2

transverse drive y-axis

resolver y-axis

control wiring without specifications has to be wired with AWG 20

MultiTherm

			creation date	26.10.2007	
			editor	Hennig	
001	05.03.08	Hennig	printout	27.03.08	
change	date	name	revisor		
previous page 2		total pages 174	last editor E1A		

MESSER CUTTING SYSTEMS
64823 GROSS-UMSTADT GERMANY

286.225
MultiTherm 4000
Eurodecoupe

block diagrams

drawing number	723.85638	page	3
assembly section =	AB1	location +	S1
last page	13	continuation page	4

switch cabinet

+S1

continuation

-XS41 -XS42

0571423 5x1,5²
voltage distribution
0571423 5x1,5²
emergency stop periphery

-XS41 -XS42

Plasma-Interlock

=IM1+S41

0571423 5x1,5²
voltage distribution
0571423 5x1,5²
emergency stop periphery

-XS41 -XS42

Plasma-Interlock

=IM2+S42

continuation

control wiring without specifications has to be wired with AWG 20

			creation date	26.10.2007	MESSER CUTTING SYSTEMS 64823 GROSS-UMSTADT GERMANY	286.225 MultiTherm 4000 Eurodecoupe	block diagrams	drawing number 723.85638 / page 4
			editor	Hennig				assembly section = AB1 / location + S1
001	05.03.08	Hennig	printout	27.03.08				last page 13 / continuation page 5
change	date	name	revisor					
previous page 3		total pages 174	last editor KRU					

switch cabinet

+S1

continuation

continuation

-X36

3x1²

0.551.042

Absaugung

=MB1+A1-A1

control wiring without specifications has to be wired with AWG 20

			creation date	26.10.2007	
			editor	Hennig	
001	05.03.08	Hennig	printout	27.03.08	
change	date	name	revisor		
previous page 4	total pages 174	last editor KRU			

MESSER CUTTING SYSTEMS
64823 GROSS-UMSTADT GERMANY

286.225
MultiTherm 4000
Eurodecoupe

block diagrams

drawing number	723.85638	page	5
assembly section =	AB1	location +	S1
last page	13	continuation page	6

switch cabinet

+S1

continuation

continuation

=VA0-X1

77003593(5m)
(Spur 2100-5000)

+M1

port 1 — 77003736 — B1 — =VA0-B1 + X

port 2

port 3 — 77003736 — B3 — =VA0-B3 - X

port 4

port 5 — 77003736 — B5 — =VA0-B5 Nullpunkt X

port 6

port 7

port 8 — 77002538 — SP8 — =VA0-SP8 pressure ok #

+M1

=VA0
actor-sensor-box

control wiring without specifications has to be wired with AWG 20

			creation date 26.10.2007		
			editor Hennig		
001	05.03.08	Hennig	printout 27.03.08		
change	date	name	revisor		
previous page 5		total pages 174	last editor KRU		

MESSER CUTTING SYSTEMS
64823 GROSS-UMSTADT GERMANY

286.225
MultiTherm 4000
Eurodecoupe

block diagrams

drawing number 723.85638		page	6
assembly section =	AB1	location +	S1
last page 13	continuation page		7

switch cabinet

+S1

continuation

continuation

=VA1-X1

72384618
9,5m bei Spur 3600-5000

+F1

port 1	77003591	Y1	=VA1-Y1 lifting cylinder
port 2		S2	=VA1-S2 tactile switch
port 3			
port 4	77004321(0,6m)	B4 (51)	=VA1-B4 + overtravel Y
port 5			
port 6	77004462	B6 (101)	=VA1-B6 home switch Y
port 7			
port 8	77003736(3,5m)	H8	=VA1-H8 laser diode

=VA1
actor-sensor-box

=VA2-X1

72384618
9,5m bei Spur 3600-5000

+F2

port 1	77003591	Y1	=VA2-Y1 lifting cylinder
port 2		S2	=VA2-S2 tactile switch
port 3			
port 4	77004462	B4 (52)	=VA2-B4 - overtravel Y
port 5			
port 6	77004462	B6 (102)	=VA2-B6 home switch Y
port 7			
port 8	77003736(3,5m)	H8	=VA2-H8 laser diode

=VA2
actor-sensor-box

control wiring without specifications has to be wired with AWG 20

switch cabinet

+S1

continuation

continuation

=BA5-XNA

77002538

+M1

port 1 — 77002538 — S1 — =VNA1-S1 foot protection front left

port 2 — 77002538 — S2 — =VNA1-S2 foot protection front right

port 3 — 77002538 — S3 — =VNA1-S3 foot protection rear left

port 4 — 77002538 — S4 — =VNA1-S4 foot protection rear right

=VNA1
actor-sensor-box

=BA5-XNA

77002538

+M2

port 1 — 77002538 — S1 — =VNA2-S1 foot protection front left

port 2 — 77002538 — S2 — =VNA2-S2 foot protection front right

port 3 — 77002538 — S3 — =VNA2-S3 foot protection rear left

port 4 — 77002538 — S4 — =VNA2-S4 foot protection rear right

=VNA2
actor-sensor-box

control wiring without specifications has to be wired with AWG 20

			creation date	26.10.2007
			editor	Hennig
001	05.03.08	Hennig	printout	27.03.08
change	date	name	revisor	
previous page 7		total pages 174	last editor KRU	

MESSER CUTTING SYSTEMS
64823 GROSS-UMSTADT GERMANY

286.225
MultiTherm 4000
Eurodecoupe

block diagrams

drawing number	723.85638	page	8
assembly section =	AB1	location +	S1
last page	13	continuation page	9

+S1

switch cabinet

+S1

continuation

=FG1-X1

-X190

continuation

height adjustment 1

=FG1+F1-XU /1.6

77004970 (8m)
Spur 3600-5000
gez. auf 723.83627

77004742
15m-Länge
bis 8000 Spur

-X1

-X190

+F1

-MOT

drive regulator

-X3

-X2

-X4

-S1
collision

Han 3d

-XU

-XM

55V

M

OL 200 Z

height adjustment

control wiring without specifications has to be wired with AWG 20

			creation date	26.10.2007	
			editor	Hennig	
001	05.03.08	Hennig	printout	27.03.08	
change	date	name	revisor		
previous page 8	total pages 174	last editor E1A			

MESSER CUTTING SYSTEMS
64823 GROSS-UMSTADT GERMANY

286.225
MultiTherm 4000
Eurodecoupe

block diagrams

drawing number 723.85638		page	9
assembly section =	AB1	location +	S1
last page 13		continuation page	10

+S1

switch cabinet

+S1

continuation

=FG2-X1

-X192

continuation

height adjustment 2

=FG2+F1-XU /1.6

77004970 (8m)
Spur 3600-5000

gez. auf 723.83627

77004742
15m-Länge
bis 8000 Spur

-X1

-X192

+F2

-MOT

drive regulator

-X3

-X2

-X4

Han 3d

-XU

-XM

55V

M

-S1
collision

OL 200 Z

height adjustment

control wiring without specifications has to be wired with AWG 20

			creation date	26.10.2007	
			editor	Hennig	
001	05.03.08	Hennig	printout	27.03.08	
change	date	name	revisor		
previous page 9		total pages 174	last editor E1A		

MESSER CUTTING SYSTEMS
64823 GROSS-UMSTADT GERMANY

286.225
MultiTherm 4000
Eurodecoupe

block diagrams

drawing number 723.85638		page	10
assembly section =	AB1	location +	S1
last page 13		continuation page	11

switch cabinet

+S1

continuation

continuation

=CA0-USB Extention

=CA0-DVI Extention

=BA2-X40

77011123 (10m)

77011123 (10m)

77004829 (10m)

+M1-P2
Empfängermodul

=CA0-USB Extention

=CA0-DVI Extention

Empfängermodul

=CA0-24V-Power
3pol

=CA0-USB-Down Stream

=CA0-DVI-DOUT
24pin

77011082 (3m)

77003736

77011082 (3m)

=CA0-X101
19pin

=CA0-X102
4bu

=CA0-X103
5pin

=BA1-X40
19pin
(24V DC IN)

+P1 (Global Control)

K-BUS
12bu

-P1
operator desk

control wiring without specifications has to be wired with AWG 20

			creation date	26.10.2007	MESSER CUTTING SYSTEMS 64823 GROSS-UMSTADT GERMANY	286.225 MultiTherm 4000 Eurodecoupe	block diagrams
			editor	Hennig			
001	05.03.08	Hennig	printout	27.03.08			
change	date	name	revisor				
previous page 10		total pages 174	last editor E1A				

drawing number 723.85638 | page 11

assembly section = AB1 | location + S1

last page 13 | continuation page 12

switch cabinet

+S1

continuation

continuation

-XP0

=EB1-TOM

=EB2-TOM

1x10²

=EB1+S1-WXP0
0551078

1x4²

=EB1+S1-WXTOM
0580737

1x4²

=EB2+S1-WXTOM
0580737

+F1

+F2

nozzle contact

nozzle contact

torch cover with quick-connect receptacle

torch cover with quick-connect receptacle

M workpiece

control wiring without specifications has to be wired with AWG 20

			creation date	26.10.2007	
			editor	Hennig	
001	05.03.08	Hennig	printout	27.03.08	
change	date	name	revisor		
previous page 11		total pages 174		last editor KRU	

MESSER CUTTING SYSTEMS
64823 GROSS-UMSTADT GERMANY

286.225
MultiTherm 4000
Eurodecoupe

block diagrams

drawing number 723.85638		page	12
assembly section =	AB1	location +	S1
last page 13		continuation page	13

switch cabinet

continuation

=CA0-CA0

+S1

continuation

RJ45

Patchkabel

RJ45

control wiring without specifications has to be wired with AWG 20

			creation date	26.10.2007
			editor	Hennig
001	05.03.08	Hennig	printout	27.03.08
change	date	name	revisor	
previous page 12	total pages 174		last editor KRU	

MESSER CUTTING SYSTEMS
64823 GROSS-UMSTADT GERMANY

286.225
MultiTherm 4000
Eurodecoupe

block diagrams

drawing number 723.85638		page	13
assembly section =	AB1	location +	S1
last page 13		continuation page=AB4+S41/1	

plasma interlock

+S41

-X90

724.16300

-1X3

37pin

-X90

-X90

724.22001

724.16301

724.16302

J300

37pin

-TB2

-XW+/-

HPR 130/260

=IM1

control wiring without specifications has to be wired with AWG 20

			creation date	26.10.2007	
			editor	Hennig	
001	05.03.08	Hennig	printout	27.03.08	
change	date	name	revisor		
previous page =AB1+S1/13		total pages 174	last editor KRU		

MESSER CUTTING SYSTEMS
64823 GROSS-UMSTADT GERMANY

286.225
MultiTherm 4000
Eurodecoupe

block diagrams

drawing number 723.85638		page	1
assembly section = AB4		location +	S41
last page 1	continuation page		+S42/1

plasma interlock

+S42

-X90

724.16300

-1X3

37pin

-X90

-X90

724.22001

724.16301

724.16302

J300

37pin

-TB2

-XW+/-

HPR 130/260

=IM2

control wiring without specifications has to be wired with AWG 20


			creation date	26.10.2007	
			editor	Hennig	
001	05.03.08	Hennig	printout	27.03.08	
change	date	name	revisor		
previous page	+S41/1	total pages 174	last editor	KRU	

MESSER CUTTING SYSTEMS
64823 GROSS-UMSTADT GERMANY

286.225
MultiTherm 4000
Eurodecoupe

block diagrams

drawing number	723.85638	page	1
assembly section =	AB4	location +	S42
last page	1	continuation page	=BA0+S1/1

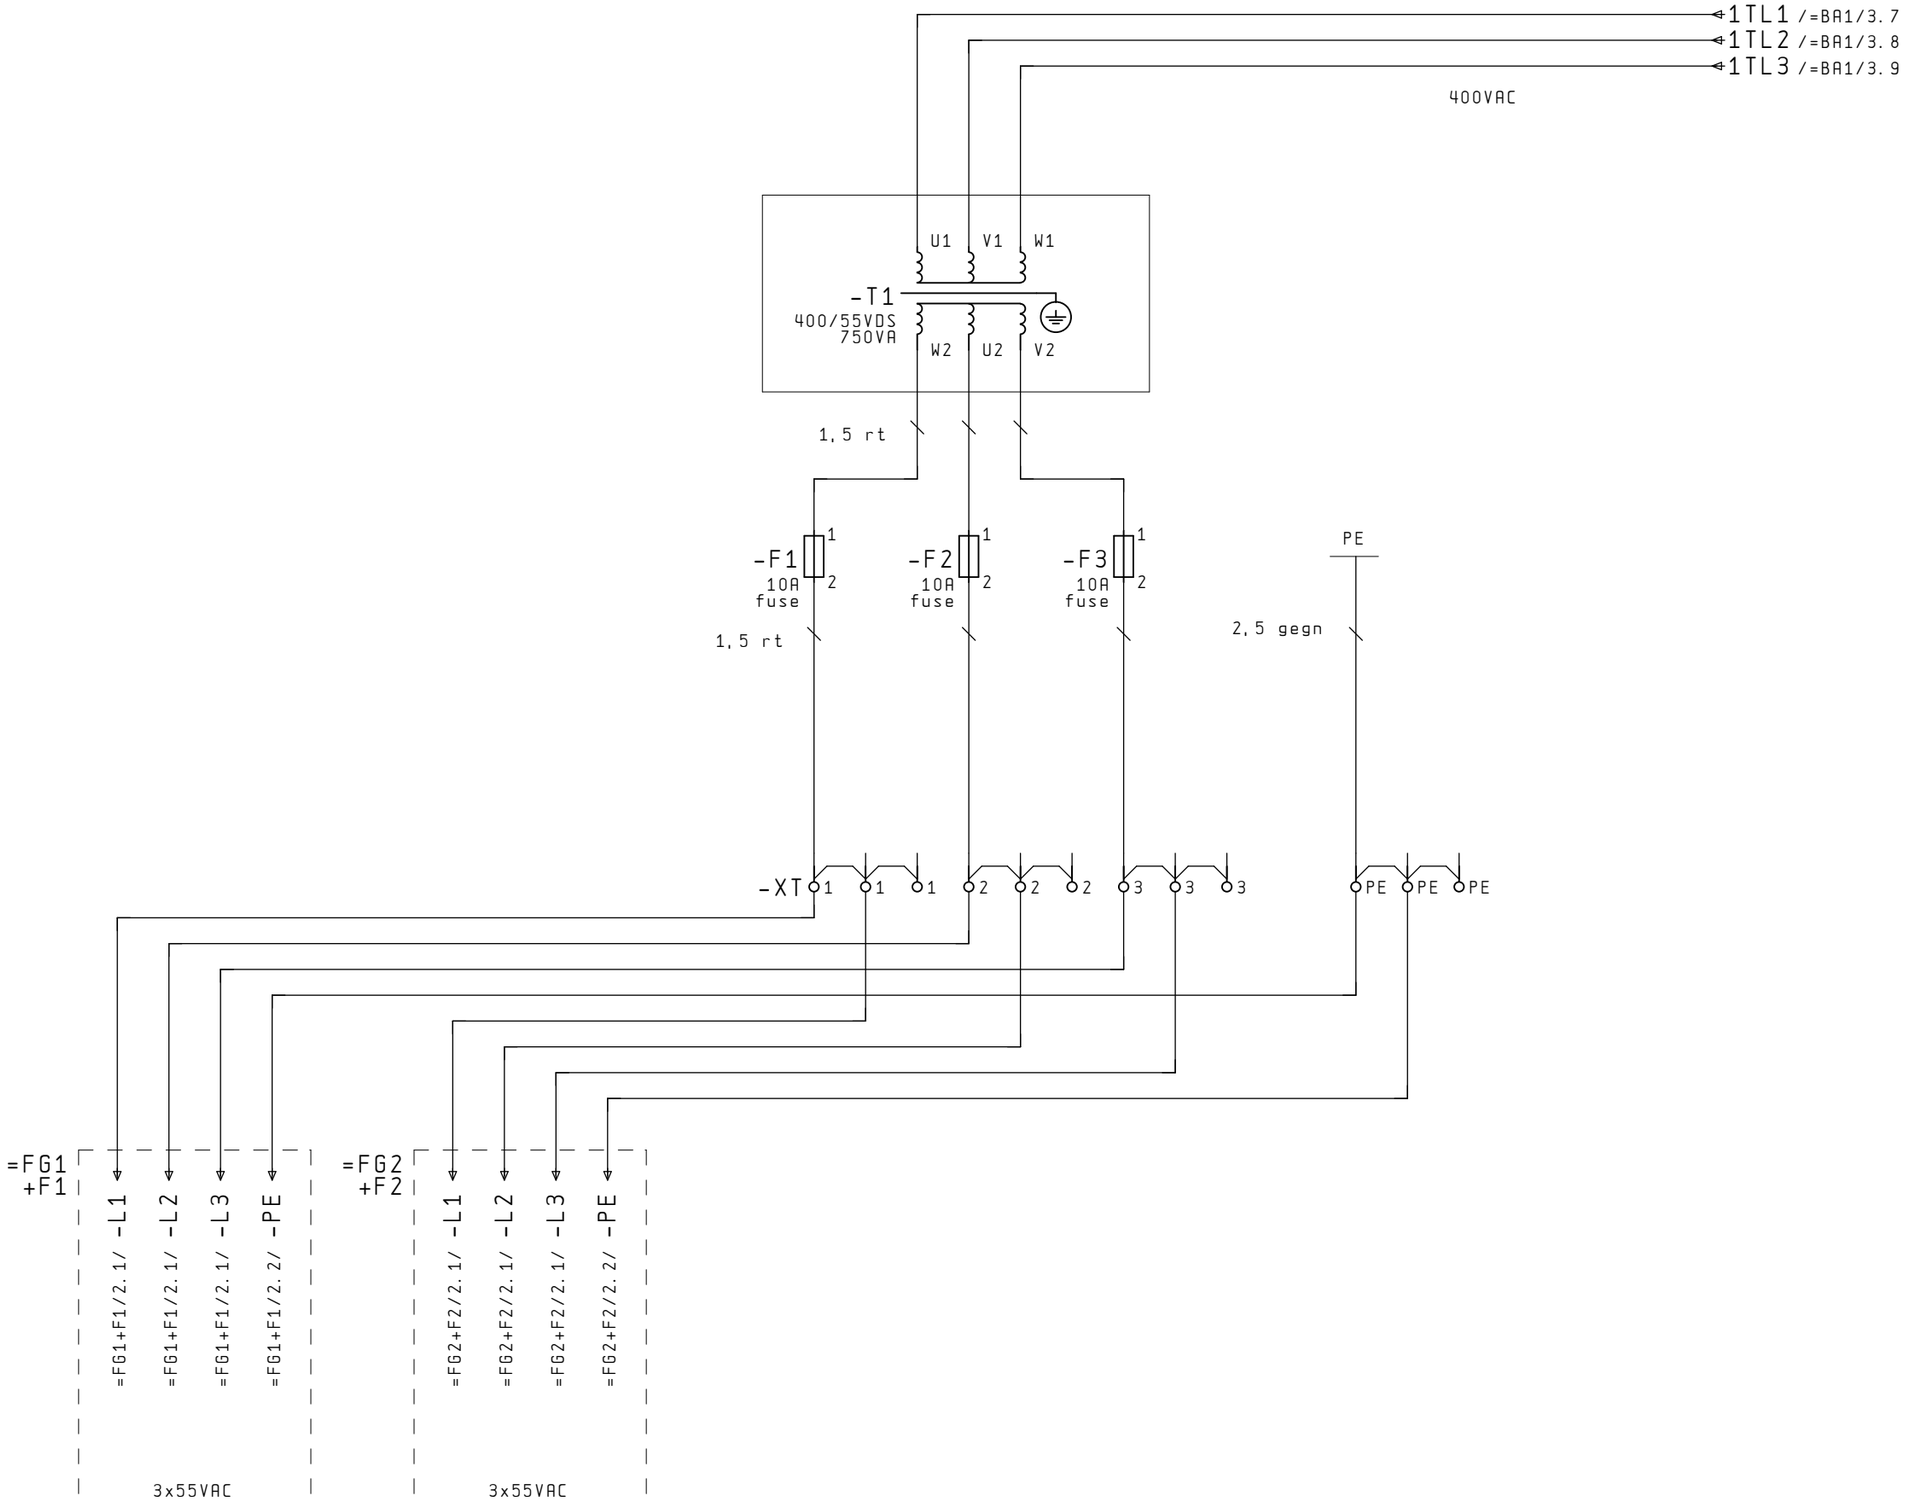

control wiring without specifications has to be wired with AWG 20


			creation date 26.10.2007		
			editor Hennig		
001	05.03.08	Hennig	printout 27.03.08		
change	date	name	revisor		
previous page =AB4+S42/1	total pages 174	last editor KRU			

MESSER CUTTING SYSTEMS
64823 GROSS-UMSTADT GERMANY

286.225
MultiTherm 4000
Eurodecoupe

infeed transformer

drawing number 723.85638		page	1
assembly section =	BA0	location +	S1
last page 1		continuation page	=BA1/1

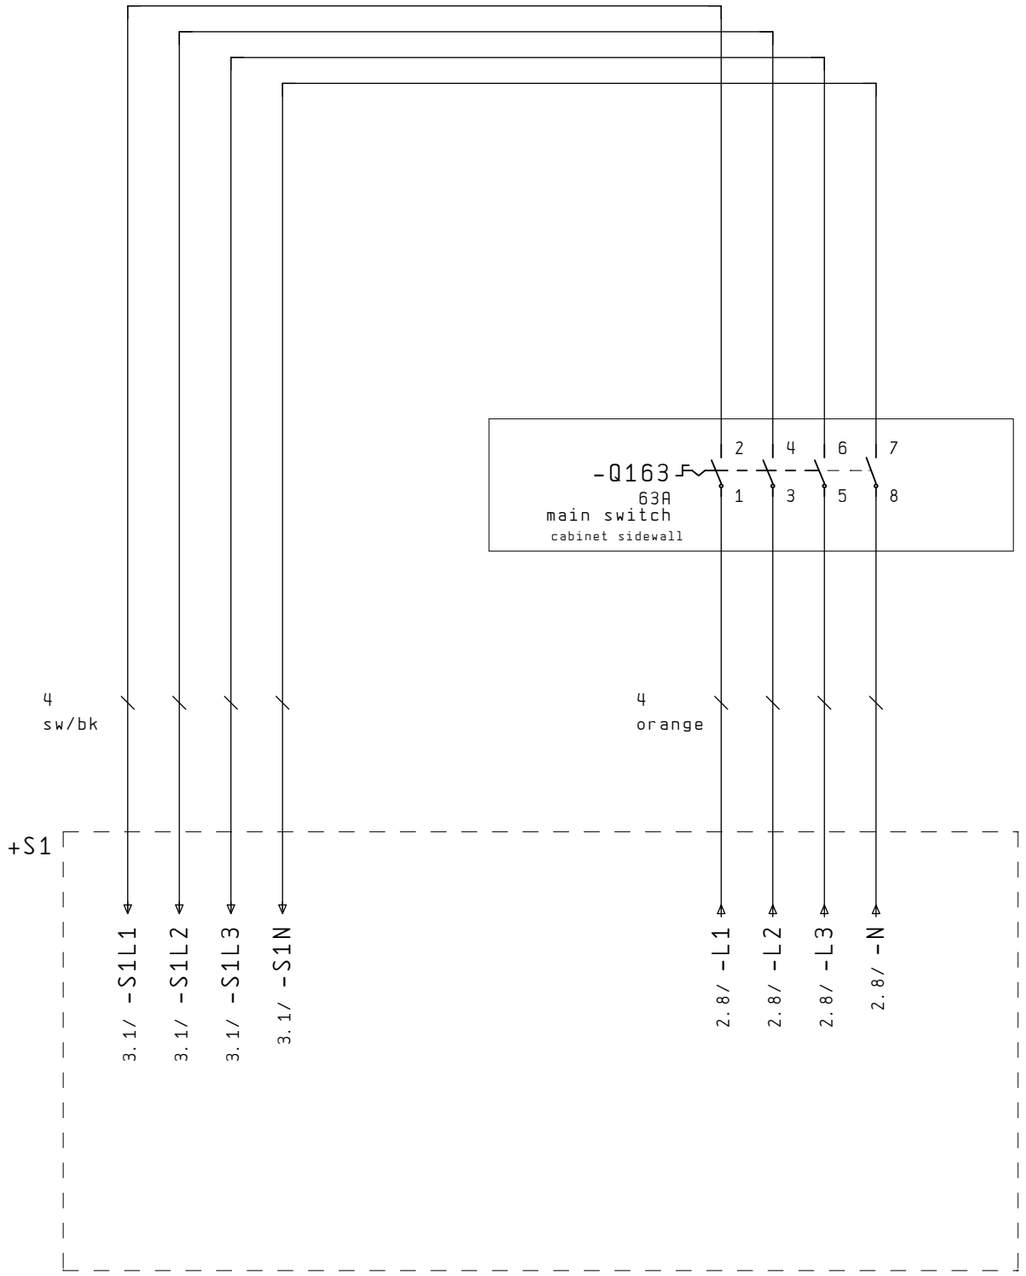

control wiring without specifications has to be wired with AWG 20

			creation date	26.10.2007	
			editor	Hennig	
001	05.03.08	Hennig	printout	27.03.08	
change	date	name	revisor		
previous page	=BA0/1	total pages	174	last editor	KRU

MESSER CUTTING SYSTEMS
64823 GROSS-UMSTADT GERMANY

286.225
MultiTherm 4000
Eurodecoupe

main switch box

drawing number	723.85638	page	1
assembly section =	BA1	location +	S1
last page	7	continuation page	2

400VAC

-F001
25A
pre fuse
1 2 3 4 5 6

-L1 /1.3
-L2 /1.3
-L3 /1.3
-N /1.3
to main switch

4
orange

4
bl/bu

1,5
orange

at main switch infeed
connected
short-circuit-proof
marked

danger
high voltage
if main switch is
disconnected !

-0F1
10A
fuse
1 2

-X0F 1 2

-K2: 24N /6.1
-X01: N /6.1

-K2
6.2
53
54

-K3
6.7
17
18

-K2: 14L /6.1

-X00 1 2 3

1,5
bl/bu

PE
6
gegn/yegn

4 5 6 7 PE PE

PEN link
option

1,5
orange

PE

N L PE

-E1
cabinet heater

1,5
orange

PE

L PE N

-X02
230VAC

1,5
orange

PE

ST-COMBI
plug-in
-X03 1 2 PE 4 3

1 1 2 2
L N N L
IN OUT
-T0
UPS

1,5
orange

PE

ST-COMBI
plug-in
-X01 1 2 PE

=CA0-PC01L
=CA0-PC01N
=CA0-PC01PE
=CA0/1.1/

230VAC
CPU supply

infeed 400VAC
customers charge
please verify circuit
diagram with provided
customers supply cable!

service socket

control wiring without specifications has to be wired with AWG 20

			creation date	26.10.2007	
			editor	Hennig	
001	05.03.08	Hennig	printout	27.03.08	
change	date	name	revisor		
previous page 1		total pages 174		last editor KRU	

MESSER CUTTING SYSTEMS
64823 GROSS-UMSTADT GERMANY

286.225
MultiTherm 4000
Eurodecoupe

infeed 400VAC

drawing number	723.85638	page	2
assembly section =	BA1	location +	S1
last page	7	continuation page	3

400VAC

Verdrahtung von -X230
kurzschlussfest
ausführen !

1,5
bl/bu

-S1T3N /4.5
-S1G1N /6.1
-S1G1L /6.1
-S1T3L /4.5

-P1
hour meter

4
sw/bk

1,5
sw/bk

4
bl/bu

4
sw/bk

-X230 N N N N N N N

-X230 L L L L

=BA4-K1
=BA4/1.7

1 3 5
2 4 6

-X0 1 2 3 4 5

1.0/ -S1L1
1.1/ -S1L2
1.1/ -S1L3
1.1/ -S1N

+S0

-F0
6,3A
fuse

1,5
bl/bu

1,5
sw/bk

PE

N L PE

-A1
cooling unit

4
sw/bk

-XTL L1 L2 L3

-FT1 -FT2 -FT3
6,3A fuse

=HX1/1.5/ =HX1-HL1
=HX1/1.5/ =HX1-HL2
=HX1/1.5/ =HX1-HL3

=BA0/1.7/ =BA0-1TL1
=BA0/1.7/ =BA0-1TL2
=BA0/1.7/ =BA0-1TL3

400VAC
drives

Trafo 55VDS

control wiring without specifications has to be wired with AWG 20

			creation date	26.10.2007
			editor	Hennig
001	05.03.08	Hennig	printout	27.03.08
change	date	name	revisor	
previous page 2		total pages 174	last editor	KRU

MESSER CUTTING SYSTEMS
64823 GROSS-UMSTADT GERMANY

286.225
MultiTherm 4000
Eurodecoupe

infeed 400VAC

drawing number	723.85638	page	3
assembly section =	BA1	location +	S1
last page	7	continuation page	4

3.5/ -S1T3N
3.5/ -S1T3L
230VAC
-F2
6,3A
fuse
1
2
L
N
-T3
230/24VAC
24
0
1,5
rt/rd
24VAC-neutral
-X24N: 1 /5.1
1,5
rt/rd
=BA4-K1
=BA4/1.7
24VAC
valves
13
14
1,5
rt/rd
-F6
10A
fuse
1,5
rt/rd
emergency stop cut off
-X24AC1
1
1
1,5
rt/rd
=VA1-X1: 17
=VA1/1.1/
actor-sensor-box
=VA2-X1: 17
=VA2/1.1/
actor-sensor-box
-F7
6,3A
fuse
1,5
rt/rd
permanent
-X24AC2
1
1
1,5
rt/rd
=FF1-24VAC
=FF1/1.5/

control wiring without specifications has to be wired with AWG 20

			creation date	26.10.2007
			editor	Hennig
001	05.03.08	Hennig	printout	27.03.08
change	date	name	revisor	
previous page 3	total pages 174		last editor	E1A

MESSER CUTTING SYSTEMS
64823 GROSS-UMSTADT GERMANY

286.225
MultiTherm 4000
Eurodecoupe

24VAC control voltage

drawing number	723.85638	page	4
assembly section =	BA1	location +	S1
last page	7	continuation page	5

caution

removing link needs
insulation
leakage monitoring

DIN VDE 0413 T.2

-X24N:1 /4.9

24VAC-neutral

actor-sensor-box

actor-sensor-box

=VA1-X1:18 /=VA1/1.1

=VA2-X1:18 /=VA2/1.1

PE

-X24N PE PE 1 1 2 2 3 3 4 4

=FG1-X1
=FG1/1.0
Sub D 25
female
11 21 22

=FG2-X1
=FG2/1.0
Sub D 25
female
11 21 22

=FG1+F1/1.6/ -XHV:11

=FG2+F2/1.6/ -XHV:11

=FG1

=FG2

control wiring without specifications has to be wired with AWG 20

			creation date	26.10.2007			
			editor	Hennig			
001	05.03.08	Hennig	printout	27.03.08			
change	date	name	revisor				
previous page	4	total pages	174	last editor	E1A		

MESSER CUTTING SYSTEMS
64823 GROSS-UMSTADT GERMANY

286.225
MultiTherm 4000
Eurodecoupe

OVAC

drawing number	723.85638	page	5
assembly section =	BA1	location +	S1
last page	7	continuation page	6

3.5/ -S1G1N

3.5/ -S1G1L

230VAC

-F1
6,3A
fuse

-K2 A1 A2 U

2.8/ -K2:14L

2.8/ -XO1:N

2.8/ -K2:24N

1,5
orange

-K2 .2 13 14 61 62 23 24 71 72

UPS
switchover

at main switch infeed
connected
short-circuit-proof
marked

danger
high voltage
if main switch is
disconnected !

T6,3
intern

-G1
24VDC
20A
AC AC
2~
- +
PHOENIX

2,5
bl/bu

-F5
10A
fuse

-K2 .2 33 34 43 44

2,5
bl/bu

-XP24:1 /7.1

0,5
bl/bu

-K3:A1 /7.1

0,5
bl/bu

-K3 A1 B1 A2

ON OFF
1 2 3 4 5
t = 120 sec

2,5
bl/bu

=BA2-XLO

=BA2/4.2/

=BA2-24VDC

=BA2/1.1/

=BA2-XF1

=BA2/2.1/

=BA4/2.4/ -K3:A2

3RH11 40-1AP00
3RH19 11-1GA22

13 - 14 .1
23 - 24 .1
33 - 34 .5
43 - 44 .6
53 - 54 2.7
61 - 62 .1
71 - 72 .2
83 - 84

6652350

17 - 18 2.8

24VDC
control voltage

PLC turn off time delayed

UPS buffered
PLC
24VDC bus coupler
drive regulator 24VDC

control wiring without specifications has to be wired with AWG 20


			creation date	26.10.2007	
			editor	Hennig	
001	05.03.08	Hennig	printout	27.03.08	
change	date	name	revisor		
previous page 5		total pages 174		last editor KRU	

MESSER CUTTING SYSTEMS
64823 GROSS-UMSTADT GERMANY

286.225
MultiTherm 4000
Eurodecoupe

24VDC control voltage

drawing number	723.85638	page	6
assembly section =	BA1	location +	S1
last page	7	continuation page	7

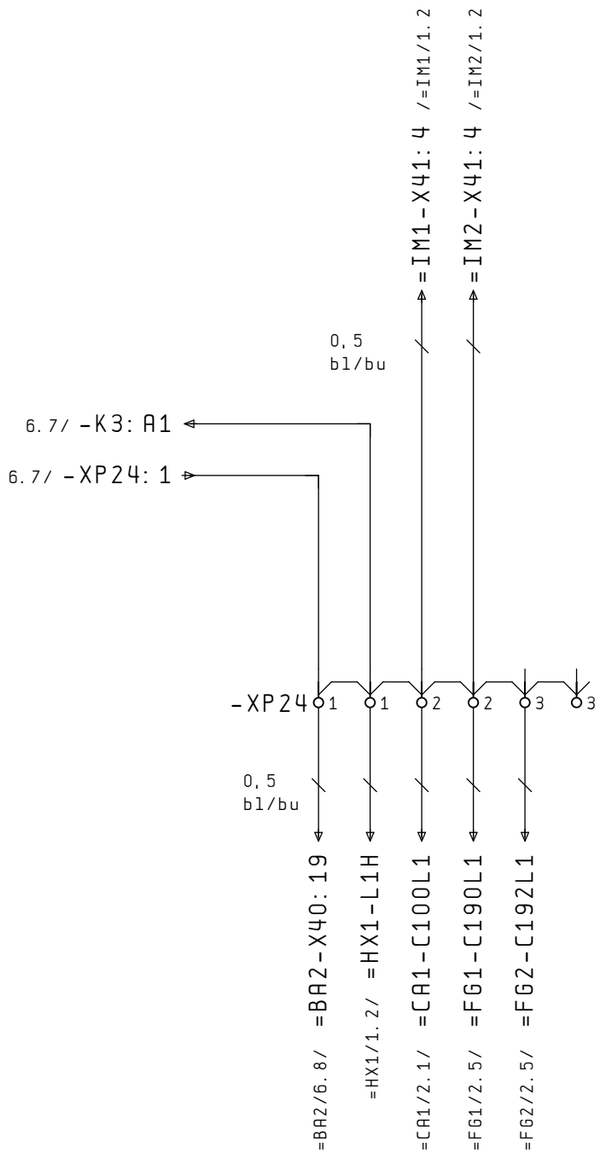

UPS buffered
PLC
24VDC bus coupler
drive regulator 24VDC

control wiring without specifications has to be wired with AWG 20


			creation date 26.10.2007		
			editor Hennig		
001	05.03.08	Hennig	printout 27.03.08		
change	date	name	revisor		
previous page 6		total pages 174	last editor KRU		

MESSER CUTTING SYSTEMS
64823 GROSS-UMSTADT GERMANY

286.225
MultiTherm 4000
Eurodecoupe

24VDC control voltage

drawing number 723.85638		page	7
assembly section =	BA1	location +	S1
last page 7		continuation page	+P1/1

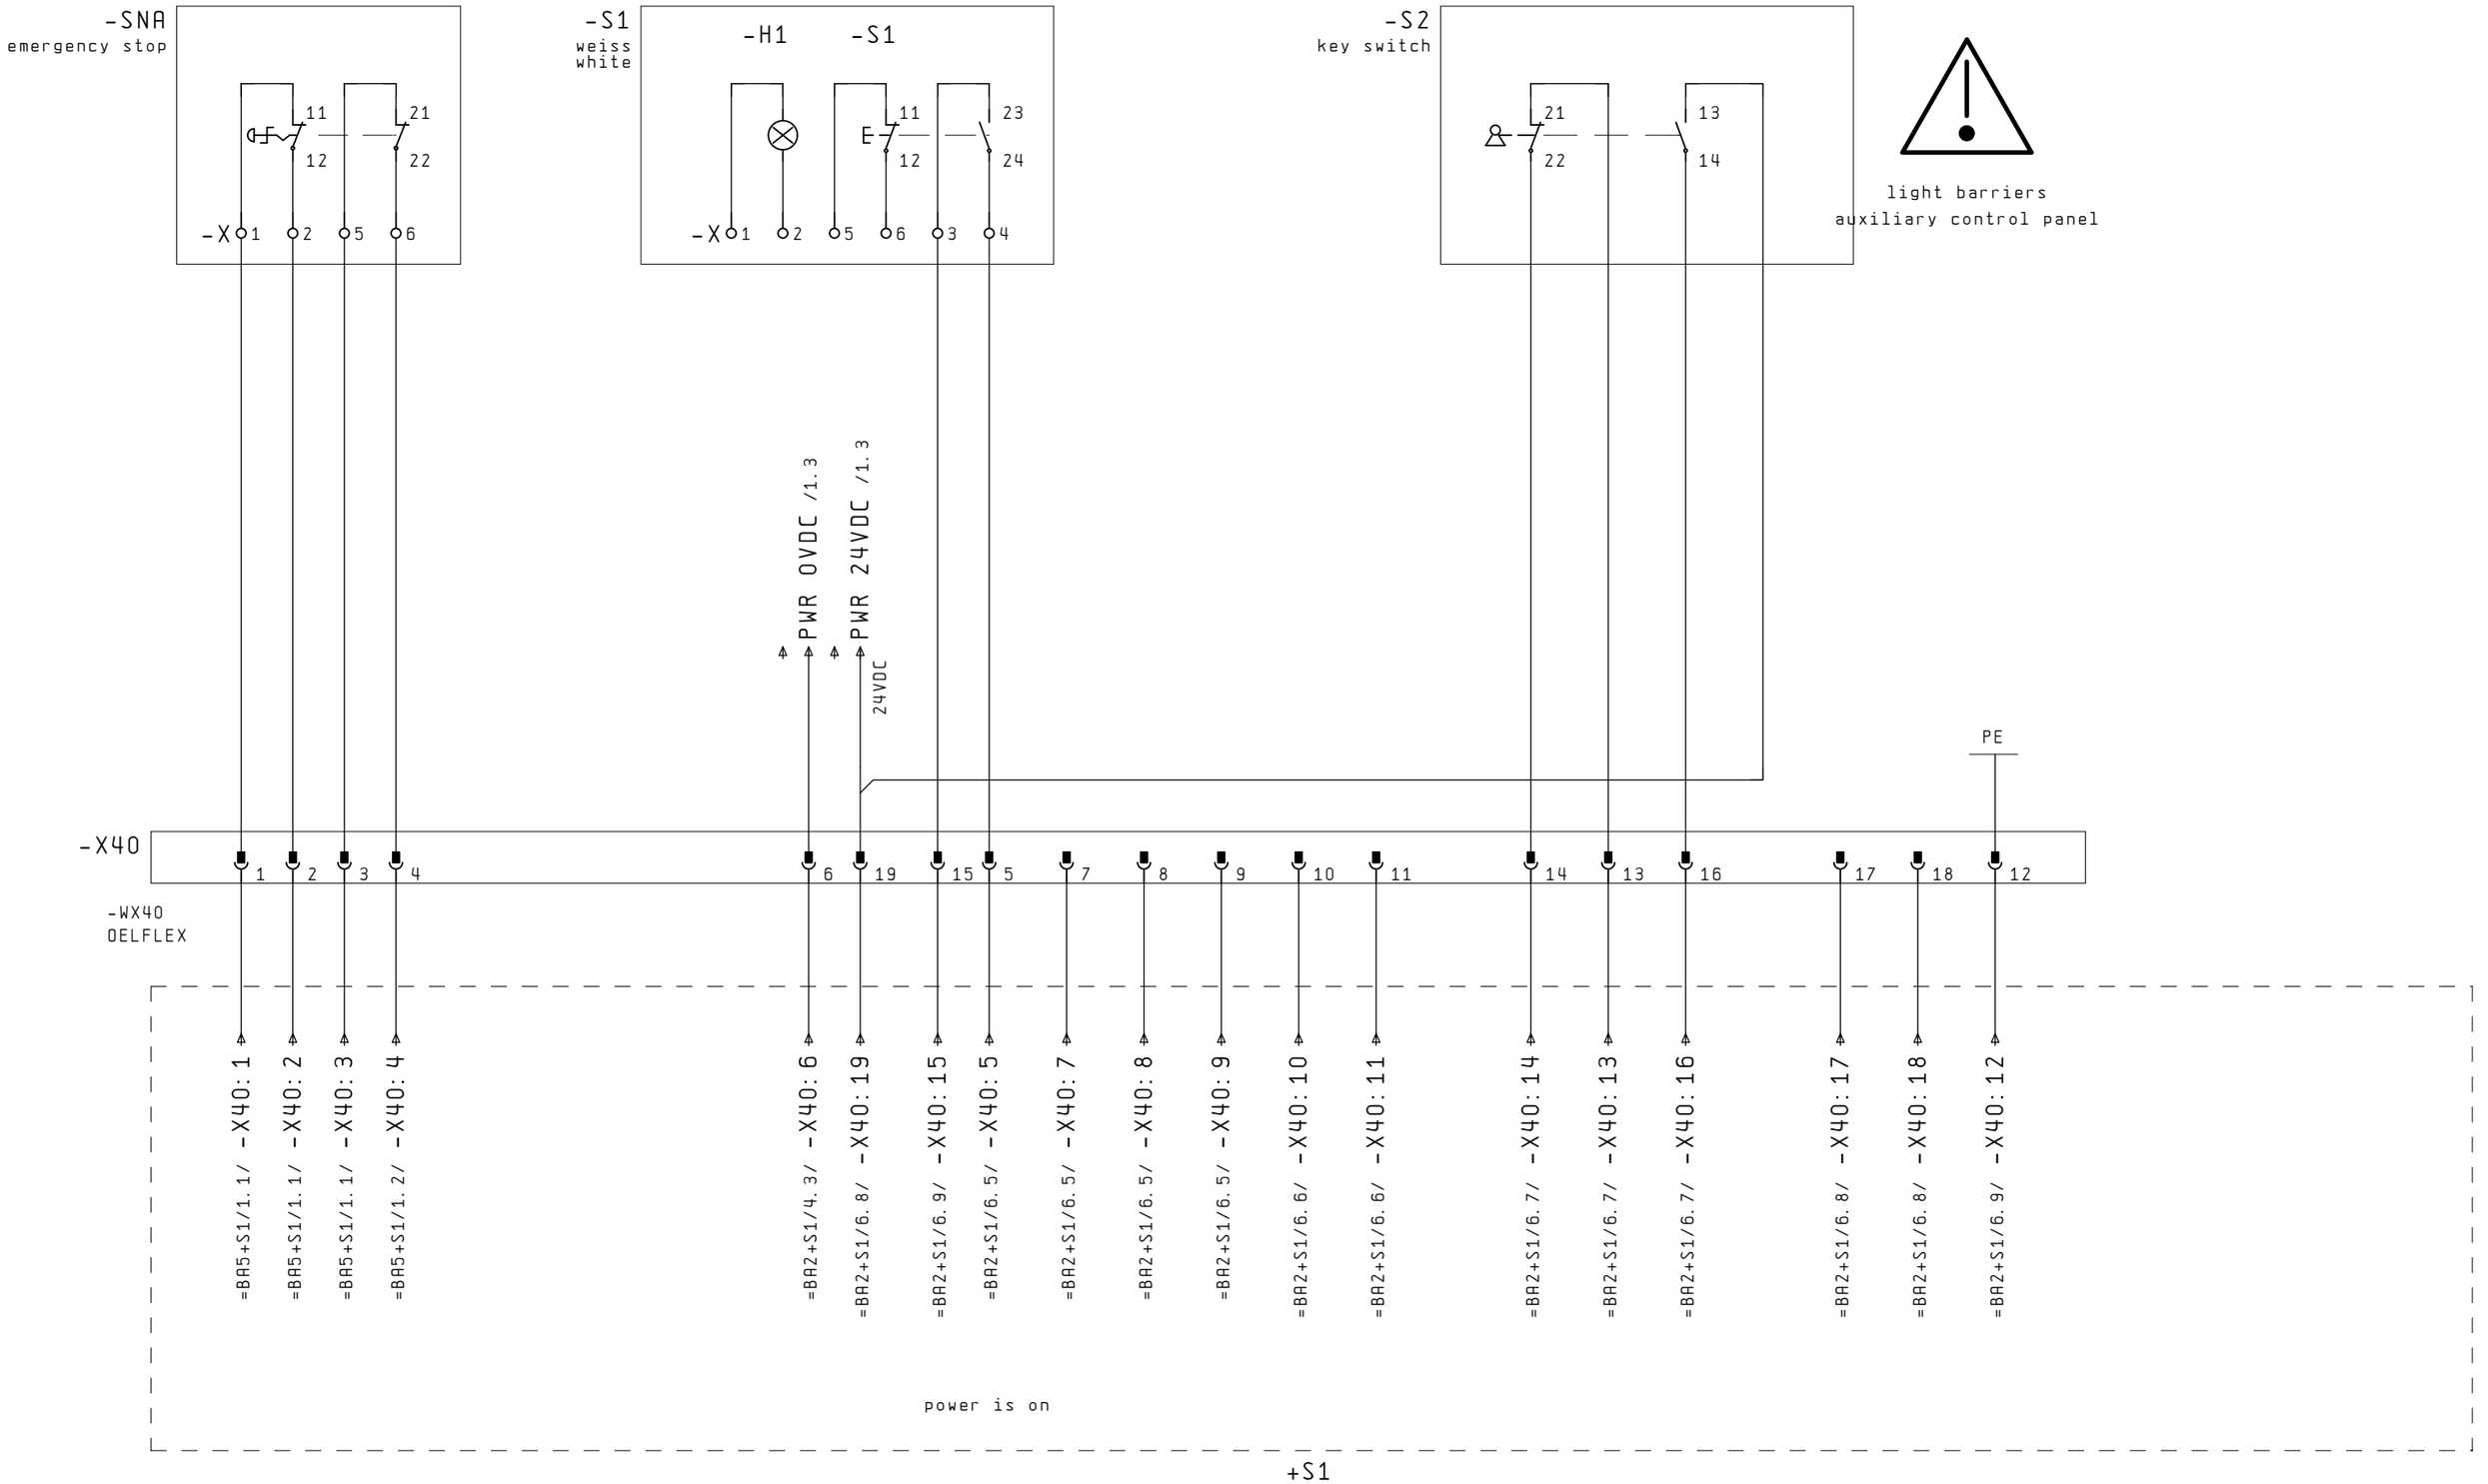

control wiring without specifications has to be wired with AWG 20


			creation date	26.10.2007
			editor	Hennig
001	05.03.08	Hennig	printout	27.03.08
change	date	name	revisor	
previous page +S1/7		total pages 174	last editor	KRU

MESSER CUTTING SYSTEMS
64823 GROSS-UMSTADT GERMANY

286.225
MultiTherm 4000
Eurodecoupe

operation desk

drawing number	723.85638	page	1
assembly section =	BA1	location +	P1
last page	1	continuation page	=BA2+S1/1

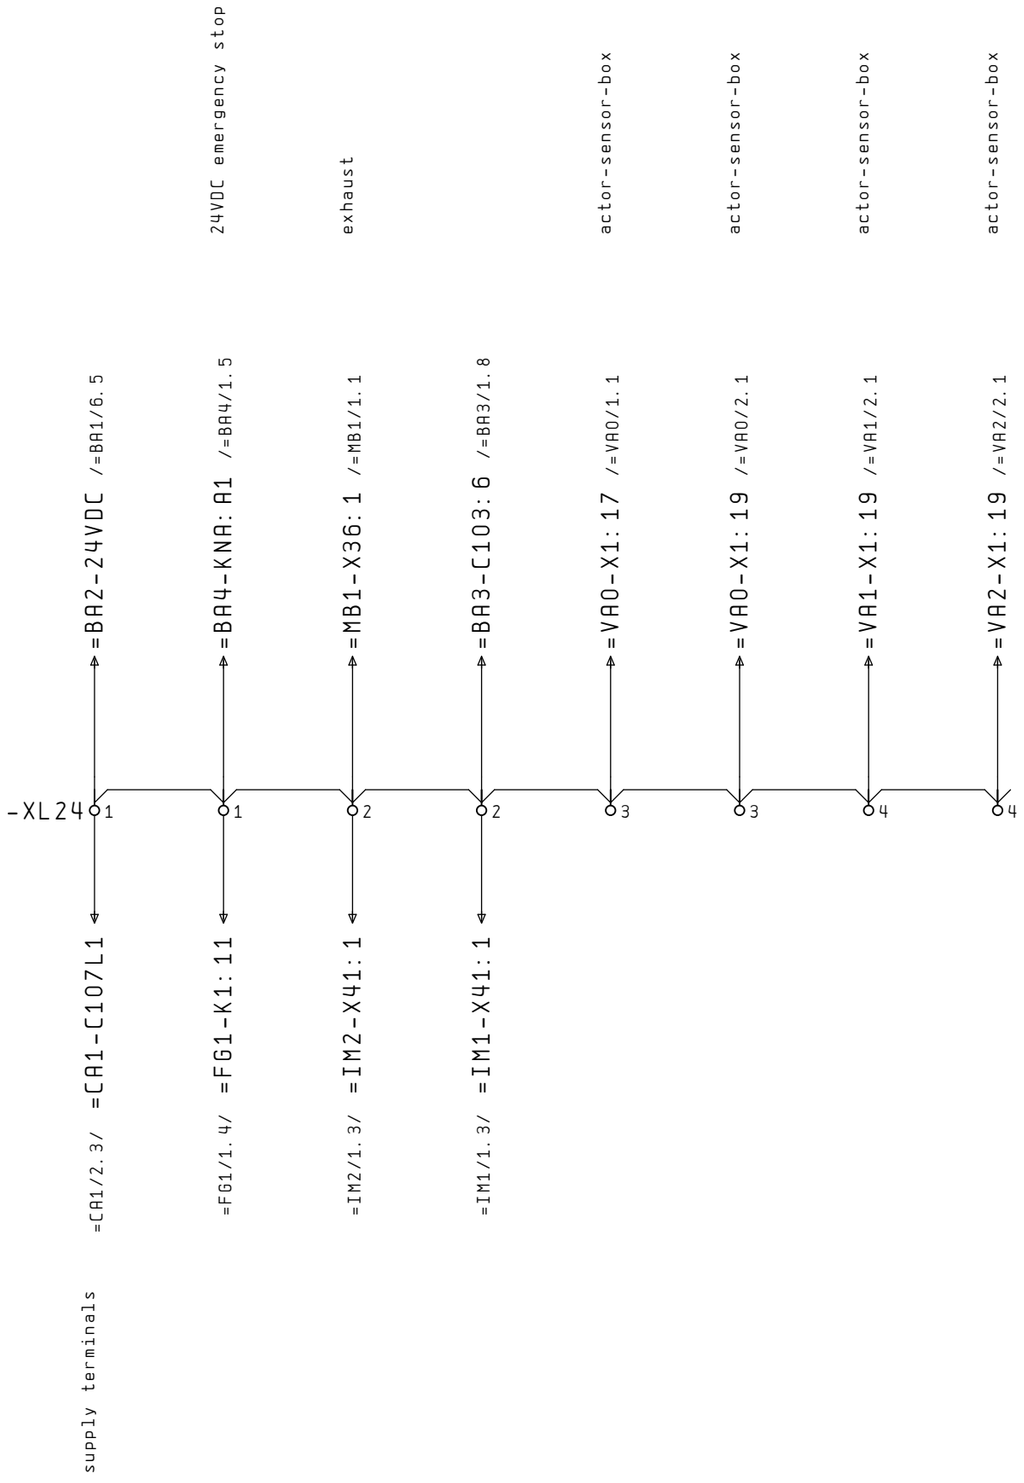

control wiring without specifications has to be wired with AWG 20

			creation date	26.10.2007
			editor	Hennig
001	05.03.08	Hennig	printout	27.03.08
change	date	name	revisor	
previous page =BA1+P1/1		total pages 174	last editor	E1A


MESSER CUTTING SYSTEMS
64823 GROSS-UMSTADT GERMANY

286.225
MultiTherm 4000
Eurodecoupe

distribution 24VDC

drawing number	723.85638	page	1
assembly section =	BA2	location +	S1
last page	6	continuation page	2

periphery line protection

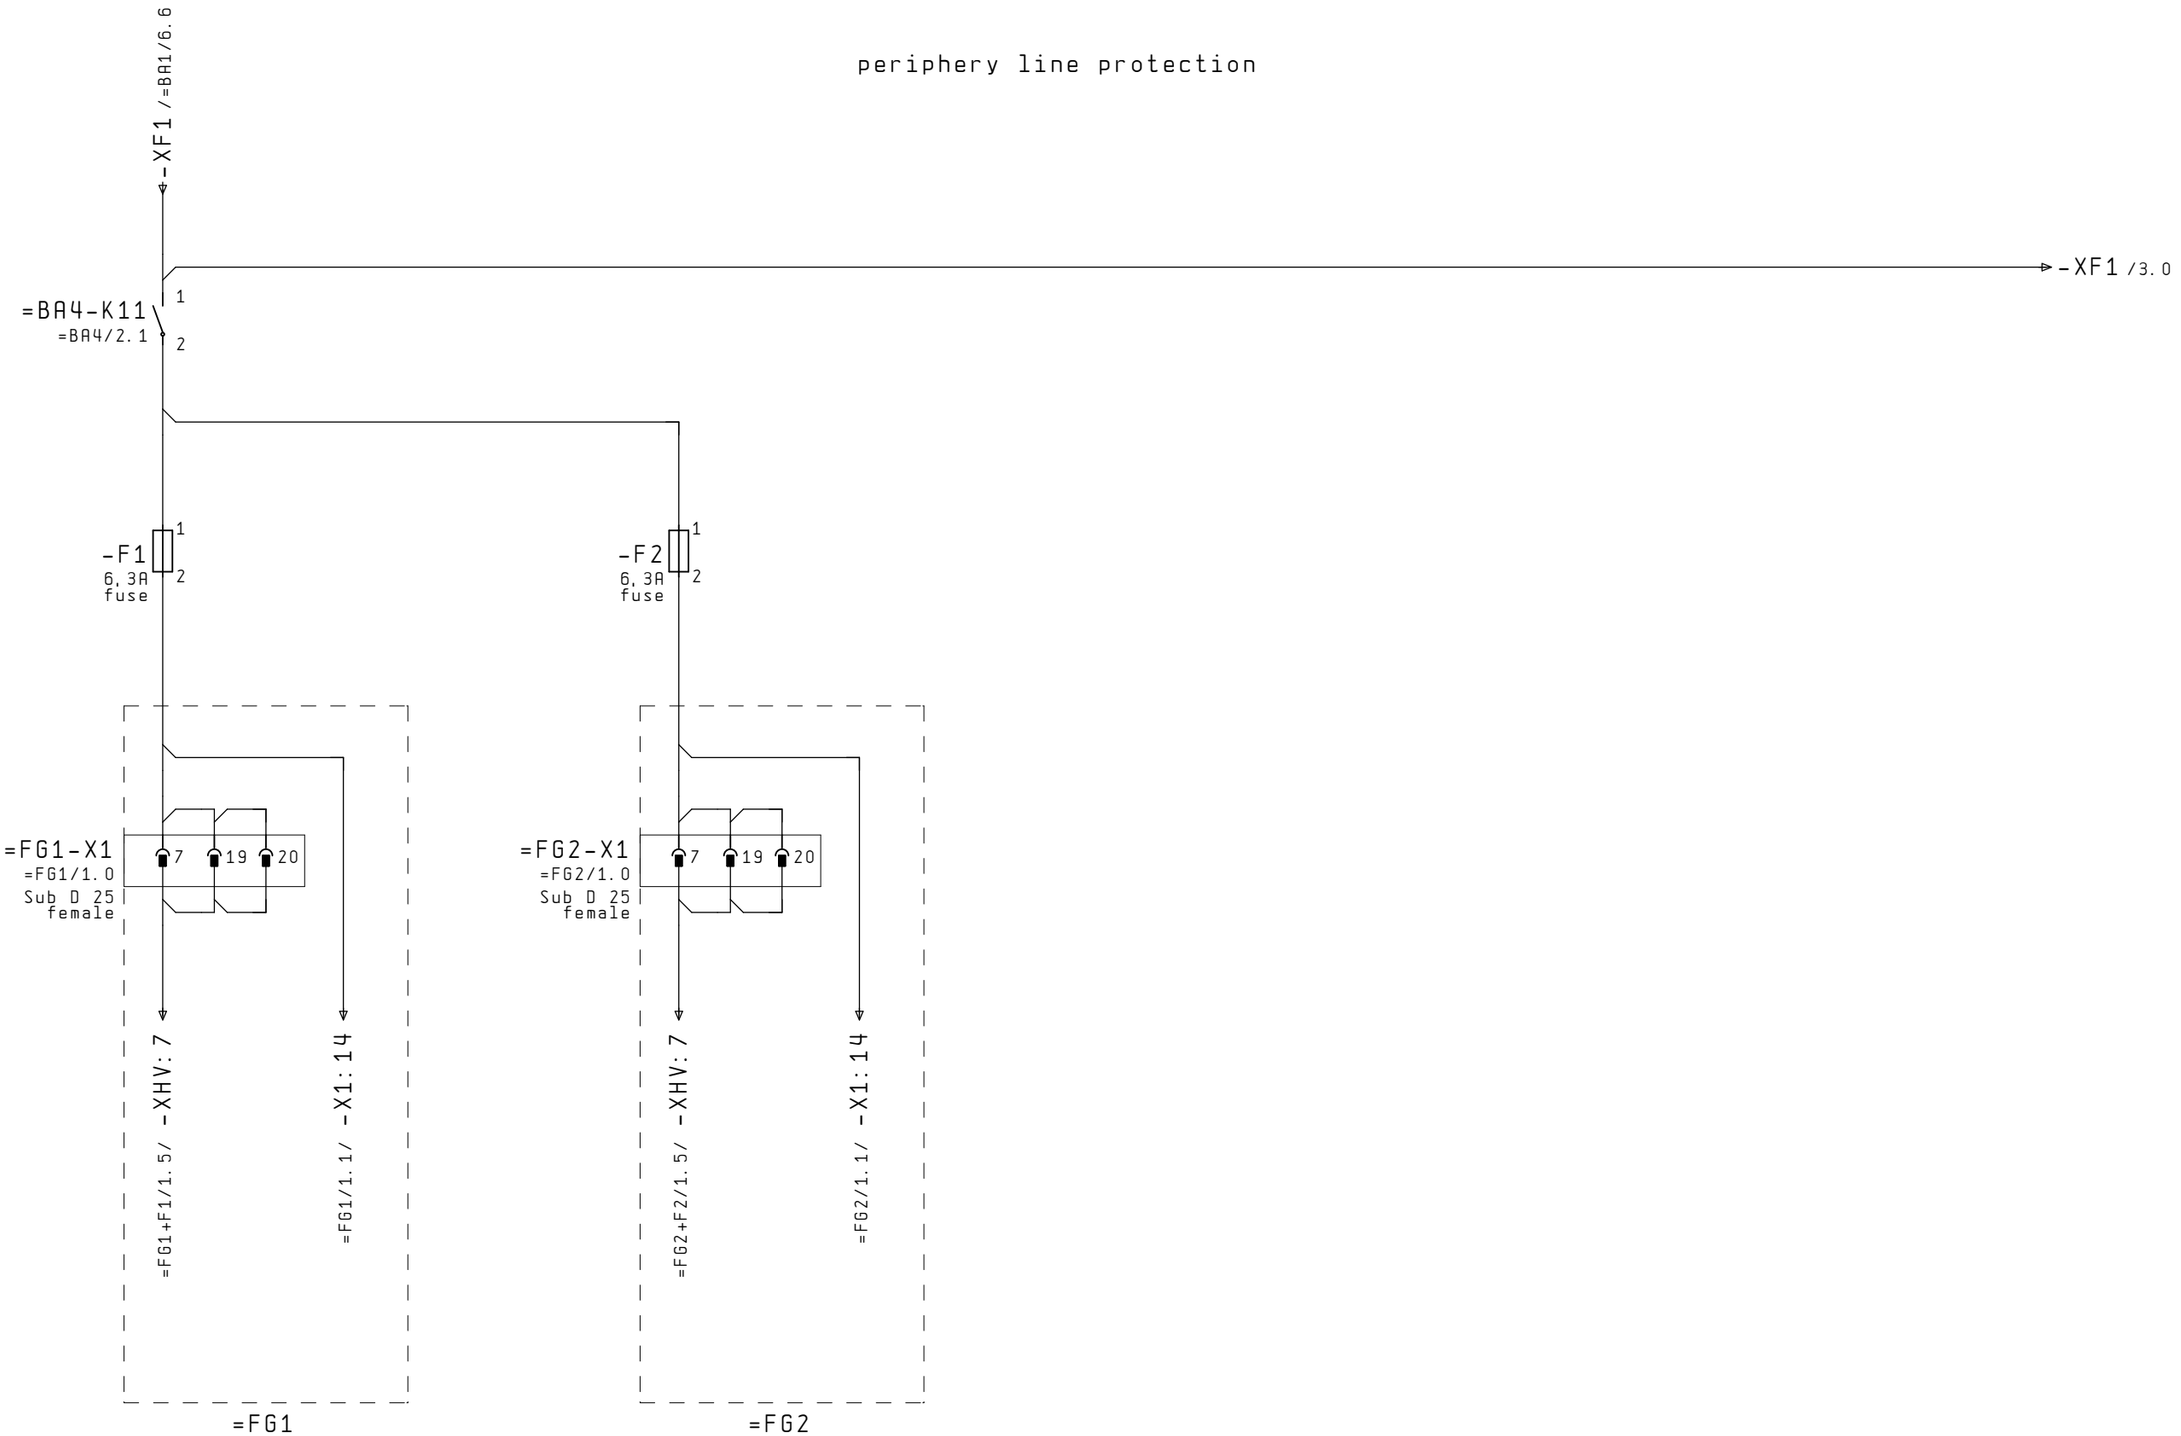

control wiring without specifications has to be wired with AWG 20

			creation date 26.10.2007		
			editor Hennig		
001	05.03.08	Hennig	printout 27.03.08		
change	date	name	revisor		
previous page 1		total pages 174	last editor E1A		


MESSER CUTTING SYSTEMS
64823 GROSS-UMSTADT GERMANY

286.225
MultiTherm 4000
Eurodecoupe

distribution 24VDC

drawing number 723.85638		page	2
assembly section =	BA2	location +	S1
last page 6		continuation page	3

periphery line protection

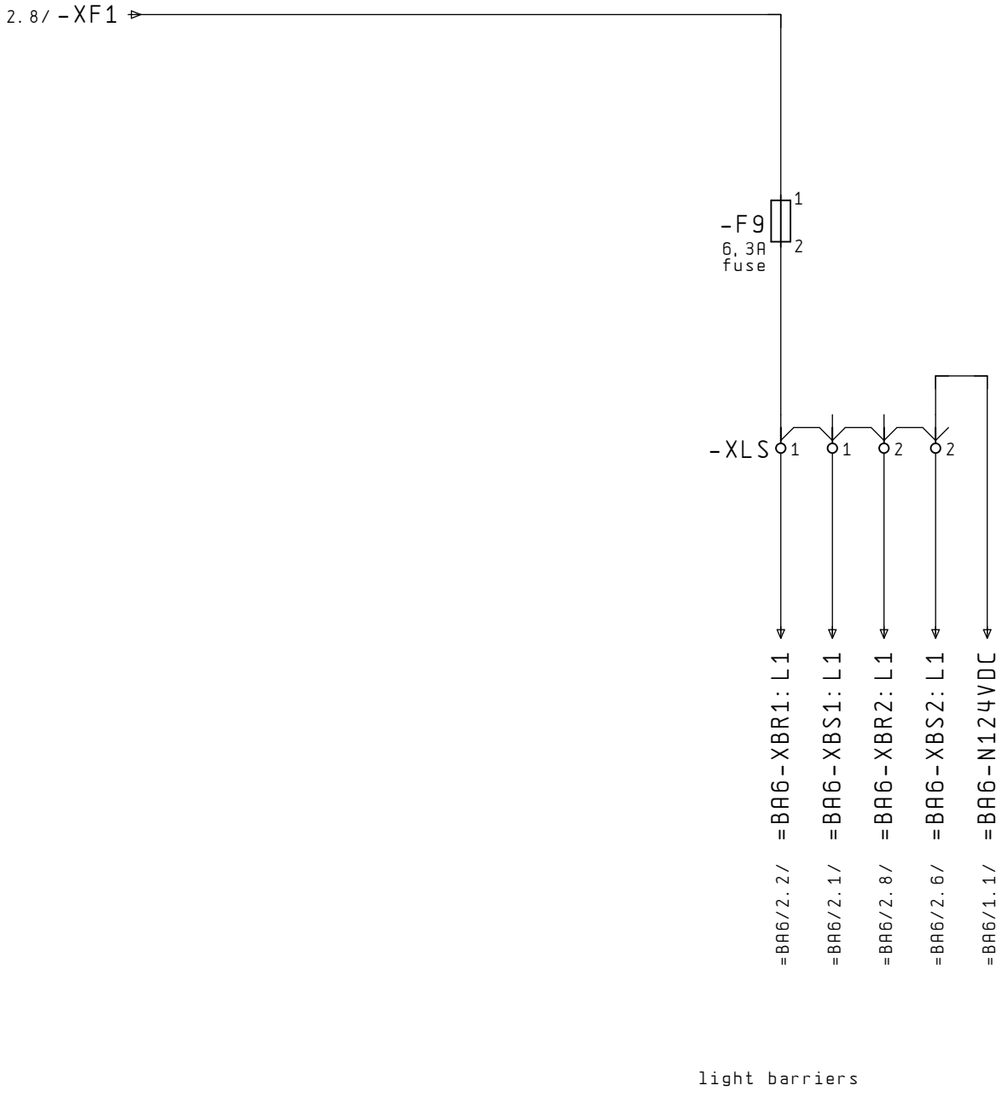

light barriers

control wiring without specifications has to be wired with AWG 20

			creation date	26.10.2007	MESSER CUTTING SYSTEMS 64823 GROSS-UMSTADT GERMANY	286.225 MultiTherm 4000 Eurodecoupe	distribution 24VDC
			editor	Hennig			
001	05.03.08	Hennig	printout	27.03.08			
change	date	name	revisor				
previous page 2		total pages 174	last editor KRU				

drawing number 723.85638		page	3
assembly section =	BA2	location +	S1
last page	6	continuation page	4

caution

removing link needs insulation leakage monitoring

DIN VDE 0413 T.2

PE

-XL0 PE PE

power unit secondary circuit

-XL0 /=BA1/6.5

1,0 bl/bu

1

6.2/ -OVDC

OVDC coils

=BA1+P1

voltage supply touch screen

-X40:6 /=BA1+P1/1.3

ST-COMBI plug-in -X40 6

1

=HX1/1.2/ =HX1-L0H

drive regulator

2

=HX1/2.1/ =HX1-HL0

drive regulator

2

=CA1/2.2/ =CA1-C100L01

supply terminals

3

=CA1/2.3/ =CA1-C107L0

supply terminals

=EB1-OVTOM /=EB1/1.2

=EB2-OVTOM /=EB2/1.2

=FG1-K1:A2 /=FG1/1.4

=FG1-C190L0 /=FG1/2.5

=FG2-C192L0 /=FG2/2.5

actor-sensor-box

=VA0-X1:18 /=VA0/1.1

actor-sensor-box

=VA0-X1:20 /=VA0/2.1

actor-sensor-box

=VA1-X1:20 /=VA1/2.1

actor-sensor-box

=VA2-X1:20 /=VA2/2.1

3

=BA6/2.1/ =BA6-XBS1:L0

4

=BA6/2.3/ =BA6-XBR1:L0

4

=BA6/2.6/ =BA6-XBS2:L0

5

=BA6/2.8/ =BA6-XBR2:L0

5

=BA6/1.0/ =BA6-N1GND

6

=BA6/1.8/ =BA6-X71:2

6

-XL0 /5.0

control wiring without specifications has to be wired with AWG 20


			creation date	26.10.2007
			editor	Hennig
001	05.03.08	Hennig	printout	27.03.08
change	date	name	revisor	
previous page 3		total pages 174	last editor	E1A

MESSER CUTTING SYSTEMS
64823 GROSS-UMSTADT GERMANY

286.225
MultiTherm 4000
Eurodecoupe


distribution OVDC

drawing number	723.85638	page	4
assembly section =	BA2	location +	S1
last page	6	continuation page	5

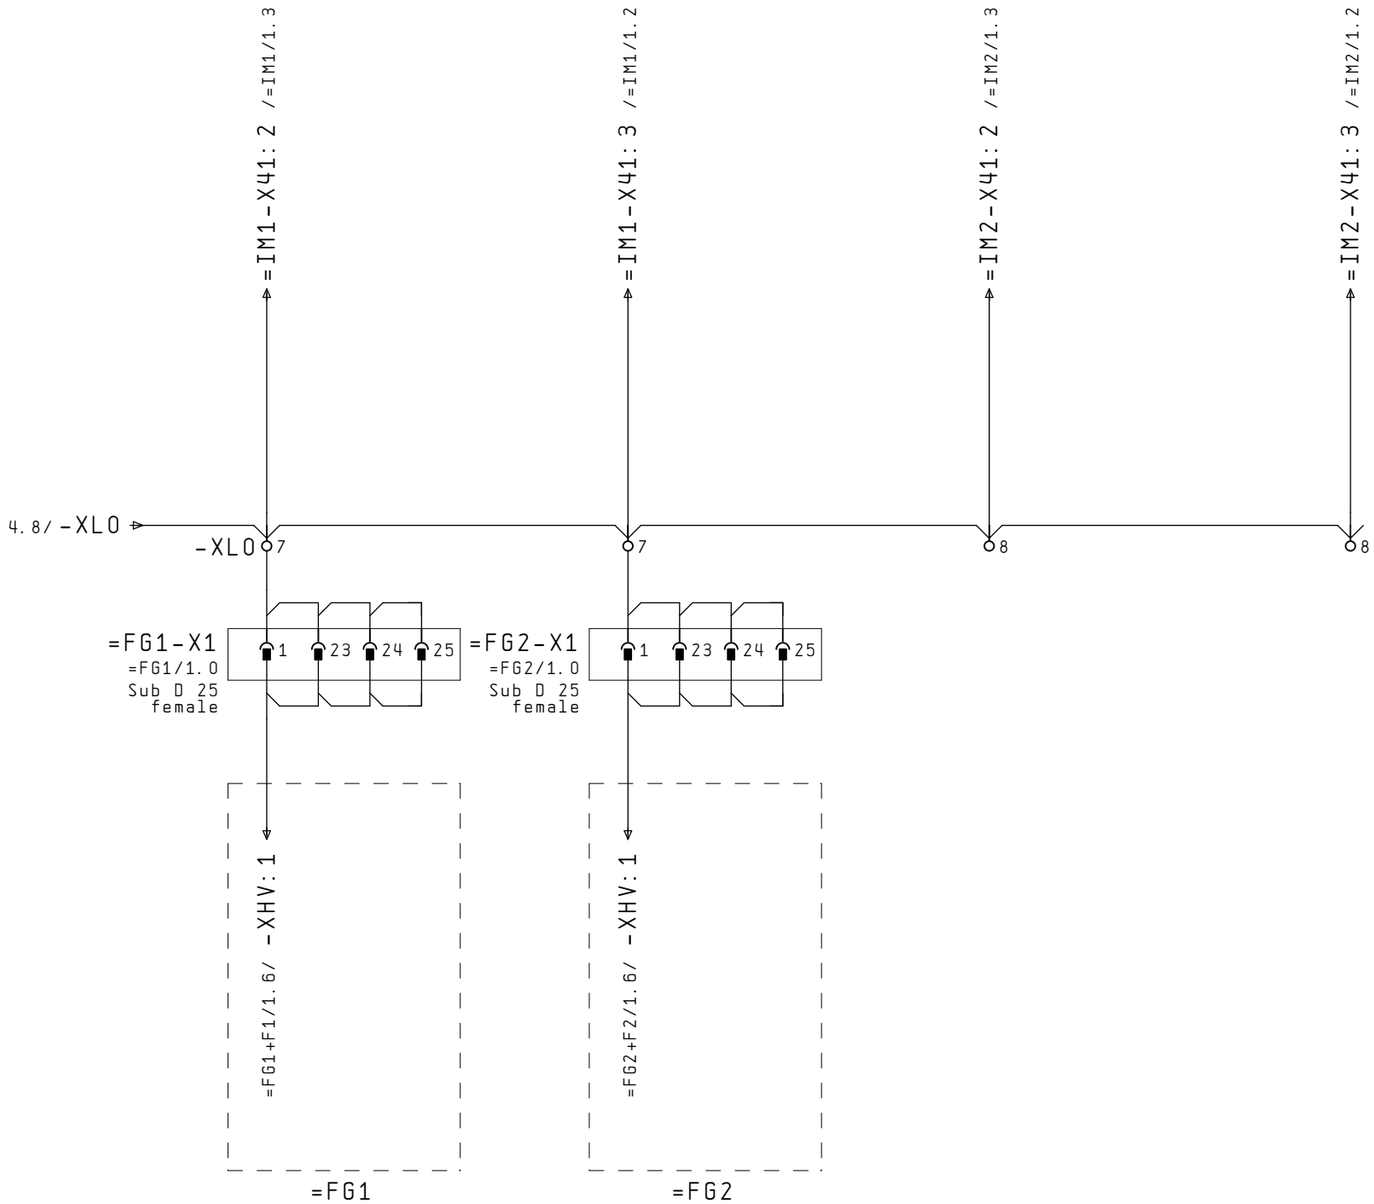

control wiring without specifications has to be wired with AWG 20

			creation date	26.10.2007	MESSER CUTTING SYSTEMS 64823 GROSS-UMSTADT GERMANY	286.225 MultiTherm 4000 Eurodecoupe	distribution OVDC	drawing number 723.85638 / page 5
			editor	Hennig				assembly section = BA2 / location + S1
001	05.03.08	Hennig	printout	27.03.08				last page 6 / continuation page 6
change	date	name	revisor					
previous page 4		total pages 174	last editor KRU					

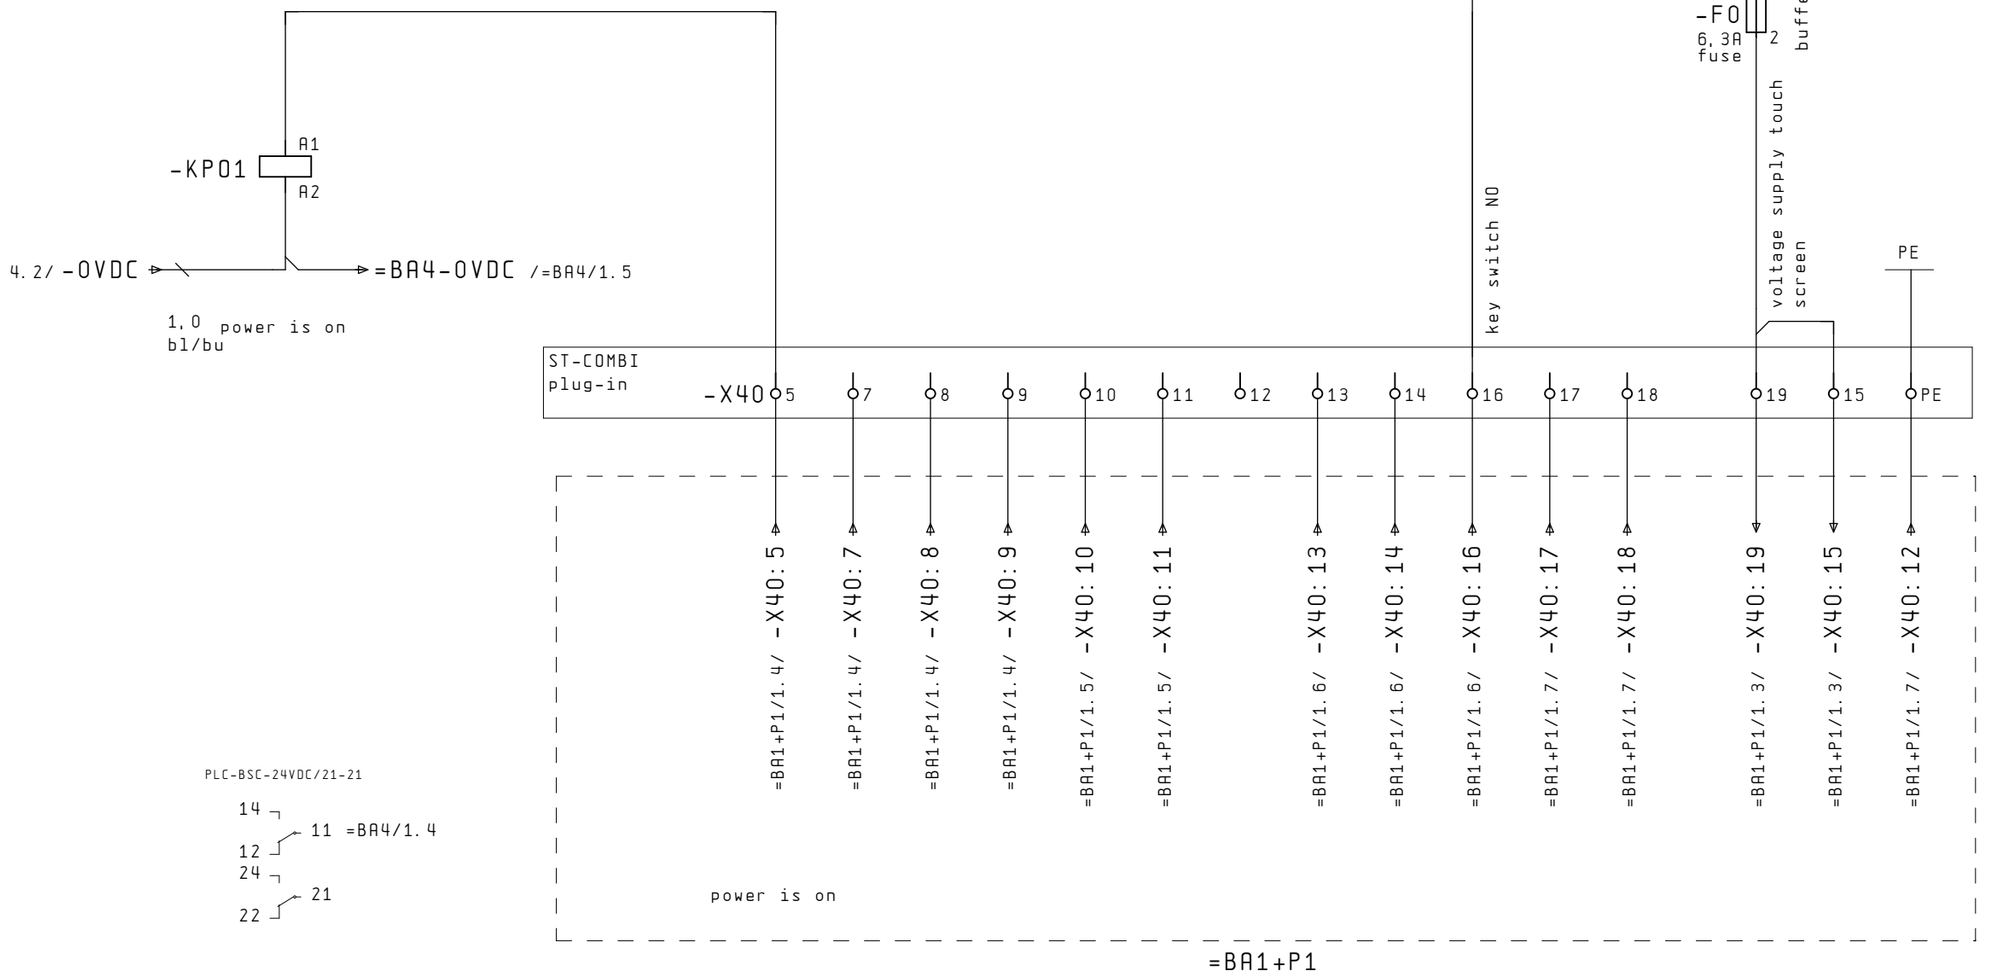

control wiring without specifications has to be wired with AWG 20

			creation date	26.10.2007
			editor	Hennig
001	05.03.08	Hennig	printout	27.03.08
change	date	name	revisor	
previous page 5		total pages 174	last editor	KRU

MESSER CUTTING SYSTEMS
64823 GROSS-UMSTADT GERMANY

286.225
MultiTherm 4000
Eurodecoupe

interface operation panel

drawing number	723.85638	page	6
assembly section =	BA2	location +	S1
last page	6	continuation page	=BA3/1

=CA1

-C108
=CA1/4.1
KL2408
digital output terminals
24VDC 0,5A
DIGITAL OUTPUT
watchdog
=CA1/4.1
O3:2

-C101
=CA1/3.1
KL2692
WATCHDOG
watchdog enable
E1:4/=CA1/3.1
=CA1/3.1
13:1
=CA1/3.1
14:2
spare
E2:8/=CA1/3.1
=CA1/3.1
23:5
=CA1/3.1
24:6

-C103
=CA1/3.1
KL1408
digital input terminals
24VDC, 3ms
DIGITAL INPUT
pressure ok
=CA1/3.1
I5:3

-C103
=CA1/3.1
KL1408
digital input terminals
24VDC, 3ms
DIGITAL INPUT
supply voltage
=CA1/3.1
I4:6

=BA4/1.1/ -C101:1
=BA5/1.1/ =BA5-X40:1
=BA4/1.2/ -C101:5
=BA4/1.2/ -C101:6
=VA0/2.8/ =VA0-X1:16
=BA2/1.2/ -C103:6

control wiring without specifications has to be wired with AWG 20

			creation date	26.10.2007	
			editor	Hennig	
001	05.03.08	Hennig	printout	27.03.08	
change	date	name	revisor		
previous page =BA2/6	total pages 174	last editor KRU			

MESSER CUTTING SYSTEMS
64823 GROSS-UMSTADT GERMANY

286.225
MultiTherm 4000
Eurodecoupe

watchdog

drawing number 723.85638		page	1
assembly section = BA3		location +	S1
last page 1	continuation page =BA4/1		

-C102
=CA1/3.5
KL1408
digital input terminals
24VDC, 3ms
DIGITAL INPUT
power is on
=CA1/3.5
I8:8

=CA1

-K1 .7 31 32
-K12 2.3 61 62
-K11 2.1 61 62
main contactor monitoring

=BA3-C101:1 /=BA3/1.2
=BA5-XNA:12 /=BA5/1.7
=BA3-C101:5 /=BA3/1.3
=BA3-C101:6 /=BA3/1.4
-KNA:A1 /=BA2/1.1

=BA2
-KP01
=BA2/6.3
12 14
11

-K12:A1 /2.1
-KNA .5 13 14
-KNA 5 delayed 37 38
-K11:A1 /2.1

Y1 Y2 S11 S12 S52 S21 S22 S33 S34 Y39 Y40
feedback loop
channel 1
channel 2
start
time reset

TESCH
F138
77004379

-KNA
emergency stop relay
A1
A2

-K1 A1 A2

=BA2/6.3/ -0VDC

-K11:A2 /2.1

emergency stop

emergency stop

1,0 bl/bu

main contactor

F138

13 – 14 .7
23 – 24
37 – 38 .7
47 – 48
57 – 58

3RT10 26-1BB40
3RH19 21-1FA22

1 – 2 =BA1/3.6
3 – 4 =BA1/3.7
5 – 6 =BA1/3.7
13 – 14 =BA1/4.5
23 – 24
31 – 32 .0
41 – 42

control wiring without specifications has to be wired with AWG 20

			creation date	26.10.2007
			editor	Hennig
001	05.03.08	Hennig	printout	27.03.08
change	date	name	revisor	
previous page =BA3/1		total pages 174	last editor	KRU

MESSER CUTTING SYSTEMS
64823 GROSS-UMSTADT GERMANY

286.225
MultiTherm 4000
Eurodecoupe

emergency stop loop

drawing number	723.85638	page	1
assembly section =	BA4	location +	S1
last page	2	continuation page	2

1.8/ -K12: A1

1.8/ -K11: A1

delayed

-K11 A1 A2

-K12 A1 A2

1.8/ -K11: A2

=BA1-K3: A2 /=BA1/6.7

height adjustments

1,0
bl/bu

3RT13 17-1BB40
3RH19 11-1FA22

1	2	=BA2/2.1	
3	4		
5	6		
7	8		
53	54		
61	62		1.0
71	72		
83	84		

cut off gas

1,0
bl/bu

3RT13 17-1BB40
3RH19 11-1FA22

1	2	=IM1/1.5	
3	4	=IM2/1.5	
5	6		
7	8		
53	54		
61	62		1.0
71	72		
83	84		

control wiring without specifications has to be wired with AWG 20


			creation date	26.10.2007	
			editor	Hennig	
001	05.03.08	Hennig	printout	27.03.08	
change	date	name	revisor		
previous page 1		total pages 174		last editor KRU	

MESSER CUTTING SYSTEMS
64823 GROSS-UMSTADT GERMANY

286.225
MultiTherm 4000
Eurodecoupe

emergency stop loop

drawing number 723.85638		page	2
assembly section =	BA4	location +	S1
last page 2		continuation page	=BA5/1

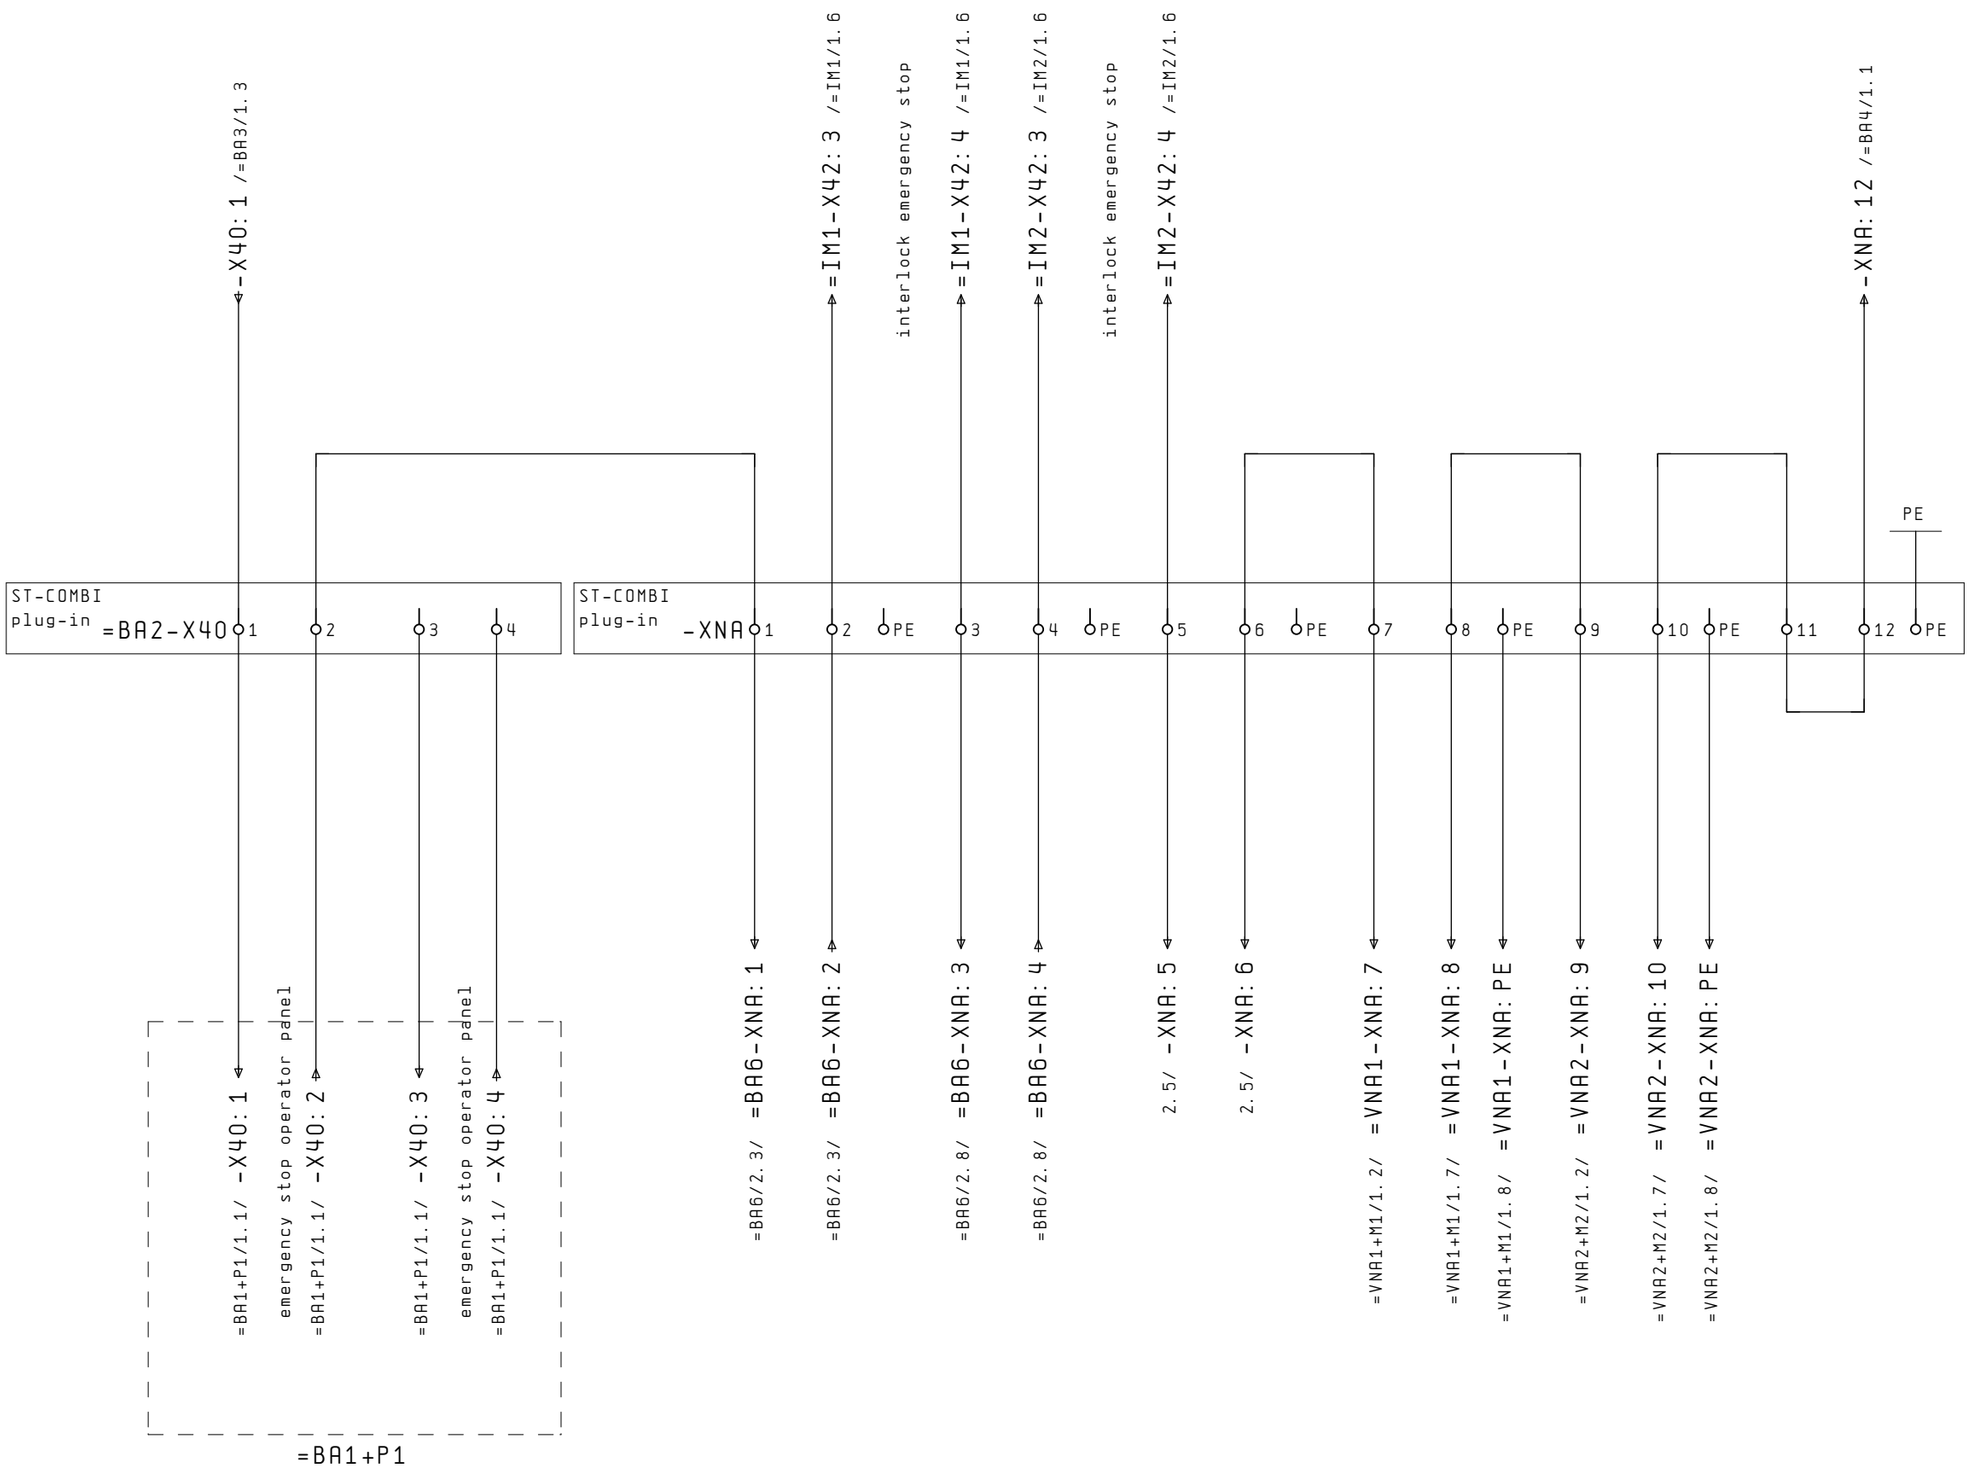

control wiring without specifications has to be wired with AWG 20

			creation date	26.10.2007
			editor	Hennig
001	05.03.08	Hennig	printout	27.03.08
change	date	name	revisor	
previous page =BA4/2		total pages 174	last editor	KRU

MESSER CUTTING SYSTEMS
64823 GROSS-UMSTADT GERMANY

286.225
MultiTherm 4000
Eurodecoupe

emergency stop loop


drawing number	723.85638	page	1
assembly section =	BA5	location +	S1
last page	2	continuation page	2

1.4/ -XNA:5
1.4/ -XNA:6

+M1

-WRL2
OELFLEX
3x0,5mm²

-RL2
emergency
cord rear



on wheel housing

emergency cord rear

control wiring without specifications has to be wired with AWG 20

			creation date	26.10.2007	
			editor	Hennig	
001	05.03.08	Hennig	printout	27.03.08	
change	date	name	revisor		
previous page 1		total pages 174		last editor KRU	

MESSER CUTTING SYSTEMS
64823 GROSS-UMSTADT GERMANY

286.225
MultiTherm 4000
Eurodecoupe

emergency cord

drawing number 723.85638		page	2
assembly section = BA5		location +	S1
last page 2	continuation page	=BA6/1	

=CA1

-C108
=CA1/4.1
KL2408
digital output terminals
24VDC 0,5A
DIGITAL OUTPUT
light barrier
bypass
=CA1/4.1
O7:4

-C103
=CA1/3.1
KL1408
digital input terminals
24VDC, 3ms
DIGITAL INPUT
bypass
key switch
=CA1/3.1
I2:5

-C103
=CA1/3.1
KL1408
digital input terminals
24VDC, 3ms
DIGITAL INPUT
light barriers
disabled
=CA1/3.1
I3:2

-C108
=CA1/4.1
KL2408
digital output terminals
24VDC 0,5A
DIGITAL OUTPUT
buzzer
=CA1/4.1
O8:8

-N1GND /=BA2/4.7
-N124VDC /=BA2/3.4
-N1:14 /2.3
-N1:15 /2.4
-N1:3 /=BA2/6.7
-X71:2 /=BA2/4.7

1 5 7 GND
2 12 24VDC
14 15 light barrier bypass
4 piercing oxygen
6 piercing plasma
3 bypass key switch
13

PE

ST-COMBI
plug-in
-X71 1 2 PE

-WX71
OELFLEX

-H1
buzzer
X1 X2
-H1

H5133
light barriers fade-out at piercing

-N1
72290128

control wiring without specifications has to be wired with AWG 20


			creation date	26.10.2007	
			editor	Hennig	
001	05.03.08	Hennig	printout	27.03.08	
change	date	name	revisor		
previous page =BA5/2		total pages 174	last editor KRU		

MESSER CUTTING SYSTEMS
64823 GROSS-UMSTADT GERMANY

286.225
MultiTherm 4000
Eurodecoupe

light barriers

drawing number 723.85638 | page 1
assembly section = BA6 | location + S1
last page 2 | continuation page 2

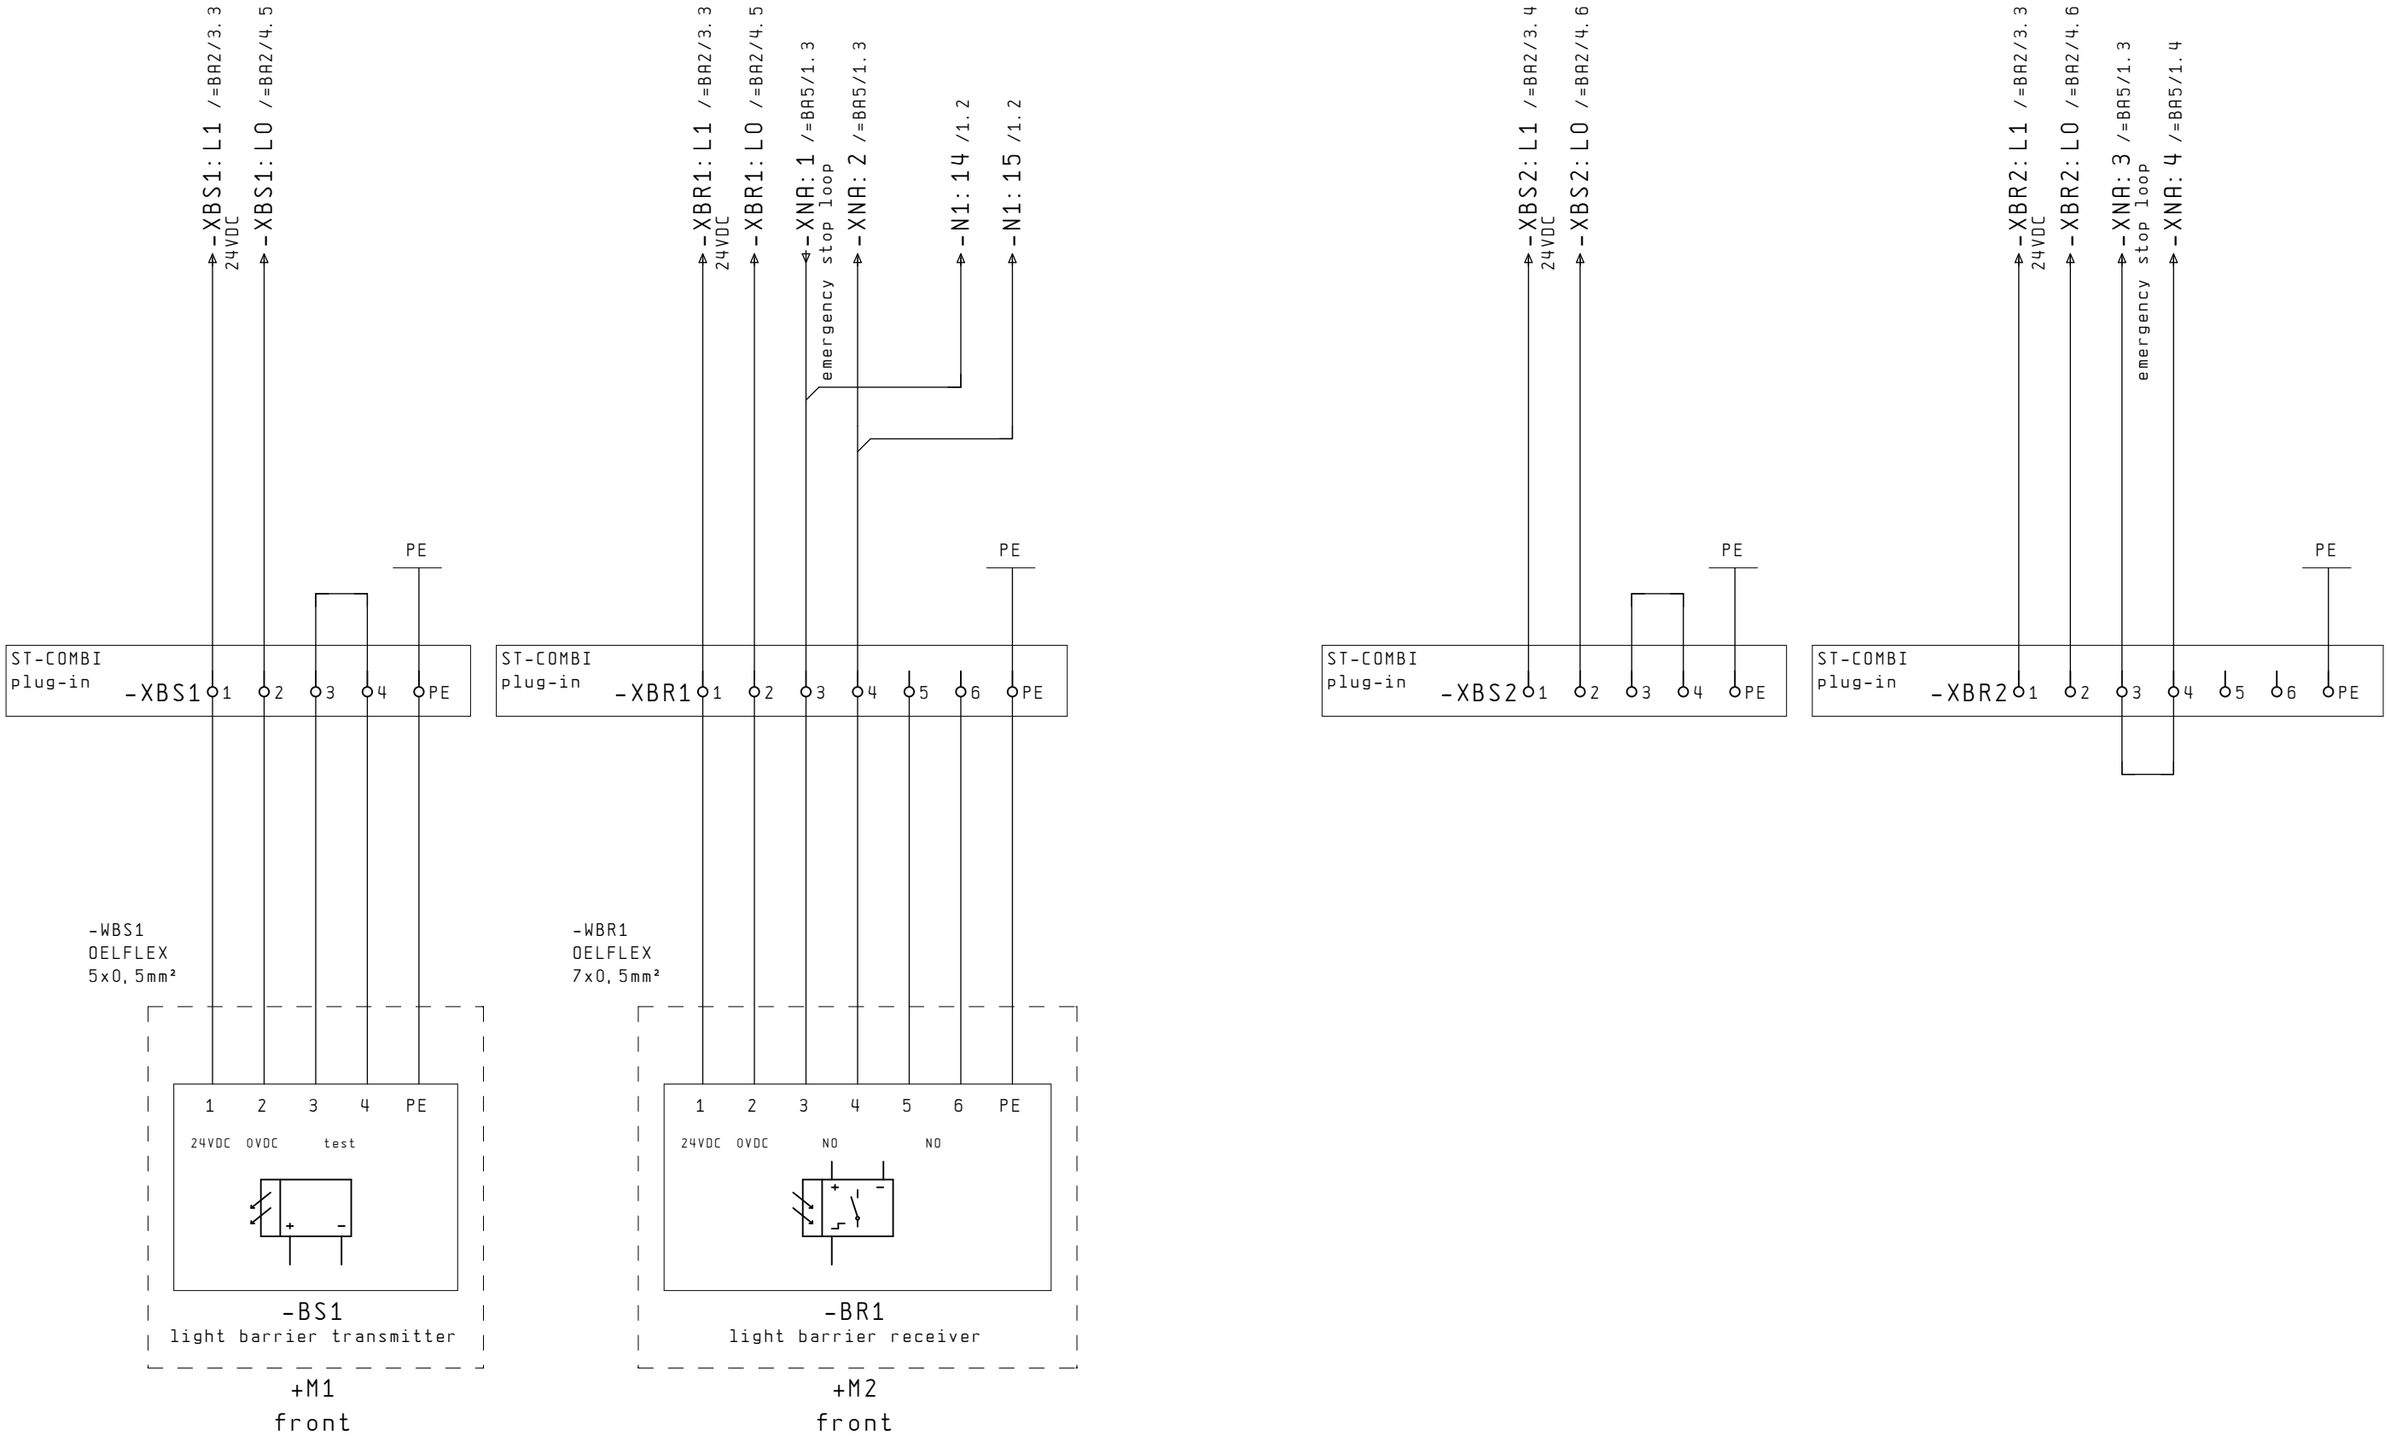

control wiring without specifications has to be wired with AWG 20


			creation date	26.10.2007
			editor	Hennig
001	05.03.08	Hennig	printout	27.03.08
change	date	name	revisor	
previous page 1		total pages 174	last editor	KRU

MESSER CUTTING SYSTEMS
64823 GROSS-UMSTADT GERMANY

286.225
MultiTherm 4000
Eurodecoupe

light barriers

drawing number	723.85638	page	2
assembly section =	BA6	location +	S1
last page 2		continuation page	=CA0/1

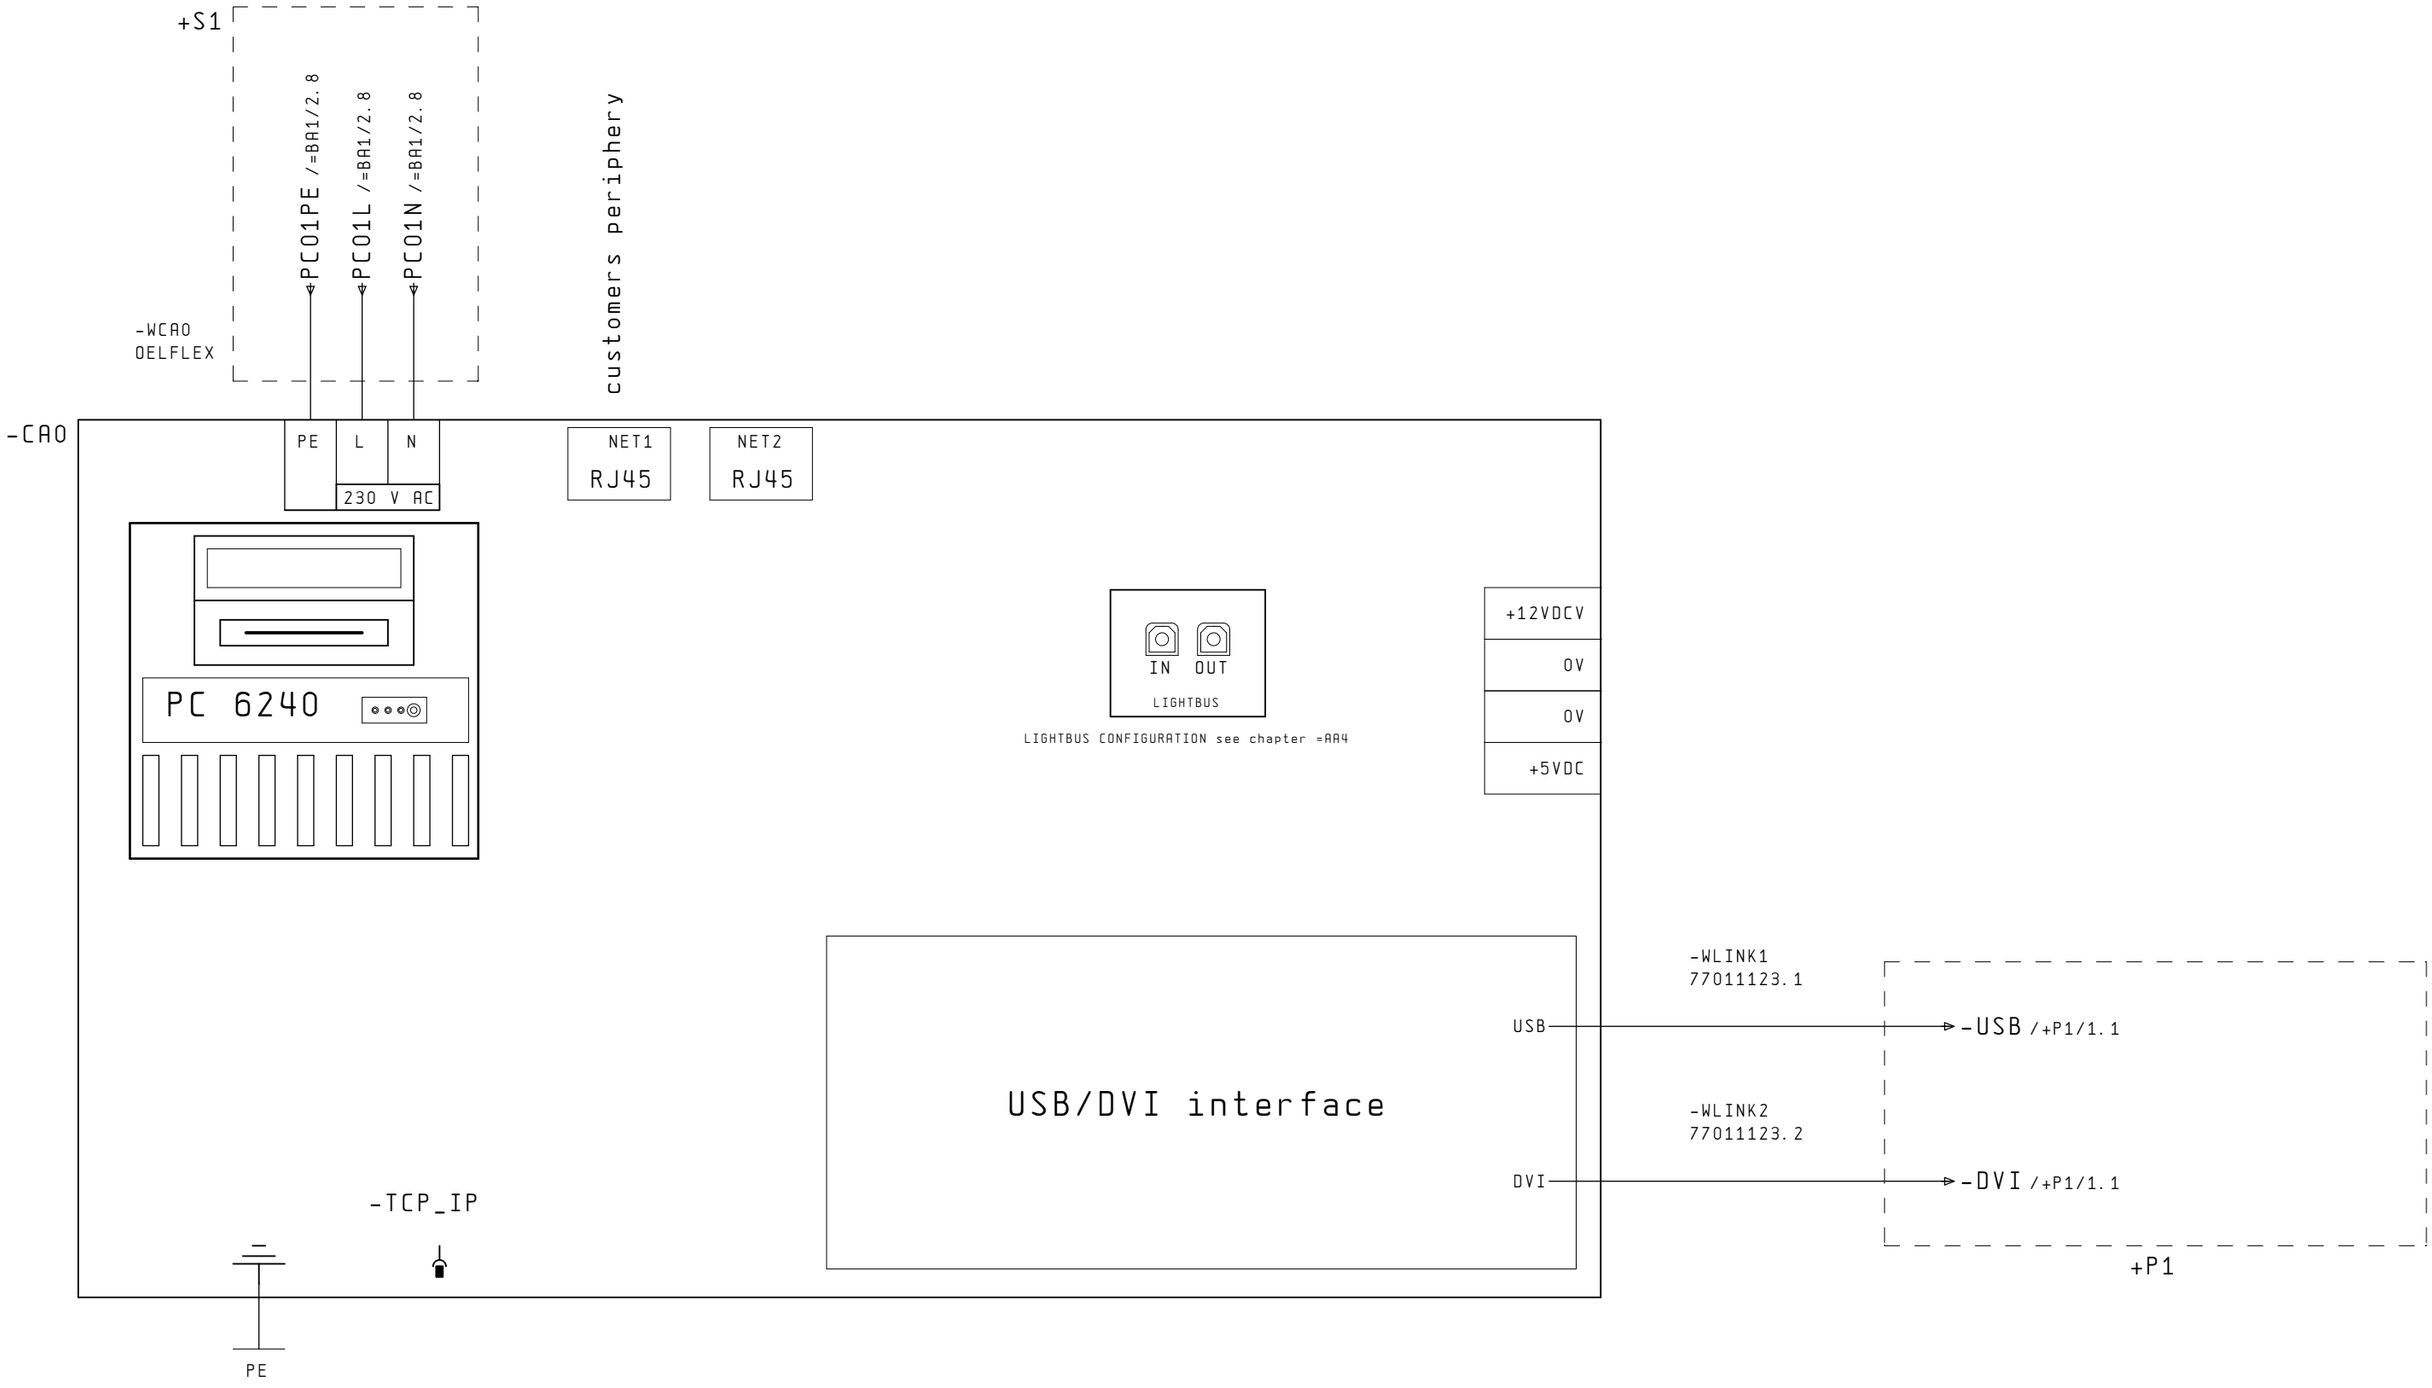

control wiring without specifications has to be wired with AWG 20


			creation date 26.10.2007		
			editor Hennig		
001	05.03.08	Hennig	printout 27.03.08		
change	date	name	revisor		
previous page =BA6/2		total pages 174	last editor KRU		

MESSER CUTTING SYSTEMS
64823 GROSS-UMSTADT GERMANY

286.225
MultiTherm 4000
Eurodecoupe

PLC USB/DVI

drawing number 723.85638		page	1
assembly section =	CA0	location +	S1
last page 1		continuation page	+P1/1

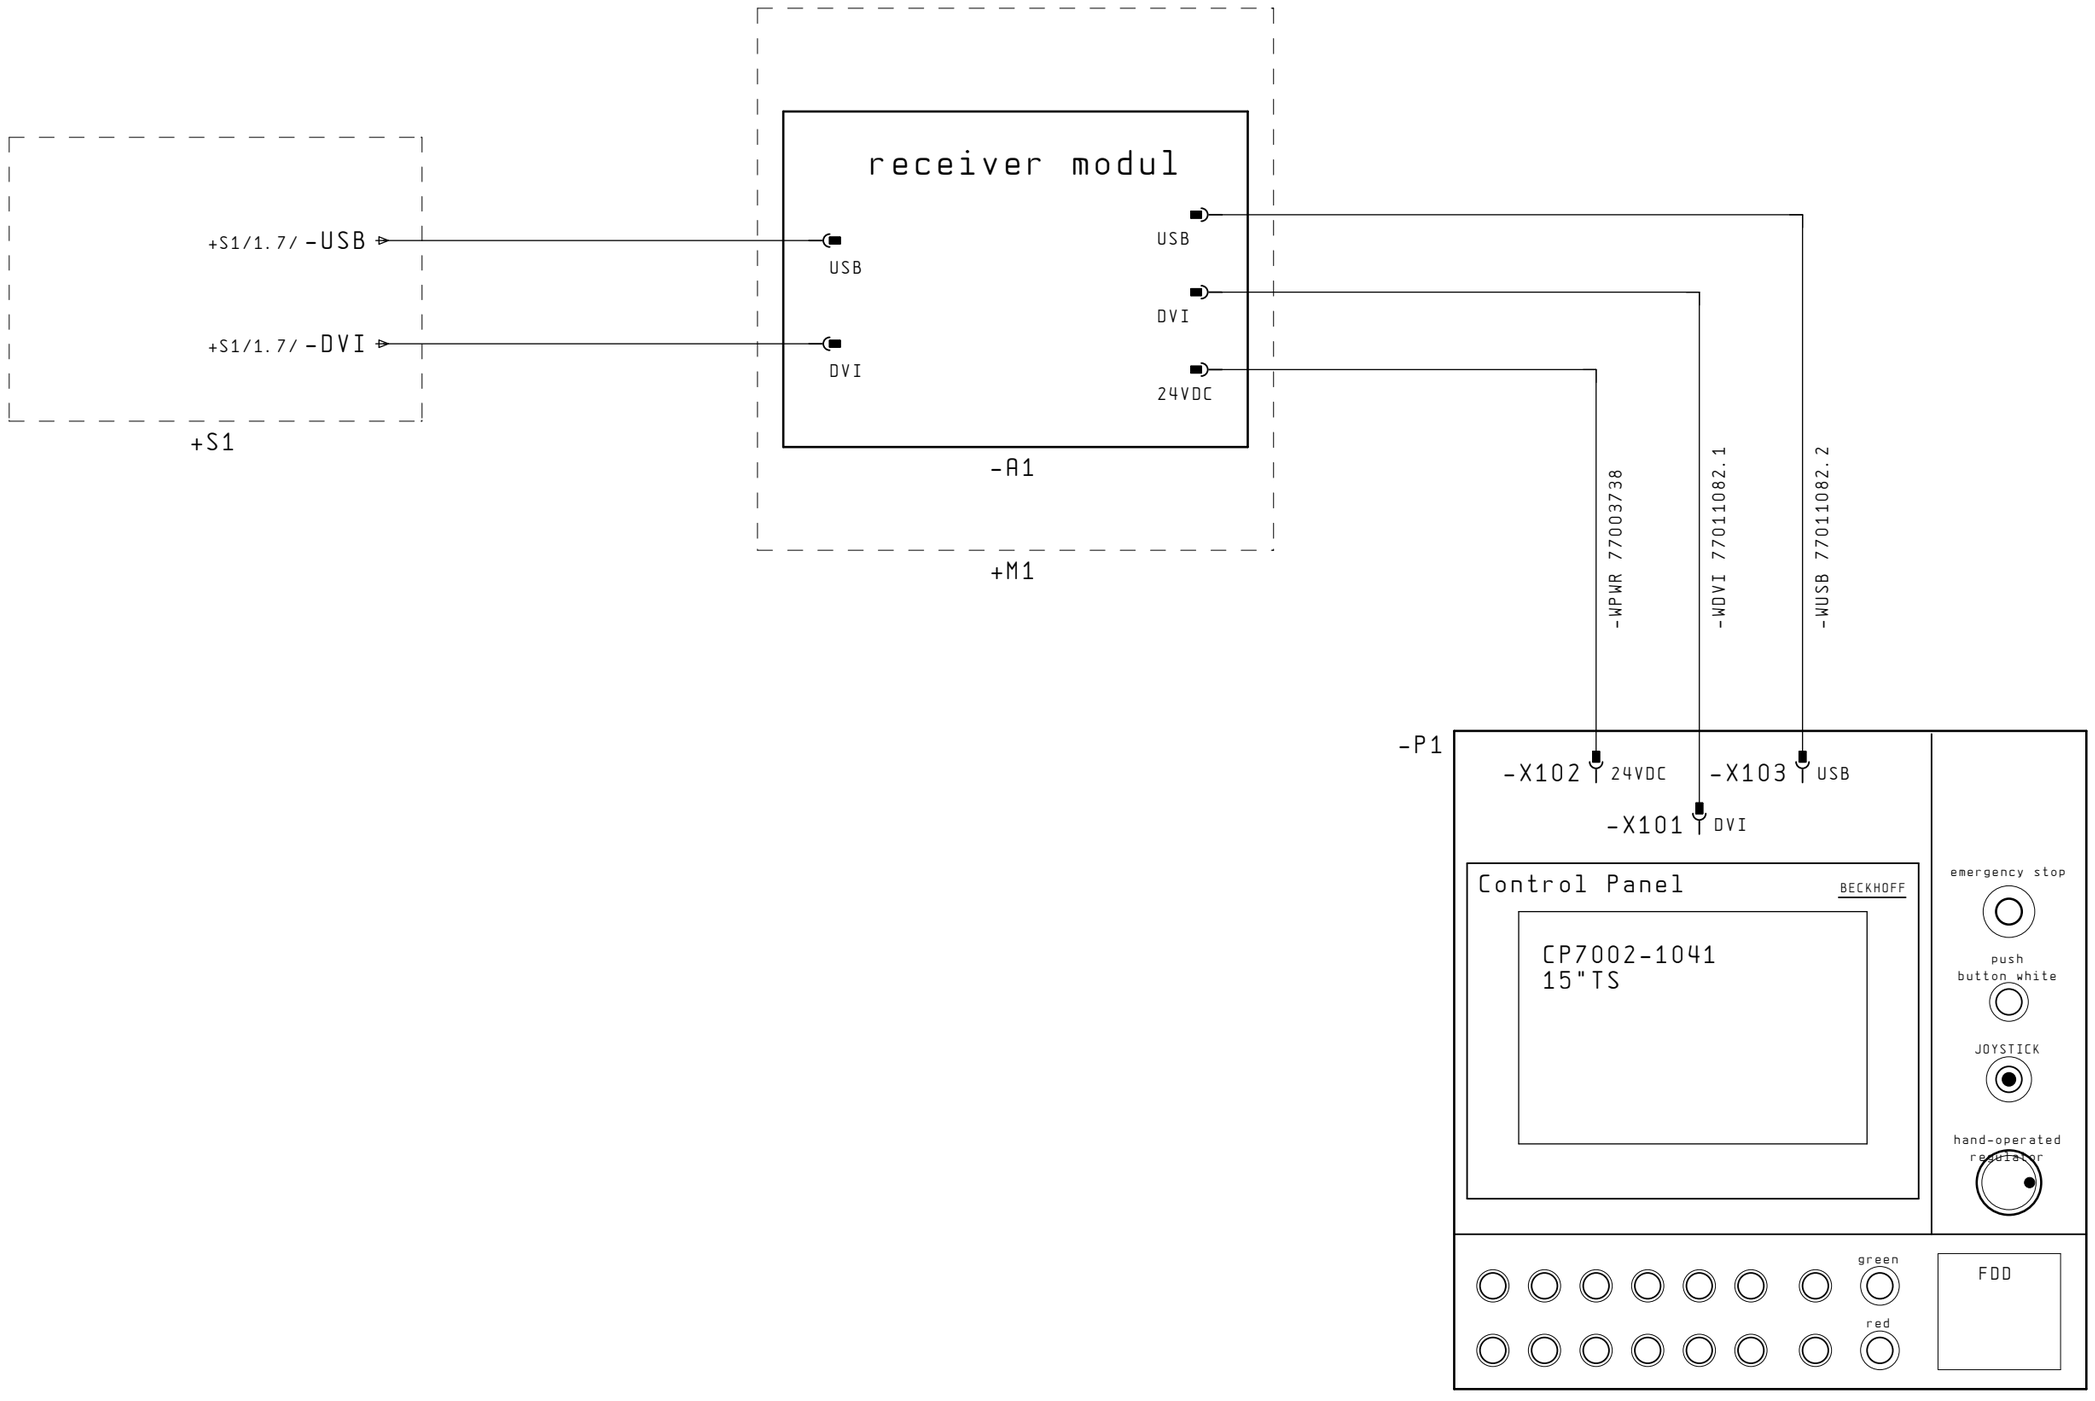

control wiring without specifications has to be wired with AWG 20

			creation date	26.10.2007
			editor	Hennig
001	05.03.08	Hennig	printout	27.03.08
change	date	name	revisor	
previous page +S1/1		total pages 174	last editor	KRU


MESSER CUTTING SYSTEMS
64823 GROSS-UMSTADT GERMANY

286.225
MultiTherm 4000
Eurodecoupe

operation desk USB/DVI

drawing number 723.85638	page 1
assembly section = CA0	location + P1
last page 1	continuation page =CA1+S1/1

-C100	2.1	BUS TERMINAL
-C101	3.1	watchdog
-C102	3.5	DIGITAL INPUT
-C103	3.1	DIGITAL INPUT
-C104	3.5	DIGITAL INPUT
-C107	2.3	POWER FEED TERMINAL
-C108	4.1	DIGITAL OUTPUT
-C109	4.5	DIGITAL OUTPUT
-C110	4.1	DIGITAL OUTPUT
-C190	5.1	ENCODER
-C191	5.5	ANALOG OUTPUT
-C192	5.1	ENCODER
-C193	5.5	ANALOG OUTPUT
-C224	6.1	RELAY OUTPUT
-C225	6.5	RELAY OUTPUT
-C904	6.1	RELAY OUTPUT
-EK1	KL9010	CONCLUSION TERMINAL

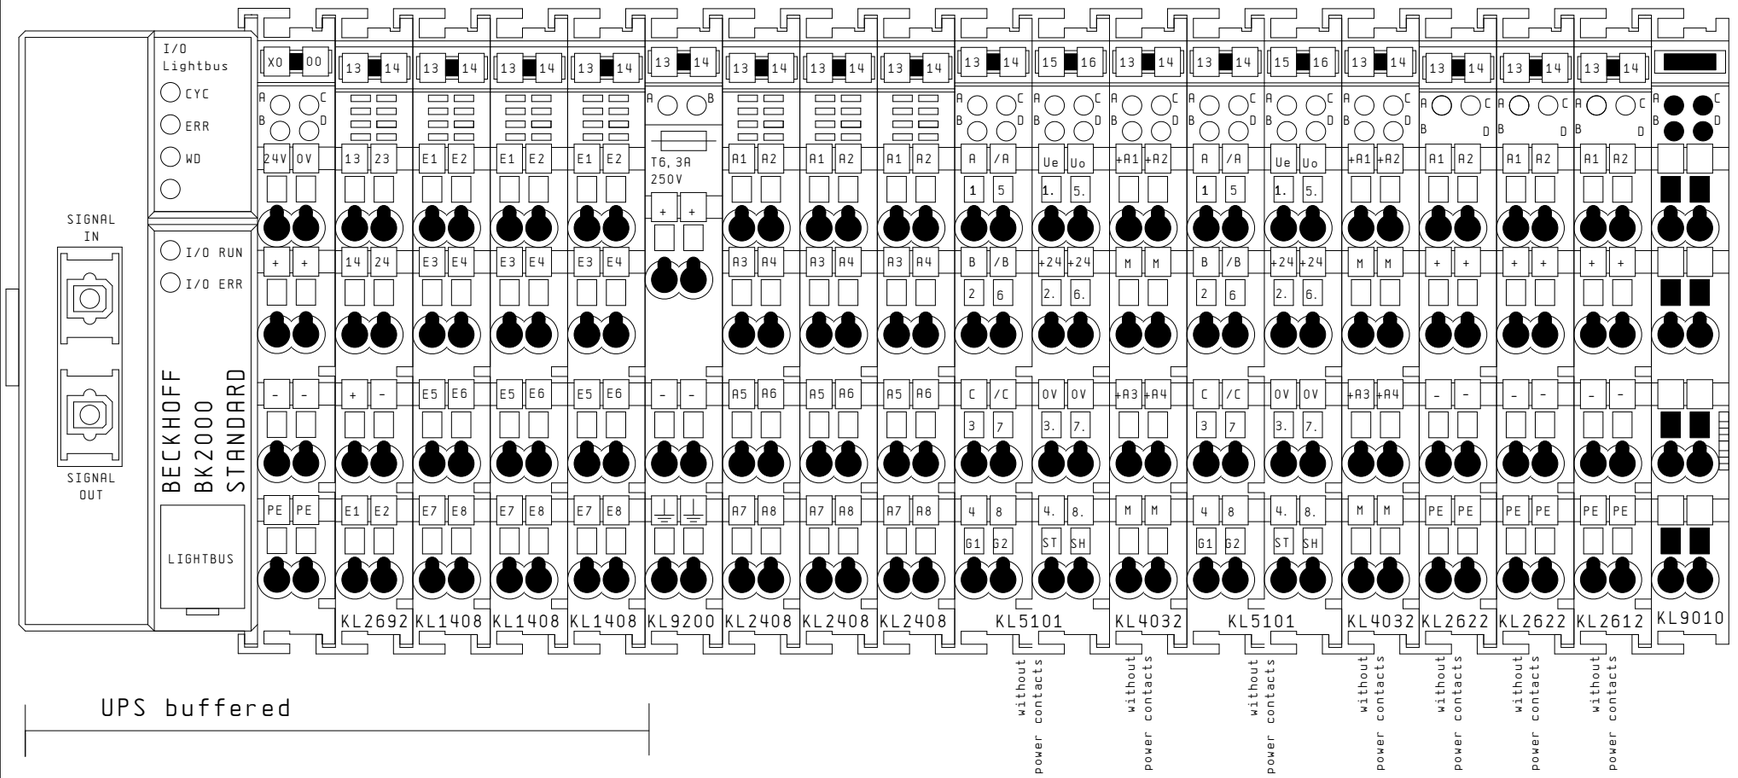

control wiring without specifications has to be wired with AWG 20

			creation date	26.10.2007	
			editor	Hennig	
001	05.03.08	Hennig	printout	27.03.08	
change	date	name	revisor		
previous page =CA0+P1/1		total pages 174	last editor	E4A	


MESSER CUTTING SYSTEMS
64823 GROSS-UMSTADT GERMANY

286.225
MultiTherm 4000
Eurodecoupe


bus terminal overview

drawing number	723.85638	page	1
assembly section =	CA1	location +	S1
last page	6	continuation page	2

-C100
1.1
BK2000

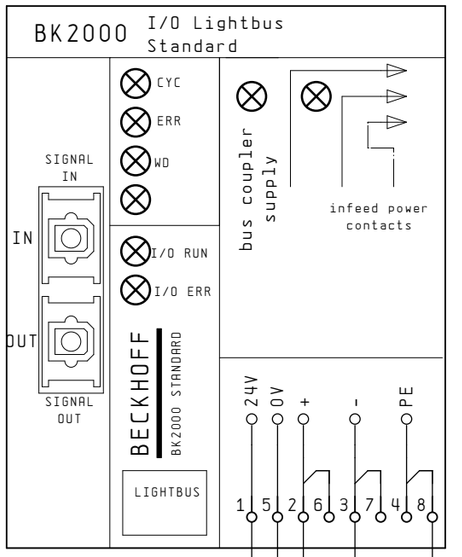

-C107
1.2
KL9200

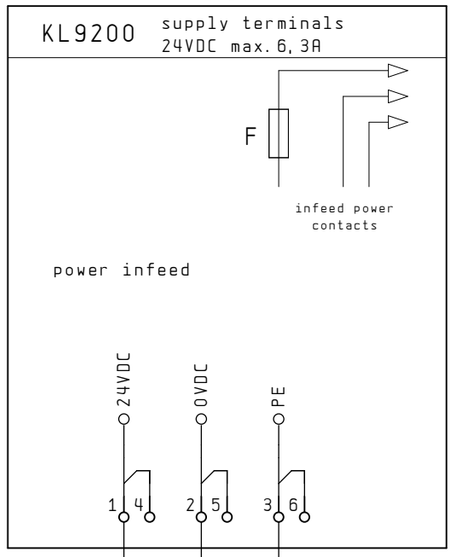

=BA1/7.1/ -C100L1
=BA2/4.4/ -C100L01

=BA2/1.1/ -C107L1

=BA2/4.4/ -C107L0

UPS buffered

control wiring without specifications has to be wired with AWG 20

			creation date 26.10.2007		
			editor Hennig		
001	05.03.08	Hennig	printout 27.03.08		
change	date	name	revisor		
previous page 1		total pages 174	last editor KRU		

MESSER CUTTING SYSTEMS
64823 GROSS-UMSTADT GERMANY

286.225
MultiTherm 4000
Eurodecoupe

bus terminal overview

drawing number 723.85638		page	2
assembly section =	CA1	location +	S1
last page 6		continuation page	3

-C101

=BA3/1.2
KL2692
24VDC

WATCHDOG

E1: 4	=BA3/1.2	KL2692	watchdog enable
13: 1	=BA3/1.2	KL2692	
14: 2	=BA3/1.3	KL2692	
E2: 8	=BA3/1.3	KL2692	spare
23: 5	=BA3/1.3	KL2692	
24: 6	=BA3/1.4	KL2692	

-C102

=BA4/1.7
KL1408
24VDC

DIGITAL INPUT

I1: 1	=HX1/2.5	KL1408	+ overtravel
I2: 5	=HX1/2.6	KL1408	- overtravel
I3: 2	=HX1/2.7	KL1408	home switch
I4: 6	=HY1/2.5	KL1408	+ overtravel
I5: 3	=HY2/2.6	KL1408	- overtravel
I6: 7	=HY1/2.7	KL1408	home switch
I7: 4	=HX1/2.1	KL1408	ready
I8: 8	=BA4/1.7	KL1408	power is on

-C103

=BA3/1.6
KL1408
24VDC

DIGITAL INPUT

I1: 1	=HY2/2.7	KL1408	home switch
I2: 5	=BA6/1.5	KL1408	key switch
I3: 2	=BA6/1.6	KL1408	light barriers disabled
I4: 6	=BA3/1.8	KL1408	supply voltage
I5: 3	=BA3/1.7	KL1408	pressure ok
I6: 7	=MB1/1.1	KL1408	exhaust
I7: 4	=EB1/1.4	KL1408	torch touch
I8: 8	=EB2/1.4	KL1408	torch touch

-C104

1.2
KL1408
24VDC

DIGITAL INPUT

I1: 1	=FG1/1.4	KL1408	upper limit
I2: 5	=FG1/2.3	KL1408	height found
I3: 2	=FG1/1.2	KL1408	collision
I4: 6	=FG1/2.4	KL1408	upper limit nc
I5: 3	=FG2/1.4	KL1408	upper limit
I6: 7	=FG2/2.3	KL1408	height found
I7: 4	=FG2/1.2	KL1408	collision
I8: 8	=FG2/2.4	KL1408	upper limit nc



control wiring without specifications has to be wired with AWG 20

			creation date	26.10.2007	
			editor	Hennig	
001	05.03.08	Hennig	printout	27.03.08	
change	date	name	revisor		
previous page 2		total pages 174	last editor E1A		

MESSER CUTTING SYSTEMS
64823 GROSS-UMSTADT GERMANY

286.225
MultiTherm 4000
Eurodecoupe

bus terminal overview

drawing number 723.85638		page	3
assembly section = CA1		location +	S1
last page 6	continuation page 4		

-C108

=BA3/1.0
KL2408
24VDC

DIGITAL OUTPUT

01: 1	=HX1/2.2	KL2408	enable
02: 5	=HX1/2.4	KL2408	reset
03: 2	=BA3/1.1	KL2408	watchdog
04: 6	=LD2/1.1	KL2408	laserpointer
05: 3	=EB1/1.3	KL2408	torch touch enable
06: 7	=EB2/1.3	KL2408	torch touch enable
07: 4	=BA6/1.3	KL2408	light barrier bypass
08: 8	=BA6/1.8	KL2408	buzzer

-C109

1.3
KL2408
24VDC

DIGITAL OUTPUT


01: 1	=FG1/1.6	KL2408	up
02: 5	=FG1/1.7	KL2408	down
03: 2	=FG1/1.9	KL2408	auto hight
04: 6	=FG1/1.3	KL2408	creep speed
05: 3	=FG2/1.6	KL2408	up
06: 7	=FG2/1.7	KL2408	down
07: 4	=FG2/1.9	KL2408	auto hight
08: 8	=FG2/1.3	KL2408	creep speed

-C110

1.3
KL2408
24VDC

DIGITAL OUTPUT

01: 1	=LD1/1.1	KL2408	laserpointer
02: 5			
03: 2			
04: 6			
05: 3			
06: 7			
07: 4			
08: 8			



control wiring without specifications has to be wired with AWG 20

			creation date	26.10.2007	
			editor	Hennig	
001	05.03.08	Hennig	printout	27.03.08	
change	date	name	revisor		
previous page 3		total pages 174	last editor E4A		

MESSER CUTTING SYSTEMS
64823 GROSS-UMSTADT GERMANY

286.225
MultiTherm 4000
Eurodecoupe

bus terminal overview

drawing number 723.85638 | page 4
assembly section = CA1 | location + S1
last page 6 | continuation page 5

-C190

1.3
KL5101

ENCODER
5VDC

without power contacts

I1:1	=FG1/2.5	KL5101	increment_A	
I1:2	=FG1/2.5	KL5101	increment_B	
I1:3	=FG1/2.6	KL5101	increment_0	
I1:4	=FG1/2.6	KL5101	latch	
I1:5	=FG1/2.6	KL5101	increment_A'	
I1:6	=FG1/2.6	KL5101	increment_B'	
I1:7	=FG1/2.7	KL5101	increment_0'	
I1:8	=FG1/2.7	KL5101	gate	

-C191

1.4
KL4032

ANALOG OUTPUT

without power contacts

O1:1+	=FG1/2.1	KL4032	nominal value
O1:3M	=FG1/2.1	KL4032	
O1:4SH	=FG1/2.2	KL4032	
O2:5+			
O2:7M			
O2:8SH			

-C192

1.4
KL5101

ENCODER
5VDC

without power contacts

I1:1	=FG2/2.5	KL5101	increment_A	
I1:2	=FG2/2.5	KL5101	increment_B	
I1:3	=FG2/2.6	KL5101	increment_0	
I1:4	=FG2/2.6	KL5101	latch	
I1:5	=FG2/2.6	KL5101	increment_A'	
I1:6	=FG2/2.6	KL5101	increment_B'	
I1:7	=FG2/2.7	KL5101	increment_0'	
I1:8	=FG2/2.7	KL5101	gate	

-C193


1.5
KL4032

ANALOG OUTPUT

without power contacts

O1:1+	=FG2/2.1	KL4032	nominal value
O1:3M	=FG2/2.1	KL4032	
O1:4SH	=FG2/2.2	KL4032	
O2:5+			
O2:7M			
O2:8SH			

position of terminals

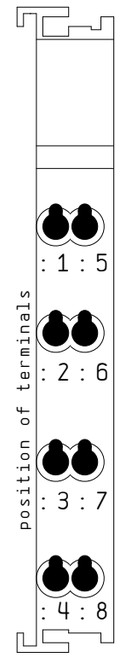

control wiring without specifications has to be wired with AWG 20

			creation date	26.10.2007			
			editor	Hennig			
001	05.03.08	Hennig	printout	27.03.08			
change	date	name	revisor				
previous page	4	total pages	174	last editor	KRU		

MESSER CUTTING SYSTEMS
64823 GROSS-UMSTADT GERMANY

286.225
MultiTherm 4000
Eurodecoupe

bus terminal overview

drawing number	723.85638	page	5
assembly section =	CA1	location +	S1
last page	6	continuation page	6

-C224
1.5
KL2622
24VDC

RELAY OUTPUT
2NO
without power contacts

O1: 1	=FF1/1.6	KL2622	lifting cylinder
O1: 2	=FF1/1.6	KL2622	
O2: 5	=FF1/1.7	KL2622	spare
O2: 6	=FF1/1.7	KL2622	

-C225
1.5
KL2622
24VDC


RELAY OUTPUT
2NO
without power contacts

O1: 1	=FF2/1.6	KL2622	lifting cylinder
O1: 2	=FF2/1.6	KL2622	
O2: 5	=FF2/1.7	KL2622	spare
O2: 6	=FF2/1.7	KL2622	

-C904
1.6
KL2612
24VDC

RELAY OUTPUT
2W
without power contacts

O1: 1	=MB1/1.3	KL2612	exhaustion ON
O1: 2	=MB1/1.3	KL2612	com
O1: 3	=MB1/1.3	KL2612	nc
O2: 5	=MB1/1.4	KL2612	no
O2: 6	=MB1/1.4	KL2612	com
O2: 7	=MB1/1.4	KL2612	exhaustion OFF



control wiring without specifications has to be wired with AWG 20

			creation date	26.10.2007	
			editor	Hennig	
001	05.03.08	Hennig	printout	27.03.08	
change	date	name	revisor		
previous page 5		total pages 174		last editor WNA	


MESSER CUTTING SYSTEMS
64823 GROSS-UMSTADT GERMANY

286.225
MultiTherm 4000
Eurodecoupe

bus terminal overview

drawing number 723.85638		page	6
assembly section = CA1		location +	S1
last page 6	continuation page =CA41+S41/1		

-C400 =IM1/1.3 bus coupler
-C401 2.1 DIGITAL INPUT
-C402 2.5 RELAY OUTPUT
-C403 2.1 ANALOG INPUT
-C404 2.5 RELAY OUTPUT
-C405 2.1 RELAY OUTPUT
-C416 2.5 RS 422 / RS 485
-EK CONCLUSION TERMINAL

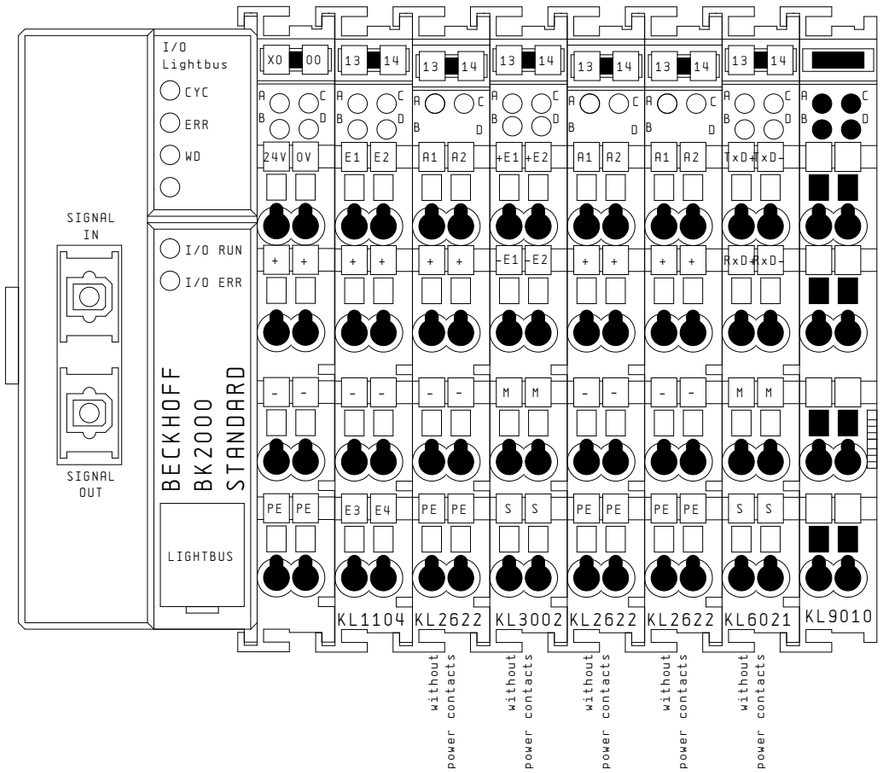

control wiring without specifications has to be wired with AWG 20

			creation date 26.10.2007	MESSER CUTTING SYSTEMS 64823 GROSS-UMSTADT GERMANY	286.225 MultiTherm 4000 Eurodecoupe
			editor Hennig		
001	05.03.08	Hennig	printout 27.03.08		
change	date	name	revisor		
previous page =CA1+S1/6		total pages 174	last editor KRU		

interlock HPR 130/260

drawing number 723.85638 | page 1

assembly section = CA41 | location + S41

last page 2 | continuation page 2

-C401

1.1
KL1104
24VDC

DIGITAL INPUT

I1: 1	=IM1/3.1	KL1104	arc transfered
I2: 5	=IM1/3.3	KL1104	plasma ready
I3: 4			
I4: 8			

-C402

1.1
KL2622
24VDC

RELAY OUTPUT
2NO
without power contacts

O1: 1	=IM1/3.4	KL2622	plasma start
O1: 2	=IM1/3.4	KL2622	com
O2: 5	=IM1/3.5	KL2622	plasma hold
O2: 6	=IM1/3.5	KL2622	com

-C403

1.2
KL3002

ANALOG INPUT
without power contacts
-10V...+10V

I1: 1+	=IM1/3.6	KL3002	workpiece
I1: 2-	=IM1/3.7	KL3002	
I1: 3M	=IM1/3.7	KL3002	
I1: 4SH	=IM1/3.7	KL3002	
I2: 5+	=IM1/3.8	KL3002	spare
I2: 6-	=IM1/3.8	KL3002	
I2: 7M	=IM1/3.9	KL3002	
I2: 8SH	=IM1/3.9	KL3002	

-C404

1.2
KL2622
24VDC

RELAY OUTPUT
2NO
without power contacts

O1: 1	=IM1/4.1	KL2622	edge
O1: 2	=IM1/4.2	KL2622	com
O2: 5	=IM1/4.2	KL2622	pierce complete
O2: 6	=IM1/4.3	KL2622	com

-C405

1.2
KL2622
24VDC

RELAY OUTPUT
2NO
without power contacts

O1: 1	=IM1/4.4	KL2622	remote ON
O1: 2	=IM1/4.4	KL2622	com
O2: 5	=IM1/4.5	KL2622	
O2: 6	=IM1/4.5	KL2622	

-C416

1.3
KL6021

RS 422
RS 485
without power contacts

TXD+: 1	=IM1/4.7	KL6021	TXD+
TXD-: 5	=IM1/4.7	KL6021	TXD-
RXD+: 2	=IM1/4.8	KL6021	RXD+
RXD-: 6	=IM1/4.8	KL6021	RXD-
3/7	=IM1/4.9	KL6021	GND
4/8	=IM1/4.9	KL6021	SHIELD

control wiring without specifications has to be wired with AWG 20

			creation date	26.10.2007		
			editor	Hennig		
001	05.03.08	Hennig	printout	27.03.08		
change	date	name	revisor			
previous page 1		total pages 174		last editor KRU		


MESSER CUTTING SYSTEMS
64823 GROSS-UMSTADT GERMANY

286.225
MultiTherm 4000
Eurodecoupe

interlock HPR 130/260

drawing number 723.85638		page	2
assembly section = CA41		location +	S41
last page 2	continuation page	=CA42+S42/1	

-C400 =IM2/1.3 bus coupler
-C401 2.1 DIGITAL INPUT
-C402 2.5 RELAY OUTPUT
-C403 2.1 ANALOG INPUT
-C404 2.5 RELAY OUTPUT
-C405 2.1 RELAY OUTPUT
-C416 2.5 RS 422 / RS 485
-EK CONCLUSION TERMINAL

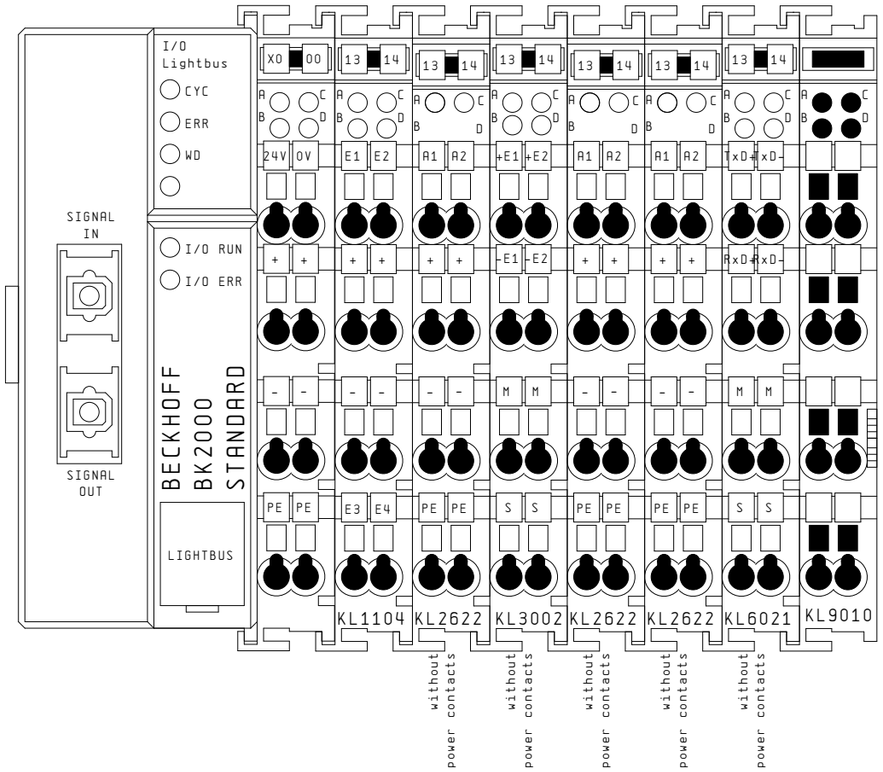

control wiring without specifications has to be wired with AWG 20

			creation date 26.10.2007	MESSER CUTTING SYSTEMS 64823 GROSS-UMSTADT GERMANY	286.225 MultiTherm 4000 Eurodecoupe
			editor Hennig		
001	05.03.08	Hennig	printout 27.03.08		
change	date	name	revisor		
previous page	CA41+S41/2	total pages 174	last editor KRU		

interlock HPR 130/260

drawing number 723.85638 | page 1
assembly section = CA42 | location + S42
last page 2 | continuation page 2

-C401

1.1
KL1104
24VDC

DIGITAL INPUT

I1: 1	=IM2/3.1	KL1104	arc transfered
I2: 5	=IM2/3.3	KL1104	plasma ready
I3: 4			
I4: 8			

-C402

1.1
KL2622
24VDC

RELAY OUTPUT

2NO

without power contacts

O1: 1	=IM2/3.4	KL2622	plasma start
O1: 2	=IM2/3.4	KL2622	com
O2: 5	=IM2/3.5	KL2622	plasma hold
O2: 6	=IM2/3.5	KL2622	com

-C403

1.2
KL3002

ANALOG INPUT

without power contacts

I1: 1+	=IM2/3.6	KL3002	workpiece
I1: 2-	=IM2/3.7	KL3002	
I1: 3M	=IM2/3.7	KL3002	
I1: 4SH	=IM2/3.7	KL3002	
I2: 5+	=IM2/3.8	KL3002	spare
I2: 6-	=IM2/3.8	KL3002	
I2: 7M	=IM2/3.9	KL3002	
I2: 8SH	=IM2/3.9	KL3002	

-10V...+10V

-C404

1.2
KL2622
24VDC

RELAY OUTPUT

2NO

without power contacts

O1: 1	=IM2/4.1	KL2622	edge
O1: 2	=IM2/4.2	KL2622	com
O2: 5	=IM2/4.2	KL2622	pierce complete
O2: 6	=IM2/4.3	KL2622	com

-C405

1.2
KL2622
24VDC

RELAY OUTPUT

2NO

without power contacts

O1: 1	=IM2/4.4	KL2622	remote ON
O1: 2	=IM2/4.4	KL2622	com
O2: 5	=IM2/4.5	KL2622	
O2: 6	=IM2/4.5	KL2622	

-C416

1.3
KL6021

RS 422
RS 485

without power contacts

TXD+: 1	=IM2/4.7	KL6021	TXD+
TXD-: 5	=IM2/4.7	KL6021	TXD-
RXD+: 2	=IM2/4.8	KL6021	RXD+
RXD-: 6	=IM2/4.8	KL6021	RXD-
3/7	=IM2/4.9	KL6021	GND
4/8	=IM2/4.9	KL6021	SHIELD

control wiring without specifications has to be wired with AWG 20

			creation date	26.10.2007	
			editor	Hennig	
001	05.03.08	Hennig	printout	27.03.08	
change	date	name	revisor		
previous page 1		total pages 174	last editor KRU		

MESSER CUTTING SYSTEMS
64823 GROSS-UMSTADT GERMANY

286.225
MultiTherm 4000
Eurodecoupe

interlock HPR 130/260

drawing number 723.85638		page	2
assembly section = CA42		location +	S42
last page 2	continuation page =EB1+S1/1		

=CA1

-C108
=CA1/4.1
KL2408

digital output terminals
24VDC 0,5A

DIGITAL OUTPUT

torch touch
enable

=CA1/4.1
O5:3

-C103
=CA1/3.1
KL1408

digital input terminals
24VDC, 3ms

DIGITAL INPUT

torch touch

=CA1/3.1
I7:4

=BA2/4.3/ -OVTOM

-TOM

TORCH TOUCH MODUL
768 01051

4 OV
3 TTE +24VDC
5 output

X1
Nozzle
workpiece
1
2

PE
MASSE GND

cabinet
ground bolt

-WTOM
Einzeladern
1x4

-L1
HF-FILTER

-NOZ

torch cover
with quick-connect receptacle

+F1

control wiring without specifications has to be wired with AWG 20

			creation date	26.10.2007	
			editor	Hennig	
001	05.03.08	Hennig	printout	27.03.08	
change	date	name	revisor		
previous page	=CA42+S42/2	total pages	174	last editor	KRU

MESSER CUTTING SYSTEMS
64823 GROSS-UMSTADT GERMANY

286.225
MultiTherm 4000
Eurodecoupe

torch touch module

drawing number	723.85638	page	1
assembly section =	EB1	location +	S1
last page	1	continuation page	=EB2/1

=CA1

-C108
=CA1/4.1
KL2408
digital output terminals
24VDC 0,5A
DIGITAL OUTPUT
torch touch
enable
=CA1/4.1
O6:7

-C103
=CA1/3.1
KL1408
digital input terminals
24VDC, 3ms
DIGITAL INPUT
torch touch
=CA1/3.1
I8:8

=BA2/4.4/ -OVTOM

-TOM
TORCH TOUCH MODUL
768 01051
4 OV
3 TTE +24VDC
5 output
X1
Nozzle
workpiece
1
2
PE
MASSE GND
cabinet ground bolt

-WTOM
Einzeladern
1x4

-L1
HF-FILTER
-NOZ
torch cover
with quick-connect receptacle
+F1

control wiring without specifications has to be wired with AWG 20

			creation date	26.10.2007	
			editor	Hennig	
001	05.03.08	Hennig	printout	27.03.08	
change	date	name	revisor		
previous page =EB1/1		total pages 174		last editor KRU	

MESSER CUTTING SYSTEMS
64823 GROSS-UMSTADT GERMANY

286.225
MultiTherm 4000
Eurodecoupe

torch touch module

drawing number	723.85638	page	1
assembly section =	EB2	location +	S1
last page	1	continuation page	=FF1/1

=CA1

-C224
=CA1/6.1
KL2622

relay outputs 230VAC/30VDC, 2A

without power contacts

RELAY OUTPUT — lifting cylinder
=CA1/6.1 O1:1
=CA1/6.1 O1:2

RELAY OUTPUT — spare
=CA1/6.1 O2:5
=CA1/6.1 O2:6

=BA1/4.7/ -24VAC
permanent

=FF2-24VAC /=FF2/1.5

=VA1/1.2/ =VA1-X1:1

connected via
actor-sensor-box

control wiring without specifications has to be wired with AWG 20

			creation date	26.10.2007
			editor	Hennig
001	05.03.08	Hennig	printout	27.03.08
change	date	name	revisor	
previous page =EB2/1	total pages 174		last editor E1A	

MESSER CUTTING SYSTEMS
64823 GROSS-UMSTADT GERMANY

286.225
MultiTherm 4000
Eurodecoupe

lifting cylinder

drawing number 723.85638		page	1
assembly section = FF1		location +	S1
last page 1	continuation page =FF2/1		

=CA1

-C225
=CA1/6.5
KL2622

relay outputs 230VAC/30VDC, 2A

without power contacts

RELAY OUTPUT

lifting cylinder

=CA1/6.5 O1:1

=CA1/6.5 O1:2

RELAY OUTPUT

spare

=CA1/6.5 O2:5

=CA1/6.5 O2:6

=FF1/1.8/ -24VAC

permanent

=VA2/1.2/ =VA2-X1:1

connected via
actor-sensor-box

control wiring without specifications has to be wired with AWG 20

			creation date	26.10.2007	
			editor	Hennig	
001	05.03.08	Hennig	printout	27.03.08	
change	date	name	revisor		
previous page =FF1/1		total pages 174		last editor E1A	

MESSER CUTTING SYSTEMS
64823 GROSS-UMSTADT GERMANY

286.225
MultiTherm 4000
Eurodecoupe

lifting cylinder

drawing number 723.85638		page	1
assembly section = FF2		location +	S1
last page 1	continuation page =FG1/1		

=CA1

-C104
=CA1/3.5
KL1408
digital input terminals
24VDC, 3ms
DIGITAL INPUT
collision
=CA1/3.5
I3:2

-C109
=CA1/4.5
KL2408
digital output terminals
24VDC 0,5A
DIGITAL OUTPUT
creep speed
=CA1/4.5
O4:6

-C104
=CA1/3.5
KL1408
digital input terminals
24VDC, 3ms
DIGITAL INPUT
upper limit
=CA1/3.5
I1:1

-C109
=CA1/4.5
KL2408
digital output terminals
24VDC 0,5A
DIGITAL OUTPUT
up
=CA1/4.5
O1:1

-C109
=CA1/4.5
KL2408
digital output terminals
24VDC 0,5A
DIGITAL OUTPUT
down
=CA1/4.5
O2:5

-C109
=CA1/4.5
KL2408
digital output terminals
24VDC 0,5A
DIGITAL OUTPUT
auto hight
=CA1/4.5
O3:2

2.4
-K1:12

-K1 A1 A2

-K1 .5 12 14 11

=BA2/4.4/ -K1:A2 → =FG2-K1:A2 /=FG2/1.4

=BA2/1.1/ -K1:11 → =FG2-K1:11 /=FG2/1.4

-X1:14 /=BA2/2.2
24VDC external value

-X1
=BA1/5.1
Sub D 25
female
16 17 18 14 12 13 2 9 15 5 6 10 4

+F1/1.8/ -XHV:16
+F1/1.9/ -XHV:14
+F1/1.8/ -XHV:12
+F1/1.9/ -XHV:13
+F1/1.8/ -XHV:2
+F1/1.7/ -XHV:9
+F1/1.7/ -XHV:15
+F1/1.7/ -XHV:5
+F1/1.7/ -XHV:6
+F1/1.6/ -XHV:10
+F1/1.7/ -XHV:4

PLC-BSC-24VDC/21
14
12
11 .5

+F1

control wiring without specifications has to be wired with AWG 20

			creation date	26.10.2007			
			editor	Hennig			
001	05.03.08	Hennig	printout	27.03.08			
change	date	name	revisor				
previous page	=FF2/1	total pages	174	last editor	KRU		

MESSER CUTTING SYSTEMS
64823 GROSS-UMSTADT GERMANY

286.225
MultiTherm 4000
Eurodecoupe

bus terminals

drawing number	723.85638	page	1
assembly section =	FG1	location +	S1
last page	2	continuation page	2

=CA1

-C191
=CA1/5.5
KL4032
2 channel analog outputs -10V/0...10V without power contacts
ANALOG OUTPUT
nominal value
GND
shield
=CA1/5.5 O1:1+
=CA1/5.5 O1:3M
=CA1/5.5 O1:4SH

-C104
=CA1/3.5
KL1408
digital input terminals 24VDC, 3ms
DIGITAL INPUT
height found
=CA1/3.5 I2:5

-C104
=CA1/3.5
KL1408
digital input terminals 24VDC, 3ms
DIGITAL INPUT
upper limit
nc
=CA1/3.5 I4:6

-C190
=CA1/5.1
KL5101
incremental encoder interface, 5V without power contacts

left: increment_A, increment_B, increment_0, latch, increment_A', increment_B', increment_0', gate
right: Ue5V, Uo, +24V, +24V, 0V, 0V, status, shield

=CA1/5.1 I1:1
=CA1/5.1 I1:2
=CA1/5.1 I1:3
=CA1/5.1 I1:4
=CA1/5.1 I1:5
=CA1/5.1 I1:6
=CA1/5.1 I1:7
=CA1/5.1 I1:8
I1:1.
I1:5.
I1:2.
I1:6.
I1:3.
I1:7.
I1:4.
I1:8.

=BA1/7.2/ -C190L1 24VDC
=BA2/4.5/ -C190L0 0VDC
UPS buffered

=VA1/2.2/ =VA1-X1:10
=VA1/1.5/ -K1:12

connected via actor-sensor-box

-X1
1.0
Sub D 25 female
3
8
+F1/1.9/ -XHV:3
+F1/1.9/ -XHV:8

ST-COMBI plug-in -X190
1 2 3 4 5 6 7 8 9 10

weiss/white
braun/brown
grün/green
gelb/yellow
grau/grey
rosa/pink
blau/blue
rot/red

+F1/3.2/ -X190:1
+F1/3.3/ -X190:2
+F1/3.3/ -X190:3
+F1/3.3/ -X190:4
+F1/3.4/ -X190:5
+F1/3.4/ -X190:6
+F1/3.5/ -X190:7
+F1/3.5/ -X190:8

+F1

control wiring without specifications has to be wired with AWG 20

			creation date	26.10.2007	
			editor	Hennig	
001	05.03.08	Hennig	printout	27.03.08	
change	date	name	revisor		
previous page 1		total pages 174	last editor KRU		

MESSER CUTTING SYSTEMS
64823 GROSS-UMSTADT GERMANY

286.225
MultiTherm 4000
Eurodecoupe

height adjustment

drawing number 723.85638 | page 2
assembly section = FG1 | location + S1
last page 2 | continuation page +F1/1

+S1

-WALFA
Konfektion

-X1

-XHV: 7 /=BA2+S1/2.1	-XHV: 1 /=BA2+S1/5.1	-XHV: 11 /=BA1+S1/5.1	-XHV: 10 /+S1/1.8	-XHV: 5 /+S1/1.7	-XHV: 15 /+S1/1.6	-XHV: 4 /+S1/1.9	-XHV: 6 /+S1/1.8	-XHV: 9 /+S1/1.4	-XHV: 2 /+S1/1.3	-XHV: 12 /+S1/1.2	-XHV: 16 /+S1/1.1	-XHV: 14 /+S1/1.1	-XHV: 13 /+S1/1.3	-XHV: 8 /+S1/2.1	-XHV: 3 /+S1/2.1
7	1	11	10	5	15	4	6	9	2	12	16	14	13	8	3
24VDC	0VDC	N24VAC	ignition valve	down	up	auto hight	height found	upper limit	creep speed	collision	ignitor on	switch over set value	set height	analog signal ground	nominal value

-MOT

drive regulator

76801001

G	H	A	M	C	B	24VDC	A1	D	K	L	E	F	F1	u4/8a	u4/16ac	PE
-XM: A1	-XM: C1	-XM: A6	-XM: A7		-XM: B6	-XM: B5			-XM: A3	-XM: C3	-XM: A4	-XM: B4	-XM: C4	-XM: C8	-XM: B8	-XM: PE
2.3/	2.3/	2.7/	2.7/		2.7/	2.5/			2.5/	2.5/	2.6/	2.6/	2.6/	2.3/	2.4/	2.2/

	+24V	GND	collision	analog gnd	analog +/-10V
-X4	1	3	2	4	6	5

	1	6	7	2	3				8	4	5		PE
-X2	1	6	7	2	3				8	4	5		9

BN BL BK

-WS1
Steuerleitung
3x0,5

-B1
10...30VDC
150mA
collision

control wiring without specifications has to be wired with AWG 20

			creation date	26.10.2007
			editor	Hennig
001	05.03.08	Hennig	printout	27.03.08
change	date	name	revisor	
previous page	+S1/2	total pages	174	last editor KRU

MESSER CUTTING SYSTEMS
64823 GROSS-UMSTADT GERMANY

286.225
MultiTherm 4000
Eurodecoupe

drive regulator without sensoric

drawing number	723.85638	page	1
assembly section =	FG1	location +	F1
last page	3	continuation page	2

+S1

-L1 /=BA0+S1/1.1
-L2 /=BA0+S1/1.1
-L3 /=BA0+S1/1.1
-PE /=BA0+S1/1.1

-WXU
OELFLEX
5x1,5

-XU 1 2 3 PE

-WXM
OELFLEX
26x0,5

-XM: PE /1.3
-XM: C1 /1.2
-XM: A1 /1.2
-XM: C8 /1.3
-XM: B8 /1.3
-XM: B5 /1.2
-XM: A3 /1.2
-XM: C3 /1.3
-XM: A4 /1.3
-XM: B4 /1.3
-XM: C4 /1.3
-XM: B6 /1.2
-XM: A6 /1.2
-XM: A7 /1.2

-XM PE C1 A1 C8 B8 B5 A3 C3 A4 B4 C4 B6 A6 A7

-M1
3.2

1 2 3 5 4 6 7 12 8 13

0VDC
72VDC

F1
6,3AT

C1
3300µF

R1
1k

R2
1k

K1
1
16

K1
4 13
9/8

-L1
0,4mH
1
2

part no.:
72243683

11 10 9 14

YB
-
+

S18
below
nc no com

S17
collision protection
nc no com

S19
above
nc no com

ws gn rt bl

-M1 M

-G1 G

brake motor tacho

control wiring without specifications has to be wired with AWG 20


			creation date	26.10.2007
			editor	Hennig
001	05.03.08	Hennig	printout	27.03.08
change	date	name	revisor	
previous page 1		total pages 174	last editor	KRU

MESSER CUTTING SYSTEMS
64823 GROSS-UMSTADT GERMANY

286.225
MultiTherm 4000
Eurodecoupe

height adjustment OL200 Z

drawing number	723.85638	page	2
assembly section =	FG1	location +	F1
last page	3	continuation page	3

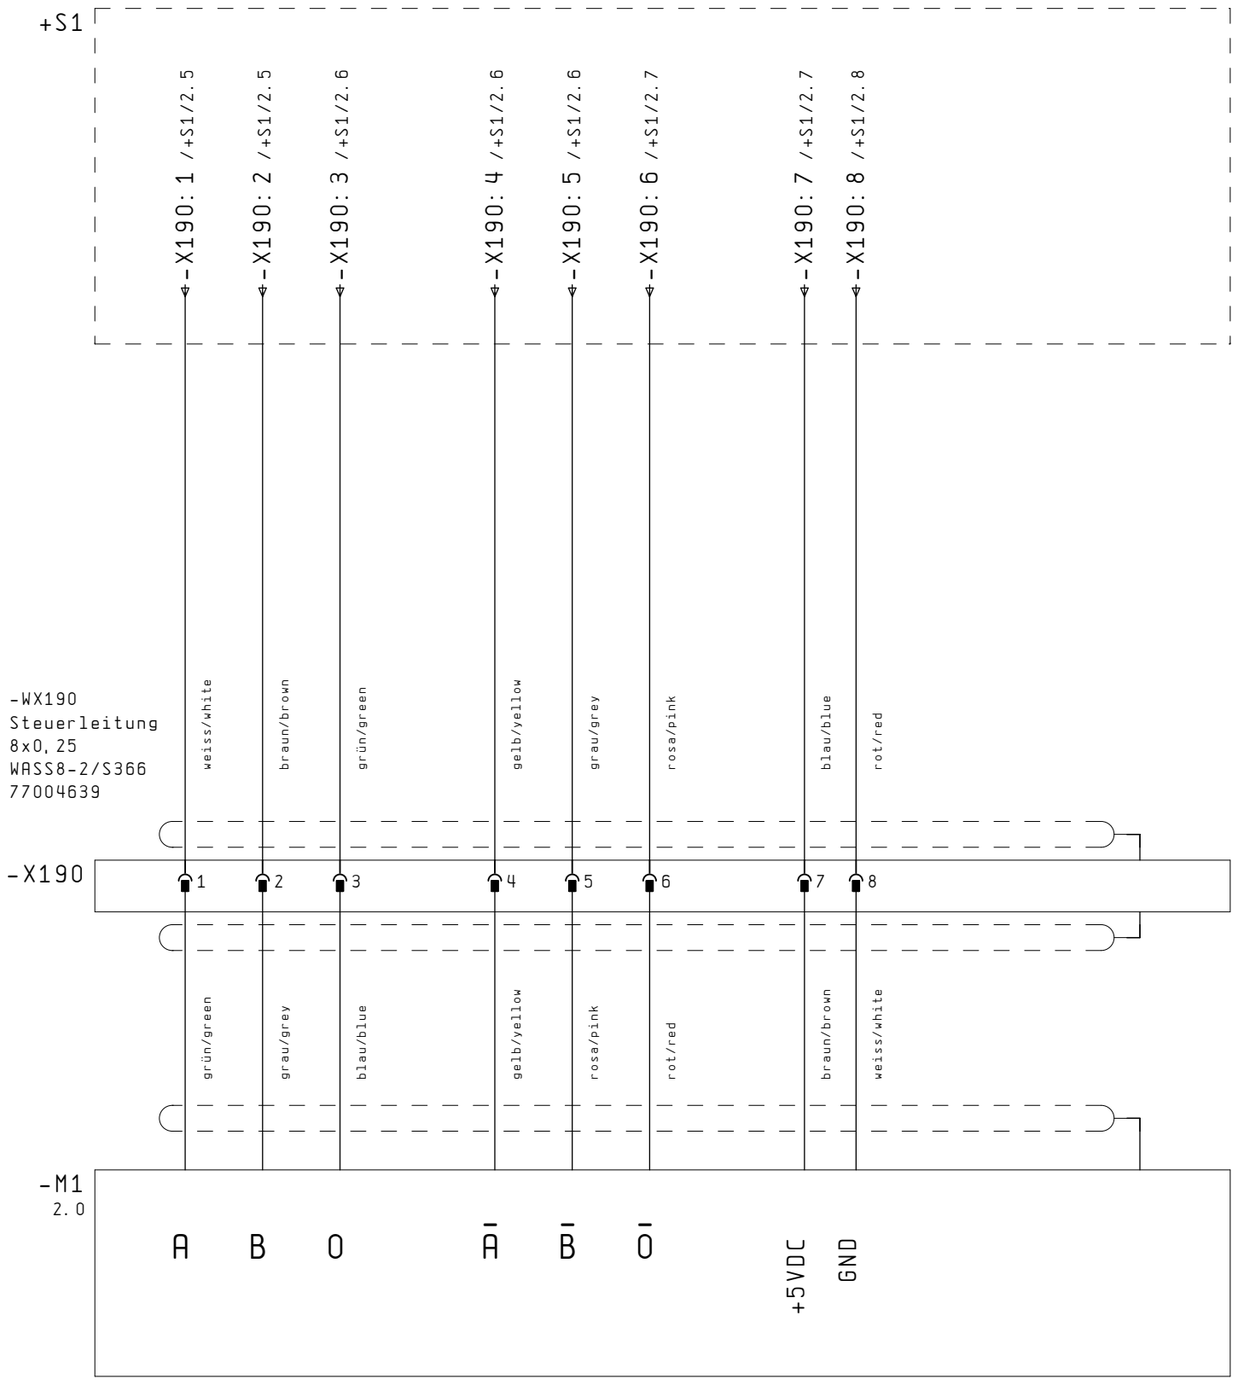

control wiring without specifications has to be wired with AWG 20

			creation date	26.10.2007	
			editor	Hennig	
001	05.03.08	Hennig	printout	27.03.08	
change	date	name	revisor		
previous page 2	total pages 174	last editor KRU			

MESSER CUTTING SYSTEMS
64823 GROSS-UMSTADT GERMANY

286.225
MultiTherm 4000
Eurodecoupe

Encoder

drawing number 723.85638		page	3
assembly section =	FG1	location +	F1
last page 3	continuation page =FG2+S1/1		

=CA1

-C104 =CA1/3.5 KL1408 — digital input terminals 24VDC, 3ms — DIGITAL INPUT — collision — =CA1/3.5 I7:4

-C109 =CA1/4.5 KL2408 — digital output terminals 24VDC 0,5A — DIGITAL OUTPUT — creep speed — =CA1/4.5 O8:8

-C104 =CA1/3.5 KL1408 — digital input terminals 24VDC, 3ms — DIGITAL INPUT — upper limit — =CA1/3.5 I5:3

-C109 =CA1/4.5 KL2408 — digital output terminals 24VDC 0,5A — DIGITAL OUTPUT — up — =CA1/4.5 O5:3

-C109 =CA1/4.5 KL2408 — digital output terminals 24VDC 0,5A — DIGITAL OUTPUT — down — =CA1/4.5 O6:7

-C109 =CA1/4.5 KL2408 — digital output terminals 24VDC 0,5A — DIGITAL OUTPUT — auto hight — =CA1/4.5 O7:4

-K1 A1 A2

2.4 -K1:12

-K1 .5 12 14 11

=FG1/1.6/ -K1:A2

=FG1/1.6/ -K1:11

24VDC external value -X1:14 /=BA2/2.4

-X1 =BA1/5.2 Sub D 25 female

16 17 18 14 12 13 2 9 15 5 6 10 4

+F2/1.8/ -XHV:16

+F2/1.9/ -XHV:14

+F2/1.8/ -XHV:12

+F2/1.9/ -XHV:13

+F2/1.8/ -XHV:2

+F2/1.7/ -XHV:9

+F2/1.7/ -XHV:15

+F2/1.7/ -XHV:5

+F2/1.7/ -XHV:6

+F2/1.6/ -XHV:10

+F2/1.7/ -XHV:4

PLC-BSC-24VDC/21

14 12 11 .5

+F2

control wiring without specifications has to be wired with AWG 20

			creation date	26.10.2007	
			editor	Hennig	
001	05.03.08	Hennig	printout	27.03.08	
change	date	name	revisor		
previous page =FG1+F1/3		total pages 174	last editor KRU		

MESSER CUTTING SYSTEMS
64823 GROSS-UMSTADT GERMANY

286.225
MultiTherm 4000
Eurodecoupe

bus terminals

drawing number 723.85638		page	1
assembly section =	FG2	location +	S1
last page	2	continuation page	2

=CA1

-C193
=CA1/5.5
KL4032

2 channel analog
outputs -10V/0...10V
without power contacts

ANALOG OUTPUT

nominal value

GND

shield

=CA1/5.5 O1:1+
=CA1/5.5 O1:3M
=CA1/5.5 O1:4SH

-C104
=CA1/3.5
KL1408

digital input terminals
24VDC, 3ms

DIGITAL INPUT

height found

=CA1/3.5 I6:7

-C104
=CA1/3.5
KL1408

digital input terminals
24VDC, 3ms

DIGITAL INPUT

upper limit
nc

=CA1/3.5 I8:8

-C192
=CA1/5.1
KL5101

incremental encoder interface, 5V
without power contacts

left: increment_A, increment_B, increment_0, latch, increment_A', increment_B', increment_0', gate
right: Ue5V, Uo, +24V, +24V, 0V, 0V, status, shield

=CA1/5.1 I1:1
=CA1/5.1 I1:2
=CA1/5.1 I1:3
=CA1/5.1 I1:4
=CA1/5.1 I1:5
=CA1/5.1 I1:6
=CA1/5.1 I1:7
=CA1/5.1 I1:8
I1:1.
I1:5.
I1:2.
I1:6.
I1:3.
I1:7.
I1:4.
I1:8.

=BA1/7.2/ -C192L1 24VDC
=BA2/4.5/ -C192L0 0VDC

UPS buffered

=VA2/2.2/ =VA2-X1:10

=VA2/1.5/ -K1:12

connected via
actor-sensor-box

-X1
1.0
Sub D 25
female

3 8

+F2/1.9/ -XHV:3
+F2/1.9/ -XHV:8

ST-COMBI
plug-in
-X192 1 2 3 4 5 6 7 8 9 10

weiss/white
braun/brown
grün/green
gelb/yellow
grau/grey
rosa/pink
blau/blue
rot/red

+F2/3.2/ -X192:1
+F2/3.3/ -X192:2
+F2/3.3/ -X192:3
+F2/3.3/ -X192:4
+F2/3.4/ -X192:5
+F2/3.4/ -X192:6
+F2/3.5/ -X192:7
+F2/3.5/ -X192:8

+F2

control wiring without specifications has to be wired with AWG 20

			creation date	26.10.2007
			editor	Hennig
001	05.03.08	Hennig	printout	27.03.08
change	date	name	revisor	
previous page 1		total pages 174	last editor	KRU

MESSER CUTTING SYSTEMS
64823 GROSS-UMSTADT GERMANY

286.225
MultiTherm 4000
Eurodecoupe

height adjustment

drawing number 723.85638 | page 2
assembly section = FG2 | location + S1
last page 2 | continuation page +F2/1

+S1

-WALFA
Konfektion

-X1

-XHV: 7 /=BA2+S1/2.3	-XHV: 1 /=BA2+S1/5.2	-XHV: 11 /=BA1+S1/5.2	-XHV: 10 /+S1/1.8	-XHV: 5 /+S1/1.7	-XHV: 15 /+S1/1.6	-XHV: 4 /+S1/1.9	-XHV: 6 /+S1/1.8	-XHV: 9 /+S1/1.4	-XHV: 2 /+S1/1.3	-XHV: 12 /+S1/1.2	-XHV: 16 /+S1/1.1	-XHV: 14 /+S1/1.1	-XHV: 13 /+S1/1.3	-XHV: 8 /+S1/2.1	-XHV: 3 /+S1/2.1
7	1	11	10	5	15	4	6	9	2	12	16	14	13	8	3
24VDC	0VDC	N24VAC	ignition valve	down	up	auto hight	height found	upper limit	creep speed	collision	ignitor on	switch over set value	set height	analog signal ground	nominal value

-MOT

drive regulator

76801001

G	H	A	M	C	B	24VDC	A1	D	K	L	E	F	F1	u4/8a	u4/16ac	PE
-XM: A1	-XM: C1	-XM: A6	-XM: A7		-XM: B6	-XM: B5			-XM: A3	-XM: C3	-XM: A4	-XM: B4	-XM: C4	-XM: C8	-XM: B8	-XM: PE
2.3/	2.3/	2.7/	2.7/		2.7/	2.5/			2.5/	2.5/	2.6/	2.6/	2.6/	2.3/	2.4/	2.2/

-X4

+24V	GND	collision	analog gnd	analog +/-10V	
1	3	2	4	6	5

-X2

1	6	7	2	3	8	4	5	9
								PE

BN BL BK

-WS1
Steuerleitung
3x0,5

-B1
10...30VDC
150mA
collision

control wiring without specifications has to be wired with AWG 20

			creation date	26.10.2007
			editor	Hennig
001	05.03.08	Hennig	printout	27.03.08
change	date	name	revisor	
previous page	+S1/2	total pages	174	last editor KRU

MESSER CUTTING SYSTEMS
64823 GROSS-UMSTADT GERMANY

286.225
MultiTherm 4000
Eurodecoupe

drive regulator without sensoric

drawing number	723.85638	page	1
assembly section =	FG2	location +	F2
last page	3	continuation page	2

+S1

-L1 /=BA0+S1/1.2
-L2 /=BA0+S1/1.2
-L3 /=BA0+S1/1.2
-PE /=BA0+S1/1.3

-WXU
OELFLEX
5x1,5

-WXM
OELFLEX
26x0,5

-XM: PE /1.3
-XM: C1 /1.2
-XM: A1 /1.2
-XM: C8 /1.3
-XM: B8 /1.3
-XM: B5 /1.2
-XM: A3 /1.2
-XM: C3 /1.3
-XM: A4 /1.3
-XM: B4 /1.3
-XM: C4 /1.3
-XM: B6 /1.2
-XM: A6 /1.2
-XM: A7 /1.2

-XU 1 2 3 PE
-XM PE C1 A1 C8 B8 B5 A3 C3 A4 B4 C4 B6 A6 A7

-M1
3.2

1 2 3 5 4 6 7 12 8 13

0VDC
72VDC

K1 1 16
K1 4 13 9/8
-L1 1 2 0,4mH

part no.:
72243683

11 10 9 14

F1
6,3AT

C1
+ -
3300µF

R1
1k

R2
1k

YB - +

S18 nc no com
below

S17 nc no com
collision protection

S19 nc no com
above

ws gn rt bl

-M1 M
-G1 G

brake motor tacho

control wiring without specifications has to be wired with AWG 20


			creation date	26.10.2007
			editor	Hennig
001	05.03.08	Hennig	printout	27.03.08
change	date	name	revisor	
previous page 1		total pages 174	last editor KRU	

MESSER CUTTING SYSTEMS
64823 GROSS-UMSTADT GERMANY

286.225
MultiTherm 4000
Eurodecoupe

height adjustment OL200 Z

drawing number 723.85638 | page 2
assembly section = FG2 | location + F2
last page 3 | continuation page 3

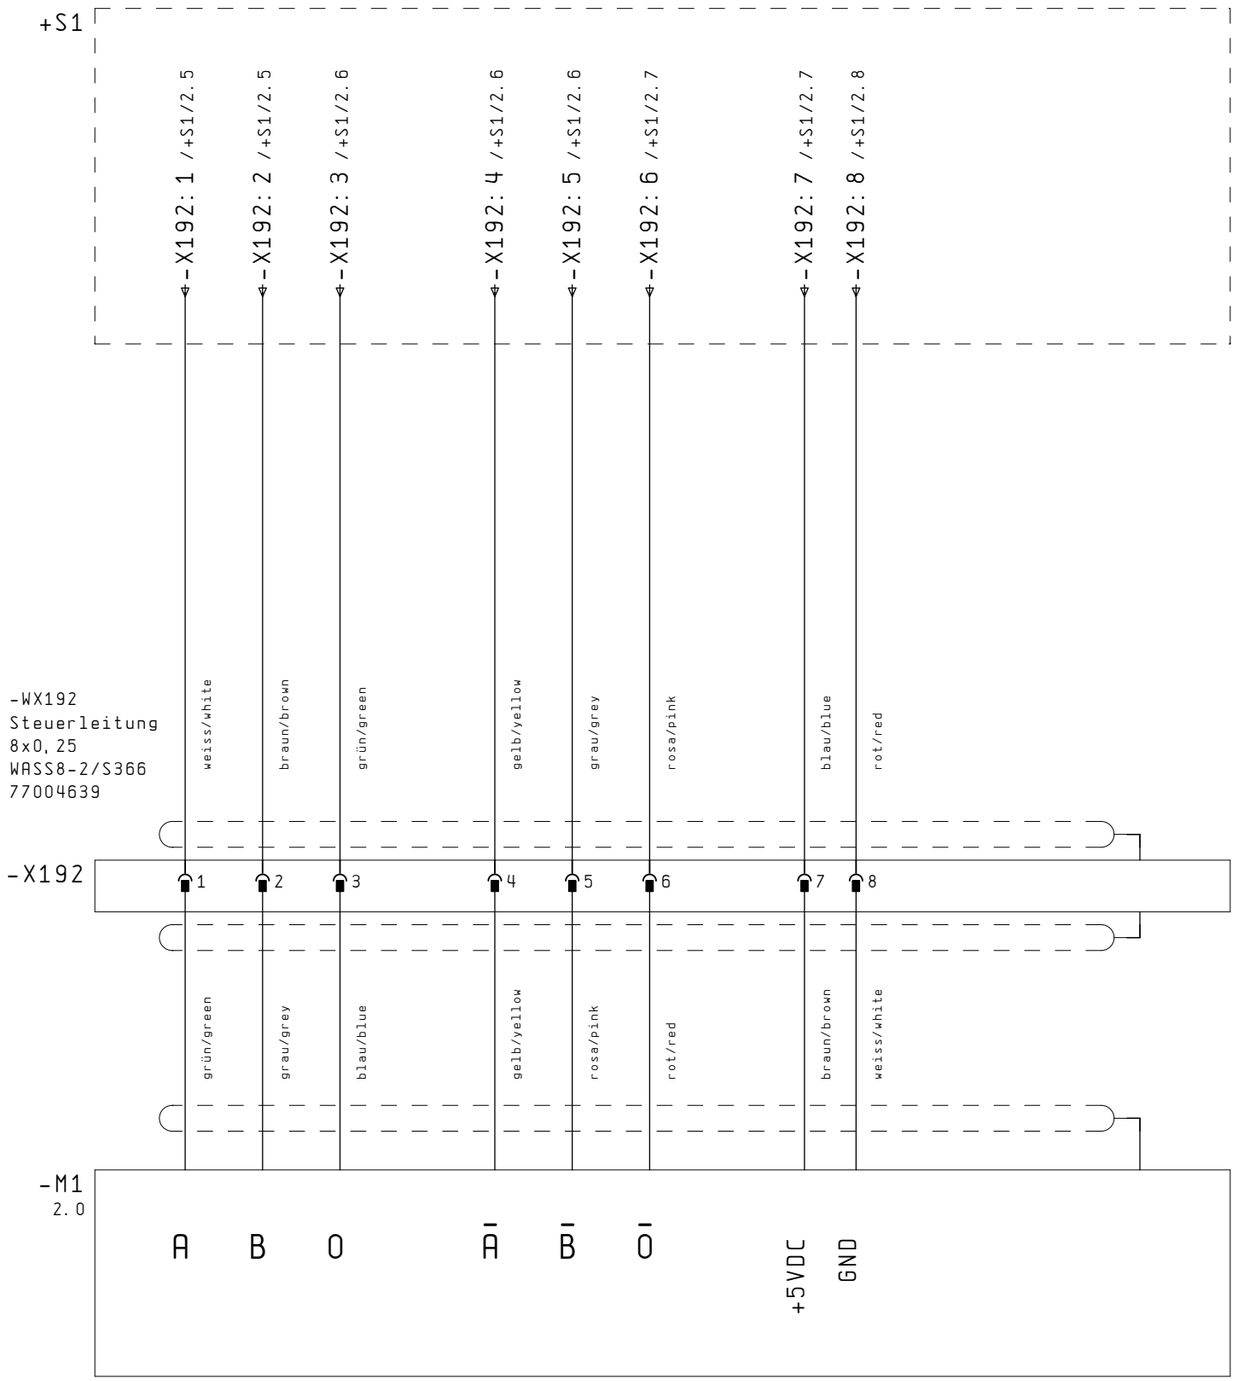

control wiring without specifications has to be wired with AWG 20

			creation date	26.10.2007	
			editor	Hennig	
001	05.03.08	Hennig	printout	27.03.08	
change	date	name	revisor		
previous page 2	total pages 174	last editor KRU			

MESSER CUTTING SYSTEMS
64823 GROSS-UMSTADT GERMANY

286.225
MultiTherm 4000
Eurodecoupe

Encoder

drawing number 723.85638		page	3
assembly section =	FG2	location +	F2
last page 3		continuation page	=HX1+S1/1

=BA2/4.3/ -L0H
=BA1/7.1/ -L1H
-BTB /2.1

=BA1/3.7/ -HL3
=BA1/3.7/ -HL2
=BA1/3.6/ -HL1

PE

6mm²
gnge
PE
metal frame

-A1
2.0
AX2513

BECKHOFF
AX2513
MASTER MODULE

-X0 1 2 3 4 5 6 7 8 9 10
+24V XGND PE +RBint -RB +RBext -DC L1 L2 L3
AC POWER IN
COMBICON 400VAC

IN OUT
LIGHTBUS
LIGHTBUS CONFIGURATION see chapter =AA4

PE

-X6
COMBICON U2 V2 W2 PE BRAKE + -
4 5 6 3 2 1
M

-X5
Sub D 9 female
S1 cos+ S3 cos- S4 sin- S2 sin+ R1 R2 PTC 2 PTC 1 shield
8 4 3 7 9 5 2 6 1

twisted pair
twisted pair
twisted pair
twisted pair

Bitte passendes Kabel verwenden

-WXG1
Konfektion

-WM1
ÖLFLEX
SERVO-FD
750P/755P
4G1,5+2x0,75

+M1

-XM1
U1 V1 W1 PE B+ B-

-XG1
1 2 3 4 5 6 8 7 S

-M1

BAUTZ

u v w
M
3 ~
PE
motor

Connect only outer shield
with plug housing ! !
Do not connect internal
shields at motors side ! ! !

S1 S3 S4
R2 R1 S2
resolver

control wiring without specifications has to be wired with AWG 20

			creation date	26.10.2007
			editor	Hennig
001	05.03.08	Hennig	printout	27.03.08
change	date	name	revisor	
previous page =FG2+F2/3		total pages 174	last editor	E4A

MESSER CUTTING SYSTEMS
64823 GROSS-UMSTADT GERMANY

286.225
MultiTherm 4000
Eurodecoupe

power component

drawing number	723.85638	page	1
assembly section =	HX1	location +	S1
last page	2	continuation page	2

=CA1

-C102
=CA1/3.5
KL1408
digital input terminals
24VDC, 3ms
DIGITAL INPUT
ready
=CA1/3.5
I7:4

-C108
=CA1/4.1
KL2408
digital output terminals
24VDC 0,5A
DIGITAL OUTPUT
enable
=CA1/4.1
O1:1

-C108
=CA1/4.1
KL2408
digital output terminals
24VDC 0,5A
DIGITAL OUTPUT
reset
=CA1/4.1
O2:5

-C102
=CA1/3.5
KL1408
digital input terminals
24VDC, 3ms
DIGITAL INPUT
+ overtravel
=CA1/3.5
I1:1

-C102
=CA1/3.5
KL1408
digital input terminals
24VDC, 3ms
DIGITAL INPUT
- overtravel
=CA1/3.5
I2:5

-C102
=CA1/3.5
KL1408
digital input terminals
24VDC, 3ms
DIGITAL INPUT
home switch
=CA1/3.5
I3:2

=VA0
from limit switch
-X1:13 /=VA0/1.6
-X1:11 /=VA0/1.4
-X1:9 /=VA0/1.2

=HX2
-NSTOP /=HX2/2.1
-PSTOP /=HX2/2.1
-RESET /=HX2/2.1

=BA2/4.3/ -HLO
24VDC
UPS buffered
1.3/ -BTB

-A1
1.0
BECKHOFF
AC DRIVE
REGULATOR

-X1 COMBICON: 1 BTB/RTO, 2 BTB/RTO, 3 ENABLE, 4 DGND, 5 DGND

-X3 COMBICON: 1 AGND, 2 ANALOG-IN -, 3 ANALOG-IN +, 4 DIGITAL-IN1, 5 DIGITAL-IN2, 6 PSTOP, 7 NSTOP, 8 DIGITAL-OUT1, 9 DIGITAL-OUT2

control wiring without specifications has to be wired with AWG 20

			creation date	26.10.2007
			editor	Hennig
001	05.03.08	Hennig	printout	27.03.08
change	date	name	revisor	
previous page 1		total pages 174	last editor	KRU

MESSER CUTTING SYSTEMS
64823 GROSS-UMSTADT GERMANY

286.225
MultiTherm 4000
Eurodecoupe

control component

drawing number 723.85638 | page 2
assembly section = HX1 | location + S1
last page 2 | continuation page =HX2/1

-A1
2.0
AX2523


BECKHOFF

AX2523

SLAVE MODULE

IN OUT
LIGHTBUS

LIGHTBUS CONFIGURATION see chapter =AA4

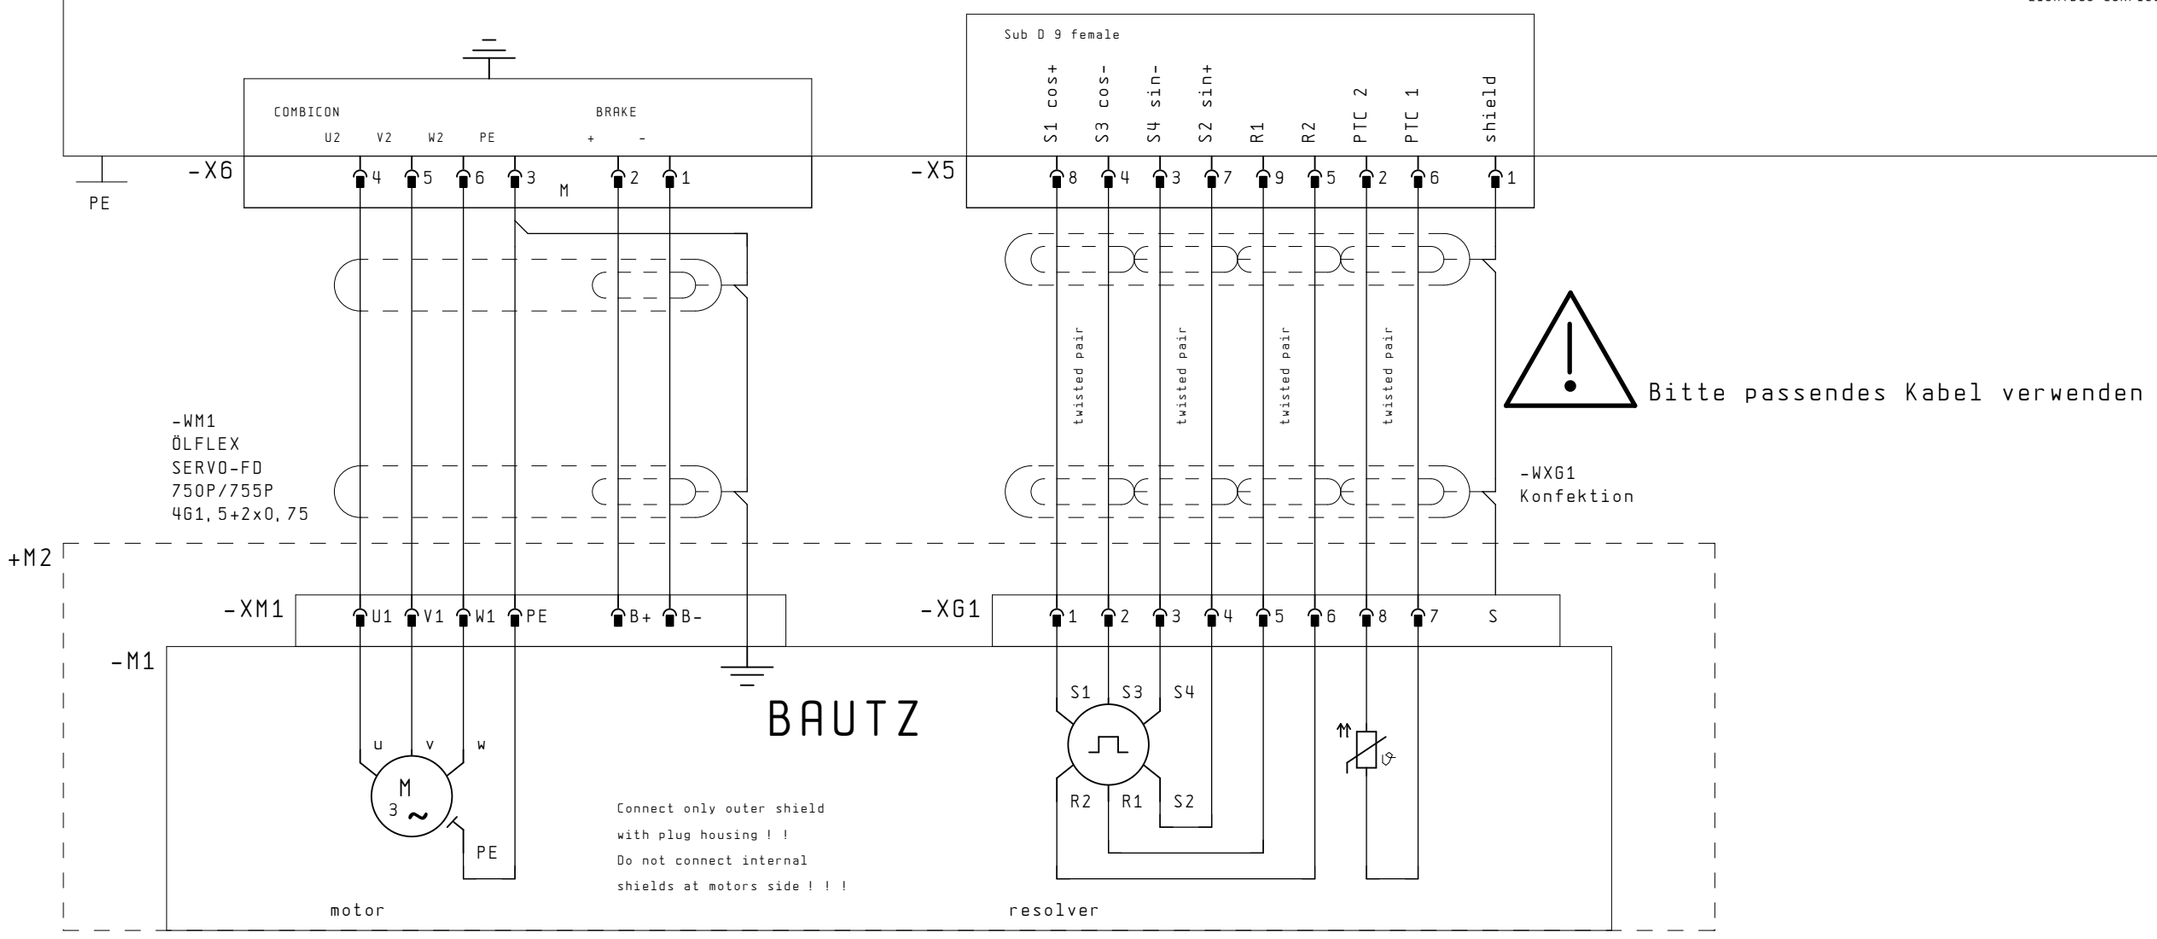

control wiring without specifications has to be wired with AWG 20

			creation date	26.10.2007	
			editor	Hennig	
001	05.03.08	Hennig	printout	27.03.08	
change	date	name	revisor		
previous page =HX1/2		total pages 174	last editor E4A		

MESSER CUTTING SYSTEMS
64823 GROSS-UMSTADT GERMANY

286.225
MultiTherm 4000
Eurodecoupe

power component

drawing number 723.85638		page	1
assembly section =	HX2	location +	S1
last page 2		continuation page	2

control wiring without specifications has to be wired with AWG 20

			creation date	26.10.2007	
			editor	Hennig	
001	05.03.08	Hennig	printout	27.03.08	
change	date	name	revisor		
previous page	1	total pages 174	last editor	KRU	

MESSER CUTTING SYSTEMS
64823 GROSS-UMSTADT GERMANY

286.225
MultiTherm 4000
Eurodecoupe

control component

drawing number	723.85638	page	2
assembly section =	HX2	location +	S1
last page	2	continuation page	=HY1/1

-A1
2.0
AX2523


BECKHOFF

AX2523

SLAVE MODULE

IN OUT
LIGHTBUS

LIGHTBUS CONFIGURATION see chapter =AA4

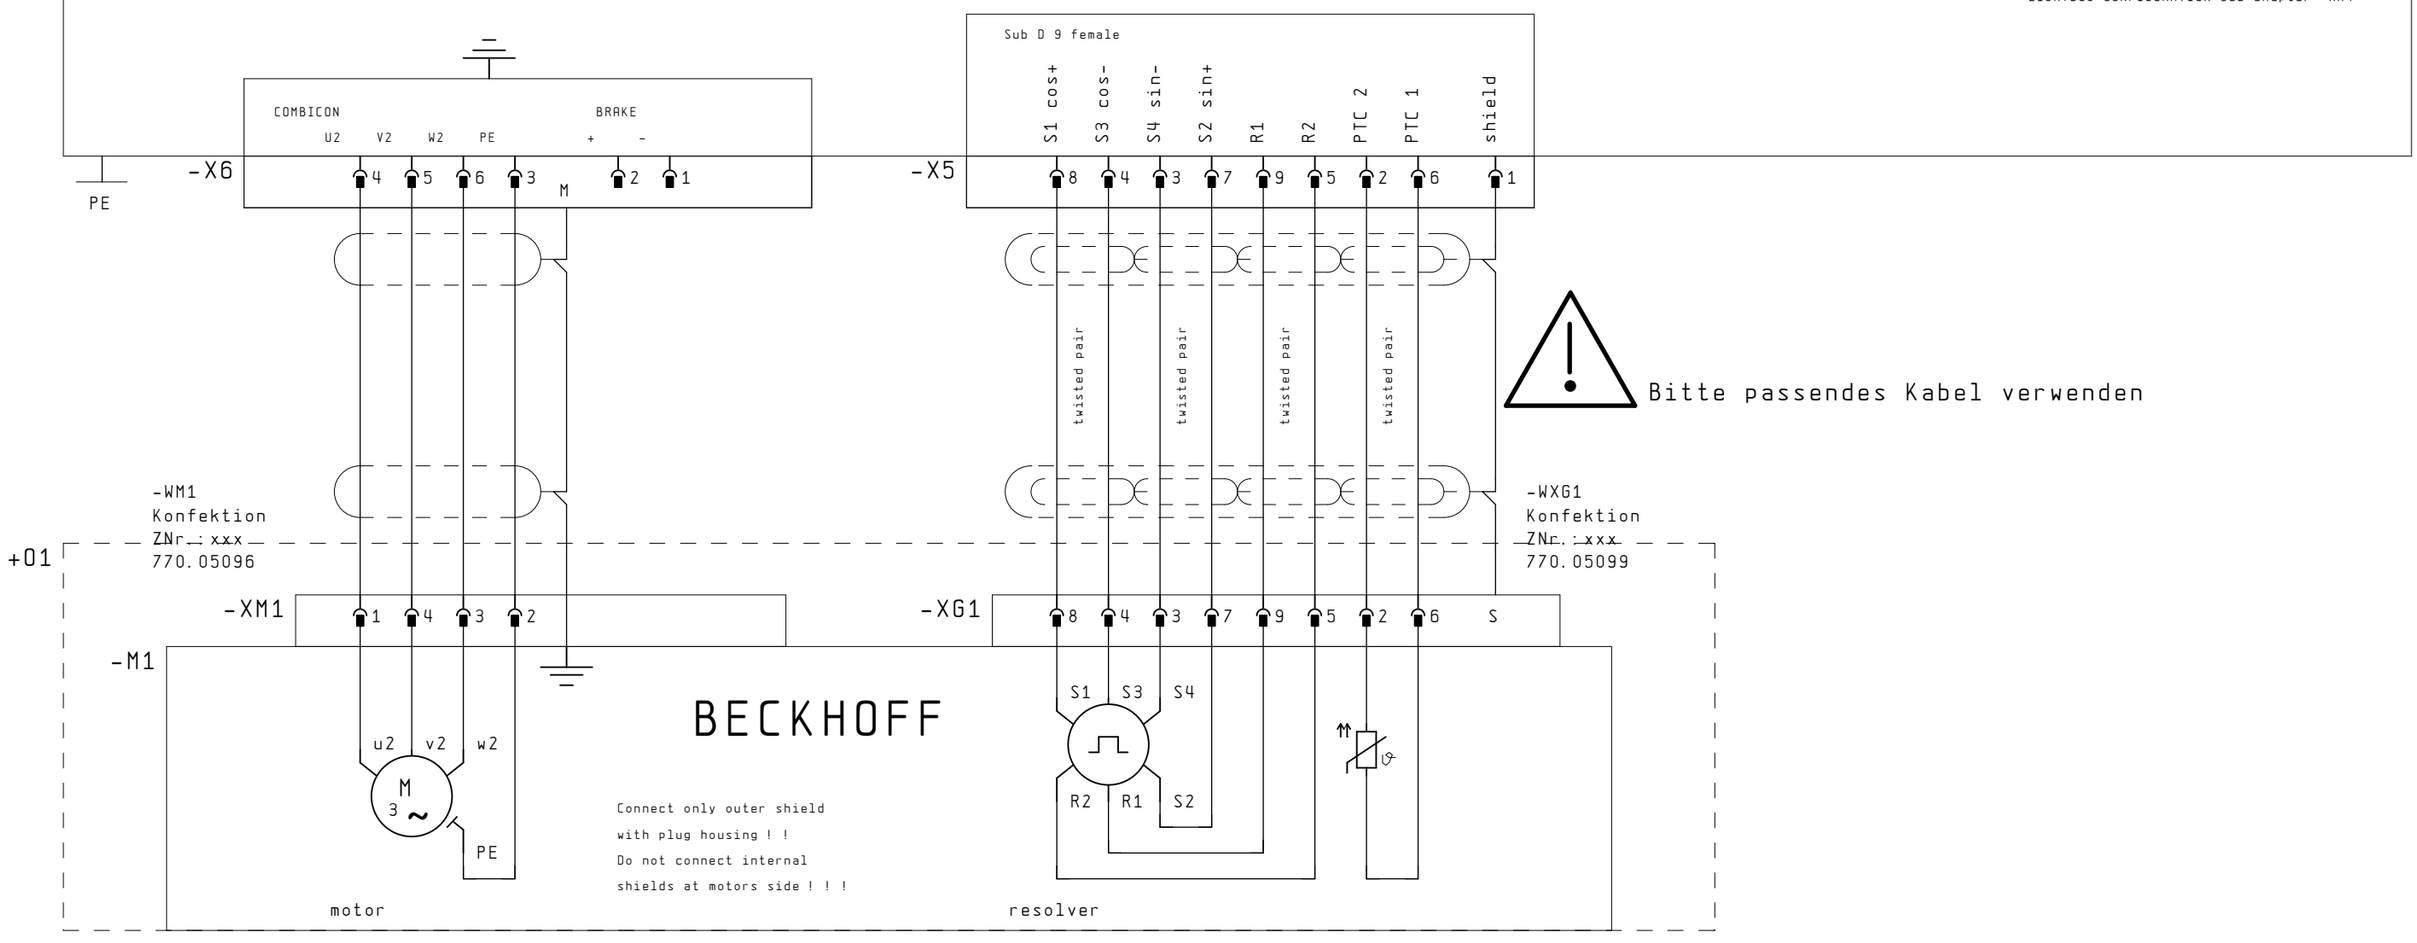

control wiring without specifications has to be wired with AWG 20

			creation date	26.10.2007	
			editor	Hennig	
001	05.03.08	Hennig	printout	27.03.08	
change	date	name	revisor		
previous page =HX2/2		total pages 174	last editor E4A		

MESSER CUTTING SYSTEMS
64823 GROSS-UMSTADT GERMANY

286.225
MultiTherm 4000
Eurodecoupe

power component

drawing number 723.85638		page	1
assembly section = HY1		location +	S1
last page 2	continuation page 2		

=CA1

-C102
=CA1/3.5
KL1408
digital input terminals
24VDC, 3ms
DIGITAL INPUT
+ overtravel
=CA1/3.5
I4:6

51

-C102
=CA1/3.5
KL1408
digital input terminals
24VDC, 3ms
DIGITAL INPUT
home switch
=CA1/3.5
I6:7

101

from limit switch

=VA1-X1:14 /=VA1/2.6

=HY2-PSTOP /=HY2/2.1

=HY2-NSTOP /=HY2/2.1

=HX2/2.8/ -RESET

=HY2-RESET /=HY2/2.1

-A1
1.0
BECKHOFF
AC DRIVE
REGULATOR

-X3 1 2 3 4 5 6 7 8 9
COMBICON

AGND
ANALOG-IN -
ANALOG-IN +
DIGITAL-IN1
DIGITAL-IN2
PSTOP
NSTOP
DIGITAL-OUT1
DIGITAL-OUT2

control wiring without specifications has to be wired with AWG 20

			creation date	26.10.2007	
			editor	Hennig	
001	05.03.08	Hennig	printout	27.03.08	
change	date	name	revisor		
previous page 1		total pages 174	last editor KRU		

MESSER CUTTING SYSTEMS
64823 GROSS-UMSTADT GERMANY

286.225
MultiTherm 4000
Eurodecoupe

control component

drawing number 723.85638 | page 2
assembly section = HY1 | location + S1
last page 2 | continuation page =HY2/1

-A1
2.0
AX2523


BECKHOFF

AX2523

SLAVE MODULE

IN OUT
LIGHTBUS

LIGHTBUS CONFIGURATION see chapter =AA4

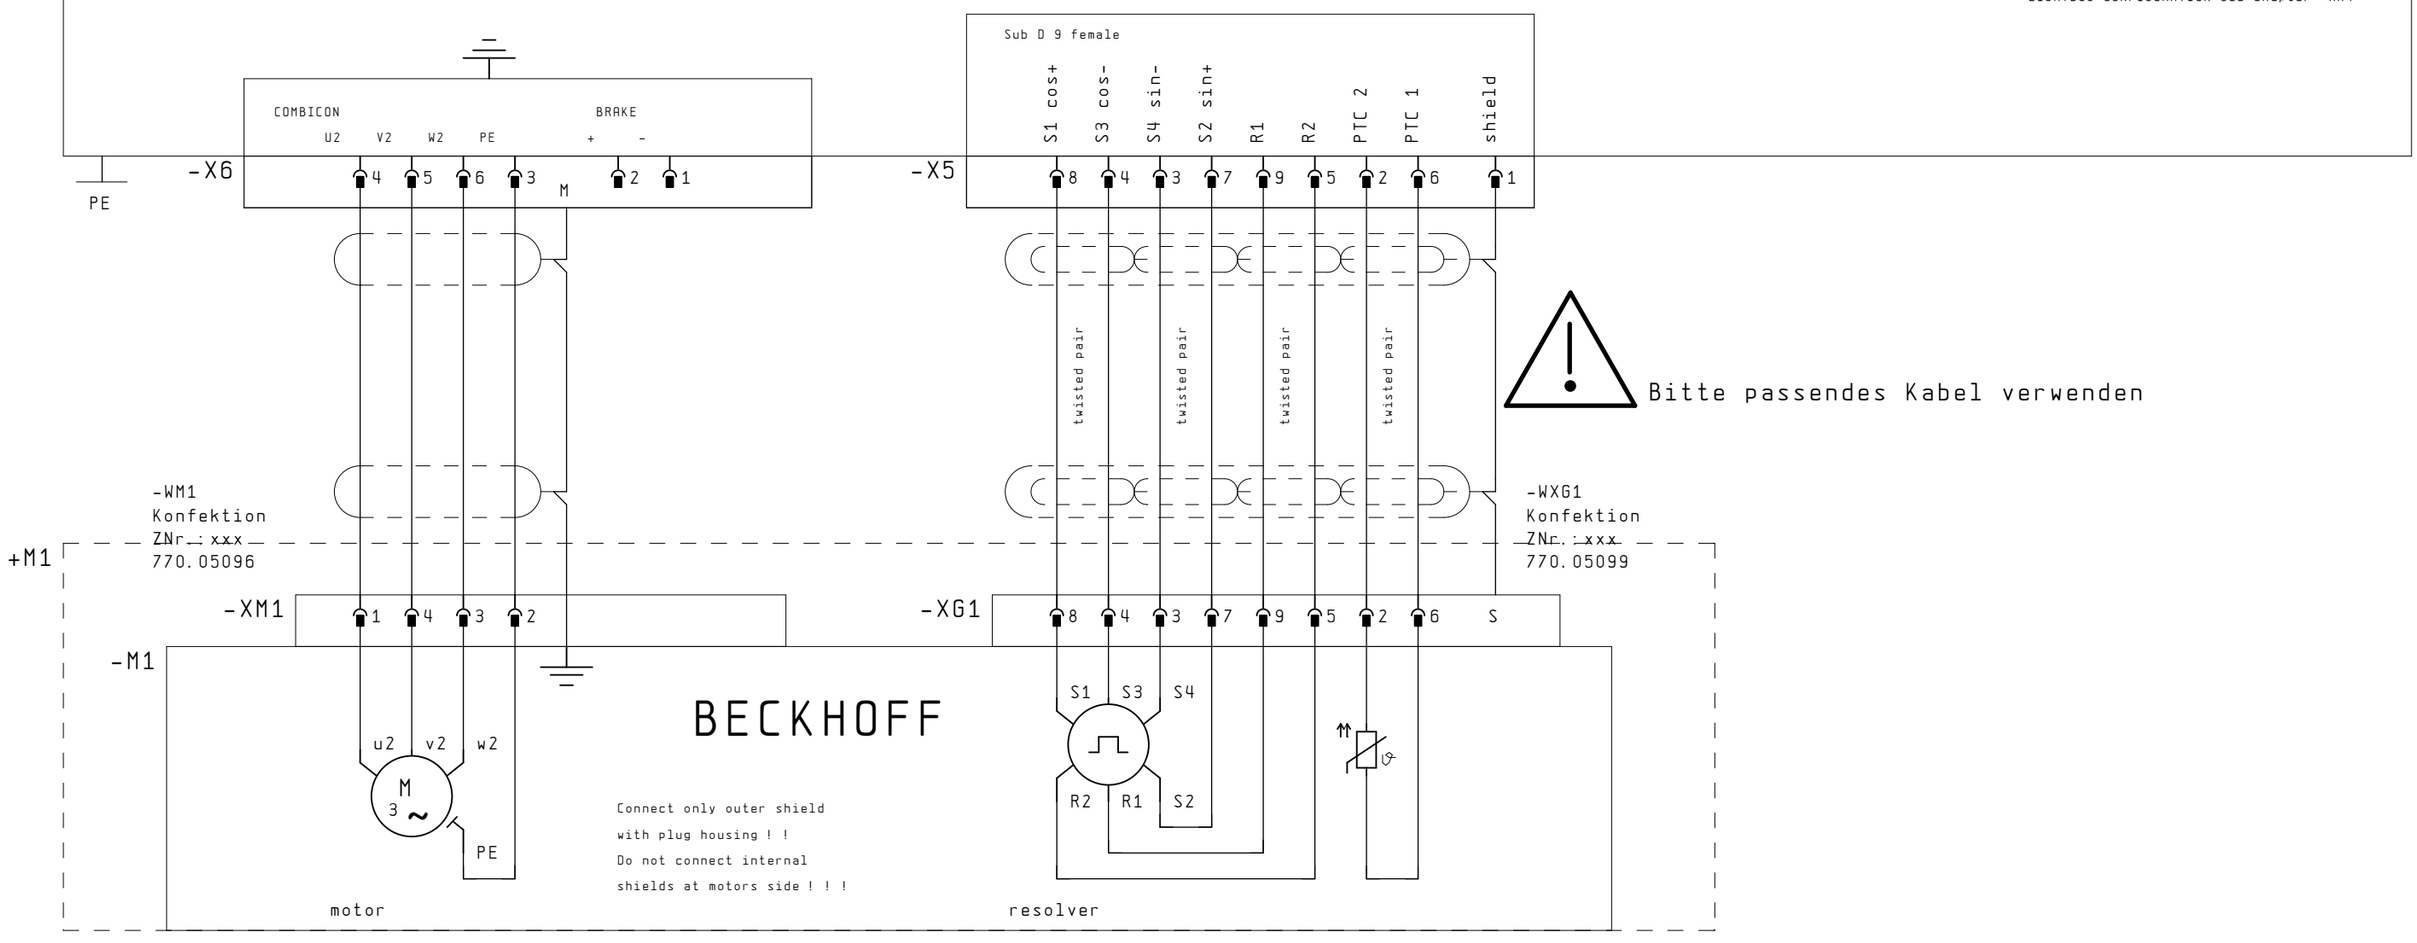

control wiring without specifications has to be wired with AWG 20

			creation date	26.10.2007	
			editor	Hennig	
001	05.03.08	Hennig	printout	27.03.08	
change	date	name	revisor		
previous page	=HY1/2	total pages	174	last editor	E1A

MESSER CUTTING SYSTEMS
64823 GROSS-UMSTADT GERMANY

286.225
MultiTherm 4000
Eurodecoupe

power component

drawing number	723.85638	page	1
assembly section =	HY2	location +	S1
last page	2	continuation page	2

=CA1

-C102
=CA1/3.5
KL1408
digital input terminals
24VDC, 3ms
DIGITAL INPUT
- overtravel
=CA1/3.5
I5:3

-C103
=CA1/3.1
KL1408
digital input terminals
24VDC, 3ms
DIGITAL INPUT
home switch
=CA1/3.1
I1:1

52

102

from limit switch

=VA2-X1:14 /=VA2/2.6

=HY1/2.8/ -PSTOP

=VA1-X1:12 /=VA1/2.4

=HY1/2.8/ -NSTOP

=VA2-X1:12 /=VA2/2.4

=HY1/2.8/ -RESET

-A1
1.0
BECKHOFF
AC DRIVE
REGULATOR

-X3 COMBICON
1 AGND
2 ANALOG-IN -
3 ANALOG-IN +
4 DIGITAL-IN1
5 DIGITAL-IN2
6 PSTOP
7 NSTOP
8 DIGITAL-OUT1
9 DIGITAL-OUT2

control wiring without specifications has to be wired with AWG 20


		creation date	26.10.2007	
		editor	Hennig	
001	05.03.08	printout	27.03.08	
change	date	revisor	name	
previous page 1	total pages 174	last editor KRU		

MESSER CUTTING SYSTEMS
64823 GROSS-UMSTADT GERMANY

286.225
MultiTherm 4000
Eurodecoupe

control component

drawing number 723.85638 | page 2
assembly section = HY2 | location + S1
last page 2 | continuation page =IM1/1

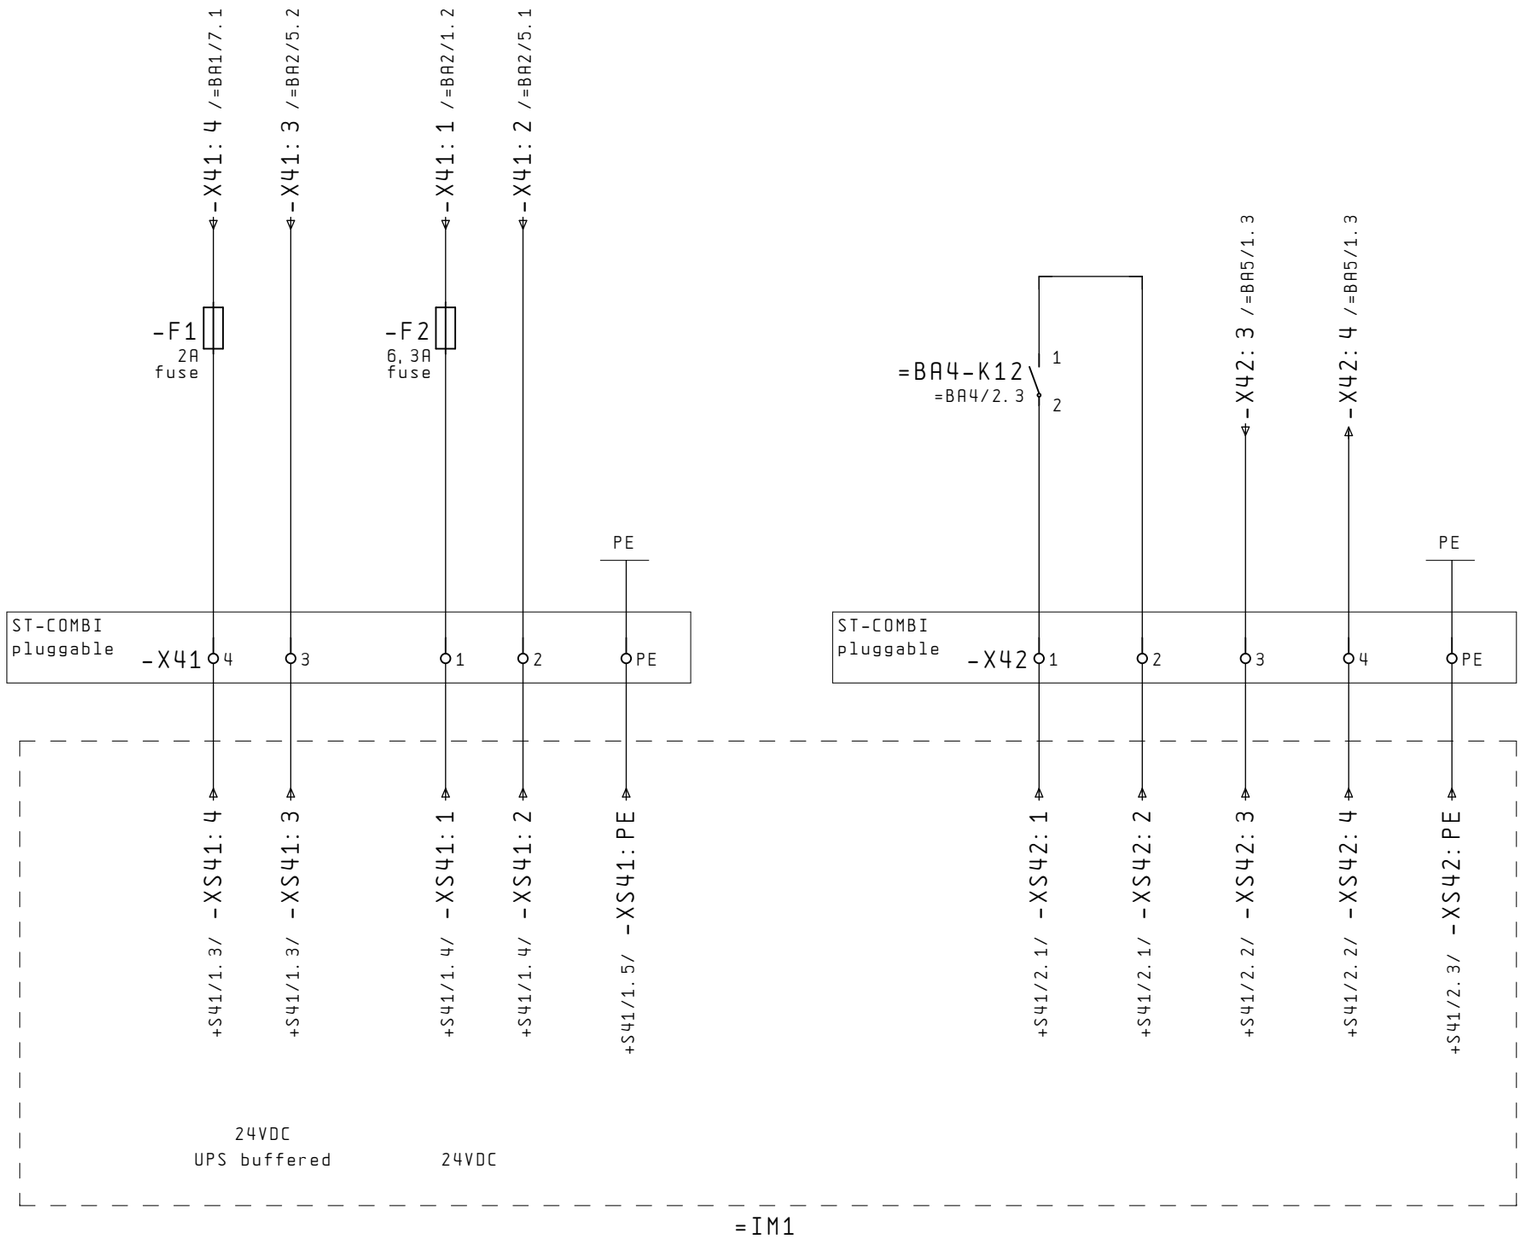


control wiring without specifications has to be wired with AWG 20

			creation date	26.10.2007	MESSER CUTTING SYSTEMS 64823 GROSS-UMSTADT GERMANY	286.225 MultiTherm 4000 Eurodecoupe	interlock HPR 130/260
			editor	Hennig			
001	05.03.08	Hennig	printout	27.03.08			
change	date	name	revisor				
previous page =HY2/2		total pages 174	last editor E1A				

drawing number 723.85638		page	1
assembly section = IM1		location +	S1
last page 1	continuation page +S41/1		

=CA41

-C400
=CA41/1.1
BK2000

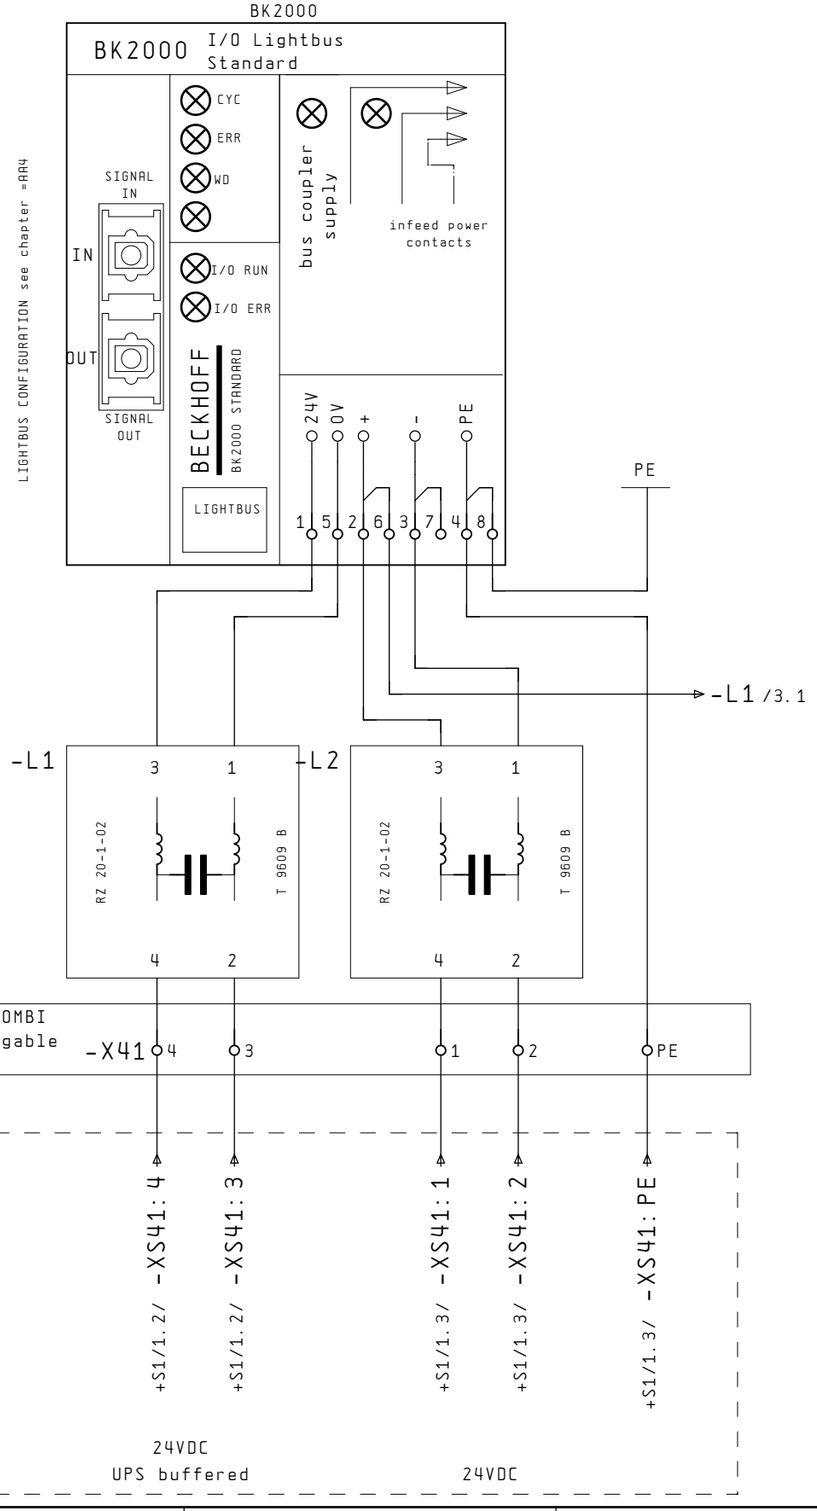

control wiring without specifications has to be wired with AWG 20


			creation date	26.10.2007	
			editor	Hennig	
001	05.03.08	Hennig	printout	27.03.08	
change	date	name	revisor		
previous page	+S1/1	total pages 174	last editor	KRU	

MESSER CUTTING SYSTEMS
64823 GROSS-UMSTADT GERMANY

286.225
MultiTherm 4000
Eurodecoupe

voltage supply

drawing number	723.85638	page	1
assembly section =	IM1	location +	S41
last page	4	continuation page	2

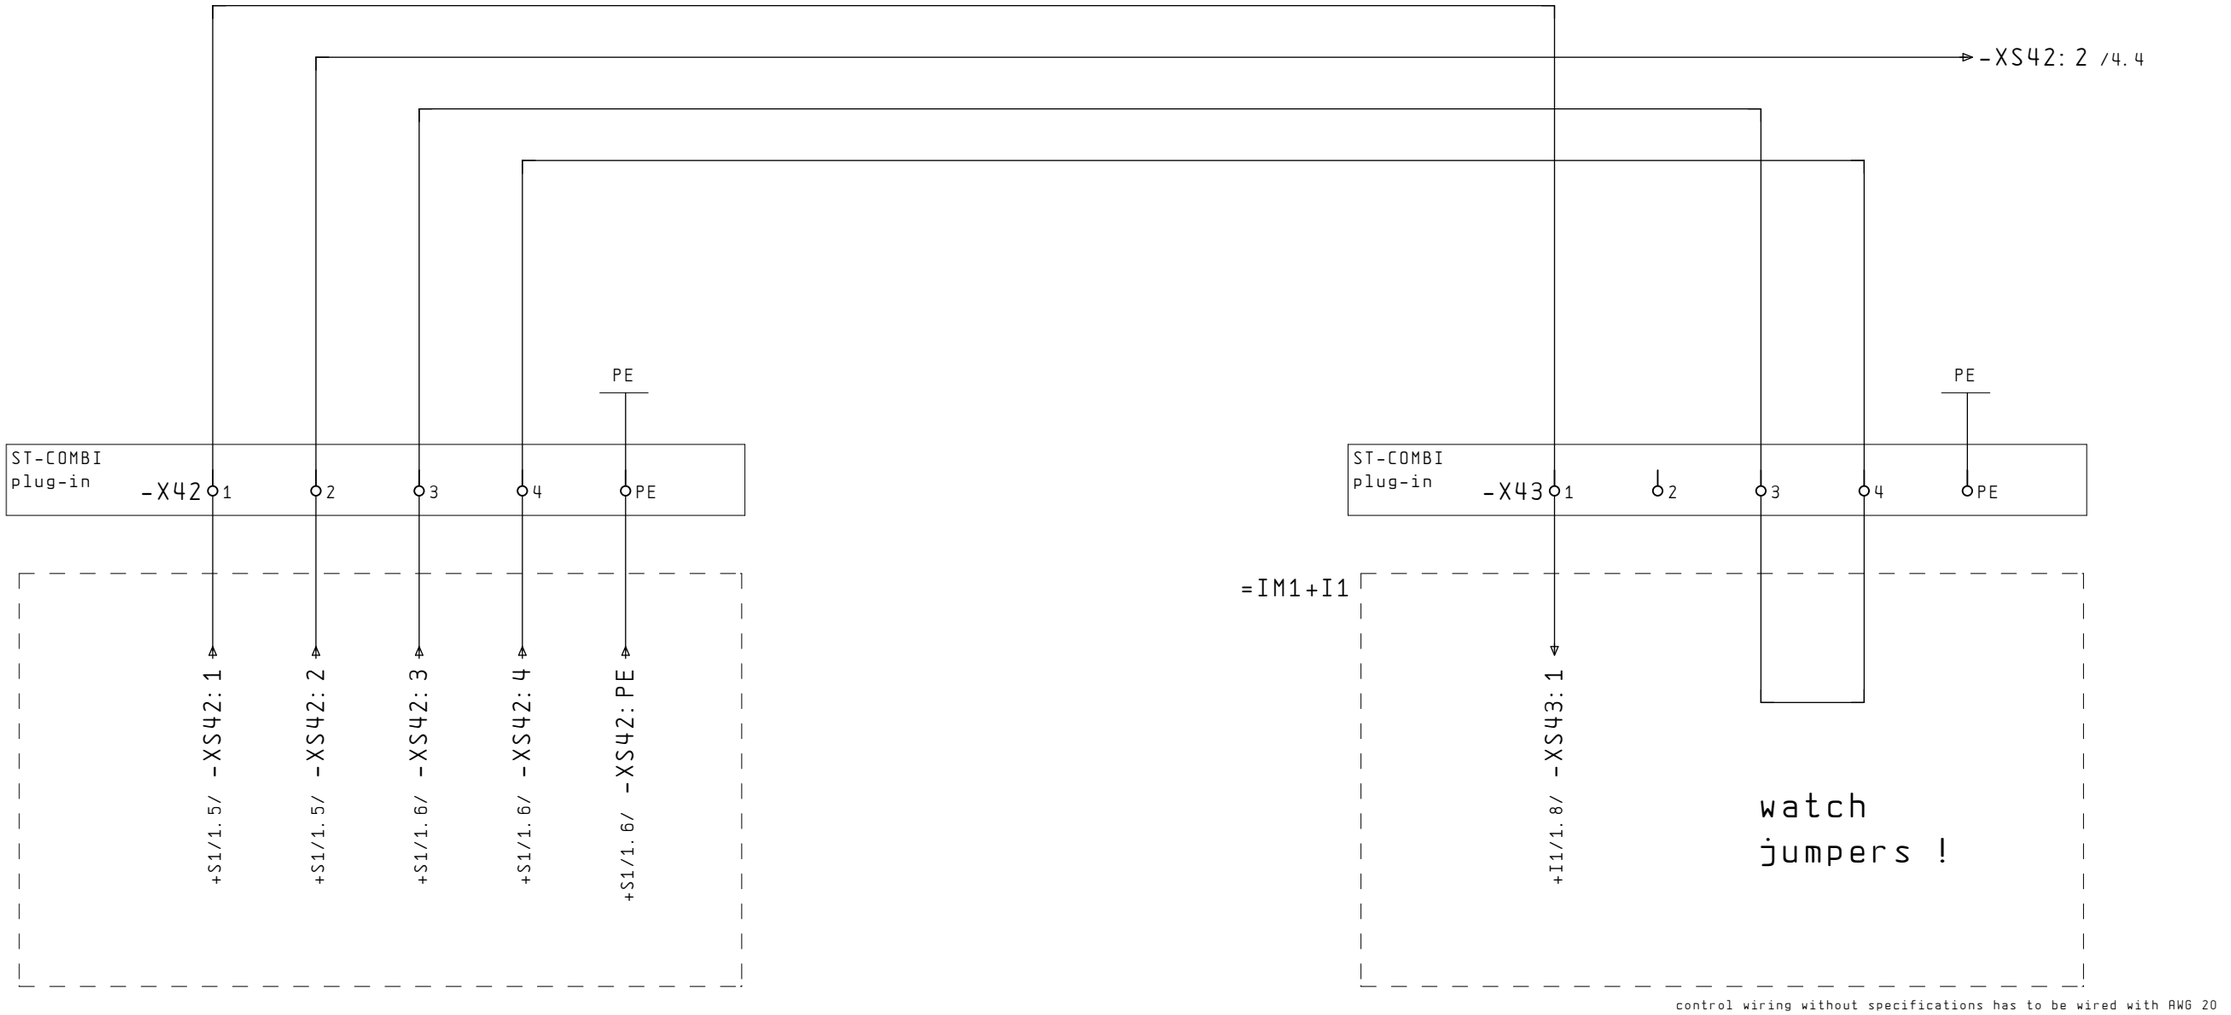

control wiring without specifications has to be wired with AWG 20

			creation date	26.10.2007	
			editor	Hennig	
001	05.03.08	Hennig	printout	27.03.08	
change	date	name	revisor		
previous page	1	total pages 174	last editor	KRU	

MESSER CUTTING SYSTEMS
64823 GROSS-UMSTADT GERMANY

286.225
MultiTherm 4000
Eurodecoupe

interlock emergency stop

drawing number	723.85638	page	2
assembly section =	IM1	location +	S41
last page	4	continuation page	3

=CA41

-C401
=CA41/2.1
KL1104
digital input terminals
24VDC, 3ms
DIGITAL INPUT
arc transfered
=CA41/2.1
I1:1

-C401
=CA41/2.1
KL1104
digital input terminals
24VDC, 3ms
DIGITAL INPUT
plasma ready
=CA41/2.1
I2:5

-C402
=CA41/2.5
KL2622
relay outputs 230VAC/30VDC, 2A
without power contacts
RELAY OUTPUT
plasma start
=CA41/2.5 O1:1
=CA41/2.5 O1:2
RELAY OUTPUT
plasma hold
=CA41/2.5 O2:5
=CA41/2.5 O2:6

-C403
=CA41/2.1
KL3002
2 channel analog inputs -10V/0...10V
without power contacts
ANALOG INPUT
workpiece
=CA41/2.1 I1:1+
=CA41/2.1 I1:2-
=CA41/2.1 I1:3M
GND
shield
=CA41/2.1 I1:4SH
ANALOG INPUT
spare
=CA41/2.1 I2:5+
=CA41/2.1 I2:6-
=CA41/2.1 I2:7M
GND
shield
=CA41/2.1 I2:8SH

1.5/ -L1 +24VDC

-L3
3 1
RZ 20-1-02
T 9609 B
4 2

-PAM
passive analog module
768 01015
4 +10V
3 0V
PE
max -300V
0V 1
IN 2
PE

PE

ST-COMBI
pluggable -X90
1 26 2 27 3 28 4 29 PE 5 30

MASSE GND
MASSE GND

+I1
+I1/1.1/ -X90:1
+I1/1.1/ -X90:26
+I1/1.2/ -X90:2
+I1/1.1/ -X90:27
+I1/1.3/ -X90:3
+I1/1.3/ -X90:28
+I1/1.4/ -X90:4
+I1/1.4/ -X90:29
+I1/1.8/ -X90:5
+I1/1.9/ -X90:30

control wiring without specifications has to be wired with AWG 20

			creation date 26.10.2007		
			editor Hennig		
001	05.03.08	Hennig	printout 27.03.08		
change	date	name	revisor		
previous page 2		total pages 174	last editor KRU		

MESSER CUTTING SYSTEMS
64823 GROSS-UMSTADT GERMANY

286.225
MultiTherm 4000
Eurodecoupe

interlock HPR 130/260

drawing number 723.85638 | page 3
assembly section = IM1 | location + S41
last page 4 | continuation page 4

=CA41

-C404
=CA41/2.5
KL2622
relay outputs 230VAC/30VDC, 2A
without power contacts
RELAY OUTPUT
edge
=CA41/2.5 O1:1
=CA41/2.5 O1:2
RELAY OUTPUT
pierce complete
=CA41/2.5 O2:5
=CA41/2.5 O2:6

-C405
=CA41/2.1
KL2622
relay outputs 230VAC/30VDC, 2A
without power contacts
RELAY OUTPUT
remote ON
=CA41/2.1 O1:1
=CA41/2.1 O1:2
RELAY OUTPUT
=CA41/2.1 O2:5
=CA41/2.1 O2:6

-C416
=CA41/2.5
KL6021
serial interface RS 422/RS 485
without power contacts
TXD+ TXD- RXD+ RXD- GND SHIELD
=CA41/2.5 TXD+:1
=CA41/2.5 TXD-:5
=CA41/2.5 RXD+:2
=CA41/2.5 RXD-:6
=CA41/2.5 3/7
=CA41/2.5 4/8

2.8/ -XS42:2

ST-COMBI pluggable -X90: 6 31 7 32 8 33 9 34
MASSE GND

ST-COMBI pluggable -XRS: 1 2 3 4 5 SH

+I1
+I1/1.3/ -X90:6
+I1/1.4/ -X90:31
+I1/1.2/ -X90:7
+I1/1.2/ -X90:32
+I1/1.8/ -X90:33
+I1/1.5/ -XRS:1
+I1/1.5/ -XRS:2
+I1/1.5/ -XRS:3
+I1/1.5/ -XRS:4
+I1/1.6/ -XRS:5

control wiring without specifications has to be wired with AWG 20

			creation date	26.10.2007	
			editor	Hennig	
001	05.03.08	Hennig	printout	27.03.08	
change	date	name	revisor		
previous page 3		total pages 174	last editor KRU		

MESSER CUTTING SYSTEMS
64823 GROSS-UMSTADT GERMANY

286.225
MultiTherm 4000
Eurodecoupe

interlock HPR 130/260

drawing number 723.85638		page	4
assembly section =	IM1	location +	S41
last page 4		continuation page	+I1/1

+S41

Sub D 37
-1X3

-X90: 26 /+S41/3.1 — 4 — cable drawing 724.22001 schwarz/black
-X90: 1 /+S41/3.1 — 23 — gelb/yellow
-X90: 27 /+S41/3.3 — 7 — rot/red
-X90: 2 /+S41/3.2 — 26 — weiss/white
-X90: 7 /+S41/4.2 — 13 — grün/green
-X90: 32 /+S41/4.3 — 32 — weiss/white
-X90: 3 /+S41/3.4 — 15 — grün/green
-X90: 28 /+S41/3.4 — 34 — gelb/yellow
-X90: 6 /+S41/4.1 — 12 — rot/red
-X90: 31 /+S41/4.2 — 31 — orange/orange
-X90: 4 /+S41/3.5 — 14 — grün/green
-X90: 29 /+S41/3.5 — 33 — blau/blue
-XRS: 3 /+S41/4.8 — 21 — grün/green
-XRS: 4 /+S41/4.8 — 2 — schwarz/black
-XRS: 1 /+S41/4.7 — 20 — rot/red
-XRS: 2 /+S41/4.7 — 1 — schwarz/black
-XRS: 5 /+S41/4.9 — 3 — schwarz/black

-XS43: 1 /+S41/2.6 — cable drawing 724.16301 — -WREM OELFLEX 2x
-X90: 33 /+S41/4.4 — cable drawing 724.16302 — -WWST OELFLEX 2x
-X90: 5 /+S41/3.6 — -FKAB 2A fuse
-X90: 30 /+S41/3.7

-WJ300
Konfektion

-J300
Sub D 37

-A1

arc transfered
plasma ready
pierce complete
plasma start
edge
plasma hold
TXD+ TXD- RXD+ RXD- GND
RS 422

-TB2: 1 -TB2: 2 -TB2: 3
workpiece positive +
negative '

with automatic gas control panel set link from -TB2: 1 to -TB2: 2
auto
remote ON

At first setup strictly remove internal wire from -TB2: 3 to -TB2: 2
manual

HPR 260

control wiring without specifications has to be wired with AWG 20


			creation date	26.10.2007
			editor	Hennig
001	05.03.08	Hennig	printout	27.03.08
change	date	name	revisor	
previous page +S41/4	total pages 174	last editor KRU		

MESSER CUTTING SYSTEMS
64823 GROSS-UMSTADT GERMANY

286.225
MultiTherm 4000
Eurodecoupe

interlock HPR 130/260

drawing number 723.85638		page	1
assembly section =	IM1	location +	I1
last page 1		continuation page	=IM2+S1/1

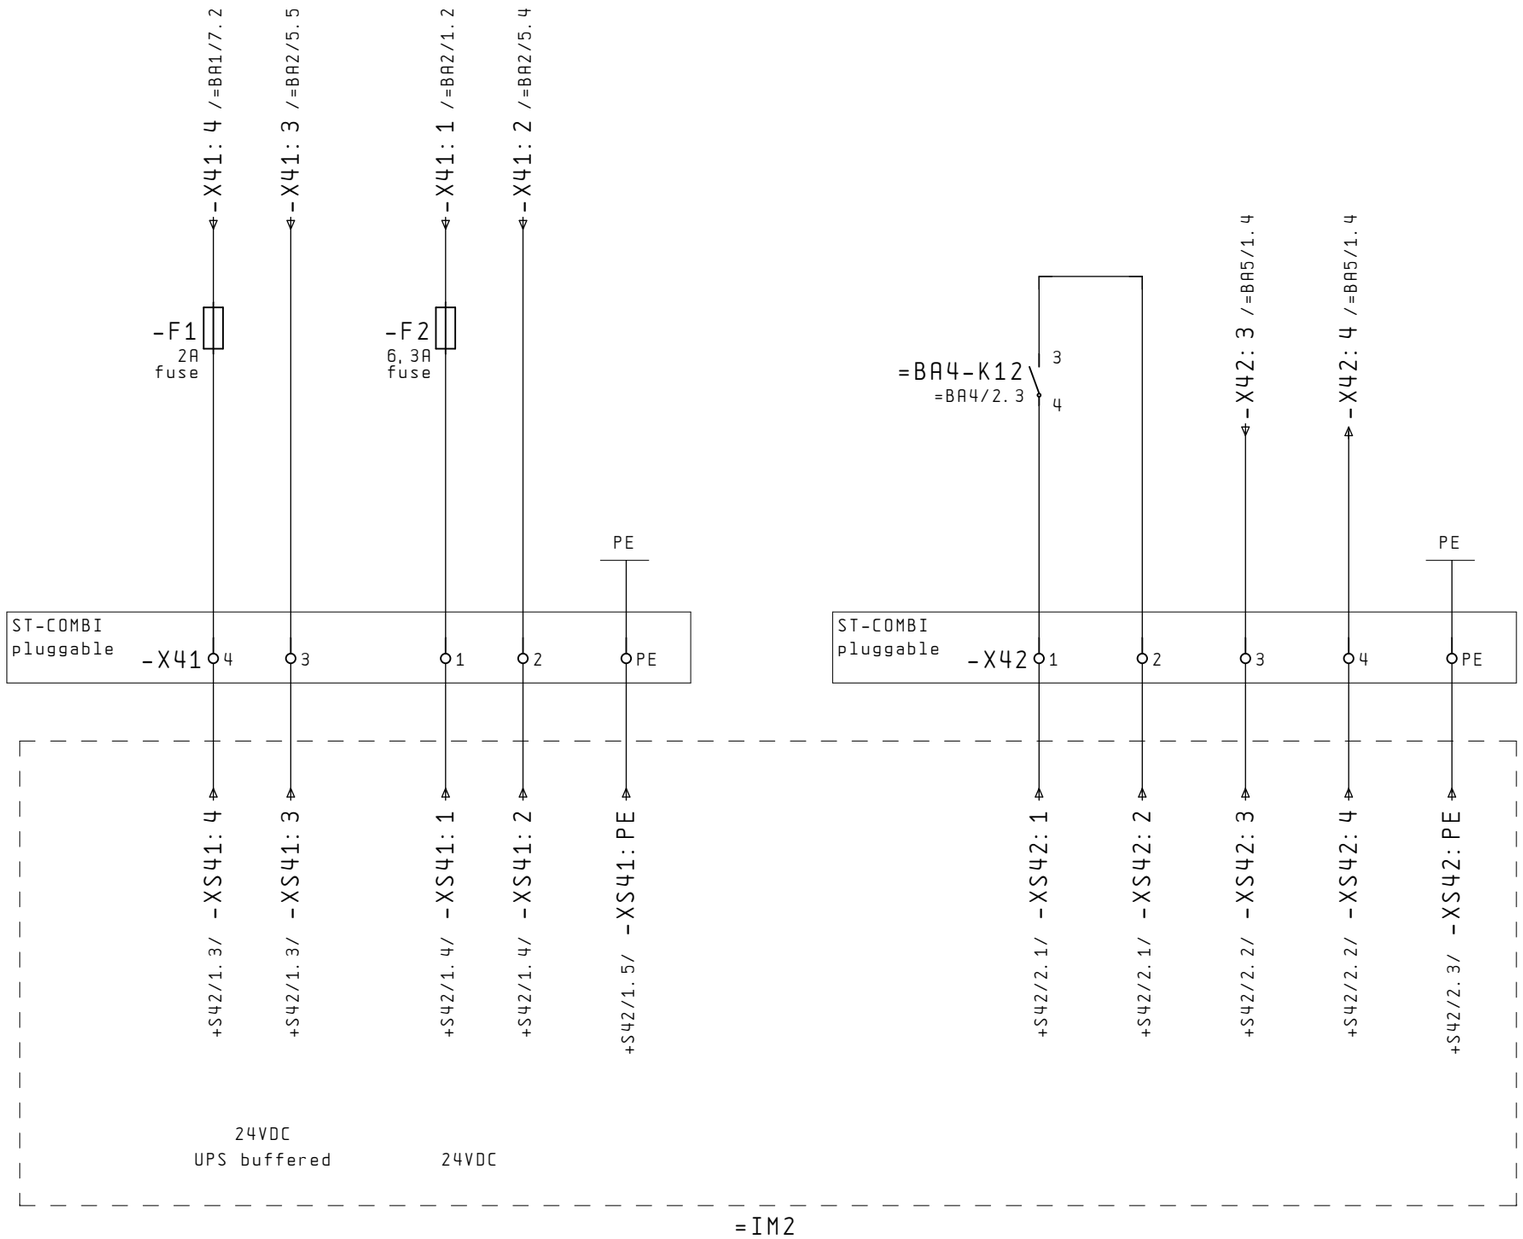


control wiring without specifications has to be wired with AWG 20

			creation date	26.10.2007	MESSER CUTTING SYSTEMS 64823 GROSS-UMSTADT GERMANY	286.225 MultiTherm 4000 Eurodecoupe	interlock HPR 130/260
			editor	Hennig			
001	05.03.08	Hennig	printout	27.03.08			
change	date	name	revisor				
previous page =IM1+I1/1		total pages 174	last editor	KRU			

drawing number	723.85638	page	1
assembly section =	IM2	location +	S1
last page	1	continuation page	+S42/1

=CA42

-C400
=CA42/1.1
BK2000

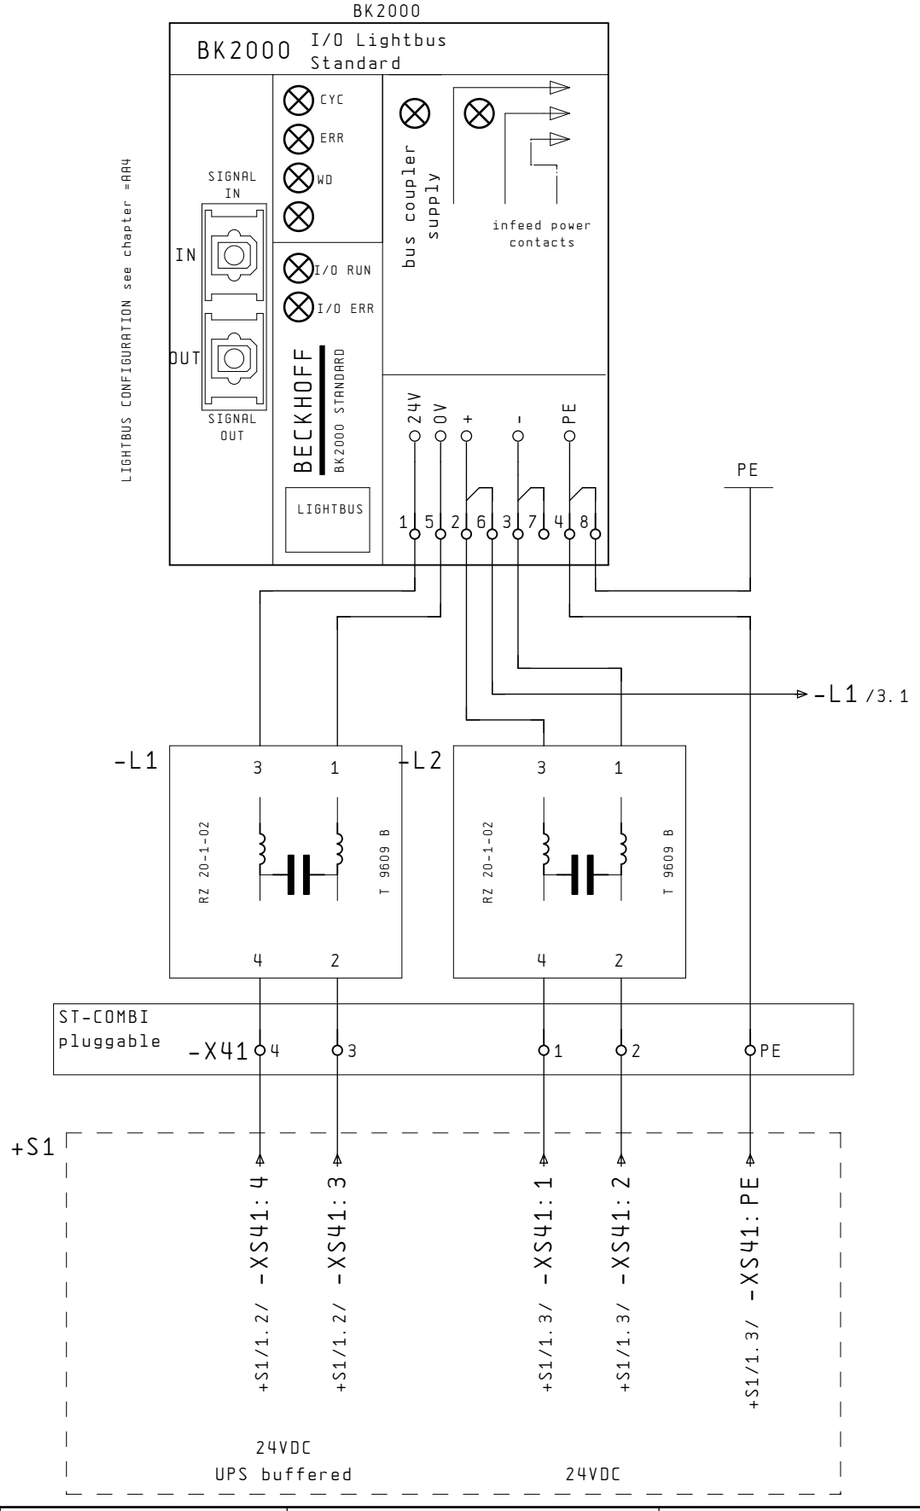

control wiring without specifications has to be wired with AWG 20


			creation date	26.10.2007	
			editor	Hennig	
001	05.03.08	Hennig	printout	27.03.08	
change	date	name	revisor		
previous page +S1/1		total pages 174	last editor KRU		

MESSER CUTTING SYSTEMS
64823 GROSS-UMSTADT GERMANY

286.225
MultiTherm 4000
Eurodecoupe

voltage supply

drawing number 723.85638		page	1
assembly section =	IM2	location +	S42
last page 4		continuation page	2

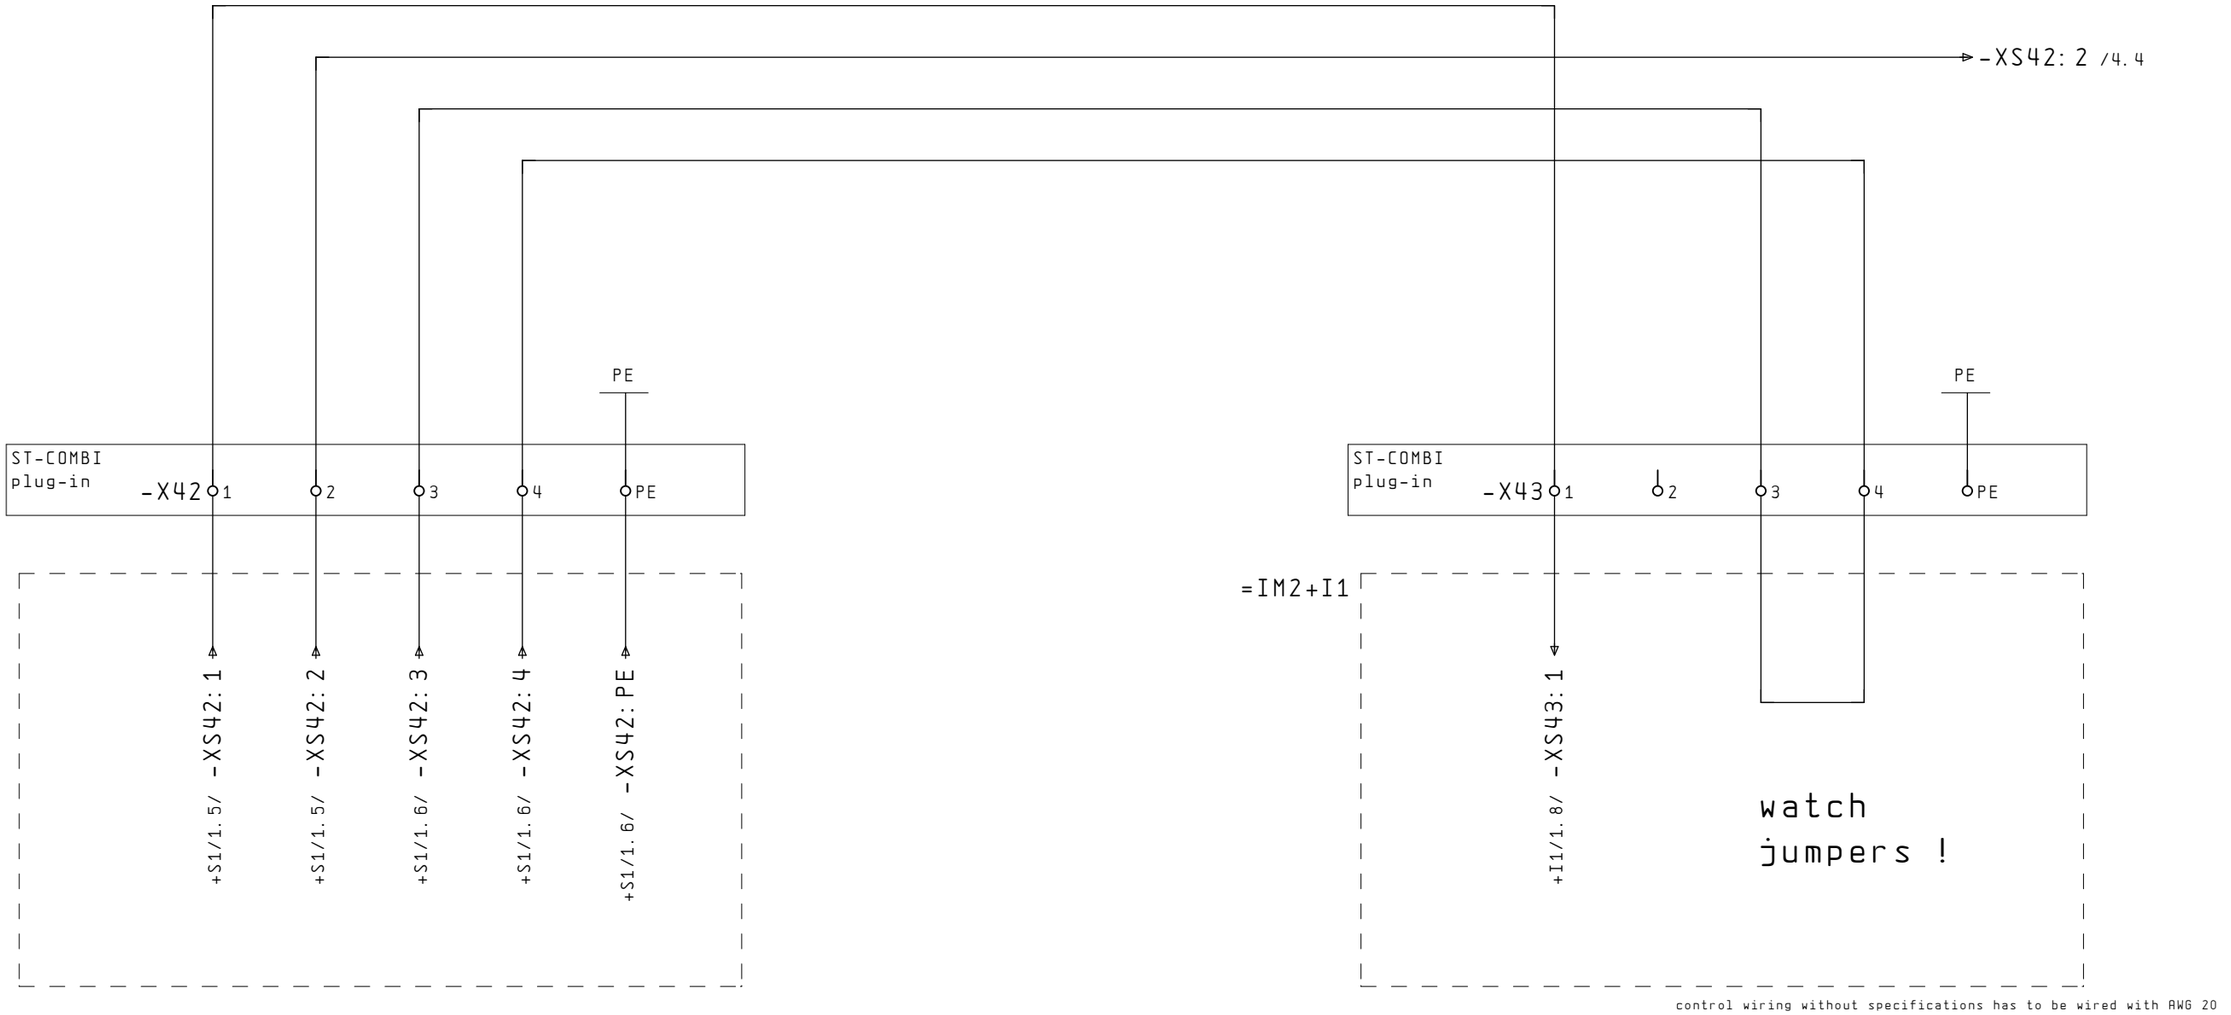

control wiring without specifications has to be wired with AWG 20

			creation date 26.10.2007		
			editor Hennig		
001	05.03.08	Hennig	printout 27.03.08		
change	date	name	revisor		
previous page 1		total pages 174	last editor KRU		

MESSER CUTTING SYSTEMS
64823 GROSS-UMSTADT GERMANY

286.225
MultiTherm 4000
Eurodecoupe

interlock emergency stop

drawing number 723.85638	page 2
assembly section = IM2	location + S42
last page 4	continuation page 3

=CA42

-C401
=CA42/2.1
KL1104
digital input terminals
24VDC, 3ms
DIGITAL INPUT
arc transfered
=CA42/2.1
I1:1

-C401
=CA42/2.1
KL1104
digital input terminals
24VDC, 3ms
DIGITAL INPUT
plasma ready
=CA42/2.1
I2:5

-C402
=CA42/2.5
KL2622
relay outputs 230VAC/30VDC, 2A
without power contacts
RELAY OUTPUT
plasma start
=CA42/2.5 O1:1
=CA42/2.5 O1:2
RELAY OUTPUT
plasma hold
=CA42/2.5 O2:5
=CA42/2.5 O2:6

-C403
=CA42/2.1
KL3002
2 channel analog inputs -10V/0...10V
without power contacts
ANALOG INPUT
workpiece
=CA42/2.1 I1:1+
=CA42/2.1 I1:2-
=CA42/2.1 I1:3M
GND
shield
=CA42/2.1 I1:4SH
ANALOG INPUT
spare
=CA42/2.1 I2:5+
=CA42/2.1 I2:6-
=CA42/2.1 I2:7M
GND
shield
=CA42/2.1 I2:8SH

1.5/ -L1 +24VDC

-L3
3 1
RZ 20-1-02
T 9609 B
4 2

-PAM
passive analog module
768 01015
4 +10V
3 0V
PE
max -300V
0V 1
IN 2
PE

PE

ST-COMBI
pluggable -X90
1 26 2 27 3 28 4 29 PE 5 30

MASSE GND
MASSE GND

+I1
+I1/1.1/ -X90:1
+I1/1.1/ -X90:26
+I1/1.2/ -X90:2
+I1/1.1/ -X90:27
+I1/1.3/ -X90:3
+I1/1.3/ -X90:28
+I1/1.4/ -X90:4
+I1/1.4/ -X90:29
+I1/1.8/ -X90:5
+I1/1.9/ -X90:30

control wiring without specifications has to be wired with AWG 20

			creation date	26.10.2007
			editor	Hennig
001	05.03.08	Hennig	printout	27.03.08
change	date	name	revisor	
previous page 2		total pages 174	last editor	KRU

MESSER CUTTING SYSTEMS
64823 GROSS-UMSTADT GERMANY

286.225
MultiTherm 4000
Eurodecoupe

interlock HPR 130/260

drawing number	723.85638	page	3
assembly section =	IM2	location +	S42
last page	4	continuation page	4

=CA42

-C404
=CA42/2.5
KL2622
relay outputs 230VAC/30VDC, 2A
without power contacts
RELAY OUTPUT
edge
=CA42/2.5 O1:1
=CA42/2.5 O1:2
RELAY OUTPUT
pierce complete
=CA42/2.5 O2:5
=CA42/2.5 O2:6

-C405
=CA42/2.1
KL2622
relay outputs 230VAC/30VDC, 2A
without power contacts
RELAY OUTPUT
remote ON
=CA42/2.1 O1:1
=CA42/2.1 O1:2
RELAY OUTPUT
=CA42/2.1 O2:5
=CA42/2.1 O2:6

2.8/ -XS42:2

-C416
=CA42/2.5
KL6021
serial interface RS 422/RS 485
without power contacts
TXD+ TXD- RXD+ RXD- GND SHIELD
=CA42/2.5 TXD+:1
=CA42/2.5 TXD-:5
=CA42/2.5 RXD+:2
=CA42/2.5 RXD-:6
=CA42/2.5 3/7
=CA42/2.5 4/8

ST-COMBI pluggable -X90: 6, 31, 7, 32, 8, 33, 9, 34
MASSE GND

ST-COMBI pluggable -XRS: 1, 2, 3, 4, 5, SH

+I1
+I1/1.3/ -X90:6
+I1/1.4/ -X90:31
+I1/1.2/ -X90:7
+I1/1.2/ -X90:32
+I1/1.8/ -X90:33
+I1/1.5/ -XRS:1
+I1/1.5/ -XRS:2
+I1/1.5/ -XRS:3
+I1/1.5/ -XRS:4
+I1/1.6/ -XRS:5

control wiring without specifications has to be wired with AWG 20

		creation date	26.10.2007	
		editor	Hennig	
001	05.03.08	printout	27.03.08	
change	date	name	revisor	
previous page 3	total pages 174	last editor KRU		

MESSER CUTTING SYSTEMS
64823 GROSS-UMSTADT GERMANY

286.225
MultiTherm 4000
Eurodecoupe

interlock HPR 130/260

drawing number 723.85638		page	4
assembly section =	IM2	location +	S42
last page 4	continuation page		+I1/1

+S42

Sub D 37
-1X3

-X90: 26 /+S42/3.1 — 4 — cable drawing 724.22001 — schwarz/black
-X90: 1 /+S42/3.1 — 23 — gelb/yellow
-X90: 27 /+S42/3.3 — 7 — rot/red
-X90: 2 /+S42/3.2 — 26 — weiss/white
-X90: 7 /+S42/4.2 — 13 — grün/green
-X90: 32 /+S42/4.3 — 32 — weiss/white
-X90: 3 /+S42/3.4 — 15 — grün/green
-X90: 28 /+S42/3.4 — 34 — gelb/yellow
-X90: 6 /+S42/4.1 — 12 — rot/red
-X90: 31 /+S42/4.2 — 31 — orange/orange
-X90: 4 /+S42/3.5 — 14 — grün/green
-X90: 29 /+S42/3.5 — 33 — blau/blue
-XRS: 3 /+S42/4.8 — 21 — grün/green
-XRS: 4 /+S42/4.8 — 2 — schwarz/black
-XRS: 1 /+S42/4.7 — 20 — rot/red
-XRS: 2 /+S42/4.7 — 1 — schwarz/black
-XRS: 5 /+S42/4.9 — 3 — schwarz/black

-XS43: 1 /+S42/2.6 — cable drawing 724.16301 — -WREM OELFLEX 2x
-X90: 33 /+S42/4.4 — cable drawing 724.16302 — -WWST OELFLEX 2x
-X90: 5 /+S42/3.6 — -FKAB 2A fuse
-X90: 30 /+S42/3.7

-WJ300
Konfektion

-J300
Sub D 37
4 23 7 26 13 32 15 34 12 31 14 33 21 2 20 1 3

-A1

arc transfered | plasma ready | pierce complete | plasma start | edge | plasma hold

TXD+ TXD- RXD+ RXD- GND
RS 422

-TB2: 1 -TB2: 2 -TB2: 3

with automatic gas control panel set link from -TB2: 1 to -TB2: 2

auto
remote ON

At first setup strictly remove internal wire from -TB2: 3 to -TB2: 2

manual

workpiece positive +
negative '

HPR 260

control wiring without specifications has to be wired with AWG 20

			creation date	26.10.2007
			editor	Hennig
001	05.03.08	Hennig	printout	27.03.08
change	date	name	revisor	
previous page +S42/4	total pages 174	last editor KRU		

MESSER CUTTING SYSTEMS
64823 GROSS-UMSTADT GERMANY

286.225
MultiTherm 4000
Eurodecoupe

interlock HPR 130/260

drawing number 723.85638 | page 1
assembly section = IM2 | location + I1
last page 1 | continuation page =LD1+S1/1

=CA1

-C110
=CA1/4.1
KL2408

digital output terminals
24VDC 0,5A

DIGITAL OUTPUT

laserpointer

=CA1/4.1
O1:1

=VA1/2.8/ =VA1-X1:8

connected via
actor-sensor-box

control wiring without specifications has to be wired with AWG 20

			creation date 26.10.2007				
			editor Hennig				
001	05.03.08	Hennig	printout 27.03.08				
change	date	name	revisor				
previous page =IM2+I1/1		total pages 174		last editor E4A			

MESSER CUTTING SYSTEMS
64823 GROSS-UMSTADT GERMANY

286.225
MultiTherm 4000
Eurodecoupe

laserpointer

drawing number 723.85638		page	1
assembly section =	LD1	location +	S1
last page 1		continuation page	=LD2/1

=CA1

-C108
=CA1/4.1
KL2408

digital output terminals
24VDC 0,5A

DIGITAL OUTPUT

laserpointer

=CA1/4.1
O4:6

=VA2/2.8/ =VA2-X1:8



connected via
actor-sensor-box

control wiring without specifications has to be wired with AWG 20

			creation date 26.10.2007				
			editor Hennig				
001	05.03.08	Hennig	printout 27.03.08				
change	date	name	revisor				
previous page =LD1/1		total pages 174		last editor E4A			

MESSER CUTTING SYSTEMS
64823 GROSS-UMSTADT GERMANY

286.225
MultiTherm 4000
Eurodecoupe

laserpointer

drawing number 723.85638		page	1
assembly section =	LD2	location +	S1
last page 1		continuation page	=MB1/1

=CA1

-C103
=CA1/3.1
KL1408

digital input terminals
24VDC, 3ms

DIGITAL INPUT

exhaust

=CA1/3.1
I6:7

-C904
=CA1/6.1
KL2612

relay outputs 125VAC/30VDC 0,5A/1A

without power contacts

RELAY OUTPUT

exhaustion ON

=CA1/6.1
O1:2
=CA1/6.1 O1:1
=CA1/6.1 O1:3

RELAY OUTPUT

exhaustion OFF

=CA1/6.1
O2:6
=CA1/6.1 O2:5
=CA1/6.1 O2:7

=BA2/1.2/ -X36:1

PE

ST-COMBI
plug-in
-X36 1 PE 2 3 4 5 6

-WX36
OELFLEX
7x1mm²

13 PE 14

-A1
ABSAUGUNG

+A1

control wiring without specifications has to be wired with AWG 20

			creation date	26.10.2007	
			editor	Hennig	
001	05.03.08	Hennig	printout	27.03.08	
change	date	name	revisor		
previous page	=LD2/1	total pages	174	last editor	WNA

MESSER CUTTING SYSTEMS
64823 GROSS-UMSTADT GERMANY

286.225
MultiTherm 4000
Eurodecoupe

periphery interface

drawing number	723.85638	page	1
assembly section =	MB1	location +	S1
last page	1	continuation page	=VA0/1

=BA2/4.6/ -X1: 18
=BA2/1.3/ -X1: 17

-X1: 9 /=HX1/2.8
-X1: 11 /=HX1/2.8
-X1: 13 /=HX1/2.8

ST-COMBI
plug-in

-X1 17 18 9 1 11 3 13 5 15 7

+M1

-WX1
ASB 21x
PVC/C/FD
16x0,34+5x0,75

-X1
2.0

17 1+ P 18 1- 0V 9 1 11 3 13 5 15 7

socket connector module

PE /2.9

DC
notice
jumper

-P1 1 3 5 2 4
-P3 1 3 5 2 4
-P5 1 3 5 2 4
-P7 1 3 5 2 4

-WB1
Konfektion
77003737

-WB3
Konfektion
77003737

-WB5
Konfektion
77003737

PE
+ overtravel X
-B1

PE
- overtravel X
-B3

PE
home switch X
-B5

+M1

control wiring without specifications has to be wired with AWG 20

			creation date	26.10.2007	
			editor	Hennig	
001	05.03.08	Hennig	printout	27.03.08	
change	date	name	revisor		
previous page =MB1/1		total pages 174		last editor KRU	

MESSER CUTTING SYSTEMS
64823 GROSS-UMSTADT GERMANY

286.225
MultiTherm 4000
Eurodecoupe

actor-sensor-box

drawing number 723.85638		page	1
assembly section = VA0		location +	S1
last page 2	continuation page		2

=BA2/4.6/ -X1: 20
=BA2/1.3/ -X1: 19

-X1: 16 /=BA3/1.7

PE

ST-COMBI
plug-in

-X1 19 20 10 2 12 4 14 6 16 8 PE

+M1

-WX1
ASB 21
PVC/C/FD
16x0,34+5x0,75

-X1
1.0

19 2+ P 20 2- 0V 10 2 12 4 14 6 16 8 PE

socket connector module

PE /1.9

DC
notice
jumper

-P2 1 3 5 2 4

-P4 1 3 5 2 4

-P6 1 3 5 2 4

-P8 1 3 5 2 4

-WSP8
Konfektion

1 4

-SP8
pressure monitoring

+01

control wiring without specifications has to be wired with AWG 20

			creation date	26.10.2007	
			editor	Hennig	
001	05.03.08	Hennig	printout	27.03.08	
change	date	name	revisor		
previous page	1	total pages	174	last editor	E4A

MESSER CUTTING SYSTEMS
64823 GROSS-UMSTADT GERMANY

286.225
MultiTherm 4000
Eurodecoupe

actor-sensor-box

drawing number	723.85638	page	2
assembly section =	VA0	location +	S1
last page	2	continuation page	=VA1/1

=BA1/5.8/ -X1: 18
=BA1/4.0/ -X1: 17
-X1: 1 /=FF1/1.6

ST-COMBI
plug-in

-X1 17 18 9 1 11 3 13 5 15 7

+F1
-WX1
ASB 21x
PVC/C/FD
16x0,34+5x0,75

-X1
2.0

AC
notice
jumper

17 1+ P 18 1- 0V 9 1 11 3 13 5 15 7
socket connector module

PE /2.9

-P1 1 3 5 2 4
-P3 1 3 5 2 4
-P5 1 3 5 2 4
-P7 1 3 5 2 4

-WY1
Konfektion

PE

lifting cylinder
-Y1

control wiring without specifications has to be wired with AWG 20

			creation date	26.10.2007	
			editor	Hennig	
001	05.03.08	Hennig	printout	27.03.08	
change	date	name	revisor		
previous page =VA0/2	total pages 174	last editor E1A			

MESSER CUTTING SYSTEMS
64823 GROSS-UMSTADT GERMANY

286.225
MultiTherm 4000
Eurodecoupe

actor-sensor-box

drawing number 723.85638		page	1
assembly section =	VA1	location +	S1
last page 2		continuation page	2

=BA2/4.7/ -X1: 20
=BA2/1.4/ -X1: 19

-X1: 10 /=FG1/2.3
-X1: 12 /=HY2/2.8
-X1: 14 /=HY1/2.8
-X1: 8 /=LD1/1.1
PE

ST-COMBI
plug-in

-X1 19 20 10 2 12 4 14 6 16 8 PE

+F1
-WX1
ASB 21
PVC/C/FD
16x0,34+5x0,75

-X1
1.0

19 2+ P 20 2- 0V 10 2 12 4 14 6 16 8 PE
socket connector module

PE /1.9

DC
notice
jumper

-P2 1 3 5 2 4
-P4 1 3 5 2 4
-P6 1 3 5 2 4
-P8 1 3 5 2 4

-WS4 Konfektion

PE
13
14
-S4
tactile switch
IHS

-WB4
Konfektion
77003737

PE
51
+ overtravel Y
-B4

-WB6
Konfektion
77003737

PE
101
home switch Y
-B6

-WXH8
Konfektion
77003736

-XH8
5pol
3 4

2 1
-H8
24VDC
laserpointer
77004380

Stecker 77002800
Kabel 770.03736(3,5m)
Kabel 770.03737(7,5m)

Kabel 72384582(>7,5m)
und
Stecker 2pol: 652033

control wiring without specifications has to be wired with AWG 20

			creation date	26.10.2007
			editor	Hennig
001	05.03.08	Hennig	printout	27.03.08
change	date	name	revisor	
previous page 1		total pages 174	last editor	E4A

MESSER CUTTING SYSTEMS
64823 GROSS-UMSTADT GERMANY

286.225
MultiTherm 4000
Eurodecoupe

actor-sensor-box

drawing number	723.85638	page	2
assembly section =	VA1	location +	S1
last page	2	continuation page	=VA2/1

=BA1/5.8/ -X1:18
=BA1/4.1/ -X1:17
-X1:1 /=FF2/1.6

ST-COMBI
plug-in

-X1 17 18 9 1 11 3 13 5 15 7

+F2
-WX1
ASB 21x
PVC/C/FD
16x0,34+5x0,75

-X1
2.0

17 1+ P 18 1- 0V 9 1 11 3 13 5 15 7
socket connector module

PE /2.9

AC
notice
jumper

-P1 1 3 5 2 4
-P3 1 3 5 2 4
-P5 1 3 5 2 4
-P7 1 3 5 2 4

-WY1
Konfektion

PE

lifting cylinder
-Y1

control wiring without specifications has to be wired with AWG 20

			creation date	26.10.2007	
			editor	Hennig	
001	05.03.08	Hennig	printout	27.03.08	
change	date	name	revisor		
previous page =VA1/2	total pages 174	last editor E1A			

MESSER CUTTING SYSTEMS
64823 GROSS-UMSTADT GERMANY

286.225
MultiTherm 4000
Eurodecoupe

actor-sensor-box

drawing number 723.85638		page	1
assembly section =	VA2	location +	S1
last page 2		continuation page	2

=BA2/4.7/ -X1: 20
=BA2/1.4/ -X1: 19

-X1: 10 /=FG2/2.3
-X1: 12 /=HY2/2.8
-X1: 14 /=HY2/2.8
-X1: 8 /=LD2/1.1
PE

ST-COMBI
plug-in

-X1 19 20 10 2 12 4 14 6 16 8 PE

+F2
-WX1
ASB 21
PVC/C/FD
16x0,34+5x0,75

-X1
1.0

19 2+ P 20 2- 0V 10 2 12 4 14 6 16 8 PE
socket connector module

PE /1.9

DC
notice
jumper

-P2 1 3 5 2 4
-P4 1 3 5 2 4
-P6 1 3 5 2 4
-P8 1 3 5 2 4

-WS4 Konfektion

PE
13
14
-S4
tactile switch
IHS

-WB4
Konfektion
77003737

PE
52
+ overtravel Y
-B4

-WB6
Konfektion
77003737

PE
102
home switch Y
-B6

OPTION
variable mounting place
-WXH8
Konfektion
77003736

-XH8
5pol
3 4
2 1
-H8
24VDC
laserpointer
77004380

Stecker 77002800
Kabel 770.03736(3,5m)
Kabel 770.03737(7,5m)

Kabel 72384582(>7,5m)
und
Stecker 2pol: 652033

control wiring without specifications has to be wired with AWG 20


			creation date	26.10.2007
			editor	Hennig
001	05.03.08	Hennig	printout	27.03.08
change	date	name	revisor	
previous page 1	total pages 174		last editor	E4A

MESSER CUTTING SYSTEMS
64823 GROSS-UMSTADT GERMANY

286.225
MultiTherm 4000
Eurodecoupe

actor-sensor-box

drawing number	723.85638	page	2
assembly section =	VA2	location +	S1
last page	2	continuation page=	VNA1+M1/1

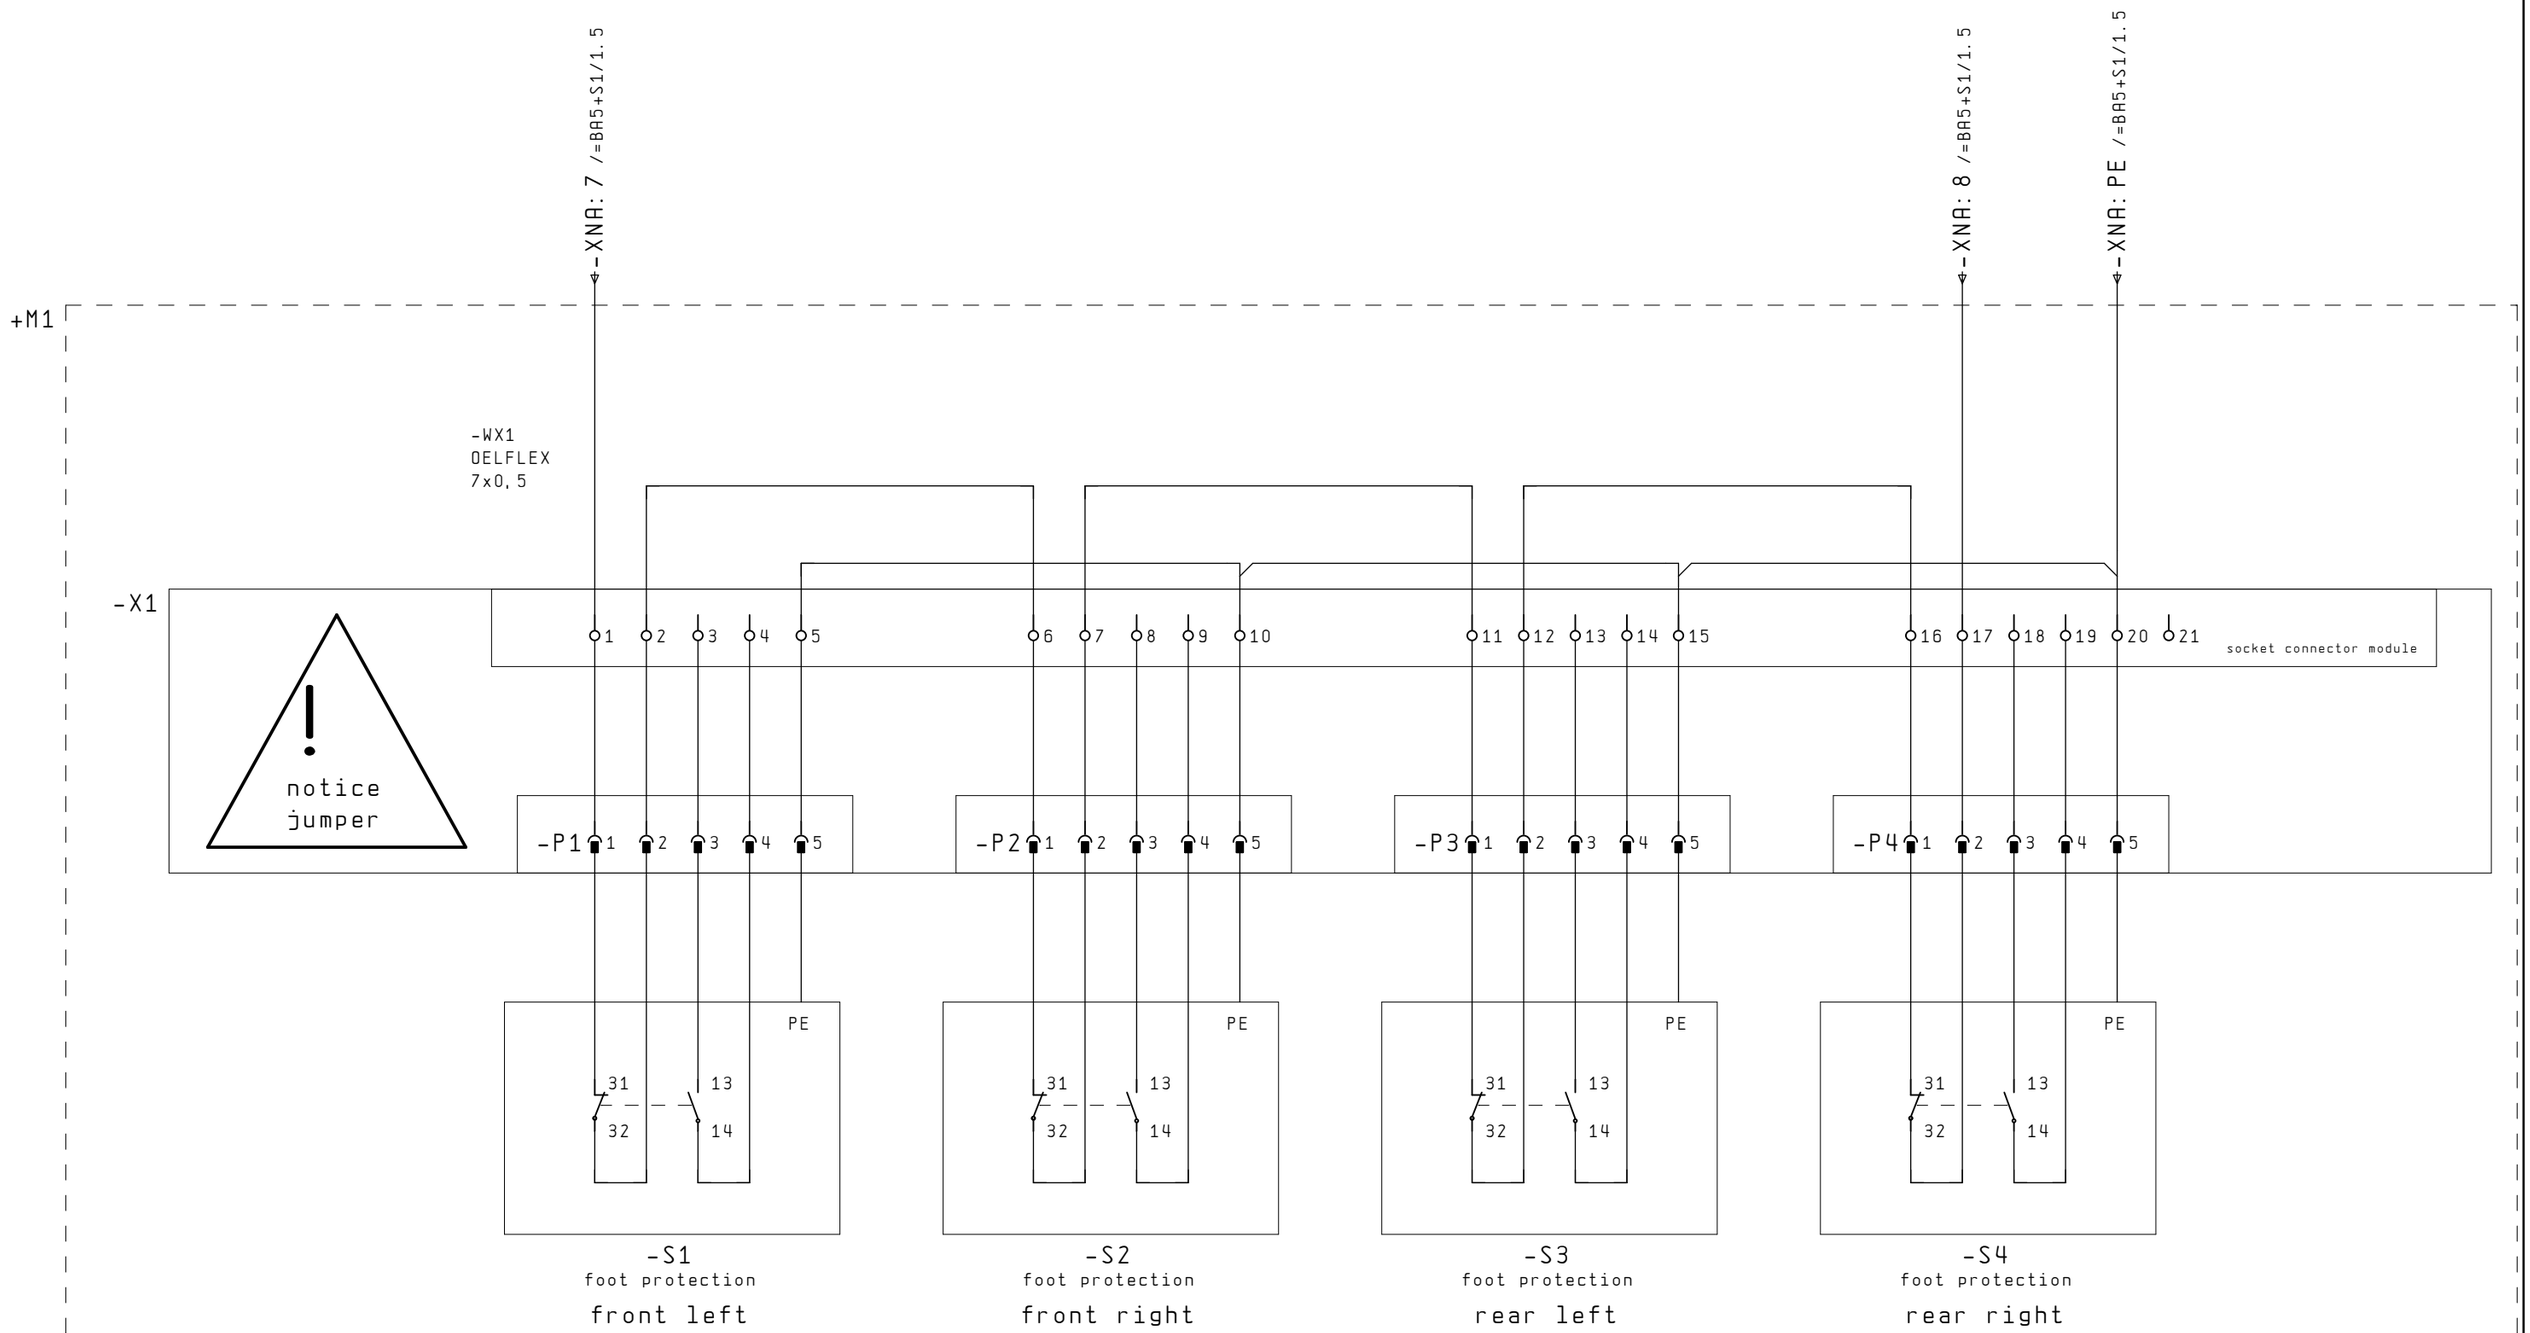

control wiring without specifications has to be wired with AWG 20

			creation date	26.10.2007
			editor	Hennig
001	05.03.08	Hennig	printout	27.03.08
change	date	name	revisor	
previous page =VA2+S1/2		total pages 174	last editor	KRU

MESSER CUTTING SYSTEMS
64823 GROSS-UMSTADT GERMANY

286.225
MultiTherm 4000
Eurodecoupe

actor-sensor-box

drawing number	723.85638	page	1
assembly section =	VNA1	location +	M1
last page	1	continuation page=	VNA2+M2/1

-XNA: 9 /=BA5+S1/1.6

-XNA: 10 /=BA5+S1/1.6

-XNA: PE /=BA5+S1/1.6

+M2

-WX1
OELFLEX
7x0,5

-X1

notice
jumper

socket connector module

-P1 1 2 3 4 5

-P2 6 7 8 9 10

-P3 11 12 13 14 15

-P4 16 17 18 19 20 21

PE

31 13
32 14

-S1
foot protection
front left

-S2
foot protection
front right

-S3
foot protection
rear left

-S4
foot protection
rear right

control wiring without specifications has to be wired with AWG 20

			creation date	26.10.2007
			editor	Hennig
001	05.03.08	Hennig	printout	27.03.08
change	date	name	revisor	
previous page =VNA1+M1/1		total pages 174	last editor	KRU

MESSER CUTTING SYSTEMS
64823 GROSS-UMSTADT GERMANY

286.225
MultiTherm 4000
Eurodecoupe

actor-sensor-box

drawing number	723.85638	page	1
assembly section =	VNA2	location +	M2
last page	1	continuation page	=W1/1

cable overview

GC_KAB_DE 11.07.07 HK

CABLE NAME CABLE DESIGNATION	SOURCE from	DESTINATION to	TYPE OF CABLE	CORES total	DIAMETER mm²	NOTES PART NUMBER	PAGE PATH
=AA4+S1-LWL1	=AA4+S1-OUT	=AA4+S41-IN	PMMA-FIBRE	1	-	77011023 Z1102	=AA4+S1/1.3
=AA4+S1-LWL2	=AA4+S1-IN	=AA4+S42-OUT	PMMA-FIBRE	1	-	77011023 Z1102	=AA4+S1/1.6
=AA4+S1-LWL3	=AA4+S1-IN	=AA4+S1-OUT	PMMA-FIBRE	1	-	77011023 Z1102	=AA4+S1/1.9
=AA4+S1-LWL4	=AA4+S1-OUT	=AA4+S1-IN	PMMA-FIBRE	1	-	77011023 Z1102	=AA4+S1/1.0
=AA4+S1-LWL42	=AA4+S42-IN	=AA4+S41-OUT	PMMA-FIBRE	1	-	77011023 Z1102	=AA4+S1/1.4
=AA4+S1-LWlink1	=AA4+S1-IN	=AA4+S1-OUT	PMMA-FIBRE	1	-	Beckhoff	=AA4+S1/1.8
=AA4+S1-LWlink2	=AA4+S1-IN	=AA4+S1-OUT	PMMA-FIBRE	1	-	Beckhoff	=AA4+S1/1.7
=AA4+S1-LWlink3	=AA4+S1-IN	=AA4+S1-OUT	PMMA-FIBRE	1	-	Beckhoff	=AA4+S1/1.1
=BA1+P1-WX40	=BA2+S1-X40	=BA1+P1-X40	OELFLEX	19	-		=BA1+P1/1.1
=BA5+M1-WRL2	=BA5+S1-XNA	=BA5+M1-RL2	OELFLEX	3	0.5		=BA5+S1/2.6
=BA6+S1-WX71	=BA6+S1-X71	=BA6+S1-H1	OELFLEX	2	-	buzzer	=BA6+S1/1.8
=BA6+M1-WBS1	=BA6+S1-XBS1	=BA6+M1-BS1	OELFLEX	5	0.5		=BA6+S1/2.0
=BA6+M2-WBR1	=BA6+S1-XBR1	=BA6+M2-BR1	OELFLEX	7	0.5		=BA6+S1/2.2
=CA0+S1-WCA0	=BA1+S1-X01	=CA0+S1-CA0	OELFLEX	3	-		=CA0+S1/1.1
=CA0+S1-WLINK1	=CA0+M1-A1	=CA0+S1-CA0		1	-	77011123.1	=CA0+S1/1.7
=CA0+S1-WLINK2	=CA0+M1-A1	=CA0+S1-CA0		1	-	77011123.2	=CA0+S1/1.7
=CA0+P1-WDVI	=CA0+M1-A1	=CA0+P1-P1-X101		1	-	77011082.1	=CA0+P1/1.6
=CA0+P1-WPWR	=CA0+M1-A1	=CA0+P1-P1-X102		1	-	77003738	=CA0+P1/1.6
=CA0+P1-WUSB	=CA0+M1-A1	=CA0+P1-P1-X103		1	-	77011082.2	=CA0+P1/1.7
=EB1+S1-WTOM	=EB1+S1-TOM	=EB1+F1-L1	Einzeladern	1	4	torch touch enable	=EB1+S1/1.3
=EB2+S1-WTOM	=EB2+S1-TOM	=EB2+F1-L1	Einzeladern	1	4	torch touch enable	=EB2+S1/1.3
=FG1+F1-WALFA	=FG1+S1-X1	=FG1+F1-X1	Konfektion	21	-		=FG1+F1/1.5
=FG1+F1-WS1	=FG1+F1-X4	=FG1+F1-B1	Steuerleitung	3	0.5		=FG1+F1/1.4
=FG1+F1-WX190	=FG1+S1-X190	=FG1+F1-X190	Steuerleitung	8	0.25	WASS8-2/S366 77004639	=FG1+F1/3.2
=FG1+F1-WXM	=FG1+F1-XM	=FG1+F1-MOT	OELFLEX	26	0.5		=FG1+F1/2.2
=FG1+F1-WXU	=BA0+S1-XT	=FG1+F1-XU	OELFLEX	5	1.5		=FG1+F1/2.1
=FG2+F2-WALFA	=FG2+S1-X1	=FG2+F2-X1	Konfektion	21	-		=FG2+F2/1.5
=FG2+F2-WS1	=FG2+F2-X4	=FG2+F2-B1	Steuerleitung	3	0.5		=FG2+F2/1.4
=FG2+F2-WX192	=FG2+S1-X192	=FG2+F2-X192	Steuerleitung	8	0.25	WASS8-2/S366 77004639	=FG2+F2/3.2
=FG2+F2-WXM	=FG2+F2-XM	=FG2+F2-MOT	OELFLEX	26	0.5		=FG2+F2/2.2
=FG2+F2-WXU	=BA0+S1-XT	=FG2+F2-XU	OELFLEX	5	1.5		=FG2+F2/2.1
=HX1+M1-WM1	=HX1+S1-X6	=HX1+M1-XM1		6	-	ÖLFLEX SERVO-FD 750P/755P 4G1,5+2x0,75	=HX1+S1/1.1
=HX1+M1-WXG1	=HX1+S1-X5	=HX1+M1-XG1	Konfektion	9	-	resolver	=HX1+S1/1.4
=HX2+M2-WM1	=HX2+S1-X6	=HX2+M2-XM1		6	-	ÖLFLEX SERVO-FD 750P/755P 4G1,5+2x0,75	=HX2+S1/1.1
=HX2+M2-WXG1	=HX2+S1-X5	=HX2+M2-XG1	Konfektion	9	-	resolver	=HX2+S1/1.4

control wiring without specifications has to be wired with AWG 20

cable overview

GC_KAB_DE 11.07.07 HK

CABLE NAME CABLE DESIGNATION	SOURCE from	DESTINATION to	TYPE OF CABLE	CORES total	DIAMETER mm²	NOTES PART NUMBER	PAGE PATH
=HY1+O1-WM1	=HY1+S1-X6	=HY1+O1-XM1	Konfektion	4	-	ZNr.: xxx 770.05096	=HY1+S1/1.1
=HY1+O1-WXG1	=HY1+S1-X5	=HY1+O1-XG1	Konfektion	9	-	ZNr.: xxx 770.05099	=HY1+S1/1.4
=HY2+M1-WM1	=HY2+S1-X6	=HY2+M1-XM1	Konfektion	4	-	ZNr.: xxx 770.05096	=HY2+S1/1.1
=HY2+M1-WXG1	=HY2+S1-X5	=HY2+M1-XG1	Konfektion	9	-	ZNr.: xxx 770.05099	=HY2+S1/1.4
=IM1+I1-WJ300	=IM1+S41-1X3	=IM1+I1-J300	Konfektion	21	-		=IM1+I1/1.0
=IM1+I1-WREM			OELFLEX	2	-		
	=IM1+S41-X43	=IM1+I1-A1-TB2		2	-		=IM1+I1/1.8
	=IM1+S41-X90	=IM1+I1-A1-TB2		2	-		=IM1+I1/1.8
=IM1+I1-WWST			OELFLEX	2	-		
	=IM1+S41-X90	=IM1+I1-A1		2	-		=IM1+I1/1.8
	=IM1+S41-X90	=IM1+I1-FKAB		2	-		=IM1+I1/1.8
=IM2+I1-WJ300	=IM2+S42-1X3	=IM2+I1-J300	Konfektion	21	-		=IM2+I1/1.0
=IM2+I1-WREM			OELFLEX	2	-		
	=IM2+S42-X43	=IM2+I1-A1-TB2		2	-		=IM2+I1/1.8
	=IM2+S42-X90	=IM2+I1-A1-TB2		2	-		=IM2+I1/1.8
=IM2+I1-WWST			OELFLEX	2	-		
	=IM2+S42-X90	=IM2+I1-A1		2	-		=IM2+I1/1.8
	=IM2+S42-X90	=IM2+I1-FKAB		2	-		=IM2+I1/1.8
=MB1+A1-WX36	=MB1+S1-X36	=MB1+A1-A1ABSAUGUNG	OELFLEX	7	1		=MB1+S1/1.1
=VA0+M1-WB1	=VA0+M1-X1-P1	=VA0+M1-B1	Konfektion	4	-	77003737	=VA0+S1/1.1
=VA0+M1-WB3	=VA0+M1-X1-P3	=VA0+M1-B3	Konfektion	4	-	77003737	=VA0+S1/1.3
=VA0+M1-WB5	=VA0+M1-X1-P5	=VA0+M1-B5	Konfektion	4	-	77003737	=VA0+S1/1.5
=VA0+M1-WX1	=VA0+S1-X1	=VA0+M1-X1	ASB	21	-	PVC/C/FD 16x0,34+5x0,75	=VA0+S1/1.1
=VA0+O1-WSP8	=VA0+M1-X1-P8	=VA0+O1-SP8	Konfektion	4	-		=VA0+S1/2.7
=VA1+F1-WB4	=VA1+F1-X1-P4	=VA1+F1-B4	Konfektion	4	-	77003737	=VA1+S1/2.3
=VA1+F1-WB6	=VA1+F1-X1-P6	=VA1+F1-B6	Konfektion	4	-	77003737	=VA1+S1/2.5
=VA1+F1-WS4	=VA1+F1-X1-P2	=VA1+F1-S4	Konfektion	4	-		=VA1+S1/2.1
=VA1+F1-WX1	=VA1+S1-X1	=VA1+F1-X1	ASB	21	-	PVC/C/FD 16x0,34+5x0,75	=VA1+S1/1.1
=VA1+F1-WXH8	=VA1+F1-XH8	=VA1+F1-X1-P8	Konfektion	4	-	77003736	=VA1+S1/2.8
=VA1+F1-WY1	=VA1+F1-X1-P1	=VA1+F1-Y1	Konfektion	4	-		=VA1+S1/1.1
=VA2+F2-WB4	=VA2+F2-X1-P4	=VA2+F2-B4	Konfektion	4	-	77003737	=VA2+S1/2.3
=VA2+F2-WB6	=VA2+F2-X1-P6	=VA2+F2-B6	Konfektion	4	-	77003737	=VA2+S1/2.5
=VA2+F2-WS4	=VA2+F2-X1-P2	=VA2+F2-S4	Konfektion	4	-		=VA2+S1/2.1
=VA2+F2-WX1	=VA2+S1-X1	=VA2+F2-X1	ASB	21	-	PVC/C/FD 16x0,34+5x0,75	=VA2+S1/1.1
=VA2+F2-WXH8	=VA2+F2-XH8	=VA2+F2-X1-P8	Konfektion	4	-	77003736	=VA2+S1/2.8

control wiring without specifications has to be wired with AWG 20

cable overview

GC_KAB_DE 11.07.07 HK

CABLE NAME / CABLE DESIGNATION	SOURCE from	DESTINATION to	TYPE OF CABLE	CORES total	DIAMETER mm²	NOTES / PART NUMBER	PAGE / PATH
=VA2+F2-WY1	=VA2+F2-X1-P1	=VA2+F2-Y1	Konfektion	4	-		=VA2+S1/1.1
=VNA1+M1-WX1	=BA5+S1-XNA	=VNA1+M1-X1	OELFLEX	7	0.5		=VNA1+M1/1.2
=VNA2+M2-WX1	=BA5+S1-XNA	=VNA2+M2-X1	OELFLEX	7	0.5		=VNA2+M2/1.2

control wiring without specifications has to be wired with AWG 20

			creation date	26.10.2007
			editor	Hennig
001	05.03.08	Hennig	printout	27.03.08
change	date	name	revisor	
previous page 2	total pages 174	last editor E4A		

MESSER CUTTING SYSTEMS
64823 GROSS-UMSTADT GERMANY

286.225
MultiTherm 4000
Eurodecoupe

cable listing

drawing number	723.85638	page	3
assembly section =	W1	location +	
last page	3	continuation page	=X1/1

GC1050DD 12.05

TERMINAL STRIP
OR
PIN ALLOCATION
=BA0+S1-XT

DESCRIPTION	=FG2+F2-WXU OELFLEX	=FG1+F1-WXU OELFLEX	NAME OF CABLE TYPE OF CABLE	DESTINATION	CONNECTION	NUMBER	CONNECTOR LEVEL above	CONNECTOR LEVEL below	jumper NAME	DESTINATION	CONNECTION	NAME OF CABLE TYPE OF CABLE					PAGE / PATH
		1		=FG1+F1-XU	1	1				=BA0+S1-F1	2		X				=BA0+S1/1.3
	1			=FG2+F2-XU	1	1											=BA0+S1/1.4
						1											=BA0+S1/1.4
		2		=FG1+F1-XU	2	2				=BA0+S1-F2	2		X				=BA0+S1/1.4
	2			=FG2+F2-XU	2	2											=BA0+S1/1.4
						2											=BA0+S1/1.4
		3		=FG1+F1-XU	3	3				=BA0+S1-F3	2		X				=BA0+S1/1.5
	3			=FG2+F2-XU	3	3											=BA0+S1/1.5
						3											=BA0+S1/1.5
		4		=FG1+F1-XU	PE	PE			PE	PE				X			=BA0+S1/1.5
	4			=FG2+F2-XU	PE	PE											=BA0+S1/1.6
						PE											=BA0+S1/1.6

control wiring without specifications has to be wired with AWG 20

			creation date	26.10.2007
			editor	Hennig
001	05.03.08	Hennig	printout	27.03.08
change	date	name	revisor	
previous page	=W1/3	total pages 174	last editor	E4A

MESSER CUTTING SYSTEMS
64823 GROSS-UMSTADT GERMANY

286.225
MultiTherm 4000
Eurodecoupe

distribution terminals

drawing number	723.85638	page	1
assembly section	= X1	location	+
last page	54	continuation page	2

GC1050DD 12.05

TERMINAL STRIP
OR
PIN ALLOCATION
=BA1+S1-X0

DESCRIPTION	NAME OF CABLE	TYPE OF CABLE	DESTINATION	CONNECTION	NUMBER	CONNECTOR LEVEL above	CONNECTOR LEVEL below	jumper	NAME	DESTINATION	CONNECTION	NAME OF CABLE	TYPE OF CABLE	PAGE / PATH
		X	=BA1+S1-Q163	2	1			○		=BA4+S1-K1	1		X	=BA1+S1/3.1
		X	=BA1+S1-Q163	4	2			○		=BA4+S1-K1	3		X	=BA1+S1/3.1
		X	=BA1+S1-Q163	6	3			○		=BA4+S1-K1	5		X	=BA1+S1/3.1
		X	=BA1+S1-Q163	7	4			●		=BA1+S1-X230	N		X	=BA1+S1/3.1
					5			●		=BA1+S1-X230	N		X	=BA1+S1/3.2

control wiring without specifications has to be wired with AWG 20

			creation date	26.10.2007
			editor	Hennig
001	05.03.08	Hennig	printout	27.03.08
change	date	name	revisor	
previous page 1	total pages 174		last editor	E4A

MESSER CUTTING SYSTEMS
64823 GROSS-UMSTADT GERMANY

286.225
MultiTherm 4000
Eurodecoupe

infeed control panel

drawing number	723.85638	page	2
assembly section	= X1	location	+
last page	54	continuation page	3

GC1050DD 12.05

TERMINAL STRIP
OR
PIN ALLOCATION
=BA1+S1-X00

DESCRIPTION	NAME OF CABLE	TYPE OF CABLE	DESTINATION	CONNECTION	NUMBER	CONNECTOR LEVEL above	CONNECTOR LEVEL below	jumper	NAME	DESTINATION	CONNECTION	NAME OF CABLE	TYPE OF CABLE					PAGE / PATH
					1			○		=BA1+S1-F001	1		X					=BA1+S1/2.0
					2			○		=BA1+S1-F001	3		X					=BA1+S1/2.1
					3			○		=BA1+S1-F001	5		X					=BA1+S1/2.1
					4					=BA1+S1-Q163	8			X				=BA1+S1/2.2
					5													=BA1+S1/2.2
					6					=BA1+S1-X03	2				X			=BA1+S1/2.2
					7					=BA1+S1-E1	N				X			=BA1+S1/2.2
					PE				PE	PE						X		=BA1+S1/2.2
					PE													=BA1+S1/2.3

control wiring without specifications has to be wired with AWG 20

			creation date	26.10.2007
			editor	Hennig
001	05.03.08	Hennig	printout	27.03.08
change	date	name	revisor	
previous page 2	total pages 174		last editor	E4A

MESSER CUTTING SYSTEMS
64823 GROSS-UMSTADT GERMANY

286.225
MultiTherm 4000
Eurodecoupe

infeed control panel

drawing number	723.85638	page	3
assembly section	= X1	location	+
last page	54	continuation page	4

GC1050DD 12.05

TERMINAL STRIP
OR
PIN ALLOCATION
=BA1+S1-X01

DESCRIPTION	=CA0+S1-WCA0 NAME OF CABLE	OELFLEX	TYPE OF CABLE	DESTINATION	CONNECTION	NUMBER	CONNECTOR LEVEL above	CONNECTOR LEVEL below	Jumper NAME	DESTINATION	CONNECTION	TYPE OF CABLE					PAGE / PATH
CPU supply		1		=CA0+S1-CA0	L	1		∘		=BA1+S1-K2	54		X				=BA1+S1/2.8
		2		=CA0+S1-CA0	N	2	∘			=BA1+S1-K2	71			X			=BA1+S1/2.8
		3		=CA0+S1-CA0	PE	PE		∘	PE	PE							=BA1+S1/2.8

control wiring without specifications has to be wired with AWG 20

			creation date	26.10.2007
			editor	Hennig
001	05.03.08	Hennig	printout	27.03.08
change	date	name	revisor	
previous page 3	total pages 174		last editor	E4A

MESSER CUTTING SYSTEMS
64823 GROSS-UMSTADT GERMANY

286.225
MultiTherm 4000
Eurodecoupe

ST-COMBI pluggable terminals

drawing number 723.85638	page 4
assembly section = X1	location +
last page 54	continuation page 5

GC1050DD 12.05

TERMINAL STRIP
OR
PIN ALLOCATION
=BA1+S1-X03

DESCRIPTION	NAME OF CABLE	TYPE OF CABLE	DESTINATION	CONNECTION	NUMBER	CONNECTOR LEVEL above	CONNECTOR LEVEL below	jumper	NAME	DESTINATION	CONNECTION	NAME OF CABLE	TYPE OF CABLE					PAGE / PATH
			=BA1+S1-T0	1	1		∘			=BA1+S1-X0F	2			X				=BA1+S1/2.6
			=BA1+S1-T0	1	2	∘				=BA1+S1-X00	6				X			=BA1+S1/2.6
			=BA1+S1-T0	2	3		∘			=BA1+S1-K2	53							=BA1+S1/2.7
			=BA1+S1-T0	2	4	∘				=BA1+S1-K2	71					X		=BA1+S1/2.7
					PE		∘		PE	PE								=BA1+S1/2.6

control wiring without specifications has to be wired with AWG 20

			creation date	26.10.2007
			editor	Hennig
001	05.03.08	Hennig	printout	27.03.08
change	date	name	revisor	
previous page 4	total pages 174		last editor	E4A

MESSER CUTTING SYSTEMS
64823 GROSS-UMSTADT GERMANY

286.225
MultiTherm 4000
Eurodecoupe

ST-COMBI pluggable terminals

drawing number 723.85638		page	5
assembly section =	X1	location	+
last page 54		continuation page	6

GC1050DD 12.05

TERMINAL STRIP
OR
PIN ALLOCATION
=BA1+S1-X0F

DESCRIPTION								TYPE OF CABLE	DESTINATION	CONNECTION	NUMBER	CONNECTOR LEVEL above	CONNECTOR LEVEL below	jumper NAME	DESTINATION	CONNECTION	TYPE OF CABLE					PAGE / PATH
							X		=BA1+S1-E1	L	1				=BA1+S1-0F1	2						=BA1+S1/2.4
service socket							X		=BA1+S1-X02	L					=BA1+S1-X03	1		X				=BA1+S1/2.5

NAME OF CABLE

control wiring without specifications has to be wired with AWG 20

			creation date	26.10.2007
			editor	Hennig
001	05.03.08	Hennig	printout	27.03.08
change	date	name	revisor	
previous page 5		total pages 174	last editor	E4A

MESSER CUTTING SYSTEMS
64823 GROSS-UMSTADT GERMANY

286.225
MultiTherm 4000
Eurodecoupe

distribution terminals

drawing number 723.85638		page	6
assembly section =	X1	location	+
last page 54		continuation page	7

GC1050DD 12.05

TERMINAL STRIP
OR
PIN ALLOCATION
=BA1+S1-X230

DESCRIPTION	NAME OF CABLE	TYPE OF CABLE	DESTINATION	CONNECTION	NUMBER	CONNECTOR LEVEL above	CONNECTOR LEVEL below	jumper	NAME	DESTINATION	CONNECTION	NAME OF CABLE	TYPE OF CABLE	PAGE / PATH
			=BA1+S1-F0	1	L					=BA1+S1-P1			X	=BA1+S1/3.4
										=BA1+S1-F1	1		X	=BA1+S1/3.5
					L					=BA1+S1-F2	1		X	=BA1+S1/3.5
										=BA4+S1-K1	1		X	=BA1+S1/3.5
					N					=BA1+S1-X0	5		X	=BA1+S1/3.2
		X	=BA1+S1-A1	N						=BA1+S1-X0	4		X	=BA1+S1/3.3
					N									=BA1+S1/3.3
										=BA1+S1-T3	N		X	=BA1+S1/3.3
					N					=BA1+S1-K2	23		X	=BA1+S1/3.3
										=BA1+S1-P1			X	=BA1+S1/3.3

control wiring without specifications has to be wired with AWG 20

			creation date	26.10.2007
			editor	Hennig
001	05.03.08	Hennig	printout	27.03.08
change	date	name	revisor	
previous page 6	total pages 174	last editor E4A		

MESSER CUTTING SYSTEMS
64823 GROSS-UMSTADT GERMANY

286.225
MultiTherm 4000
Eurodecoupe

voltage distribution

drawing number 723.85638		page	7
assembly section =	X1	location	+
last page 54		continuation page	8

GC1050DD 12.05

TERMINAL STRIP
OR
PIN ALLOCATION
=BA1+S1-X24N

DESCRIPTION	TYPE OF CABLE	DESTINATION	CONNECTION	NUMBER	CONNECTOR LEVEL above	CONNECTOR LEVEL below	jumper	NAME	DESTINATION	CONNECTION	TYPE OF CABLE	NAME OF CABLE	PAGE / PATH
				PE				PE	PE				=BA1+S1/5.0
													=BA1+S1/5.1
		=FG1+S1-X1	11	1					=BA1+S1-T3	0	X		=BA1+S1/5.1
		=FG2+S1-X1	11										=BA1+S1/5.2
				2									=BA1+S1/5.3
													=BA1+S1/5.4
				3					=VA1+S1-X1	18			=BA1+S1/5.8
									=VA2+S1-X1	18			=BA1+S1/5.8
				4									=BA1+S1/5.8
													=BA1+S1/5.8

control wiring without specifications has to be wired with AWG 20

			creation date	26.10.2007
			editor	Hennig
001	05.03.08	Hennig	printout	27.03.08
change	date	name	revisor	
previous page 7	total pages 174		last editor	E4A

MESSER CUTTING SYSTEMS
64823 GROSS-UMSTADT GERMANY

286.225
MultiTherm 4000
Eurodecoupe

24VAC distribution

drawing number	723.85638	page	8
assembly section	= X1	location	+
last page	54	continuation page	9

GC1050DD 12.05

TERMINAL STRIP
OR
PIN ALLOCATION
=BA1+S1-X24AC1

DESCRIPTION									TYPE OF CABLE	DESTINATION	CONNECTION	NUMBER	CONNECTOR LEVEL above	CONNECTOR LEVEL below	jumper NAME	DESTINATION	CONNECTION	TYPE OF CABLE					PAGE / PATH
								X		=VA1+S1-X1	17	1				=BA1+S1-F6	2		X				=BA1+S1/4.0
								X		=VA2+S1-X1	17												=BA1+S1/4.1

NAME OF CABLE

control wiring without specifications has to be wired with AWG 20

			creation date	26.10.2007
			editor	Hennig
001	05.03.08	Hennig	printout	27.03.08
change	date	name	revisor	
previous page 8		total pages 174	last editor	E4A

MESSER CUTTING SYSTEMS
64823 GROSS-UMSTADT GERMANY

286.225
MultiTherm 4000
Eurodecoupe

distribution terminals

drawing number	723.85638	page	9
assembly section	= X1	location	+
last page	54	continuation page	10

GC1050DD 12.05

TERMINAL STRIP
OR
PIN ALLOCATION
=BA1+S1-X24AC2

DESCRIPTION	NAME OF CABLE	TYPE OF CABLE	DESTINATION	CONNECTION	NUMBER	CONNECTOR LEVEL above	CONNECTOR LEVEL below	jumper NAME	DESTINATION	CONNECTION	NAME OF CABLE	TYPE OF CABLE	PAGE / PATH
		X	=CA1+S1-C224	01:2	1			01:2	=BA1+S1-F7	2		X	=BA1+S1/4.7
													=BA1+S1/4.7

control wiring without specifications has to be wired with AWG 20

			creation date	26.10.2007
			editor	Hennig
001	05.03.08	Hennig	printout	27.03.08
change	date	name	revisor	
previous page 9	total pages 174	last editor E4A		

MESSER CUTTING SYSTEMS
64823 GROSS-UMSTADT GERMANY

286.225
MultiTherm 4000
Eurodecoupe

distribution terminals

drawing number 723.85638		page	10
assembly section =	X1	location	+
last page	54	continuation page	11

GC1050DD 12.05

TERMINAL STRIP
OR
PIN ALLOCATION
=BA1+S1-XP24

DESCRIPTION									NAME OF CABLE	DESTINATION	CONNECTION	NUMBER	CONNECTOR LEVEL above	CONNECTOR LEVEL below	jumper NAME	DESTINATION	CONNECTION	NAME OF CABLE					PAGE / PATH
								TYPE OF CABLE										TYPE OF CABLE					
							X		=BA2+S1-F0	1	1				=BA1+S1-K2	43		X				=BA1+S1/7.1
							X		=HX1+S1-A1-X0	1					=BA1+S1-K3	A1			X			=BA1+S1/7.1
							X		=CA1+S1-C100	1	2				=IM1+S1-F1	_1				X		=BA1+S1/7.1
							X		=CA1+S1-C190-I1	2.					=IM2+S1-F1	_1				X		=BA1+S1/7.2
							X		=CA1+S1-C192-I1	2.	3											=BA1+S1/7.2
																						=BA1+S1/7.2

control wiring without specifications has to be wired with AWG 20

			creation date	26.10.2007
			editor	Hennig
001	05.03.08	Hennig	printout	27.03.08
change	date	name	revisor	
previous page 10		total pages 174	last editor	E4A

MESSER CUTTING SYSTEMS
64823 GROSS-UMSTADT GERMANY

286.225
MultiTherm 4000
Eurodecoupe

distribution 24VDC

drawing number	723.85638	page	11
assembly section	= X1	location	+
last page	54	continuation page	12

GC1050DD 12.05

TERMINAL STRIP
OR
PIN ALLOCATION
=BA1+S1-XTL

DESCRIPTION	TYPE OF CABLE	DESTINATION	CONNECTION	NUMBER	CONNECTOR LEVEL above	CONNECTOR LEVEL below	jumper	NAME	DESTINATION	CONNECTION	TYPE OF CABLE	NAME OF CABLE	PAGE / PATH
Trafo 55VDS	X	=BA1+S1-FT1	1	L1			○		=BA4+S1-K1	2	X		=BA1+S1/3.7
	X	=BA1+S1-FT2	1	L2			○		=BA4+S1-K1	4	X		=BA1+S1/3.8
	X	=BA1+S1-FT3	1	L3			○		=BA4+S1-K1	6	X		=BA1+S1/3.9

control wiring without specifications has to be wired with AWG 20

			creation date	26.10.2007
			editor	Hennig
001	05.03.08	Hennig	printout	27.03.08
change	date	name	revisor	
previous page 11	total pages 174	last editor E4A		

MESSER CUTTING SYSTEMS
64823 GROSS-UMSTADT GERMANY

286.225
MultiTherm 4000
Eurodecoupe

voltage distribution

drawing number 723.85638		page	12
assembly section =	X1	location	+
last page 54		continuation page	13

GC1050DD 12.05

TERMINAL STRIP
OR
PIN ALLOCATION
=BA2+S1-X40

DESCRIPTION	OELFLEX	TYPE OF CABLE	DESTINATION	CONNECTION	NUMBER	CONNECTOR LEVEL above	CONNECTOR LEVEL below	jumper NAME	DESTINATION	CONNECTION	TYPE OF CABLE	OELFLEX	PAGE / PATH
	1		=BA1+P1-X40	1	1		∘	14:2	=CA1+S1-C101	14:2			=BA5+S1/1.1
	2		=BA1+P1-X40	2	2	∘			=BA5+S1-XNA	1			=BA5+S1/1.1
	3		=BA1+P1-X40	3	3		∘						=BA5+S1/1.1
	4		=BA1+P1-X40	4	4	∘							=BA5+S1/1.2
power is on	5		=BA1+P1-X40	5	5		∘		=BA2+S1-KP01	A1			=BA2+S1/6.5
			=BA2+S1-XL0	1	6	∘			=BA1+P1-X40	6		6	=BA2+S1/4.3
	7		=BA1+P1-X40	7	7		∘						=BA2+S1/6.5
	8		=BA1+P1-X40	8	8	∘							=BA2+S1/6.5
	9		=BA1+P1-X40	9	9		∘						=BA2+S1/6.5
	10		=BA1+P1-X40	10	10	∘							=BA2+S1/6.6
	11		=BA1+P1-X40	11	11		∘						=BA2+S1/6.6
					12	∘							=BA2+S1/6.6
	13		=BA1+P1-X40	13	13		∘						=BA2+S1/6.7
	14		=BA1+P1-X40	14	14	∘							=BA2+S1/6.7
	15		=BA1+P1-X40	15	15		∘						=BA2+S1/6.9
	16		=BA1+P1-X40	16	16	∘			=BA6+S1-N1	3			=BA2+S1/6.7
	17		=BA1+P1-X40	17	17		∘						=BA2+S1/6.8
	18		=BA1+P1-X40	18	18	∘							=BA2+S1/6.8
	19		=BA1+P1-X40	19	19		∘		=BA2+S1-F0	2			=BA2+S1/6.8
	12		=BA1+P1-X40	12	PE		∘	PE	PE				=BA2+S1/6.9

control wiring without specifications has to be wired with AWG 20

			creation date	26.10.2007
			editor	Hennig
001	05.03.08	Hennig	printout	27.03.08
change	date	name	revisor	
previous page 12	total pages 174	last editor E4A		

MESSER CUTTING SYSTEMS
64823 GROSS-UMSTADT GERMANY

286.225
MultiTherm 4000
Eurodecoupe

ST-COMBI pluggable terminals

drawing number 723.85638 | page 13
assembly section = X1 | location +
last page 54 | continuation page 14

GC1050DD 12.05

TERMINAL STRIP
OR
PIN ALLOCATION
=BA2+S1-XL0

DESCRIPTION	NAME OF CABLE	TYPE OF CABLE	DESTINATION	CONNECTION	NUMBER	CONNECTOR LEVEL above	CONNECTOR LEVEL below	jumper	NAME	DESTINATION	CONNECTION	NAME OF CABLE	TYPE OF CABLE	PAGE / PATH
					PE				PE	PE				=BA2+S1/4.0
														=BA2+S1/4.1
		X	=BA2+S1-KP01	A2	1					=BA1+S1-G1	_2		X	=BA2+S1/4.2
			=HX1+S1-A1-X0	2						=BA2+S1-X40	6			=BA2+S1/4.3
			=HX1+S1-A1-X1	4	2					=EB1+S1-TOM	4			=BA2+S1/4.3
			=CA1+S1-C100	5						=EB2+S1-TOM	4			=BA2+S1/4.4
			=CA1+S1-C107	2	3					=FG1+S1-K1	A2			=BA2+S1/4.4
			=BA6+S1-XBS1	2						=CA1+S1-C190-I1	3.			=BA2+S1/4.5
			=BA6+S1-XBR1	2	4					=CA1+S1-C192-I1	3.			=BA2+S1/4.5
			=BA6+S1-XBS2	2						=VA0+S1-X1	18			=BA2+S1/4.6
			=BA6+S1-XBR2	2	5					=VA0+S1-X1	20			=BA2+S1/4.6
			=BA6+S1-N1	1						=VA1+S1-X1	20			=BA2+S1/4.7
			=BA6+S1-X71	2	6					=VA2+S1-X1	20			=BA2+S1/4.7
														=BA2+S1/4.8
			=FG1+S1-X1	1	7					=IM1+S1-X41	2			=BA2+S1/5.1
			=FG2+S1-X1	1						=IM1+S1-X41	3			=BA2+S1/5.2
					8					=IM2+S1-X41	2			=BA2+S1/5.4
										=IM2+S1-X41	3			=BA2+S1/5.5

control wiring without specifications has to be wired with AWG 20

			creation date	26.10.2007
			editor	Hennig
001	05.03.08	Hennig	printout	27.03.08
change	date	name	revisor	
previous page 13	total pages 174	last editor E4A		

MESSER CUTTING SYSTEMS
64823 GROSS-UMSTADT GERMANY

286.225
MultiTherm 4000
Eurodecoupe

distribution OVDC

drawing number 723.85638	page 14
assembly section = X1	location +
last page 54	continuation page 15

GC1050DD 12.05

TERMINAL STRIP
OR
PIN ALLOCATION
=BA2+S1-XL24

DESCRIPTION	NAME OF CABLE	TYPE OF CABLE	DESTINATION	CONNECTION	NUMBER	CONNECTOR LEVEL above	CONNECTOR LEVEL below	jumper	NAME	DESTINATION	CONNECTION	NAME OF CABLE	TYPE OF CABLE					PAGE / PATH
			=CA1+S1-C107	1	1					=BA1+S1-K2	34			X				=BA2+S1/1.1
			=FG1+S1-K1	11						=BA4+S1-KNA	A1							=BA2+S1/1.1
			=IM2+S1-F2	-1	2					=MB1+S1-X36	1							=BA2+S1/1.2
			=IM1+S1-F2	-1					I4:6	=CA1+S1-C103	I4:6							=BA2+S1/1.2
					3					=VA0+S1-X1	17							=BA2+S1/1.3
										=VA0+S1-X1	19							=BA2+S1/1.3
					4					=VA1+S1-X1	19							=BA2+S1/1.4
										=VA2+S1-X1	19							=BA2+S1/1.4

control wiring without specifications has to be wired with AWG 20

GC1050DD 12.05

TERMINAL STRIP
OR
PIN ALLOCATION
=FG1+S1-X1

DESCRIPTION	Konfektion	TYPE OF CABLE	DESTINATION	CONNECTION	NUMBER	CONNECTOR LEVEL above	CONNECTOR LEVEL below	Jumper	NAME	DESTINATION	CONNECTION	TYPE OF CABLE	PAGE / PATH
	1		=FG1+F1-X1	1	1			○		=BA2+S1-XL0	7		=BA2+S1/5.1
creep speed	2		=FG1+F1-X1	2	2			○	O4:6	=CA1+S1-C109	O4:6		=FG1+S1/1.3
nominal value	3		=FG1+F1-X1	3	3			○	O1:1+	=CA1+S1-C191	O1:1+		=FG1+S1/2.1
auto hight	4		=FG1+F1-X1	4	4			○	O3:2	=CA1+S1-C109	O3:2		=FG1+S1/1.9
down	5		=FG1+F1-X1	5	5			○	O2:5	=CA1+S1-C109	O2:5		=FG1+S1/1.7
	6		=FG1+F1-X1	6	6			○					=FG1+S1/1.8
	7		=FG1+F1-X1	7	7			○		=BA2+S1-F1	2		=BA2+S1/2.1
	8		=FG1+F1-X1	8	8			○	O1:3M	=CA1+S1-C191	O1:3M		=FG1+S1/2.1
upper limit	9		=FG1+F1-X1	9	9			○	I1:1	=CA1+S1-C104	I1:1		=FG1+S1/1.4
	10		=FG1+F1-X1	10	10			○					=FG1+S1/1.8
	11		=FG1+F1-X1	11	11			○		=BA1+S1-X24N	1		=BA1+S1/5.1
collision	12		=FG1+F1-X1	12	12			○	I3:2	=CA1+S1-C104	I3:2		=FG1+S1/1.2
	13		=FG1+F1-X1	13	13			○					=FG1+S1/1.3
	14		=FG1+F1-X1	14	14			○		=BA2+S1-F1	2		=FG1+S1/1.1
up	15		=FG1+F1-X1	15	15			○	O1:1	=CA1+S1-C109	O1:1		=FG1+S1/1.6
	16		=FG1+F1-X1	16	16			○					=FG1+S1/1.1
			=FG1+S1-X1	16	17			○		=FG1+S1-X1	16		=FG1+S1/1.1
			=FG1+S1-X1	17	18			○		=FG1+S1-X1	17		=FG1+S1/1.1
			=FG1+S1-X1	7	19			○		=FG1+S1-X1	7		=BA2+S1/2.1
			=FG1+S1-X1	19	20			○		=FG1+S1-X1	19		=BA2+S1/2.1
			=FG1+S1-X1	11	21			○		=FG1+S1-X1	11		=BA1+S1/5.1
			=FG1+S1-X1	21	22			○		=FG1+S1-X1	21		=BA1+S1/5.1
			=FG1+S1-X1	1	23			○		=FG1+S1-X1	1		=BA2+S1/5.1
			=FG1+S1-X1	23	24			○		=FG1+S1-X1	23		=BA2+S1/5.1
			=FG1+S1-X1	24	25			○		=FG1+S1-X1	24		=BA2+S1/5.2

control wiring without specifications has to be wired with AWG 20

GC1050DD 12.05

TERMINAL STRIP
OR
PIN ALLOCATION
=FG1+S1-X190

=FG1+F1-WX190 | NAME OF CABLE

NAME OF CABLE

DESCRIPTION	Steuerleitung	TYPE OF CABLE	DESTINATION	CONNECTION	NUMBER	CONNECTOR LEVEL above	CONNECTOR LEVEL below	jumper NAME	DESTINATION	CONNECTION	TYPE OF CABLE	PAGE / PATH
increment_A	1		=FG1+F1-X190	1	1		∘	I1:1	=CA1+S1-C190	I1:1		=FG1+S1/2.5
increment_B	2		=FG1+F1-X190	2	2	∘		I1:2	=CA1+S1-C190	I1:2		=FG1+S1/2.5
increment_0	3		=FG1+F1-X190	3	3		∘	I1:3	=CA1+S1-C190	I1:3		=FG1+S1/2.6
increment_A'	4		=FG1+F1-X190	4	4	∘		I1:5	=CA1+S1-C190	I1:5		=FG1+S1/2.6
increment_B'	5		=FG1+F1-X190	5	5		∘	I1:6	=CA1+S1-C190	I1:6		=FG1+S1/2.6
increment_0'	6		=FG1+F1-X190	6	6	∘		I1:7	=CA1+S1-C190	I1:7		=FG1+S1/2.7
	7		=FG1+F1-X190	7	7		∘		=CA1+S1-C190-I1	1.		=FG1+S1/2.7
	8		=FG1+F1-X190	8	8	∘			=CA1+S1-C190-I1	5.		=FG1+S1/2.8
					9		∘					=FG1+S1/2.8
			Schirm		10	∘			Schirm			=FG1+S1/2.9

control wiring without specifications has to be wired with AWG 20

			creation date	26.10.2007
			editor	Hennig
001	05.03.08	Hennig	printout	27.03.08
change	date	name	revisor	
previous page 16	total pages 174		last editor	E4A

MESSER CUTTING SYSTEMS
64823 GROSS-UMSTADT GERMANY

286.225
MultiTherm 4000
Eurodecoupe

ST-COMBI pluggable terminals

drawing number 723.85638 | page 17
assembly section = X1 | location +
last page 54 | continuation page 18

GC1050DD 12.05

TERMINAL STRIP
OR
PIN ALLOCATION
=FG2+S1-X1

DESCRIPTION	Konfektion	TYPE OF CABLE	DESTINATION	CONNECTION	NUMBER	CONNECTOR LEVEL above	CONNECTOR LEVEL below	Jumper	NAME	DESTINATION	CONNECTION	TYPE OF CABLE	PAGE / PATH
	1		=FG2+F2-X1	1	1			○		=BA2+S1-XL0	7		=BA2+S1/5.2
creep speed	2		=FG2+F2-X1	2	2			○	O8:8	=CA1+S1-C109	O8:8		=FG2+S1/1.3
nominal value	3		=FG2+F2-X1	3	3			○	O1:1+	=CA1+S1-C193	O1:1+		=FG2+S1/2.1
auto hight	4		=FG2+F2-X1	4	4			○	O7:4	=CA1+S1-C109	O7:4		=FG2+S1/1.9
down	5		=FG2+F2-X1	5	5			○	O6:7	=CA1+S1-C109	O6:7		=FG2+S1/1.7
	6		=FG2+F2-X1	6	6			○					=FG2+S1/1.8
	7		=FG2+F2-X1	7	7			○		=BA2+S1-F2	2		=BA2+S1/2.3
	8		=FG2+F2-X1	8	8			○	O1:3M	=CA1+S1-C193	O1:3M		=FG2+S1/2.1
upper limit	9		=FG2+F2-X1	9	9			○	I5:3	=CA1+S1-C104	I5:3		=FG2+S1/1.4
	10		=FG2+F2-X1	10	10			○					=FG2+S1/1.8
	11		=FG2+F2-X1	11	11			○		=BA1+S1-X24N	1		=BA1+S1/5.2
collision	12		=FG2+F2-X1	12	12			○	I7:4	=CA1+S1-C104	I7:4		=FG2+S1/1.2
	13		=FG2+F2-X1	13	13			○					=FG2+S1/1.3
	14		=FG2+F2-X1	14	14			○		=BA2+S1-F2	2		=FG2+S1/1.1
up	15		=FG2+F2-X1	15	15			○	O5:3	=CA1+S1-C109	O5:3		=FG2+S1/1.6
	16		=FG2+F2-X1	16	16			○					=FG2+S1/1.1
			=FG2+S1-X1	16	17			○		=FG2+S1-X1	16		=FG2+S1/1.1
			=FG2+S1-X1	17	18			○		=FG2+S1-X1	17		=FG2+S1/1.1
			=FG2+S1-X1	7	19			○		=FG2+S1-X1	7		=BA2+S1/2.3
			=FG2+S1-X1	19	20			○		=FG2+S1-X1	19		=BA2+S1/2.3
			=FG2+S1-X1	11	21			○		=FG2+S1-X1	11		=BA1+S1/5.2
			=FG2+S1-X1	21	22			○		=FG2+S1-X1	21		=BA1+S1/5.2
			=FG2+S1-X1	1	23			○		=FG2+S1-X1	1		=BA2+S1/5.3
			=FG2+S1-X1	23	24			○		=FG2+S1-X1	23		=BA2+S1/5.3
			=FG2+S1-X1	24	25			○		=FG2+S1-X1	24		=BA2+S1/5.3

control wiring without specifications has to be wired with AWG 20

GC1050DD 12.05

TERMINAL STRIP
OR
PIN ALLOCATION
=FG2+S1-X192

=FG2+F2-WX192 | NAME OF CABLE

NAME OF CABLE

DESCRIPTION	Steuerleitung	TYPE OF CABLE	DESTINATION	CONNECTION	NUMBER	CONNECTOR LEVEL above	CONNECTOR LEVEL below	jumper NAME	DESTINATION	CONNECTION	TYPE OF CABLE	PAGE / PATH
increment_A	1		=FG2+F2-X192	1	1		∘	I1:1	=CA1+S1-C192	I1:1		=FG2+S1/2.5
increment_B	2		=FG2+F2-X192	2	2	∘		I1:2	=CA1+S1-C192	I1:2		=FG2+S1/2.5
increment_0	3		=FG2+F2-X192	3	3		∘	I1:3	=CA1+S1-C192	I1:3		=FG2+S1/2.6
increment_A'	4		=FG2+F2-X192	4	4	∘		I1:5	=CA1+S1-C192	I1:5		=FG2+S1/2.6
increment_B'	5		=FG2+F2-X192	5	5		∘	I1:6	=CA1+S1-C192	I1:6		=FG2+S1/2.6
increment_0'	6		=FG2+F2-X192	6	6	∘		I1:7	=CA1+S1-C192	I1:7		=FG2+S1/2.7
	7		=FG2+F2-X192	7	7		∘		=CA1+S1-C192-I1	1.		=FG2+S1/2.7
	8		=FG2+F2-X192	8	8	∘			=CA1+S1-C192-I1	5.		=FG2+S1/2.8
					9		∘					=FG2+S1/2.8
			Schirm		10	∘			Schirm			=FG2+S1/2.9

control wiring without specifications has to be wired with AWG 20

			creation date	26.10.2007
			editor	Hennig
001	05.03.08	Hennig	printout	27.03.08
change	date	name	revisor	
previous page 18	total pages 174		last editor	E4A

MESSER CUTTING SYSTEMS
64823 GROSS-UMSTADT GERMANY

286.225
MultiTherm 4000
Eurodecoupe

ST-COMBI pluggable terminals

drawing number 723.85638 | page 19
assembly section = X1 | location +
last page 54 | continuation page 20

GC1050DD 12.05

TERMINAL STRIP
OR
PIN ALLOCATION
=IM1+S1-X41

DESCRIPTION	NAME OF CABLE	TYPE OF CABLE	DESTINATION	CONNECTION	NUMBER	CONNECTOR LEVEL above	CONNECTOR LEVEL below	jumper	NAME	DESTINATION	CONNECTION	NAME OF CABLE	TYPE OF CABLE	PAGE / PATH
			=IM1+S41-X41	1	1		○			=IM1+S1-F2				=IM1+S1/1.3
			=IM1+S41-X41	2	2	○				=BA2+S1-XL0	7			=IM1+S1/1.3
			=IM1+S41-X41	3	3		○			=BA2+S1-XL0	7			=IM1+S1/1.2
			=IM1+S41-X41	4	4	○				=IM1+S1-F1				=IM1+S1/1.2
			=IM1+S41-X41	PE	PE		○		PE	PE				=IM1+S1/1.3

control wiring without specifications has to be wired with AWG 20

			creation date	26.10.2007
			editor	Hennig
001	05.03.08	Hennig	printout	27.03.08
change	date	name	revisor	
previous page 19	total pages 174		last editor	E4A

MESSER CUTTING SYSTEMS
64823 GROSS-UMSTADT GERMANY

286.225
MultiTherm 4000
Eurodecoupe

ST-COMBI pluggable terminals

drawing number 723.85638	page 20
assembly section = X1	location +
last page 54	continuation page 21

GC1050DD 12.05

TERMINAL STRIP
OR
PIN ALLOCATION
=IM1+S1-X42

DESCRIPTION	NAME OF CABLE	TYPE OF CABLE	DESTINATION	CONNECTION	NUMBER	CONNECTOR LEVEL above	CONNECTOR LEVEL below	jumper NAME	DESTINATION	CONNECTION	NAME OF CABLE	TYPE OF CABLE	PAGE / PATH
			=IM1+S41-X42	1	1		∘		=BA4+S1-K12	2			=IM1+S1/1.5
			=IM1+S41-X42	2	2	∘			=BA4+S1-K12	1			=IM1+S1/1.5
			=IM1+S41-X42	3	3		∘		=BA5+S1-XNA	2			=IM1+S1/1.6
			=IM1+S41-X42	4	4	∘			=BA5+S1-XNA	3			=IM1+S1/1.6
			=IM1+S41-X42	PE	PE		∘	PE	PE				=IM1+S1/1.6

control wiring without specifications has to be wired with AWG 20

			creation date	26.10.2007
			editor	Hennig
001	05.03.08	Hennig	printout	27.03.08
change	date	name	revisor	
previous page 20	total pages 174		last editor	E4A

MESSER CUTTING SYSTEMS
64823 GROSS-UMSTADT GERMANY

286.225
MultiTherm 4000
Eurodecoupe

ST-COMBI pluggable terminals

drawing number 723.85638	page 21
assembly section = X1	location +
last page 54	continuation page 22

GC1050DD 12.05

TERMINAL STRIP
OR
PIN ALLOCATION
=IM2+S1-X41

DESCRIPTION	TYPE OF CABLE	DESTINATION	CONNECTION	NUMBER	CONNECTOR LEVEL above	CONNECTOR LEVEL below	jumper NAME	DESTINATION	CONNECTION	TYPE OF CABLE	PAGE / PATH
		=IM2+S42-X41	1	1		∘		=IM2+S1-F2			=IM2+S1/1.3
		=IM2+S42-X41	2	2	∘			=BA2+S1-XLO	8		=IM2+S1/1.3
		=IM2+S42-X41	3	3		∘		=BA2+S1-XLO	8		=IM2+S1/1.2
		=IM2+S42-X41	4	4	∘			=IM2+S1-F1			=IM2+S1/1.2
		=IM2+S42-X41	PE	PE		∘	PE	PE			=IM2+S1/1.3

control wiring without specifications has to be wired with AWG 20

			creation date	26.10.2007
			editor	Hennig
001	05.03.08	Hennig	printout	27.03.08
change	date	name	revisor	
previous page 21	total pages 174		last editor	E4A

MESSER CUTTING SYSTEMS
64823 GROSS-UMSTADT GERMANY

286.225
MultiTherm 4000
Eurodecoupe

ST-COMBI pluggable terminals

drawing number 723.85638 | page 22
assembly section = X1 | location +
last page 54 | continuation page 23

GC1050DD 12.05

TERMINAL STRIP
OR
PIN ALLOCATION
=IM2+S1-X42

DESCRIPTION	NAME OF CABLE	TYPE OF CABLE	DESTINATION	CONNECTION	NUMBER	CONNECTOR LEVEL above	CONNECTOR LEVEL below	jumper	NAME	DESTINATION	CONNECTION	NAME OF CABLE	TYPE OF CABLE	PAGE / PATH
			=IM2+S42-X42	1	1		∘			=BA4+S1-K12	4			=IM2+S1/1.5
			=IM2+S42-X42	2	2	∘				=BA4+S1-K12	3			=IM2+S1/1.5
			=IM2+S42-X42	3	3		∘			=BA5+S1-XNA	4			=IM2+S1/1.6
			=IM2+S42-X42	4	4	∘				=BA5+S1-XNA	5			=IM2+S1/1.6
			=IM2+S42-X42	PE	PE		∘		PE	PE				=IM2+S1/1.6

control wiring without specifications has to be wired with AWG 20

			creation date	26.10.2007
			editor	Hennig
001	05.03.08	Hennig	printout	27.03.08
change	date	name	revisor	
previous page 22	total pages 174	last editor E4A		

MESSER CUTTING SYSTEMS
64823 GROSS-UMSTADT GERMANY

286.225
MultiTherm 4000
Eurodecoupe

ST-COMBI pluggable terminals

drawing number 723.85638	page 23
assembly section = X1	location +
last page 54	continuation page 24

GC1050DD 12.05

TERMINAL STRIP
OR
PIN ALLOCATION
=MB1+S1-X36

DESCRIPTION	=MB1+A1-WX36 OELFLEX	NAME OF CABLE / TYPE OF CABLE	DESTINATION	CONNECTION	NUMBER	CONNECTOR LEVEL above	CONNECTOR LEVEL below	jumper NAME	DESTINATION	CONNECTION	NAME OF CABLE / TYPE OF CABLE	PAGE / PATH
	1		=MB1+A1-A1ABSAUGUNG	13	1		○		=BA2+S1-XL24	2		=MB1+S1/1.1
exhaust	2		=MB1+A1-A1ABSAUGUNG	14	2	○		I6:7	=CA1+S1-C103	I6:7		=MB1+S1/1.1
exhaustion ON	3		=MB1+A1-A1ABSAUGUNG		3		○	O1:1	=CA1+S1-C904	O1:1		=MB1+S1/1.3
com	4		=MB1+A1-A1ABSAUGUNG		4	○		O1:2	=CA1+S1-C904	O1:2		=MB1+S1/1.3
com	5		=MB1+A1-A1ABSAUGUNG		5		○	O2:6	=CA1+S1-C904	O2:6		=MB1+S1/1.4
exhaustion OFF	6		=MB1+A1-A1ABSAUGUNG		6	○		O2:7	=CA1+S1-C904	O2:7		=MB1+S1/1.4
	7		=MB1+A1-A1ABSAUGUNG	PE	PE		○	PE	PE			=MB1+S1/1.1

control wiring without specifications has to be wired with AWG 20

			creation date	26.10.2007
			editor	Hennig
001	05.03.08	Hennig	printout	27.03.08
change	date	name	revisor	
previous page 23	total pages 174	last editor E4A		

MESSER CUTTING SYSTEMS
64823 GROSS-UMSTADT GERMANY

286.225
MultiTherm 4000
Eurodecoupe

ST-COMBI pluggable terminals

drawing number 723.85638	page 24
assembly section = X1	location +
last page 54	continuation page 25

GC1050DD 12.05

TERMINAL STRIP
OR
PIN ALLOCATION
=VA0+S1-X1

=VA0+M1-WX1 | NAME OF CABLE

NAME OF CABLE

DESCRIPTION	ASB	TYPE OF CABLE	DESTINATION	CONNECTION	NUMBER	CONNECTOR LEVEL above	CONNECTOR LEVEL below	jumper	NAME	DESTINATION	CONNECTION	TYPE OF CABLE	PAGE / PATH
	WS		=VA0+M1-X1	1	1		○						=VA0+S1/1.2
	GN		=VA0+M1-X1	2	2	○							=VA0+S1/2.2
	GE		=VA0+M1-X1	3	3		○						=VA0+S1/1.4
	GR		=VA0+M1-X1	4	4	○							=VA0+S1/2.4
	RS		=VA0+M1-X1	5	5		○						=VA0+S1/1.6
	RT		=VA0+M1-X1	6	6	○							=VA0+S1/2.6
	SW		=VA0+M1-X1	7	7		○						=VA0+S1/1.8
	VI		=VA0+M1-X1	8	8	○							=VA0+S1/2.8
	GRRS		=VA0+M1-X1	9	9		○		I1:1	=CA1+S1-C102	I1:1		=VA0+S1/1.2
	RTBL		=VA0+M1-X1	10	10	○							=VA0+S1/2.2
	WSGN		=VA0+M1-X1	11	11		○		I2:5	=CA1+S1-C102	I2:5		=VA0+S1/1.4
	BNGN		=VA0+M1-X1	12	12	○							=VA0+S1/2.4
	WSGE		=VA0+M1-X1	13	13		○		I3:2	=CA1+S1-C102	I3:2		=VA0+S1/1.6
	GEBR		=VA0+M1-X1	14	14	○							=VA0+S1/2.6
	WSGR		=VA0+M1-X1	15	15		○						=VA0+S1/1.8
	GRBR		=VA0+M1-X1	16	16	○			I5:3	=CA1+S1-C103	I5:3		=VA0+S1/2.8
	1		=VA0+M1-X1	1+P	17		○			=BA2+S1-XL24	3		=VA0+S1/1.1
	2		=VA0+M1-X1	1-0V	18	○				=BA2+S1-XL0	4		=VA0+S1/1.1
	3		=VA0+M1-X1	2+P	19		○			=BA2+S1-XL24	3		=VA0+S1/2.1
	4		=VA0+M1-X1	2-0V	20	○				=BA2+S1-XL0	5		=VA0+S1/2.1
			=VA0+M1-X1	PE	PE		○		PE	PE			=VA0+S1/2.9

control wiring without specifications has to be wired with AWG 20

			creation date	26.10.2007
			editor	Hennig
001	05.03.08	Hennig	printout	27.03.08
change	date	name	revisor	
previous page 24	total pages 174	last editor E4A		

MESSER CUTTING SYSTEMS
64823 GROSS-UMSTADT GERMANY

286.225
MultiTherm 4000
Eurodecoupe

ST-COMBI pluggable terminals

drawing number 723.85638 | page 25
assembly section = X1 | location +
last page 54 | continuation page 26

GC1050DD 12.05

TERMINAL STRIP
OR
PIN ALLOCATION
=VA1+S1-X1

=VA1+F1-WX1 | NAME OF CABLE

NAME OF CABLE

DESCRIPTION	ASB	TYPE OF CABLE	DESTINATION	CONNECTION	NUMBER	CONNECTOR LEVEL above	CONNECTOR LEVEL below	jumper NAME	DESTINATION	CONNECTION	TYPE OF CABLE	PAGE / PATH
	WS		=VA1+F1-X1	1	1		∘	01:1	=CA1+S1-C224	01:1		=VA1+S1/1.2
	GN		=VA1+F1-X1	2	2	∘						=VA1+S1/2.2
	GE		=VA1+F1-X1	3	3		∘					=VA1+S1/1.4
	GR		=VA1+F1-X1	4	4	∘						=VA1+S1/2.4
	RS		=VA1+F1-X1	5	5		∘					=VA1+S1/1.6
	RT		=VA1+F1-X1	6	6	∘						=VA1+S1/2.6
	SW		=VA1+F1-X1	7	7		∘					=VA1+S1/1.8
	VI		=VA1+F1-X1	8	8	∘		01:1	=CA1+S1-C110	01:1		=VA1+S1/2.8
	GRRS		=VA1+F1-X1	9	9		∘					=VA1+S1/1.2
	RTBL		=VA1+F1-X1	10	10	∘		I2:5	=CA1+S1-C104	I2:5		=VA1+S1/2.2
	WSGN		=VA1+F1-X1	11	11		∘					=VA1+S1/1.4
	BNGN		=VA1+F1-X1	12	12	∘			=HY2+S1-A1-X3	6		=VA1+S1/2.4
	WSGE		=VA1+F1-X1	13	13		∘					=VA1+S1/1.6
	GEBR		=VA1+F1-X1	14	14	∘		I6:7	=CA1+S1-C102	I6:7		=VA1+S1/2.6
	WSGR		=VA1+F1-X1	15	15		∘					=VA1+S1/1.8
	GRBR		=VA1+F1-X1	16	16	∘						=VA1+S1/2.8
	1		=VA1+F1-X1	1+P	17		∘		=BA1+S1-X24AC1	1	X	=VA1+S1/1.1
	2		=VA1+F1-X1	1-0V	18	∘			=BA1+S1-X24N	3		=VA1+S1/1.1
	3		=VA1+F1-X1	2+P	19		∘		=BA2+S1-XL24	4		=VA1+S1/2.1
	4		=VA1+F1-X1	2-0V	20	∘			=BA2+S1-XL0	5		=VA1+S1/2.1
			=VA1+F1-X1	PE	PE		∘	PE	PE			=VA1+S1/2.9

control wiring without specifications has to be wired with AWG 20

			creation date	26.10.2007
			editor	Hennig
001	05.03.08	Hennig	printout	27.03.08
change	date	name	revisor	
previous page 25	total pages 174	last editor E4A		

MESSER CUTTING SYSTEMS
64823 GROSS-UMSTADT GERMANY

286.225
MultiTherm 4000
Eurodecoupe

ST-COMBI pluggable terminals

drawing number 723.85638 | page 26
assembly section = X1 | location +
last page 54 | continuation page 27

GC1050DD 12.05

TERMINAL STRIP
OR
PIN ALLOCATION
=VA2+S1-X1

=VA2+F2-WX1 | NAME OF CABLE

NAME OF CABLE

DESCRIPTION	ASB	TYPE OF CABLE	DESTINATION	CONNECTION	NUMBER	CONNECTOR LEVEL above	CONNECTOR LEVEL below	jumper	NAME	DESTINATION	CONNECTION	TYPE OF CABLE	PAGE / PATH
	WS		=VA2+F2-X1	1	1		○		01:1	=CA1+S1-C225	01:1		=VA2+S1/1.2
	GN		=VA2+F2-X1	2	2	○							=VA2+S1/2.2
	GE		=VA2+F2-X1	3	3		○						=VA2+S1/1.4
	GR		=VA2+F2-X1	4	4	○							=VA2+S1/2.4
	RS		=VA2+F2-X1	5	5		○						=VA2+S1/1.6
	RT		=VA2+F2-X1	6	6	○							=VA2+S1/2.6
	SW		=VA2+F2-X1	7	7		○						=VA2+S1/1.8
	VI		=VA2+F2-X1	8	8	○			04:6	=CA1+S1-C108	04:6		=VA2+S1/2.8
	GRRS		=VA2+F2-X1	9	9		○						=VA2+S1/1.2
	RTBL		=VA2+F2-X1	10	10	○			I6:7	=CA1+S1-C104	I6:7		=VA2+S1/2.2
	WSGN		=VA2+F2-X1	11	11		○						=VA2+S1/1.4
	BNGN		=VA2+F2-X1	12	12	○			I5:3	=CA1+S1-C102	I5:3		=VA2+S1/2.4
	WSGE		=VA2+F2-X1	13	13		○						=VA2+S1/1.6
	GEBR		=VA2+F2-X1	14	14	○			I1:1	=CA1+S1-C103	I1:1		=VA2+S1/2.6
	WSGR		=VA2+F2-X1	15	15		○						=VA2+S1/1.8
	GRBR		=VA2+F2-X1	16	16	○							=VA2+S1/2.8
	1		=VA2+F2-X1	1+P	17		○			=BA1+S1-X24AC1	1	X	=VA2+S1/1.1
	2		=VA2+F2-X1	1-0V	18	○				=BA1+S1-X24N	3		=VA2+S1/1.1
	3		=VA2+F2-X1	2+P	19		○			=BA2+S1-XL24	4		=VA2+S1/2.1
	4		=VA2+F2-X1	2-0V	20	○				=BA2+S1-XL0	6		=VA2+S1/2.1
			=VA2+F2-X1	PE	PE		○		PE	PE			=VA2+S1/2.9

control wiring without specifications has to be wired with AWG 20

			creation date	26.10.2007
			editor	Hennig
001	05.03.08	Hennig	printout	27.03.08
change	date	name	revisor	
previous page 26	total pages 174	last editor E4A		

MESSER CUTTING SYSTEMS
64823 GROSS-UMSTADT GERMANY

286.225
MultiTherm 4000
Eurodecoupe

ST-COMBI pluggable terminals

drawing number 723.85638	page 27
assembly section = X1	location +
last page 54	continuation page 28

GC1050DD 12.05

TERMINAL STRIP
OR
PIN ALLOCATION
=IM1+S41-X41

DESCRIPTION	NAME OF CABLE	TYPE OF CABLE	DESTINATION	CONNECTION	NUMBER	CONNECTOR LEVEL above	CONNECTOR LEVEL below	jumper	NAME	DESTINATION	CONNECTION	NAME OF CABLE	TYPE OF CABLE	PAGE / PATH
			=IM1+S1-X41	1	1		∘			=IM1+S41-L2	4			=IM1+S41/1.4
			=IM1+S1-X41	2	2	∘				=IM1+S41-L2	2			=IM1+S41/1.4
			=IM1+S1-X41	3	3		∘			=IM1+S41-L1	2			=IM1+S41/1.3
			=IM1+S1-X41	4	4	∘				=IM1+S41-L1	4			=IM1+S41/1.3
			=IM1+S1-X41	PE	PE		∘		PE	=CA41+S41-C400	4			=IM1+S41/1.5

control wiring without specifications has to be wired with AWG 20

			creation date	26.10.2007
			editor	Hennig
001	05.03.08	Hennig	printout	27.03.08
change	date	name	revisor	
previous page 27	total pages 174	last editor E4A		

MESSER CUTTING SYSTEMS
64823 GROSS-UMSTADT GERMANY

286.225
MultiTherm 4000
Eurodecoupe

ST-COMBI pluggable terminals

drawing number 723.85638	page 28
assembly section = X1	location +
last page 54	continuation page 29

GC1050DD 12.05

TERMINAL STRIP
OR
PIN ALLOCATION
=IM1+S41-X42

DESCRIPTION	NAME OF CABLE	TYPE OF CABLE	DESTINATION	CONNECTION	NUMBER	CONNECTOR LEVEL above	CONNECTOR LEVEL below	jumper	NAME	DESTINATION	CONNECTION	NAME OF CABLE	TYPE OF CABLE	PAGE / PATH
			=IM1+S1-X42	1	1		○			=IM1+S41-X43	1			=IM1+S41/2.1
			=IM1+S1-X42	2	2	○			01:2	=CA41+S41-C405	01:2			=IM1+S41/2.1
			=IM1+S1-X42	3	3		○			=IM1+S41-X43	3			=IM1+S41/2.2
			=IM1+S1-X42	4	4	○				=IM1+S41-X43	4			=IM1+S41/2.2
			=IM1+S1-X42	PE	PE		○		PE	PE				=IM1+S41/2.3

control wiring without specifications has to be wired with AWG 20

			creation date	26.10.2007
			editor	Hennig
001	05.03.08	Hennig	printout	27.03.08
change	date	name	revisor	
previous page 28	total pages 174		last editor	E4A

MESSER CUTTING SYSTEMS
64823 GROSS-UMSTADT GERMANY

286.225
MultiTherm 4000
Eurodecoupe

ST-COMBI pluggable terminals

drawing number 723.85638	page 29
assembly section = X1	location +
last page 54	continuation page 30

GC1050DD 12.05

TERMINAL STRIP
OR
PIN ALLOCATION
=IM1+S41-X43

DESCRIPTION	=IM1+I1-WREM	NAME OF CABLE	DESTINATION	CONNECTION	NUMBER	CONNECTOR LEVEL above	CONNECTOR LEVEL below	jumper	NAME	DESTINATION	CONNECTION	NAME OF CABLE	PAGE / PATH
	OELFLEX	TYPE OF CABLE											
	1		=IM1+I1-A1-TB2	2	1		○			=IM1+S41-X42	1		=IM1+S41/2.6
					2	○							=IM1+S41/2.7
					3		○	●		=IM1+S41-X42	3		=IM1+S41/2.7
					4	○		●		=IM1+S41-X42	4		=IM1+S41/2.7
					PE		○		PE	PE			=IM1+S41/2.8

control wiring without specifications has to be wired with AWG 20

			creation date	26.10.2007
			editor	Hennig
001	05.03.08	Hennig	printout	27.03.08
change	date	name	revisor	
previous page 29	total pages 174		last editor	E4A

MESSER CUTTING SYSTEMS
64823 GROSS-UMSTADT GERMANY

286.225
MultiTherm 4000
Eurodecoupe

ST-COMBI pluggable terminals

drawing number 723.85638 | page 30
assembly section = X1 | location +
last page 54 | continuation page 31

GC1050DD 12.05

TERMINAL STRIP
OR
PIN ALLOCATION
=IM1+S41-X90

DESCRIPTION	=IM1+I1-WREM	=IM1+I1-WST	NAME OF CABLE	DESTINATION	CONNECTION	NUMBER	CONNECTOR LEVEL above	CONNECTOR LEVEL below	jumper	NAME	DESTINATION	CONNECTION	TYPE OF CABLE	PAGE / PATH
	OELFLEX	OELFLEX	TYPE OF CABLE											
				=IM1+S41-1X3	23	1		○			=IM1+S41-L3	4		=IM1+S41/3.1
				=IM1+S41-1X3	26	2	○				=IM1+S41-L3	3		=IM1+S41/3.2
plasma start				=IM1+S41-1X3	15	3		○		01:1	=CA41+S41-C402	01:1		=IM1+S41/3.4
plasma hold				=IM1+S41-1X3	14	4	○			02:5	=CA41+S41-C402	02:5		=IM1+S41/3.5
workpiece		1		=IM1+I1-A1	+	5		○			=IM1+S41-PAM	0V1		=IM1+S41/3.6
edge				=IM1+S41-1X3	12	6	○			01:1	=CA41+S41-C404	01:1		=IM1+S41/4.1
pierce complete				=IM1+S41-1X3	13	7		○		02:5	=CA41+S41-C404	02:5		=IM1+S41/4.2
						8	○							=IM1+S41/4.4
com						9		○						=IM1+S41/4.4
arc transfered				=IM1+S41-1X3	4	26	○				=IM1+S41-L3	2		=IM1+S41/3.1
plasma ready				=IM1+S41-1X3	7	27		○		I2:5	=CA41+S41-C401	I2:5		=IM1+S41/3.3
com				=IM1+S41-1X3	34	28	○			01:2	=CA41+S41-C402	01:2		=IM1+S41/3.4
com				=IM1+S41-1X3	33	29		○		02:6	=CA41+S41-C402	02:6		=IM1+S41/3.5
		2		=IM1+I1-FKAB	-1	30	○				=IM1+S41-PAM	IN2		=IM1+S41/3.7
com				=IM1+S41-1X3	31	31		○		01:2	=CA41+S41-C404	01:2		=IM1+S41/4.2
com				=IM1+S41-1X3	32	32	○			02:6	=CA41+S41-C404	02:6		=IM1+S41/4.3
remote ON	2			=IM1+I1-A1-TB2	3	33		○		01:1	=CA41+S41-C405	01:1		=IM1+S41/4.4
						34	○							=IM1+S41/4.5
						PE		○		PE	PE			=IM1+S41/3.6

control wiring without specifications has to be wired with AWG 20

change	date	name		
			creation date	26.10.2007
			editor	Hennig
001	05.03.08	Hennig	printout	27.03.08
			revisor	

previous page 30 | total pages 174 | last editor E4A

MESSER CUTTING SYSTEMS
64823 GROSS-UMSTADT GERMANY

286.225
MultiTherm 4000
Eurodecoupe

ST-COMBI pluggable terminals

drawing number 723.85638 | page 31
assembly section = X1 | location +
last page 54 | continuation page 32

GC1050DD 12.05

TERMINAL STRIP
OR
PIN ALLOCATION
=IM1+S41-XRS

DESCRIPTION	TYPE OF CABLE	DESTINATION	CONNECTION	NUMBER	CONNECTOR LEVEL above	CONNECTOR LEVEL below	jumper NAME	DESTINATION	CONNECTION	TYPE OF CABLE	PAGE / PATH
TXD+		=IM1+S41-1X3	20	1		o	TXD+: 1	=CA41+S41-C416	TXD+: 1		=IM1+S41/4.7
TXD-		=IM1+S41-1X3	1	2	o		TXD-: 5	=CA41+S41-C416	TXD-: 5		=IM1+S41/4.7
RXD+		=IM1+S41-1X3	21	3		o	RXD+: 2	=CA41+S41-C416	RXD+: 2		=IM1+S41/4.8
RXD-		=IM1+S41-1X3	2	4	o		RXD-: 6	=CA41+S41-C416	RXD-: 6		=IM1+S41/4.8
GND		=IM1+S41-1X3	3	5		o	3/7	=CA41+S41-C416	3/7		=IM1+S41/4.9
SHIELD		Schirm		SH		o		Schirm			=IM1+S41/4.9

control wiring without specifications has to be wired with AWG 20

			creation date	26.10.2007
			editor	Hennig
001	05.03.08	Hennig	printout	27.03.08
change	date	name	revisor	
previous page 31	total pages 174		last editor	E4A

MESSER CUTTING SYSTEMS
64823 GROSS-UMSTADT GERMANY

286.225
MultiTherm 4000
Eurodecoupe

COMBICON socket terminals

drawing number 723.85638	page 32
assembly section = X1	location +
last page 54	continuation page 33

GC1050DD 12.05

TERMINAL STRIP
OR
PIN ALLOCATION
=IM2+S42-X41

DESCRIPTION	NAME OF CABLE	TYPE OF CABLE	DESTINATION	CONNECTION	NUMBER	CONNECTOR LEVEL above	CONNECTOR LEVEL below	jumper	NAME	DESTINATION	CONNECTION	NAME OF CABLE	TYPE OF CABLE	PAGE / PATH
			=IM2+S1-X41	1	1		∘			=IM2+S42-L2	4			=IM2+S42/1.4
			=IM2+S1-X41	2	2	∘				=IM2+S42-L2	2			=IM2+S42/1.4
			=IM2+S1-X41	3	3		∘			=IM2+S42-L1	2			=IM2+S42/1.3
			=IM2+S1-X41	4	4	∘				=IM2+S42-L1	4			=IM2+S42/1.3
			=IM2+S1-X41	PE	PE		∘		PE	=CA42+S42-C400	4			=IM2+S42/1.5

control wiring without specifications has to be wired with AWG 20

			creation date	26.10.2007
			editor	Hennig
001	05.03.08	Hennig	printout	27.03.08
change	date	name	revisor	
previous page 32	total pages 174	last editor E4A		

MESSER CUTTING SYSTEMS
64823 GROSS-UMSTADT GERMANY

286.225
MultiTherm 4000
Eurodecoupe

ST-COMBI pluggable terminals

drawing number 723.85638	page 33
assembly section = X1	location +
last page 54	continuation page 34

GC1050DD 12.05

TERMINAL STRIP
OR
PIN ALLOCATION
=IM2+S42-X42

DESCRIPTION	NAME OF CABLE	TYPE OF CABLE	DESTINATION	CONNECTION	NUMBER	CONNECTOR LEVEL above	CONNECTOR LEVEL below	jumper NAME	DESTINATION	CONNECTION	NAME OF CABLE	TYPE OF CABLE	PAGE / PATH
			=IM2+S1-X42	1	1		∘		=IM2+S42-X43	1			=IM2+S42/2.1
			=IM2+S1-X42	2	2	∘		01:2	=CA42+S42-C405	01:2			=IM2+S42/2.1
			=IM2+S1-X42	3	3		∘		=IM2+S42-X43	3			=IM2+S42/2.2
			=IM2+S1-X42	4	4	∘			=IM2+S42-X43	4			=IM2+S42/2.2
			=IM2+S1-X42	PE	PE		∘	PE	PE				=IM2+S42/2.3

control wiring without specifications has to be wired with AWG 20

			creation date	26.10.2007
			editor	Hennig
001	05.03.08	Hennig	printout	27.03.08
change	date	name	revisor	
previous page 33	total pages 174	last editor E4A		

MESSER CUTTING SYSTEMS
64823 GROSS-UMSTADT GERMANY

286.225
MultiTherm 4000
Eurodecoupe

ST-COMBI pluggable terminals

drawing number 723.85638	page 34
assembly section = X1	location +
last page 54	continuation page 35

GC1050DD 12.05

TERMINAL STRIP
OR
PIN ALLOCATION
=IM2+S42-X43

DESCRIPTION	=IM2+I1-WREM	NAME OF CABLE	DESTINATION	CONNECTION	NUMBER	CONNECTOR LEVEL above	CONNECTOR LEVEL below	jumper	NAME	DESTINATION	CONNECTION	NAME OF CABLE	PAGE / PATH
	OELFLEX	TYPE OF CABLE										TYPE OF CABLE	
	1		=IM2+I1-A1-TB2	2	1		∘			=IM2+S42-X42	1		=IM2+S42/2.6
					2	∘							=IM2+S42/2.7
					3		∘			=IM2+S42-X42	3		=IM2+S42/2.7
					4	∘				=IM2+S42-X42	4		=IM2+S42/2.7
					PE		∘		PE	PE			=IM2+S42/2.8

control wiring without specifications has to be wired with AWG 20

			creation date	26.10.2007
			editor	Hennig
001	05.03.08	Hennig	printout	27.03.08
change	date	name	revisor	
previous page 34	total pages 174		last editor	E4A

MESSER CUTTING SYSTEMS
64823 GROSS-UMSTADT GERMANY

286.225
MultiTherm 4000
Eurodecoupe

ST-COMBI pluggable terminals

drawing number 723.85638	page 35
assembly section = X1	location +
last page 54	continuation page 36

GC1050DD 12.05

TERMINAL STRIP
OR
PIN ALLOCATION
=IM2+S42-X90

DESCRIPTION	=IM2+I1-WREM	=IM2+I1-WWST	NAME OF CABLE	DESTINATION	CONNECTION	NUMBER	CONNECTOR LEVEL above	CONNECTOR LEVEL below	jumper	NAME	DESTINATION	CONNECTION	TYPE OF CABLE	PAGE / PATH
				=IM2+S42-1X3	23	1		○			=IM2+S42-L3	4		=IM2+S42/3.1
				=IM2+S42-1X3	26	2	○				=IM2+S42-L3	3		=IM2+S42/3.2
plasma start				=IM2+S42-1X3	15	3		○		01:1	=CA42+S42-C402	01:1		=IM2+S42/3.4
plasma hold				=IM2+S42-1X3	14	4	○			02:5	=CA42+S42-C402	02:5		=IM2+S42/3.5
workpiece		1		=IM2+I1-A1	+	5		○			=IM2+S42-PAM	0V1		=IM2+S42/3.6
edge				=IM2+S42-1X3	12	6	○			01:1	=CA42+S42-C404	01:1		=IM2+S42/4.1
pierce complete				=IM2+S42-1X3	13	7		○		02:5	=CA42+S42-C404	02:5		=IM2+S42/4.2
						8	○							=IM2+S42/4.4
com						9		○						=IM2+S42/4.4
arc transfered				=IM2+S42-1X3	4	26	○				=IM2+S42-L3	2		=IM2+S42/3.1
plasma ready				=IM2+S42-1X3	7	27		○		I2:5	=CA42+S42-C401	I2:5		=IM2+S42/3.3
com				=IM2+S42-1X3	34	28	○			01:2	=CA42+S42-C402	01:2		=IM2+S42/3.4
com				=IM2+S42-1X3	33	29		○		02:6	=CA42+S42-C402	02:6		=IM2+S42/3.5
		2		=IM2+I1-FKAB	-1	30	○				=IM2+S42-PAM	IN2		=IM2+S42/3.7
com				=IM2+S42-1X3	31	31		○		01:2	=CA42+S42-C404	01:2		=IM2+S42/4.2
com				=IM2+S42-1X3	32	32	○			02:6	=CA42+S42-C404	02:6		=IM2+S42/4.3
remote ON	2			=IM2+I1-A1-TB2	3	33		○		01:1	=CA42+S42-C405	01:1		=IM2+S42/4.4
						34	○							=IM2+S42/4.5
						PE		○		PE	PE			=IM2+S42/3.6

control wiring without specifications has to be wired with AWG 20

GC1050DD 12.05

TERMINAL STRIP
OR
PIN ALLOCATION
=IM2+S42-XRS

DESCRIPTION	TYPE OF CABLE	DESTINATION	CONNECTION	NUMBER	CONNECTOR LEVEL above	CONNECTOR LEVEL below	jumper NAME	DESTINATION	CONNECTION	TYPE OF CABLE	PAGE / PATH
TXD+		=IM2+S42-1X3	20	1		∘	TXD+: 1	=CA42+S42-C416	TXD+: 1		=IM2+S42/4.7
TXD-		=IM2+S42-1X3	1	2	∘		TXD-: 5	=CA42+S42-C416	TXD-: 5		=IM2+S42/4.7
RXD+		=IM2+S42-1X3	21	3		∘	RXD+: 2	=CA42+S42-C416	RXD+: 2		=IM2+S42/4.8
RXD-		=IM2+S42-1X3	2	4	∘		RXD-: 6	=CA42+S42-C416	RXD-: 6		=IM2+S42/4.8
GND		=IM2+S42-1X3	3	5		∘	3/7	=CA42+S42-C416	3/7		=IM2+S42/4.9
SHIELD		Schirm		SH		∘		Schirm			=IM2+S42/4.9

control wiring without specifications has to be wired with AWG 20

			creation date	26.10.2007
			editor	Hennig
001	05.03.08	Hennig	printout	27.03.08
change	date	name	revisor	
previous page 36		total pages 174	last editor	E4A

MESSER CUTTING SYSTEMS
64823 GROSS-UMSTADT GERMANY

286.225
MultiTherm 4000
Eurodecoupe

COMBICON socket terminals

drawing number	723.85638	page	37
assembly section	= X1	location	+
last page	54	continuation page	38

GC1050DD 12.05

TERMINAL STRIP
OR
PIN ALLOCATION
=FG1+F1-X1

DESCRIPTION	=FG1+F1-WALFA	NAME OF CABLE	Konfektion	TYPE OF CABLE	DESTINATION	CONNECTION	NUMBER	CONNECTOR LEVEL above	CONNECTOR LEVEL below	Jumper	NAME	DESTINATION	CONNECTION	TYPE OF CABLE	NAME OF CABLE	PAGE / PATH
0VDC			1		=FG1+S1-X1	1	1			○						=FG1+F1/1.6
creep speed			2		=FG1+S1-X1	2	2			○						=FG1+F1/1.8
nominal value			3		=FG1+S1-X1	3	3			○						=FG1+F1/1.9
auto hight			4		=FG1+S1-X1	4	4			○						=FG1+F1/1.7
down			5		=FG1+S1-X1	5	5			○						=FG1+F1/1.7
height found			6		=FG1+S1-X1	6	6			○						=FG1+F1/1.7
24VDC			7		=FG1+S1-X1	7	7			○						=FG1+F1/1.5
analog signal ground			8		=FG1+S1-X1	8	8			○						=FG1+F1/1.9
upper limit			9		=FG1+S1-X1	9	9			○						=FG1+F1/1.7
ignition valve			10		=FG1+S1-X1	10	10			○						=FG1+F1/1.6
N24VAC			11		=FG1+S1-X1	11	11			○						=FG1+F1/1.6
collision			12		=FG1+S1-X1	12	12			○						=FG1+F1/1.8
set height			13		=FG1+S1-X1	13	13			○						=FG1+F1/1.9
switch over set value			14		=FG1+S1-X1	14	14			○						=FG1+F1/1.9
up			15		=FG1+S1-X1	15	15			○						=FG1+F1/1.7
ignitor on			16		=FG1+S1-X1	16	16			○						=FG1+F1/1.8

control wiring without specifications has to be wired with AWG 20

GC1050DD 12.05

TERMINAL STRIP
OR
PIN ALLOCATION
=FG1+F1-X2

NAME OF CABLE

DESCRIPTION	TYPE OF CABLE	DESTINATION	CONNECTION	NUMBER	CONNECTOR LEVEL above	CONNECTOR LEVEL below	jumper	NAME	DESTINATION	CONNECTION	TYPE OF CABLE	PAGE / PATH
				1			○					=FG1+F1/1.6
				2			○					=FG1+F1/1.6
				3			○					=FG1+F1/1.6
				4			○					=FG1+F1/1.8
				5			○					=FG1+F1/1.8
				6			○					=FG1+F1/1.6
				7			○					=FG1+F1/1.6
				8			○					=FG1+F1/1.8
				9			○	PE	=FG1+F1-MOT	PE		=FG1+F1/1.9

control wiring without specifications has to be wired with AWG 20

			creation date	26.10.2007
			editor	Hennig
001	05.03.08	Hennig	printout	27.03.08
change	date	name	revisor	
previous page 38	total pages 174	last editor E4A		

MESSER CUTTING SYSTEMS
64823 GROSS-UMSTADT GERMANY

286.225
MultiTherm 4000
Eurodecoupe

PAN connection ignition device

drawing number 723.85638		page	39
assembly section =	X1	location	+
last page 54		continuation page	40

GC1050DD 12.05

TERMINAL STRIP
OR
PIN ALLOCATION
=FG1+F1-X190

NAME OF CABLE | =FG1+F1-WX190

DESCRIPTION	TYPE OF CABLE	DESTINATION	CONNECTION	NUMBER	CONNECTOR LEVEL above	CONNECTOR LEVEL below	Jumper	NAME	DESTINATION	CONNECTION	TYPE OF CABLE	Steuerleitung	PAGE / PATH
		=FG1+F1-M1		1			○		=FG1+S1-X190	1		1	=FG1+F1/3.2
		=FG1+F1-M1		2			○		=FG1+S1-X190	2		2	=FG1+F1/3.3
		=FG1+F1-M1		3			○		=FG1+S1-X190	3		3	=FG1+F1/3.3
		=FG1+F1-M1		4			○		=FG1+S1-X190	4		4	=FG1+F1/3.3
		=FG1+F1-M1		5			○		=FG1+S1-X190	5		5	=FG1+F1/3.4
		=FG1+F1-M1		6			○		=FG1+S1-X190	6		6	=FG1+F1/3.4
		=FG1+F1-M1		7			○		=FG1+S1-X190	7		7	=FG1+F1/3.5
		=FG1+F1-M1		8			○		=FG1+S1-X190	8		8	=FG1+F1/3.5

control wiring without specifications has to be wired with AWG 20

			creation date	26.10.2007
			editor	Hennig
001	05.03.08	Hennig	printout	27.03.08
change	date	name	revisor	
previous page 39	total pages 174	last editor E4A		

MESSER CUTTING SYSTEMS
64823 GROSS-UMSTADT GERMANY

286.225
MultiTherm 4000
Eurodecoupe

plug connection

drawing number 723.85638 | page 40
assembly section = X1 | location +
last page 54 | continuation page 41

GC1050DD 12.05

TERMINAL STRIP
OR
PIN ALLOCATION
=FG1+F1-XM

NAME OF CABLE | =FG1+F1-WXM

DESCRIPTION	TYPE OF CABLE	DESTINATION	CONNECTION	NUMBER	CONNECTOR LEVEL above	CONNECTOR LEVEL below	jumper	NAME	DESTINATION	CONNECTION	TYPE OF CABLE	OELFLEX	PAGE / PATH
		=FG1+F1-M1	6	A1			○		=FG1+F1-MOT	G		1	=FG1+F1/2.3
		=FG1+F1-M1	13	A3			○		=FG1+F1-MOT	K		2	=FG1+F1/2.5
				A4			○		=FG1+F1-MOT	E		3	=FG1+F1/2.6
				A6			○		=FG1+F1-MOT	A		4	=FG1+F1/2.7
				A7			○		=FG1+F1-MOT	M		5	=FG1+F1/2.7
				B4			○		=FG1+F1-MOT	F		6	=FG1+F1/2.6
		=FG1+F1-M1	8	B5			○		=FG1+F1-MOT	24VDC		7	=FG1+F1/2.5
				B6			○		=FG1+F1-MOT	B		8	=FG1+F1/2.7
		=FG1+F1-M1	12	B8			○		=FG1+F1-MOT	u4/16ac		9	=FG1+F1/2.4
		=FG1+F1-M1	4	C1			○		=FG1+F1-MOT	H		10	=FG1+F1/2.3
				C3			○		=FG1+F1-MOT	L		11	=FG1+F1/2.5
				C4			○		=FG1+F1-MOT	F1		12	=FG1+F1/2.6
		=FG1+F1-M1	7	C8			○		=FG1+F1-MOT	u4/8a		13	=FG1+F1/2.3
		=FG1+F1-M1	5	PE			○	PE	=FG1+F1-MOT	PE		14	=FG1+F1/2.2

control wiring without specifications has to be wired with AWG 20

			creation date	26.10.2007
			editor	Hennig
001	05.03.08	Hennig	printout	27.03.08
change	date	name	revisor	
previous page 40	total pages 174	last editor E4A		

MESSER CUTTING SYSTEMS
64823 GROSS-UMSTADT GERMANY

286.225
MultiTherm 4000
Eurodecoupe

connection height regulation

drawing number 723.85638		page	41
assembly section =	X1	location	+
last page 54		continuation page	42

GC1050DD 12.05

TERMINAL STRIP
OR
PIN ALLOCATION
=FG1+F1-XU

=FG1+F1-WXU | NAME OF CABLE

NAME OF CABLE

DESCRIPTION	OELFLEX	TYPE OF CABLE	DESTINATION	CONNECTION	NUMBER	CONNECTOR LEVEL above	CONNECTOR LEVEL below	jumper	NAME	DESTINATION	CONNECTION	TYPE OF CABLE	PAGE / PATH
	1		=BA0+S1-XT	1	1			○		=FG1+F1-M1	1		=FG1+F1/2.1
	2		=BA0+S1-XT	2	2			○		=FG1+F1-M1	2		=FG1+F1/2.1
	3		=BA0+S1-XT	3	3			○		=FG1+F1-M1	3		=FG1+F1/2.1
	4		=BA0+S1-XT	PE	PE			○					=FG1+F1/2.2

control wiring without specifications has to be wired with AWG 20

			creation date	26.10.2007
			editor	Hennig
001	05.03.08	Hennig	printout	27.03.08
change	date	name	revisor	
previous page 41	total pages 174		last editor	E4A

MESSER CUTTING SYSTEMS
64823 GROSS-UMSTADT GERMANY

286.225
MultiTherm 4000
Eurodecoupe

connection height regulation

drawing number 723.85638	page 42
assembly section = X1	location +
last page 54	continuation page 43

GC1050DD 12.05

TERMINAL STRIP
OR
PIN ALLOCATION
=FG2+F2-X1

=FG2+F2-WALFA | NAME OF CABLE

NAME OF CABLE

DESCRIPTION	Konfektion	TYPE OF CABLE	DESTINATION	CONNECTION	NUMBER	CONNECTOR LEVEL above	CONNECTOR LEVEL below	jumper	NAME	DESTINATION	CONNECTION	TYPE OF CABLE	PAGE / PATH
0VDC	1		=FG2+S1-X1	1	1			○					=FG2+F2/1.6
creep speed	2		=FG2+S1-X1	2	2			○					=FG2+F2/1.8
nominal value	3		=FG2+S1-X1	3	3			○					=FG2+F2/1.9
auto hight	4		=FG2+S1-X1	4	4			○					=FG2+F2/1.7
down	5		=FG2+S1-X1	5	5			○					=FG2+F2/1.7
height found	6		=FG2+S1-X1	6	6			○					=FG2+F2/1.7
24VDC	7		=FG2+S1-X1	7	7			○					=FG2+F2/1.5
analog signal ground	8		=FG2+S1-X1	8	8			○					=FG2+F2/1.9
upper limit	9		=FG2+S1-X1	9	9			○					=FG2+F2/1.7
ignition valve	10		=FG2+S1-X1	10	10			○					=FG2+F2/1.6
N24VAC	11		=FG2+S1-X1	11	11			○					=FG2+F2/1.6
collision	12		=FG2+S1-X1	12	12			○					=FG2+F2/1.8
set height	13		=FG2+S1-X1	13	13			○					=FG2+F2/1.9
switch over set value	14		=FG2+S1-X1	14	14			○					=FG2+F2/1.9
up	15		=FG2+S1-X1	15	15			○					=FG2+F2/1.7
ignitor on	16		=FG2+S1-X1	16	16			○					=FG2+F2/1.8

control wiring without specifications has to be wired with AWG 20

GC1050DD 12.05

TERMINAL STRIP
OR
PIN ALLOCATION
=FG2+F2-X2

DESCRIPTION	NAME OF CABLE	TYPE OF CABLE	DESTINATION	CONNECTION	NUMBER	CONNECTOR LEVEL above	CONNECTOR LEVEL below	jumper	NAME	DESTINATION	CONNECTION	NAME OF CABLE	TYPE OF CABLE	PAGE / PATH
					1			○						=FG2+F2/1.6
					2			○						=FG2+F2/1.6
					3			○						=FG2+F2/1.6
					4			○						=FG2+F2/1.8
					5			○						=FG2+F2/1.8
					6			○						=FG2+F2/1.6
					7			○						=FG2+F2/1.6
					8			○						=FG2+F2/1.8
					9			○	PE	=FG2+F2-MOT	PE			=FG2+F2/1.9

control wiring without specifications has to be wired with AWG 20

			creation date	26.10.2007
			editor	Hennig
001	05.03.08	Hennig	printout	27.03.08
change	date	name	revisor	
previous page 43	total pages 174		last editor	E4A

MESSER CUTTING SYSTEMS
64823 GROSS-UMSTADT GERMANY

286.225
MultiTherm 4000
Eurodecoupe

PAN connection ignition device

drawing number	723.85638	page	44
assembly section	= X1	location	+
last page	54	continuation page	45

GC1050DD 12.05

TERMINAL STRIP
OR
PIN ALLOCATION
=FG2+F2-X192

NAME OF CABLE

=FG2+F2-WX192

DESCRIPTION	TYPE OF CABLE	DESTINATION	CONNECTION	NUMBER	CONNECTOR LEVEL above	CONNECTOR LEVEL below	jumper	NAME	DESTINATION	CONNECTION	TYPE OF CABLE	Steuerleitung	PAGE / PATH
		=FG2+F2-M1		1			○		=FG2+S1-X192	1		1	=FG2+F2/3.2
		=FG2+F2-M1		2			○		=FG2+S1-X192	2		2	=FG2+F2/3.3
		=FG2+F2-M1		3			○		=FG2+S1-X192	3		3	=FG2+F2/3.3
		=FG2+F2-M1		4			○		=FG2+S1-X192	4		4	=FG2+F2/3.3
		=FG2+F2-M1		5			○		=FG2+S1-X192	5		5	=FG2+F2/3.4
		=FG2+F2-M1		6			○		=FG2+S1-X192	6		6	=FG2+F2/3.4
		=FG2+F2-M1		7			○		=FG2+S1-X192	7		7	=FG2+F2/3.5
		=FG2+F2-M1		8			○		=FG2+S1-X192	8		8	=FG2+F2/3.5

control wiring without specifications has to be wired with AWG 20

			creation date	26.10.2007
			editor	Hennig
001	05.03.08	Hennig	printout	27.03.08
change	date	name	revisor	
previous page 44	total pages 174		last editor	E4A

MESSER CUTTING SYSTEMS
64823 GROSS-UMSTADT GERMANY

286.225
MultiTherm 4000
Eurodecoupe

plug connection

drawing number 723.85638 | page 45
assembly section = X1 | location +
last page 54 | continuation page 46

GC1050DD 12.05

TERMINAL STRIP
OR
PIN ALLOCATION
=FG2+F2-XM

NAME OF CABLE | =FG2+F2-WXM

DESCRIPTION	TYPE OF CABLE	DESTINATION	CONNECTION	NUMBER	CONNECTOR LEVEL above	CONNECTOR LEVEL below	jumper	NAME	DESTINATION	CONNECTION	TYPE OF CABLE	OELFLEX	PAGE / PATH
		=FG2+F2-M1	6	A1			○		=FG2+F2-MOT	G		1	=FG2+F2/2.3
		=FG2+F2-M1	13	A3			○		=FG2+F2-MOT	K		2	=FG2+F2/2.5
				A4			○		=FG2+F2-MOT	E		3	=FG2+F2/2.6
				A6			○		=FG2+F2-MOT	A		4	=FG2+F2/2.7
				A7			○		=FG2+F2-MOT	M		5	=FG2+F2/2.7
				B4			○		=FG2+F2-MOT	F		6	=FG2+F2/2.6
		=FG2+F2-M1	8	B5			○		=FG2+F2-MOT	24VDC		7	=FG2+F2/2.5
				B6			○		=FG2+F2-MOT	B		8	=FG2+F2/2.7
		=FG2+F2-M1	12	B8			○		=FG2+F2-MOT	u4/16ac		9	=FG2+F2/2.4
		=FG2+F2-M1	4	C1			○		=FG2+F2-MOT	H		10	=FG2+F2/2.3
				C3			○		=FG2+F2-MOT	L		11	=FG2+F2/2.5
				C4			○		=FG2+F2-MOT	F1		12	=FG2+F2/2.6
		=FG2+F2-M1	7	C8			○		=FG2+F2-MOT	u4/8a		13	=FG2+F2/2.3
		=FG2+F2-M1	5	PE			○	PE	=FG2+F2-MOT	PE		14	=FG2+F2/2.2

control wiring without specifications has to be wired with AWG 20

			creation date	26.10.2007
			editor	Hennig
001	05.03.08	Hennig	printout	27.03.08
change	date	name	revisor	
previous page 45	total pages 174	last editor E4A		

MESSER CUTTING SYSTEMS
64823 GROSS-UMSTADT GERMANY

286.225
MultiTherm 4000
Eurodecoupe

connection height regulation

drawing number 723.85638 | page 46
assembly section = X1 | location +
last page 54 | continuation page 47

GC1050DD 12.05

TERMINAL STRIP
OR
PIN ALLOCATION
=FG2+F2-XU

=FG2+F2-WXU | NAME OF CABLE

NAME OF CABLE

DESCRIPTION	OELFLEX	TYPE OF CABLE	DESTINATION	CONNECTION	NUMBER	CONNECTOR LEVEL above	CONNECTOR LEVEL below	jumper	NAME	DESTINATION	CONNECTION	TYPE OF CABLE	PAGE / PATH
	1		=BA0+S1-XT	1	1			○		=FG2+F2-M1	1		=FG2+F2/2.1
	2		=BA0+S1-XT	2	2			○		=FG2+F2-M1	2		=FG2+F2/2.1
	3		=BA0+S1-XT	3	3			○		=FG2+F2-M1	3		=FG2+F2/2.1
	4		=BA0+S1-XT	PE	PE			○					=FG2+F2/2.2

control wiring without specifications has to be wired with AWG 20

			creation date	26.10.2007
			editor	Hennig
001	05.03.08	Hennig	printout	27.03.08
change	date	name	revisor	
previous page 46	total pages 174		last editor	E4A

MESSER CUTTING SYSTEMS
64823 GROSS-UMSTADT GERMANY

286.225
MultiTherm 4000
Eurodecoupe

connection height regulation

drawing number 723.85638	page 47
assembly section = X1	location +
last page 54	continuation page 48

GC1050DD 12.05

TERMINAL STRIP
OR
PIN ALLOCATION
=BA1+P1-X40

NAME OF CABLE: | NAME OF CABLE: =BA1+P1-WX40

DESCRIPTION	TYPE OF CABLE	DESTINATION	CONNECTION	NUMBER	CONNECTOR LEVEL above	CONNECTOR LEVEL below	jumper	NAME	DESTINATION	CONNECTION	TYPE OF CABLE	OELFLEX	PAGE / PATH
		=BA1+P1-SNA-X	1	1			∘		=BA2+S1-X40	1		1	=BA1+P1/1.1
		=BA1+P1-SNA-X	2	2			∘		=BA2+S1-X40	2		2	=BA1+P1/1.1
		=BA1+P1-SNA-X	5	3			∘		=BA2+S1-X40	3		3	=BA1+P1/1.1
		=BA1+P1-SNA-X	6	4			∘		=BA2+S1-X40	4		4	=BA1+P1/1.1
power is on		=BA1+P1-S1-X	4	5			∘		=BA2+S1-X40	5		5	=BA1+P1/1.4
				6			∘		=BA2+S1-X40	6		6	=BA1+P1/1.3
				7			∘		=BA2+S1-X40	7		7	=BA1+P1/1.4
				8			∘		=BA2+S1-X40	8		8	=BA1+P1/1.4
				9			∘		=BA2+S1-X40	9		9	=BA1+P1/1.4
				10			∘		=BA2+S1-X40	10		10	=BA1+P1/1.5
				11			∘		=BA2+S1-X40	11		11	=BA1+P1/1.5
		PE		12			∘	PE	=BA2+S1-X40	PE		12	=BA1+P1/1.7
				13			∘		=BA2+S1-X40	13		13	=BA1+P1/1.6
				14			∘		=BA2+S1-X40	14		14	=BA1+P1/1.6
		=BA1+P1-S1-X	3	15			∘		=BA2+S1-X40	15		15	=BA1+P1/1.3
				16			∘		=BA2+S1-X40	16		16	=BA1+P1/1.6
				17			∘		=BA2+S1-X40	17		17	=BA1+P1/1.7
				18			∘		=BA2+S1-X40	18		18	=BA1+P1/1.7
				19			∘		=BA2+S1-X40	19		19	=BA1+P1/1.3

control wiring without specifications has to be wired with AWG 20

GC1050DD 12.05

TERMINAL STRIP
OR
PIN ALLOCATION
=BA2+S1-XLS

DESCRIPTION	TYPE OF CABLE	DESTINATION	CONNECTION	NUMBER	CONNECTOR LEVEL above	CONNECTOR LEVEL below	jumper NAME	DESTINATION	CONNECTION	TYPE OF CABLE	PAGE / PATH
		=BA6+S1-XBR1	1	1				=BA2+S1-F9	2		=BA2+S1/3.3
		=BA6+S1-XBS1	1								=BA2+S1/3.3
		=BA6+S1-XBR2	1	2							=BA2+S1/3.3
		=BA6+S1-XBS2	1					=BA6+S1-N1	2		=BA2+S1/3.4

NAME OF CABLE

control wiring without specifications has to be wired with AWG 20

			creation date	26.10.2007
			editor	Hennig
001	05.03.08	Hennig	printout	27.03.08
change	date	name	revisor	
previous page 48	total pages 174	last editor E4A		

MESSER CUTTING SYSTEMS
64823 GROSS-UMSTADT GERMANY

286.225
MultiTherm 4000
Eurodecoupe

distribution terminals

drawing number 723.85638		page	49
assembly section =	X1	location	+
last page 54		continuation page	50

GC1050DD 12.05

TERMINAL STRIP
OR
PIN ALLOCATION
=BA6+S1-X71

DESCRIPTION	OELFLEX	TYPE OF CABLE	DESTINATION	CONNECTION	NUMBER	CONNECTOR LEVEL above	CONNECTOR LEVEL below	jumper NAME	DESTINATION	CONNECTION	TYPE OF CABLE	PAGE / PATH
buzzer	1		=BA6+S1-H1	X1	1		∘	08:8	=CA1+S1-C108	08:8		=BA6+S1/1.8
	2		=BA6+S1-H1	X2	2	∘			=BA2+S1-XL0	6		=BA6+S1/1.8
					PE	∘		PE	PE			=BA6+S1/1.8

NAME OF CABLE =BA6+S1-WX71

NAME OF CABLE

control wiring without specifications has to be wired with AWG 20

			creation date	26.10.2007
			editor	Hennig
001	05.03.08	Hennig	printout	27.03.08
change	date	name	revisor	
previous page 49	total pages 174		last editor	E4A

MESSER CUTTING SYSTEMS
64823 GROSS-UMSTADT GERMANY

286.225
MultiTherm 4000
Eurodecoupe

ST-COMBI pluggable terminals

drawing number 723.85638	page 50
assembly section = X1	location +
last page 54	continuation page 51

GC1050DD 12.05

TERMINAL STRIP
OR
PIN ALLOCATION
=BA6+S1-XBR1

DESCRIPTION	OELFLEX	TYPE OF CABLE	DESTINATION	CONNECTION	NUMBER	CONNECTOR LEVEL above	CONNECTOR LEVEL below	jumper NAME	DESTINATION	CONNECTION	TYPE OF CABLE	PAGE / PATH
	1		=BA6+M2-BR1	1	1		○		=BA2+S1-XLS	1		=BA6+S1/2.2
	2		=BA6+M2-BR1	2	2	○			=BA2+S1-XLO	4		=BA6+S1/2.3
	3		=BA6+M2-BR1	3	3		○		=BA5+S1-XNA	1		=BA6+S1/2.3
	4		=BA6+M2-BR1	4	4	○			=BA5+S1-XNA	2		=BA6+S1/2.3
	5		=BA6+M2-BR1	5	5		○					=BA6+S1/2.3
	6		=BA6+M2-BR1	6	6	○						=BA6+S1/2.3
			=BA6+M2-BR1	PE	PE		○	PE	PE			=BA6+S1/2.4

control wiring without specifications has to be wired with AWG 20

			creation date	26.10.2007
			editor	Hennig
001	05.03.08	Hennig	printout	27.03.08
change	date	name	revisor	
previous page 50	total pages 174		last editor	E4A

MESSER CUTTING SYSTEMS
64823 GROSS-UMSTADT GERMANY

286.225
MultiTherm 4000
Eurodecoupe

ST-COMBI pluggable terminals

drawing number 723.85638	page 51
assembly section = X1	location +
last page 54	continuation page 52

GC1050DD 12.05

TERMINAL STRIP
OR
PIN ALLOCATION
=BA6+S1-XBR2

DESCRIPTION	NAME OF CABLE	TYPE OF CABLE	DESTINATION	CONNECTION	NUMBER	CONNECTOR LEVEL above	CONNECTOR LEVEL below	jumper NAME	DESTINATION	CONNECTION	NAME OF CABLE	TYPE OF CABLE	PAGE / PATH
					1		○		=BA2+S1-XLS	2			=BA6+S1/2.8
					2	○			=BA2+S1-XLO	5			=BA6+S1/2.8
					3		○	●	=BA5+S1-XNA	3			=BA6+S1/2.8
					4	○		●	=BA5+S1-XNA	4			=BA6+S1/2.8
					5		○						=BA6+S1/2.8
					6	○							=BA6+S1/2.9
					PE		○	PE	PE				=BA6+S1/2.9

control wiring without specifications has to be wired with AWG 20

			creation date	26.10.2007
			editor	Hennig
001	05.03.08	Hennig	printout	27.03.08
change	date	name	revisor	
previous page 51	total pages 174		last editor	E4A

MESSER CUTTING SYSTEMS
64823 GROSS-UMSTADT GERMANY

286.225
MultiTherm 4000
Eurodecoupe

ST-COMBI pluggable terminals

drawing number 723.85638	page 52
assembly section = X1	location +
last page 54	continuation page 53

GC1050DD 12.05

TERMINAL STRIP
OR
PIN ALLOCATION
=BA6+S1-XBS1

=BA6+M1-WBS1 | NAME OF CABLE

NAME OF CABLE

DESCRIPTION	OELFLEX	TYPE OF CABLE	DESTINATION	CONNECTION	NUMBER	CONNECTOR LEVEL above	CONNECTOR LEVEL below	jumper NAME	DESTINATION	CONNECTION	TYPE OF CABLE	PAGE / PATH
	1		=BA6+M1-BS1	1	1		∘		=BA2+S1-XLS	1		=BA6+S1/2.1
	2		=BA6+M1-BS1	2	2	∘			=BA2+S1-XLO	3		=BA6+S1/2.1
	3		=BA6+M1-BS1	3	3		∘					=BA6+S1/2.1
	4		=BA6+M1-BS1	4	4	∘						=BA6+S1/2.1
			=BA6+M1-BS1	PE	PE		∘	PE	PE			=BA6+S1/2.1

control wiring without specifications has to be wired with AWG 20

			creation date	26.10.2007
			editor	Hennig
001	05.03.08	Hennig	printout	27.03.08
change	date	name	revisor	
previous page 52	total pages 174		last editor	E4A

MESSER CUTTING SYSTEMS
64823 GROSS-UMSTADT GERMANY

286.225
MultiTherm 4000
Eurodecoupe

ST-COMBI pluggable terminals

drawing number 723.85638 | page 53
assembly section = X1 | location +
last page 54 | continuation page 54

GC1050DD 12.05

TERMINAL STRIP
OR
PIN ALLOCATION
=BA6+S1-XBS2

DESCRIPTION	NAME OF CABLE	TYPE OF CABLE	DESTINATION	CONNECTION	NUMBER	CONNECTOR LEVEL above	CONNECTOR LEVEL below	jumper NAME	DESTINATION	CONNECTION	NAME OF CABLE	TYPE OF CABLE	PAGE / PATH
					1		°		=BA2+S1-XLS	2			=BA6+S1/2.6
					2	°			=BA2+S1-XLO	4			=BA6+S1/2.6
					3		°						=BA6+S1/2.6
					4	°							=BA6+S1/2.6
					PE		°	PE	PE				=BA6+S1/2.6

control wiring without specifications has to be wired with AWG 20

			creation date	26.10.2007
			editor	Hennig
001	05.03.08	Hennig	printout	27.03.08
change	date	name	revisor	
previous page 53	total pages 174		last editor	E4A

MESSER CUTTING SYSTEMS
64823 GROSS-UMSTADT GERMANY

286.225
MultiTherm 4000
Eurodecoupe

ST-COMBI pluggable terminals

drawing number 723.85638	page 54
assembly section = X1	location +
last page 54	continuation page =Z1/1

PARTS LIST

MCW_ESTK 23.02.00 HK

NAME OF EQUIPMENT	QTY	DESIGNATION	PRODUCER DESIGNATION	PRODUCER	MESSER PART NUMBER	PAGE PATH	FUNCTION
=BA0+S1-F1	1	Sicherungsklemnme 5x20 <10A	DT 6/2,5 DREHSI	PHOENIX	0546157	=BA0+S1/1.3	
=BA0+S1-F1	1	Glasrohrsicherung 5X20 T10A	5X20 T10A	DISTRIBUTOR	0583943	=BA0+S1/1.3	
=BA0+S1-F2	1	Sicherungsklemnme 5x20 <10A	DT 6/2,5 DREHSI	PHOENIX	0546157	=BA0+S1/1.4	
=BA0+S1-F2	1	Glasrohrsicherung 5X20 T10A	5X20 T10A	DISTRIBUTOR	0583943	=BA0+S1/1.4	
=BA0+S1-F3	1	Sicherungsklemnme 5x20 <10A	DT 6/2,5 DREHSI	PHOENIX	0546157	=BA0+S1/1.5	
=BA0+S1-F3	1	Glasrohrsicherung 5X20 T10A	5X20 T10A	DISTRIBUTOR	0583943	=BA0+S1/1.5	
=BA0+S1-T1	1	400/55 VDS 750VA	DS TRAFO 55	Messer	72290885	=BA0+S1/1.4	
=BA0+S1-XT	12	Durchgangsklemme <4qmm	DURCHGANGSKLEMME			=BA0+S1/1.3	distribution terminals
=BA1+S1-A1	1	230VAC, 320W 125m³/h filterlos	KG-4266	SEIFERT	77003765	=BA1+S1/3.2	cooling unit
=BA1+S1-E1	1	Schaltschrankheizung	AH 1002A	Hofmann	77002370	=BA1+S1/2.3	cabinet heater
=BA1+S1-F0	1	Sicherungsklemnme 5x20 <10A	DT 6/2,5 DREHSI	PHOENIX	0546157	=BA1+S1/3.3	
=BA1+S1-F0	1	Glasrohrsicherung 5X20 T6,3A	5X20 T6,3A	DISTRIBUTOR	65541022	=BA1+S1/3.3	
=BA1+S1-F1	1	Sicherungsklemnme 5x20 <10A	DT 6/2,5 DREHSI	PHOENIX	0546157	=BA1+S1/6.1	
=BA1+S1-F1	1	Glasrohrsicherung 5X20 T6,3A	5X20 T6,3A	DISTRIBUTOR	65541022	=BA1+S1/6.1	
=BA1+S1-OF1	1	Sicherungsklemnme 5x20 <10A	DT 6/2,5 DREHSI	PHOENIX	0546157	=BA1+S1/2.4	
=BA1+S1-OF1	1	Glasrohrsicherung 5X20 T10A	5X20 T10A	DISTRIBUTOR	0583943	=BA1+S1/2.4	
=BA1+S1-F001	3	Einzelelement bis 63A	NEOZED ELEMENT <63A	LINDNER		=BA1+S1/2.5	pre fuse
=BA1+S1-F001	3	SI-Schmelzeinsatz 25A	D02 EINSATZ 25A	LINDNER	72270517	=BA1+S1/2.5	pre fuse
=BA1+S1-F001	3	Schraubkappe 63A	NEOZED SCHRAUBKAPPE	LINDNER	77002782	=BA1+S1/2.5	pre fuse
=BA1+S1-F001	3	Passring 25A	PASSRING 25A	LINDNER	77004031	=BA1+S1/2.5	pre fuse
=BA1+S1-F2	1	Sicherungsklemnme 5x20 <10A	DT 6/2,5 DREHSI	PHOENIX	0546157	=BA1+S1/4.5	fuse
=BA1+S1-F2	1	Glasrohrsicherung 5X20 T6,3A	5X20 T6,3A	DISTRIBUTOR	65541022	=BA1+S1/4.5	fuse
=BA1+S1-F5	1	Sicherungsklemnme 5x20 <10A	DT 6/2,5 DREHSI	PHOENIX	0546157	=BA1+S1/6.5	
=BA1+S1-F5	1	Glasrohrsicherung 5X20 T10A	5X20 T10A	DISTRIBUTOR	0583943	=BA1+S1/6.5	
=BA1+S1-F6	1	Sicherungsklemnme 5x20 <10A	DT 6/2,5 DREHSI	PHOENIX	0546157	=BA1+S1/4.0	
=BA1+S1-F6	1	Glasrohrsicherung 5X20 T10A	5X20 T10A	DISTRIBUTOR	0583943	=BA1+S1/4.0	
=BA1+S1-F7	1	Sicherungsklemnme 5x20 <10A	DT 6/2,5 DREHSI	PHOENIX	0546157	=BA1+S1/4.7	
=BA1+S1-F7	1	Glasrohrsicherung 5X20 T6,3A	5X20 T6,3A	DISTRIBUTOR	65541022	=BA1+S1/4.7	
=BA1+S1-FT1	1	Sicherungsklemnme 5x20 <10A	DT 6/2,5 DREHSI	PHOENIX	0546157	=BA1+S1/3.7	Trafo 55VDS
=BA1+S1-FT1	1	Glasrohrsicherung 5X20 T6,3A	5X20 T6,3A	DISTRIBUTOR	65541022	=BA1+S1/3.7	Trafo 55VDS
=BA1+S1-FT2	1	Sicherungsklemnme 5x20 <10A	DT 6/2,5 DREHSI	PHOENIX	0546157	=BA1+S1/3.8	
=BA1+S1-FT2	1	Glasrohrsicherung 5X20 T6,3A	5X20 T6,3A	DISTRIBUTOR	65541022	=BA1+S1/3.8	
=BA1+S1-FT3	1	Sicherungsklemnme 5x20 <10A	DT 6/2,5 DREHSI	PHOENIX	0546157	=BA1+S1/3.9	

control wiring without specifications has to be wired with AWG 20

PARTS LIST

MCW_ESTK 23.02.00 HK

NAME OF EQUIPMENT	QTY	DESIGNATION	PRODUCER DESIGNATION	PRODUCER	MESSER PART NUMBER	PAGE PATH	FUNCTION
=BA1+S1-FT3	1	Glasrohrsicherung 5X20 T6,3A	5X20 T6,3A	DISTRIBUTOR	65541022	=BA1+S1/3.9	
=BA1+S1-G1	1	Stromversorgung 230VAC/24VDC/20A	TRIO-PS/1AC/24DC/20	PHOENIX	77005217	=BA1+S1/6.5	24VDC 20A
=BA1+S1-K2	1	Hilfsschütz 4S 230VAC	3RH11 40-1AP00	Siemens	77004587	=BA1+S1/6.2	UPS switchover
=BA1+S1-K2	1	S00 Hilfsschalterblock 2S+2Ö	3RH19 11-1GA22	Siemens	72270475	=BA1+S1/6.2	UPS switchover
=BA1+S1-K2	1	VARISTOR, AC 127...240V	3RT19 16-1BD00	Siemens	77004668	=BA1+S1/6.2	UPS switchover
=BA1+S1-K3	1	MIRO MULTI Timer 24VDC	6652350	Murrelektronik	77003738	=BA1+S1/6.7	PLC turn off time delayed
=BA1+S1-P1	1	Betriebsstundenzähler 230VAC	Z 99999,9H		77002169	=BA1+S1/3.4	
=BA1+S1-Q163	1	Hauptschalter P3-63/EA/SVB-SW	P3-63/EA/SVB-SW	MÖLLER		=BA1+S1/1.3	main switch
=BA1+S1-Q163	1	f. Hauptschalter P3-63/EA/SVB-SW	SCHALTGLIED N-P3Z	MÖLLER	77004148	=BA1+S1/1.3	main switch
=BA1+S1-T0	1	USV 1200VA, 10min, RS232	USV MI 1200	EFFEKTA	77004552	=BA1+S1/2.6	UPS
=BA1+S1-T3	1	Transformator 230/24V 500VA	KWB 019/3083	KWB	77003589	=BA1+S1/4.5	
=BA1+S1-X00	9	Durchgangsklemme <16qmm	DURCHGANGSKLEMME			=BA1+S1/2.0	infeed control panel
=BA1+S1-X0	5	Durchgangsklemme <16qmm	DURCHGANGSKLEMME			=BA1+S1/3.1	infeed control panel
=BA1+S1-X0F	2	Durchgangsklemme <4qmm	DURCHGANGSKLEMME			=BA1+S1/2.4	distribution terminals
=BA1+S1-X01	2	WAGO 870-501	DURCHGANGSKLEMME			=BA1+S1/2.8	ST-COMBI pluggable terminals
=BA1+S1-X02	1	230V/16A Steckdose m. LED	67901	Murrelektronik	77006125	=BA1+S1/2.5	service socket
=BA1+S1-X03	3	WAGO 870-501	DURCHGANGSKLEMME			=BA1+S1/2.6	ST-COMBI pluggable terminals
=BA1+S1-X24AC1	1	Durchgangsklemme 2,5qmm	DURCHGANGSKLEMME			=BA1+S1/4.0	distribution terminals
=BA1+S1-X24AC2	1	Durchgangsklemme 2,5qmm	DURCHGANGSKLEMME			=BA1+S1/4.7	distribution terminals
=BA1+S1-X24N	5	Durchgangsklemme 2,5qmm	DURCHGANGSKLEMME			=BA1+S1/5.0	24VAC distribution
=BA1+S1-X230	5	Durchgangsklemme <4qmm	DURCHGANGSKLEMME			=BA1+S1/3.2	voltage distribution
=BA1+S1-XP24	3	Durchgangsklemme 2,5qmm	DURCHGANGSKLEMME			=BA1+S1/7.1	distribution 24VDC
=BA1+S1-XTL	3	Durchgangsklemme <4qmm	DURCHGANGSKLEMME			=BA1+S1/3.7	voltage distribution
=BA2+S1-F0	1	Sicherungsklemnme 5x20 <10A	DT 6/2,5 DREHSI	PHOENIX	0546157	=BA2+S1/6.8	
=BA2+S1-F0	1	Glasrohrsicherung 5X20 T6,3A	5X20 T6,3A	DISTRIBUTOR	65541022	=BA2+S1/6.8	
=BA2+S1-F1	1	Sicherungsklemnme 5x20 <10A	DT 6/2,5 DREHSI	PHOENIX	0546157	=BA2+S1/2.1	
=BA2+S1-F1	1	Glasrohrsicherung 5X20 T6,3A	5X20 T6,3A	DISTRIBUTOR	65541022	=BA2+S1/2.1	
=BA2+S1-F2	1	Sicherungsklemnme 5x20 <10A	DT 6/2,5 DREHSI	PHOENIX	0546157	=BA2+S1/2.3	
=BA2+S1-F2	1	Glasrohrsicherung 5X20 T6,3A	5X20 T6,3A	DISTRIBUTOR	65541022	=BA2+S1/2.3	
=BA2+S1-F9	1	Sicherungsklemnme 5x20 <10A	DT 6/2,5 DREHSI	PHOENIX	0546157	=BA2+S1/3.3	
=BA2+S1-F9	1	Glasrohrsicherung 5X20 T6,3A	5X20 T6,3A	DISTRIBUTOR	65541022	=BA2+S1/3.3	
=BA2+S1-KP01	1	Relais 2 Wechsler	PLC-BSC-24VDC/21-21	PHOENIX	77002894	=BA2+S1/6.3	power is on
=BA2+S1-X40	11	WAGO 870-501	DURCHGANGSKLEMME			=BA2+S1/6.5	ST-COMBI pluggable terminals

control wiring without specifications has to be wired with AWG 20

PARTS LIST

MCW_ESTK 23.02.00 HK

NAME OF EQUIPMENT	QTY	DESIGNATION	PRODUCER DESIGNATION	PRODUCER	MESSER PART NUMBER	PAGE PATH	FUNCTION
=BA2+S1-XL0	9	Durchgangsklemme 2,5qmm	DURCHGANGSKLEMME			=BA2+S1/4.0	distribution 0VDC
=BA2+S1-XL24	4	Durchgangsklemme 2,5qmm	DURCHGANGSKLEMME			=BA2+S1/1.1	distribution 24VDC
=BA2+S1-XLS	2	Durchgangsklemme 2,5qmm	DURCHGANGSKLEMME			=BA2+S1/3.3	distribution terminals
=BA4+S1-K1	1	SO Schütz 11kW o. HS	3RT10 26-1BB40	Siemens	77003991	=BA4+S1/1.7	main contactor
=BA4+S1-K1	1	SO Hilfsschalterblock 2S+2Ö	3RH19 21-1FA22	Siemens	77003992	=BA4+S1/1.7	main contactor
=BA4+S1-K11	1	SOO Schütz 14,5/13kW 4S 24VDC	3RT13 17-1BB40	Siemens	77003590	=BA4+S1/2.1	height adjustments
=BA4+S1-K11	1	SOO Hilfsschalterblock 2S+2Ö	3RH19 11-1FA22	Siemens	72270475	=BA4+S1/2.1	height adjustments
=BA4+S1-K12	1	SOO Schütz 14,5/13kW 4S 24VDC	3RT13 17-1BB40	Siemens	77003590	=BA4+S1/2.3	cut off gas
=BA4+S1-K12	1	SOO Hilfsschalterblock 2S+2Ö	3RH19 11-1FA22	Siemens	72270475	=BA4+S1/2.3	cut off gas
=BA4+S1-KNA	1	NOT-AUS Auswertgerät	F138	TESCH	77004457	=BA4+S1/1.5	emergency stop
=BA5+S1-XNA	12	WAGO 870-501	DURCHGANGSKLEMME			=BA5+S1/1.3	ST-COMBI pluggable terminals
=BA6+S1-N1	1	Lichtschranken Auswertgerät	LS AUSWERTUNG	Messer	72290137	=BA6+S1/1.0	
=BA6+S1-X71	2	WAGO 870-501	DURCHGANGSKLEMME			=BA6+S1/1.8	ST-COMBI pluggable terminals
=BA6+S1-XBR1	4	WAGO 870-501	DURCHGANGSKLEMME			=BA6+S1/2.2	ST-COMBI pluggable terminals
=BA6+S1-XBR2	4	WAGO 870-501	DURCHGANGSKLEMME			=BA6+S1/2.8	ST-COMBI pluggable terminals
=BA6+S1-XBS1	3	WAGO 870-501	DURCHGANGSKLEMME			=BA6+S1/2.1	ST-COMBI pluggable terminals
=BA6+S1-XBS2	3	WAGO 870-501	DURCHGANGSKLEMME			=BA6+S1/2.6	ST-COMBI pluggable terminals
=CA0+S1-CA0	1	PC-System USB/DVI	C 6240USB	Beckhoff	77011070	=CA0+S1/1.0	
=CA1+S1-C100	1	Buskoppler Standard (Lightbus)	BK 2000	Beckhoff	77011001	=CA1+S1/2.1	
=CA1+S1-C101	1	Watchdog Relaisklemme	KL 2692	Beckhoff	77011063	=CA1+S1/3.55	KL2692
=CA1+S1-C102	1	Eingang 8 x positiv	KL 1408	Beckhoff	77011006	=CA1+S1/3.215	KL1408
=CA1+S1-C103	1	Eingang 8 x positiv	KL 1408	Beckhoff	77011006	=CA1+S1/3.55	KL1408
=CA1+S1-C104	1	Eingang 8 x positiv	KL 1408	Beckhoff	77011006	=CA1+S1/3.215	KL1408
=CA1+S1-C107	1	Einspeiseklemme 6,3A 24VDC	KL 9200	Beckhoff	77011011	=CA1+S1/2.3	
=CA1+S1-C108	1	Ausgang 8 x positiv 500mA	KL 2408	Beckhoff	77011009	=CA1+S1/4.55	KL2408
=CA1+S1-C109	1	Ausgang 8 x positiv 500mA	KL 2408	Beckhoff	77011009	=CA1+S1/4.215	KL2408
=CA1+S1-C110	1	Ausgang 8 x positiv 500mA	KL 2408	Beckhoff	77011009	=CA1+S1/4.55	KL2408
=CA1+S1-C190	1	Incremental Encoder Interface 5VDC	KL 5101	Beckhoff	77011016	=CA1+S1/5.55	KL5101
=CA1+S1-C191	1	Ausgang analog +/-10V 2-Kanal	KL 4032	Beckhoff	77011017	=CA1+S1/5.215	KL4032
=CA1+S1-C192	1	Incremental Encoder Interface 5VDC	KL 5101	Beckhoff	77011016	=CA1+S1/5.55	KL5101
=CA1+S1-C193	1	Ausgang analog +/-10V 2-Kanal	KL 4032	Beckhoff	77011017	=CA1+S1/5.215	KL4032
=CA1+S1-C224	1	Ausgang 2 x Relais 2A 230VAC	KL 2622	Beckhoff	77011036	=CA1+S1/6.55	KL2622
=CA1+S1-C225	1	Ausgang 2 x Relais 2A 230VAC	KL 2622	Beckhoff	77011036	=CA1+S1/6.215	KL2622

control wiring without specifications has to be wired with AWG 20

PARTS LIST

MCW_ESTK 23.02.00 HK

NAME OF EQUIPMENT	QTY	DESIGNATION	PRODUCER DESIGNATION	PRODUCER	MESSER PART NUMBER	PAGE PATH	FUNCTION
=CA1+S1-C904	1	Ausgang 2 x Relais 500mA AC	KL 2612	Beckhoff	77011010	=CA1+S1/6.55	KL2612
=CA1+S1-EK1	1	Busendklemme	KL 9010	Beckhoff	77011014	=CA1+S1/1.6	KL9010
=CA41+S41-C400	1	Buskoppler Standard (Lightbus)	BK 2000	Beckhoff	77011001	=IM1+S41/1.3	
=CA41+S41-C401	1	Eingang 4 x positiv	KL 1104	Beckhoff	77011005	=CA41+S41/2.55	KL1104
=CA41+S41-C402	1	Ausgang 2 x Relais 2A 230VAC	KL 2622	Beckhoff	77011036	=CA41+S41/2.215	KL2622
=CA41+S41-C403	1	Eingang analog +/-10V 2-Kanal	KL 3002	Beckhoff	77011029	=CA41+S41/2.55	KL3002
=CA41+S41-C404	1	Ausgang 2 x Relais 2A 230VAC	KL 2622	Beckhoff	77011036	=CA41+S41/2.215	KL2622
=CA41+S41-C405	1	Ausgang 2 x Relais 2A 230VAC	KL 2622	Beckhoff	77011036	=CA41+S41/2.55	KL2622
=CA41+S41-C416	1	Schnittstelle RS 422 (RS485)	KL 6021	Beckhoff	77011031	=CA41+S41/2.215	KL6021
=CA41+S41-EK	1	Busendklemme	KL 9010	Beckhoff	77011014	=CA41+S41/1.3	
=CA42+S42-C400	1	Buskoppler Standard (Lightbus)	BK 2000	Beckhoff	77011001	=IM2+S42/1.3	
=CA42+S42-C401	1	Eingang 4 x positiv	KL 1104	Beckhoff	77011005	=CA42+S42/2.55	KL1104
=CA42+S42-C402	1	Ausgang 2 x Relais 2A 230VAC	KL 2622	Beckhoff	77011036	=CA42+S42/2.215	KL2622
=CA42+S42-C403	1	Eingang analog +/-10V 2-Kanal	KL 3002	Beckhoff	77011029	=CA42+S42/2.55	KL3002
=CA42+S42-C404	1	Ausgang 2 x Relais 2A 230VAC	KL 2622	Beckhoff	77011036	=CA42+S42/2.215	KL2622
=CA42+S42-C405	1	Ausgang 2 x Relais 2A 230VAC	KL 2622	Beckhoff	77011036	=CA42+S42/2.55	KL2622
=CA42+S42-C416	1	Schnittstelle RS 422 (RS485)	KL 6021	Beckhoff	77011031	=CA42+S42/2.215	KL6021
=CA42+S42-EK	1	Busendklemme	KL 9010	Beckhoff	77011014	=CA42+S42/1.3	
=EB1+F1-L1	1	HF Filter für Kontaktkappe Plasma an TOM	HF FILTER	Messer	76801062	=EB1+S1/1.3	
=EB1+S1-TOM	1	TOM torch touch modul	TOM	Messer	76801051	=EB1+S1/1.2	
=EB2+F1-L1	1	HF Filter für Kontaktkappe Plasma an TOM	HF FILTER	Messer	76801062	=EB2+S1/1.3	
=EB2+S1-TOM	1	TOM torch touch modul	TOM	Messer	76801051	=EB2+S1/1.2	
=FG1+S1-K1	1	Relais 1 Wechsler	PLC-BSC-24VDC/21	PHOENIX	77002771	=FG1+S1/1.5	
=FG1+S1-X1	1	Sub D 25 Einbaumodul 1/2 Breite	SUB D EINBAU	DISTRIBUTOR		=FG1+S1/1.0	Sub D 25 female
=FG1+S1-X190	5	WAGO 870-501	DURCHGANGSKLEMME			=FG1+S1/2.5	ST-COMBI pluggable terminals
=FG2+S1-K1	1	Relais 1 Wechsler	PLC-BSC-24VDC/21	PHOENIX	77002771	=FG2+S1/1.5	
=FG2+S1-X1	1	Sub D 25 Einbaumodul 1/2 Breite	SUB D EINBAU	DISTRIBUTOR		=FG2+S1/1.0	Sub D 25 female
=FG2+S1-X192	5	WAGO 870-501	DURCHGANGSKLEMME			=FG2+S1/2.5	ST-COMBI pluggable terminals
=HX1+S1-A1	1	Servoverstärker DIG AC 3A Master	AX2513 -B200-0000	Beckhoff	77011067	=HX1+S1/1.0	
=HX2+S1-A1	1	Servoverstärker DIG AC 3A Slave	AX2523 -B200-0000	Beckhoff	77011068	=HX2+S1/1.0	
=HY1+S1-A1	1	Servoverstärker DIG AC 3A Slave	AX2523 -B200-0000	Beckhoff	77011068	=HY1+S1/1.0	
=HY2+S1-A1	1	Servoverstärker DIG AC 3A Slave	AX2523 -B200-0000	Beckhoff	77011068	=HY2+S1/1.0	
=IM1+S1-F1	1	Sicherungsklemnme 5x20 <10A	DT 6/2,5 DREHSI	PHOENIX	0546157	=IM1+S1/1.2	

control wiring without specifications has to be wired with AWG 20

PARTS LIST

MCW_ESTK 23.02.00 HK

NAME OF EQUIPMENT	QTY	DESIGNATION	PRODUCER DESIGNATION	PRODUCER	MESSER PART NUMBER	PAGE PATH	FUNCTION
=IM1+S1-F1	1	Glasrohrsicherung 5X20 T2A	5X20 T2A	DISTRIBUTOR	75908904	=IM1+S1/1.2	
=IM1+S1-F2	1	Sicherungsklemnme 5x20 <10A	DT 6/2,5 DREHSI	PHOENIX	0546157	=IM1+S1/1.3	
=IM1+S1-F2	1	Glasrohrsicherung 5X20 T6,3A	5X20 T6,3A	DISTRIBUTOR	65541022	=IM1+S1/1.3	
=IM1+S1-X41	3	WAGO 870-501	DURCHGANGSKLEMME			=IM1+S1/1.2	ST-COMBI pluggable terminals
=IM1+S1-X42	3	WAGO 870-501	DURCHGANGSKLEMME			=IM1+S1/1.5	ST-COMBI pluggable terminals
=IM1+S41-L1	1	Schaffner T 9609 B	RZ 20-1-02	Messer	0535029	=IM1+S41/1.3	
=IM1+S41-L2	1	Schaffner T 9609 B	RZ 20-1-02	Messer	0535029	=IM1+S41/1.4	
=IM1+S41-L3	1	Schaffner T 9609 B	RZ 20-1-02	Messer	0535029	=IM1+S41/3.1	
=IM1+S41-PAM	1	PAM Passives Analogmodul	PAM	Messer	76801015	=IM1+S41/3.6	
=IM1+S41-X41	3	WAGO 870-501	DURCHGANGSKLEMME			=IM1+S41/1.3	ST-COMBI pluggable terminals
=IM1+S41-X42	3	WAGO 870-501	DURCHGANGSKLEMME			=IM1+S41/2.1	ST-COMBI pluggable terminals
=IM1+S41-X43	3	WAGO 870-501	DURCHGANGSKLEMME			=IM1+S41/2.6	ST-COMBI pluggable terminals
=IM1+S41-X90	10	WAGO 870-501	DURCHGANGSKLEMME			=IM1+S41/3.1	ST-COMBI pluggable terminals
=IM1+S41-XRS	4	WAGO 870-501	DURCHGANGSKLEMME			=IM1+S41/4.7	COMBICON socket terminals
=IM2+S1-F1	1	Sicherungsklemnme 5x20 <10A	DT 6/2,5 DREHSI	PHOENIX	0546157	=IM2+S1/1.2	
=IM2+S1-F1	1	Glasrohrsicherung 5X20 T2A	5X20 T2A	DISTRIBUTOR	75908904	=IM2+S1/1.2	
=IM2+S1-F2	1	Sicherungsklemnme 5x20 <10A	DT 6/2,5 DREHSI	PHOENIX	0546157	=IM2+S1/1.3	
=IM2+S1-F2	1	Glasrohrsicherung 5X20 T6,3A	5X20 T6,3A	DISTRIBUTOR	65541022	=IM2+S1/1.3	
=IM2+S1-X41	3	WAGO 870-501	DURCHGANGSKLEMME			=IM2+S1/1.2	ST-COMBI pluggable terminals
=IM2+S1-X42	3	WAGO 870-501	DURCHGANGSKLEMME			=IM2+S1/1.5	ST-COMBI pluggable terminals
=IM2+S42-L1	1	Schaffner T 9609 B	RZ 20-1-02	Messer	0535029	=IM2+S42/1.3	
=IM2+S42-L2	1	Schaffner T 9609 B	RZ 20-1-02	Messer	0535029	=IM2+S42/1.4	
=IM2+S42-L3	1	Schaffner T 9609 B	RZ 20-1-02	Messer	0535029	=IM2+S42/3.1	
=IM2+S42-PAM	1	PAM Passives Analogmodul	PAM	Messer	76801015	=IM2+S42/3.6	
=IM2+S42-X41	3	WAGO 870-501	DURCHGANGSKLEMME			=IM2+S42/1.3	ST-COMBI pluggable terminals
=IM2+S42-X42	3	WAGO 870-501	DURCHGANGSKLEMME			=IM2+S42/2.1	ST-COMBI pluggable terminals
=IM2+S42-X43	3	WAGO 870-501	DURCHGANGSKLEMME			=IM2+S42/2.6	ST-COMBI pluggable terminals
=IM2+S42-X90	10	WAGO 870-501	DURCHGANGSKLEMME			=IM2+S42/3.1	ST-COMBI pluggable terminals
=IM2+S42-XRS	4	WAGO 870-501	DURCHGANGSKLEMME			=IM2+S42/4.7	COMBICON socket terminals
=MB1+S1-X36	4	WAGO 870-501	DURCHGANGSKLEMME			=MB1+S1/1.1	ST-COMBI pluggable terminals
=VA0+S1-X1	11	WAGO 870-501	DURCHGANGSKLEMME			=VA0+S1/1.1	ST-COMBI pluggable terminals
=VA1+F1-H8	1	Laserdiodenmodul	FP-67/1AF-24V	Flexpoint	77004380	=VA1+S1/2.8	laserpointer
=VA1+F1-S4	1	Näherungsschalter	3RG4013-3AP33	Siemens	77002697	=VA1+S1/2.1	tactile switch IHS

control wiring without specifications has to be wired with AWG 20

PARTS LIST

MCW_ESTK 23.02.00 HK

NAME OF EQUIPMENT	QTY	DESIGNATION	PRODUCER DESIGNATION	PRODUCER	MESSER PART NUMBER	PAGE PATH	FUNCTION
=VA1+F1-XH8	1	Kupplungsstecker 2pol.	09-000100-02	BINDER	652033	=VA1+S1/2.8	5pol
=VA1+F1-XH8	1	Kupplungsdose 2pol.		BINDER	0550117	=VA1+S1/2.8	5pol
=VA1+S1-X1	11	WAGO 870-501	DURCHGANGSKLEMME			=VA1+S1/1.1	ST-COMBI pluggable terminals
=VA2+F2-H8	1	Laserdiodenmodul	FP-67/1AF-24V	Flexpoint	77004380	=VA2+S1/2.8	laserpointer
=VA2+F2-S4	1	Näherungsschalter	3RG4013-3AP33	Siemens	77002697	=VA2+S1/2.1	tactile switch IHS
=VA2+F2-XH8	1	Kupplungsstecker 2pol.	09-000100-02	BINDER	652033	=VA2+S1/2.8	5pol
=VA2+F2-XH8	1	Kupplungsdose 2pol.		BINDER	0550117	=VA2+S1/2.8	5pol
=VA2+S1-X1	11	WAGO 870-501	DURCHGANGSKLEMME			=VA2+S1/1.1	ST-COMBI pluggable terminals

control wiring without specifications has to be wired with AWG 20

			creation date	26.10.2007
			editor	Hennig
001	05.03.08	Hennig	printout	27.03.08
change	date	name	revisor	
previous page 5	total pages 174	last editor E4A		

MESSER CUTTING SYSTEMS
64823 GROSS-UMSTADT GERMANY

286.225
MultiTherm 4000
Eurodecoupe

equipment listing

drawing number	723.85638	page	6
assembly section =	Z1	location	+
last page	6	continuation page	