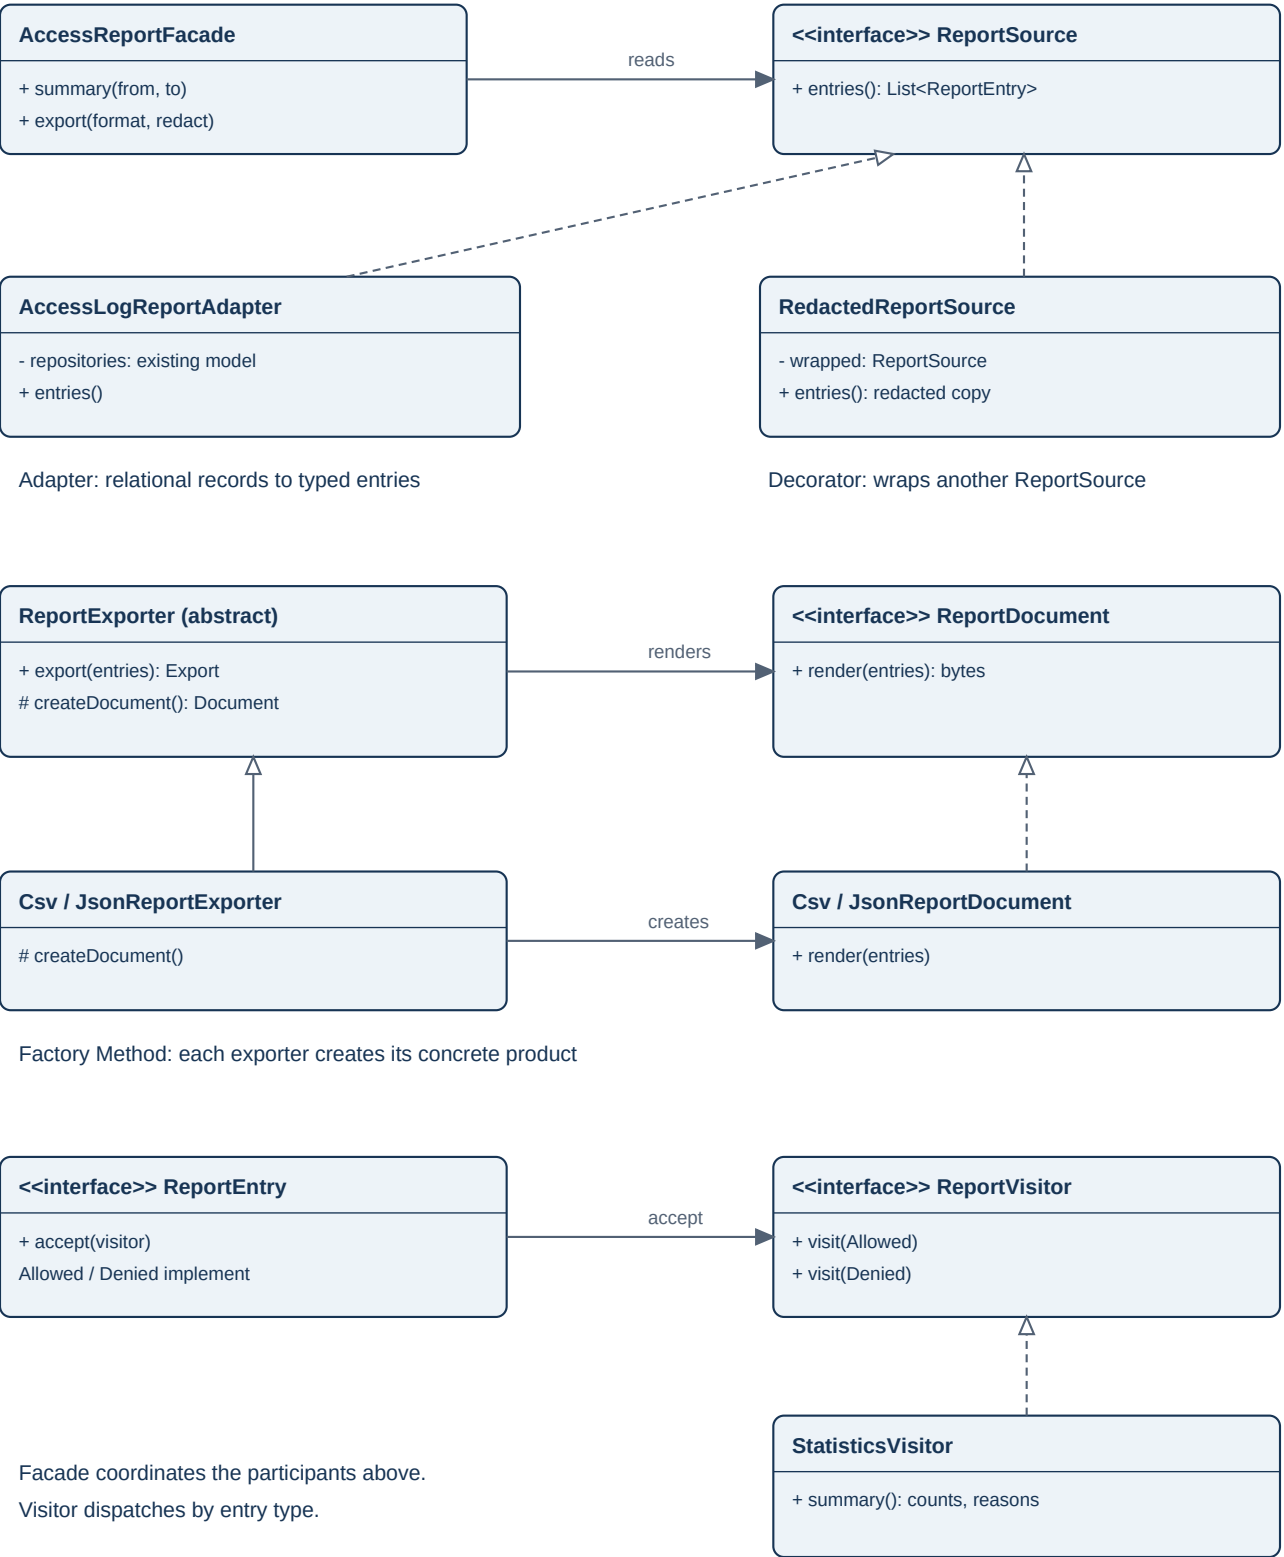
AccessReportFacade
+ summary(from, to)
+ export(format, redact)
reads
<<interface>> ReportSource
+ entries(): List<ReportEntry>
AccessLogReportAdapter
- repositories: existing model
+ entries()
RedactedReportSource
- wrapped: ReportSource
+ entries(): redacted copy
Adapter: relational records to typed entries
Decorator: wraps another ReportSource
ReportExporter (abstract)
+ export(entries): Export
# createDocument(): Document
renders
<<interface>> ReportDocument
+ render(entries): bytes
Csv / JsonReportExporter
createDocument()
creates
Csv / JsonReportDocument
+ render(entries)
Factory Method: each exporter creates its concrete product
<<interface>> ReportEntry
+ accept(visitor)
Allowed / Denied implement
accept
<<interface>> ReportVisitor
+ visit(Allowed)
+ visit(Denied)
StatisticsVisitor
+ summary(): counts, reasons
Facade coordinates the participants above.
Visitor dispatches by entry type.