PIR

DETECT | RASPBERRY PI | MOTION

What does it do?

A PIR spots movement nearby, such as somebody walking past.

PIR stands for passive infrared. It watches the warmth that bodies give off and reports when that warmth moves, so it notices people and animals rather than furniture.


Your projects can use it to wake something up the moment somebody arrives, and go quiet again when they leave.

Uses



Burglar alarm

DETECT Movement in the room → **DECIDE** Should the room be empty? → **DO** Raise the alarm



Sibling alarm

DETECT Movement at the door → **DECIDE** Is privacy mode armed? → **DO** Sound the warning



Dome	VCC	OUT	GND
Wide-angle lens	Power, 5V	High on movement	Ground

Raspberry Pi Foundation

Code

Raspberry Pi

```
from gpiozero import MotionSensor


pir = MotionSensor(14)

moved = pir.motion_detected
```

`moved` is True or False. Also `pir.when_motion` and `pir.when_no_motion` to run a function the moment it changes. Most boards carry two dials that set how sensitive it is and how long OUT stays high.

Wiring

RASPBERRY PI 5

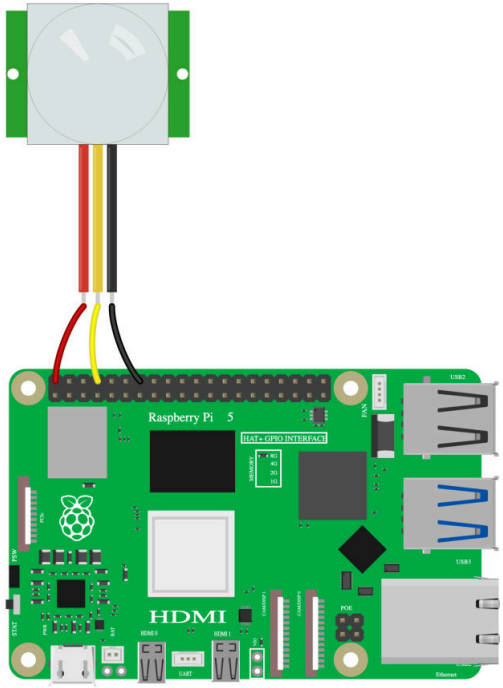

5V (pin 2) · OUT **GPIO 14** (pin 8) · **GND** (pin 14)