




Let's Talk Entry Monitoring

D1 Sensor | Secure all entry points with complete peace of mind

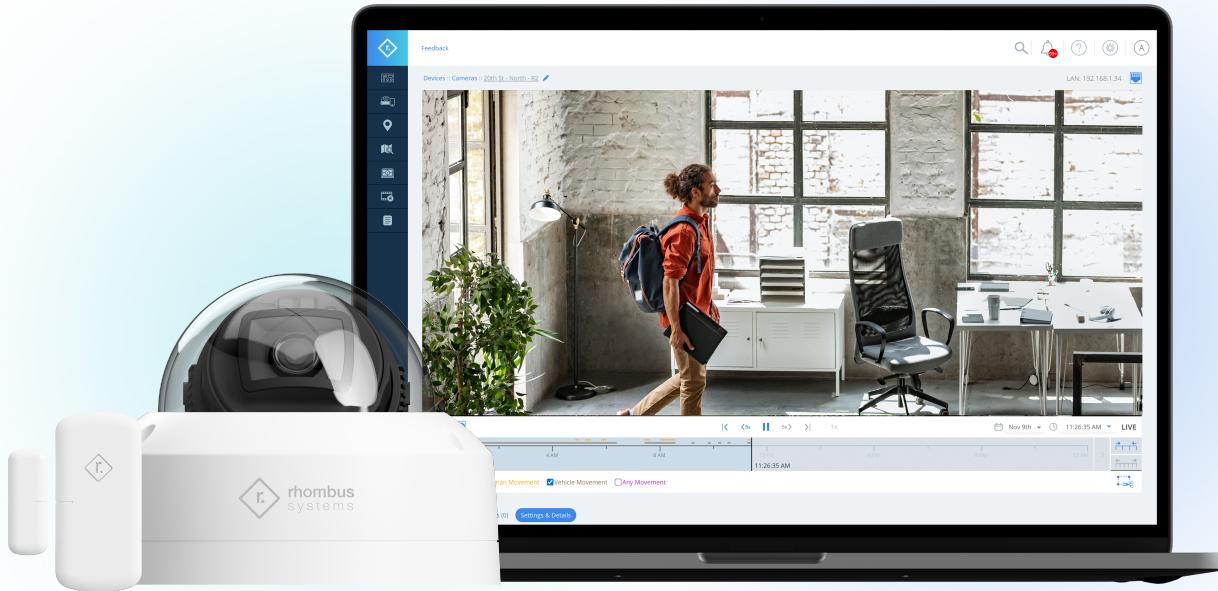

Monitor entry, protect restricted areas, and improve response if unauthorized people enter



Attach to any door, window, or entry point to monitor access across all locations



Receive alerts when an entry point opens, closes, or is left ajar with synchronized video footage



Monitor all entry points through the Rhombus Console or Mobile App

About the D1

The D1 Sensor delivers powerful entry monitoring capabilities combined with video footage to provide insight when a door, window, or entry point has been opened.

The D1 connects automatically to the nearest Rhombus BLE-enabled device and can be attached anywhere to issue alerts when an entry point has been breached or left vulnerable.

D1 Sensor Specs

Dimensions: 53mm (2.1in) x 25mm (1.0in) x 11mm (0.44in)

Magnet Dimensions: 31mm (1.3in) x 12mm (0.48in) x 11mm (0.44in)

Range: Up to 100m (300ft)

Battery: 2x CR2032, replaceable

Battery Life: 3 years

Magnet Gap: Up to 0.75in

Accelerometer: Detects roll-up doors without magnet

Mounting: Two-sided tape (included) or screws (optional)

Outdoor Use: Use in a covered location; resistant to brief incidental splashes