The steps below will guide you through the process of enrolling or de-enrolling a customer from the **Smart Energy Plan**.

Table of Contents

Requests 2
Enrollment 5
RevDemo Enrollment 15
De Enrollments 24
RevDemo De-Enrollment 32

Requests

Enrollment requests are handled by CSRs. When a customer informs us that they would like to enroll in SEP, CSRs fill out an internal **SEP Walk-In From** which comes directly to the team.

Walk-In

Smart Energy Plan Walk In Form

Hi , when you submit this form, the owner will see your name and email address

ACCT Number

Enter a number

Email Address

Enter value here

ENROLL

—

CONFIRM NO PG

—

Submit

Powered by Microsoft Lists

This content is created by the owner of the form. The data you submit will be sent to the List owner. Never give out your password.

We are notified via email when a new form has been submitted.

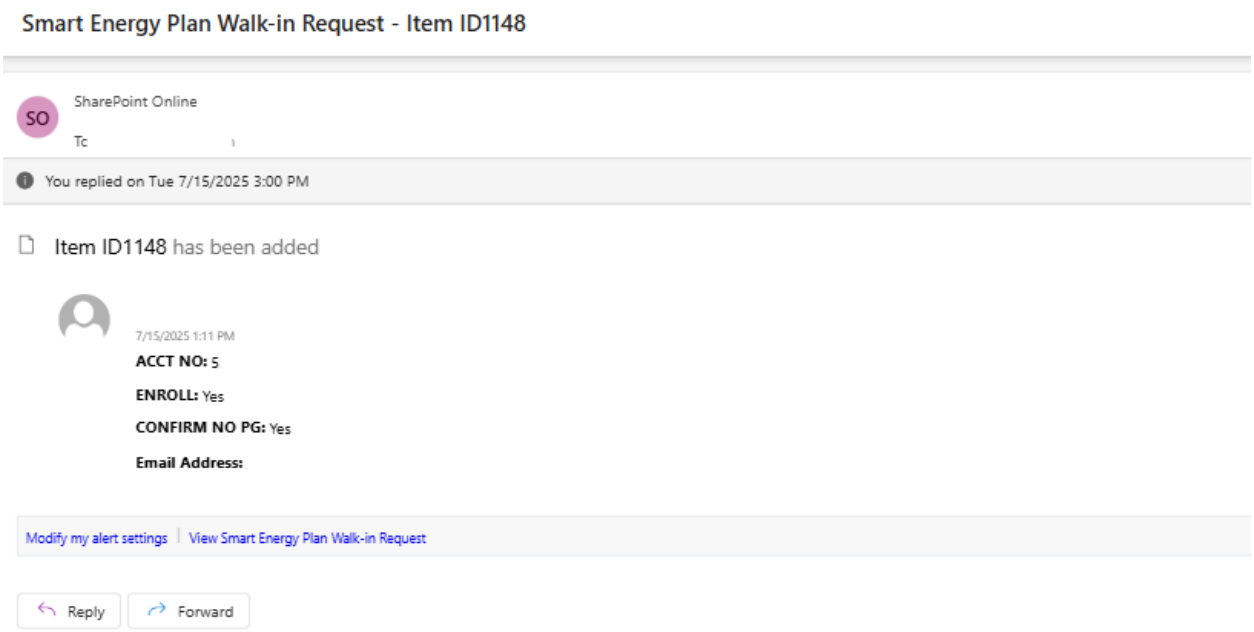

De-enrollment Are also handled by CSRs. When a customer informs us that they would like to de-enroll in SEP, CSRs fill out an internal [SEP Opt Out Form]() which triggers a de-enrollment process in RevDemo.

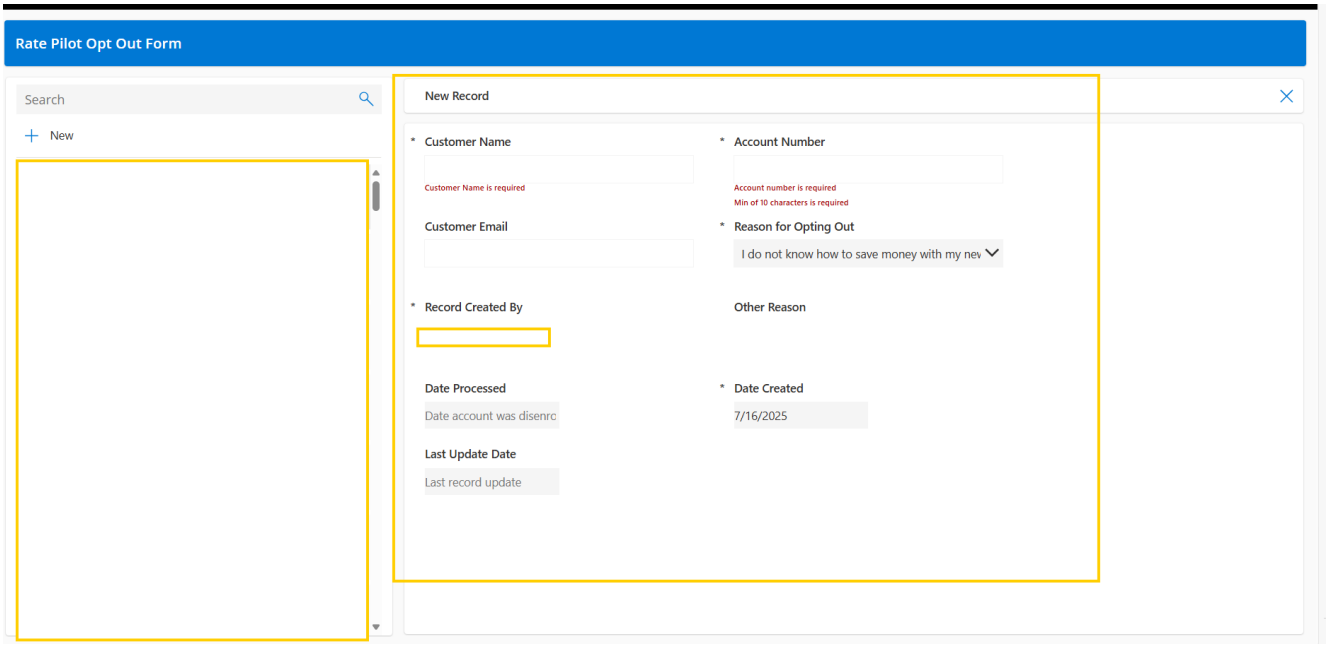

Enrollment

Before proceeding with enrollment, complete the following verifications:

1. Ensure AMI Communicating Meter

- In the **Alerts** section, confirm that the customer has an **AMI communicating meter**.

2. Check for Open Personal Service Investigations

- In the **Alerts** section, ensure there are **no open Personal Service Investigations** pending.

3. Verify Residential Status

- Under the **Current Context** section, ensure the customer is listed as **"Residential", "Religious",** or **Non-Residential (SC2)**

  *Note: Waiting for Rate consultants to confirm the process step for Religious account – SC9, SC51.

4. Check Current Rate and Enrollment History

- Go to **Service Agreement** → click **Search** → select the **Electric Master SA**.
- Confirm the **SA Type** is correct and the **SA Status** is **Active**.
- Navigate to the **Rate Info** tab to check the current rate:
  - If the customer is on **SC01 Rate 3 (TOU)**, they must contact the TOU team to de-enroll before proceeding.
  - If the customer opted out of **CES1DIP(1-7)** within the last **18 months**, they are not eligible to re-enroll in SEP yet.

5. Verify Billing Status

- Go to **Current Context** → **Bill Segments** → click **Search**.
- Check the **Status** of the most recent bill that shows the last bill cycle status as **"Frozen."**

Step 1. Retrieve customer's account.

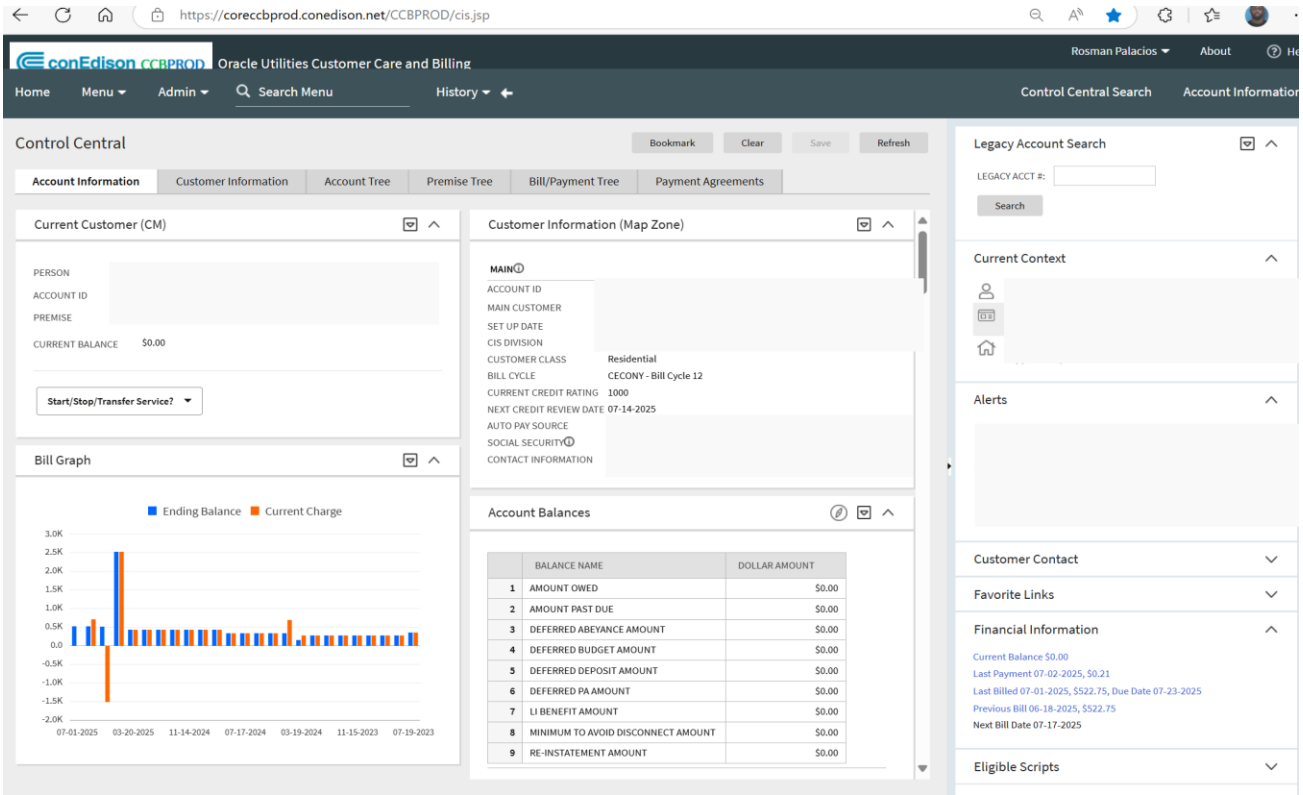

Step 2. In the "**Current Context menu**", find "**Go to Account,**" then click the dropdown arrow labeled "**Show Account Context Menu,**" select "**Go to Customer Rate Change Request**" near the bottom, and click "**Add.**"

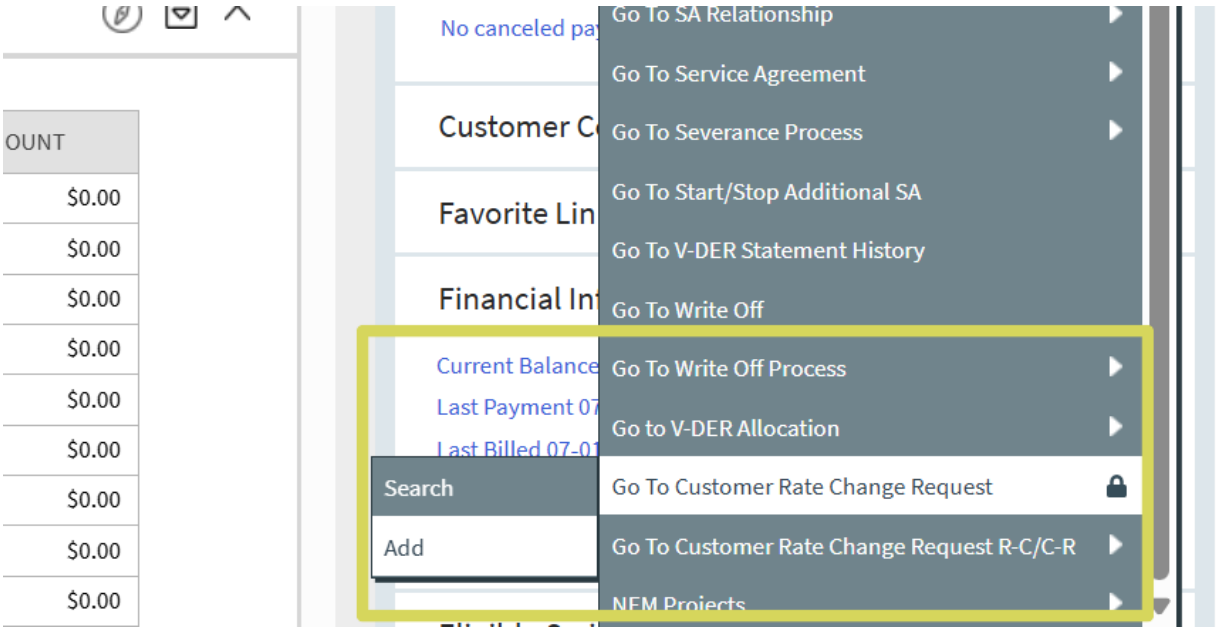

Step 3. In the Customer Rate Change Screen, for "Service Type" click "**Electric Service.**" You will also see "Gas Service" as an option, but in this process, since the rate change in question is for electric service, your selection will always be "Electric Service" only. Click **"Save."**

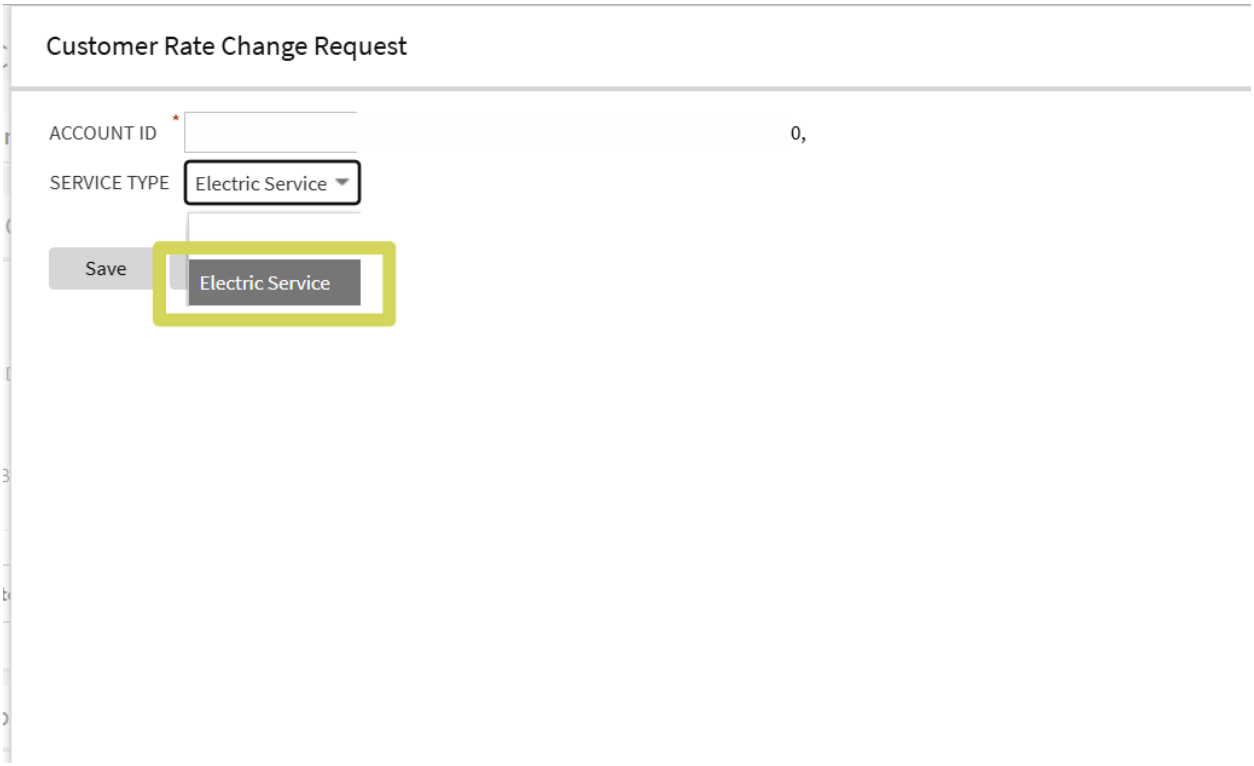

IPP TODC & Rate Pilot Indicator

The Rate	Attributes	Rate Schedule	TODC	Rate Schedule
Rate I *SC1 and SC2*	Demand Delivery Peak: 12 – 8PM (Mon.-Fri) Summer and non-summer	**SC01 Innovative Pricing Pilot-Rate 1 (Rider 2)** **SC02 Innovative Pricing Pilot-Rate 1 (Rider AA)**	21 or 41 29 or 49	CES1DIP1 (SC2) CES2DIP1
Rate II	Demand Delivery Peak: 12 – 8PM (Mon.-Fri) Summer only	**SC01 Innovative Pricing Pilot-Rate 2 (Rider 2)**	22 or 42	CES1DIP2
Rate III	Demand Delivery Peak: 2 – 10PM (Mon.-Fri) Summer and non-summer	**SC01 Innovative Pricing Pilot-Rate 3 (Rider 2)**	23 or 43	CES1DIP3
Rate IV	TOU Supply + Demand Delivery Peak: 12 – 8PM (Mon.-Fri) Summer and non-summer	**SC01 Innovative Pricing Pilot-Rate 4 (Rider 2)**	40	CES1DIP4
Rate V	Subscription Rate Demand subscription level fixed based on prior 12-month history NO overage charges if subscription level exceeded	**SC01 Innovative Pricing Pilot-Rate 5 (Rider 2)**	25 or 46	CES1DIP5
Rate VI	Subscription Rate Demand subscription level fixed based on prior 12-month history Includes overage charges in the summer if subscription level exceeded	**SC01 Innovative Pricing Pilot-Rate 6 (Rider 2)**	26 or 46	CES1DIP6
Rate VII	Half Volumetric + Half Demand Peak: 12 – 8PM (Mon.-Fri) Summer and non-summer	**SC01 Innovative Pricing Pilot-Rate 7 (Rider 2)**	35 or 45	CES1DIP7

The **TOD CODE** is based on whether the customer is a **Residential Customer** or a **Small Commerical Customer** and if the account has an **ESCO** or not, as indicated in the Alerts section or the Service Agreement:

For Residential Customers:

- If the customer does not have ESCO, set the TOD CODE to "**(21) IPP RATE I - SC1**"
- If the customer has ESCO, set the TOD CODE to "**(41) RETL CHOICE IPP RATE I -SC1**."

For Small Commercial Customers:

- If the customer does not have ESCO, set the TOD CODE to "**(29) IPP RATE RIDER AA - SC2**"
- If the customer has ESCO, set the TOD CODE to "**(49) RETL CHOICE IPP RATE RIDER AA - SC2**."

Step 4. * Follow the steps in the photo in order.

In Customer Rate Change option, click “Last scheduled bill date.” Next, in the Rate Info section, go to the “TOD CODE” and look for the appropriate TODC e.g., **(21) IPP Rate I – SC1.** Lastly, click “**Save.**”

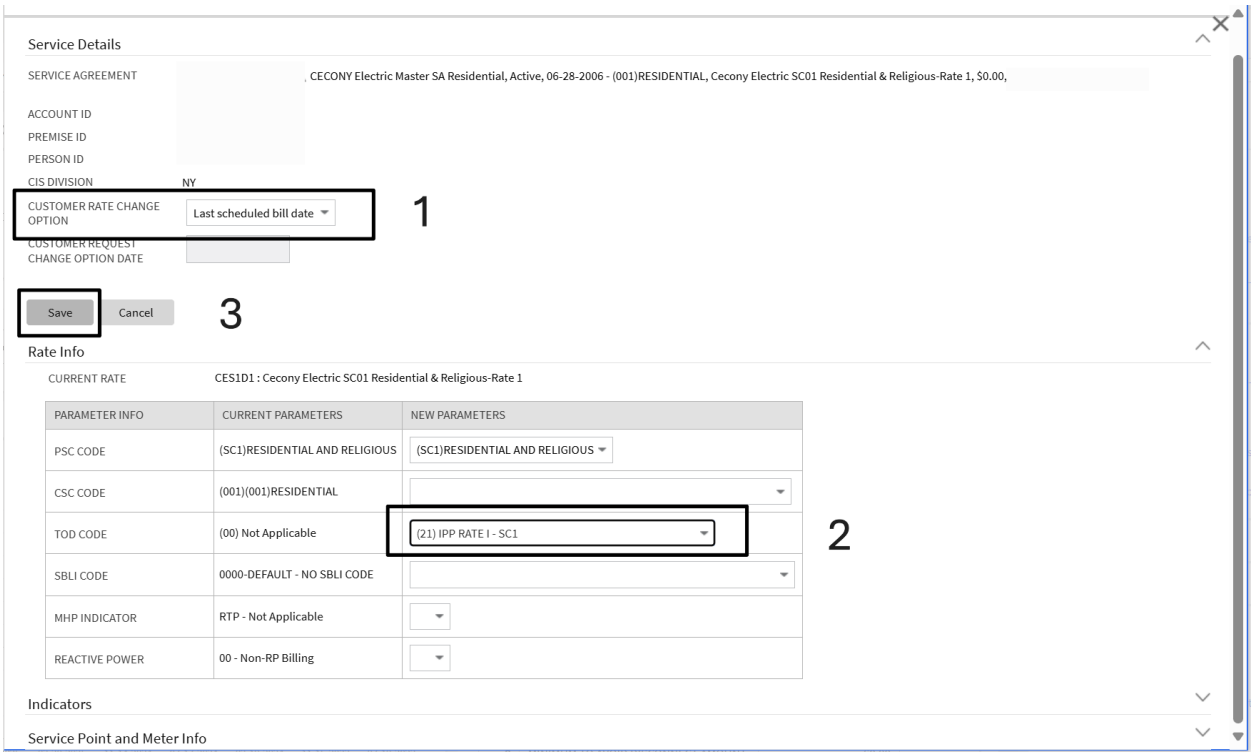

Step 5. Click “**Send for Approval.**"

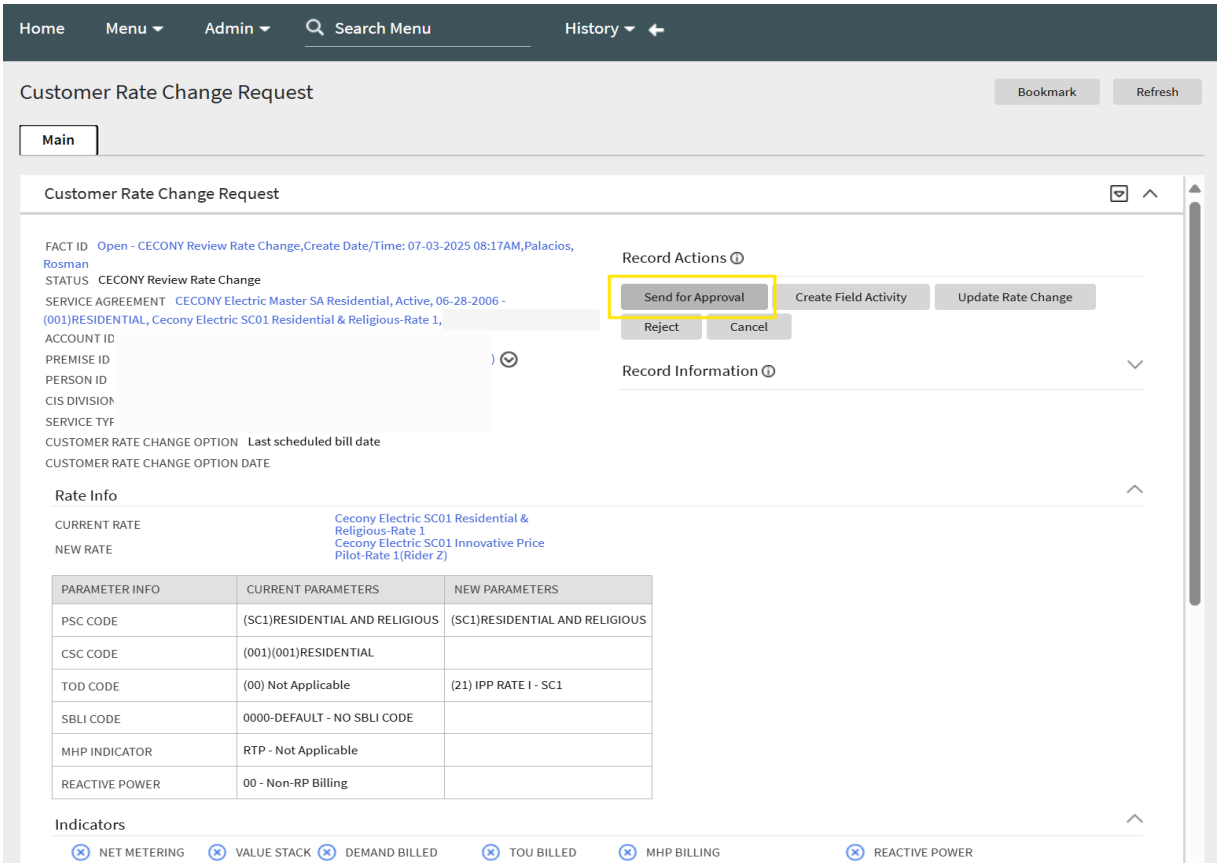

Step 6. You will be asked to provide a comment on this rate change. Once you provide a simple comment, click "**save**."

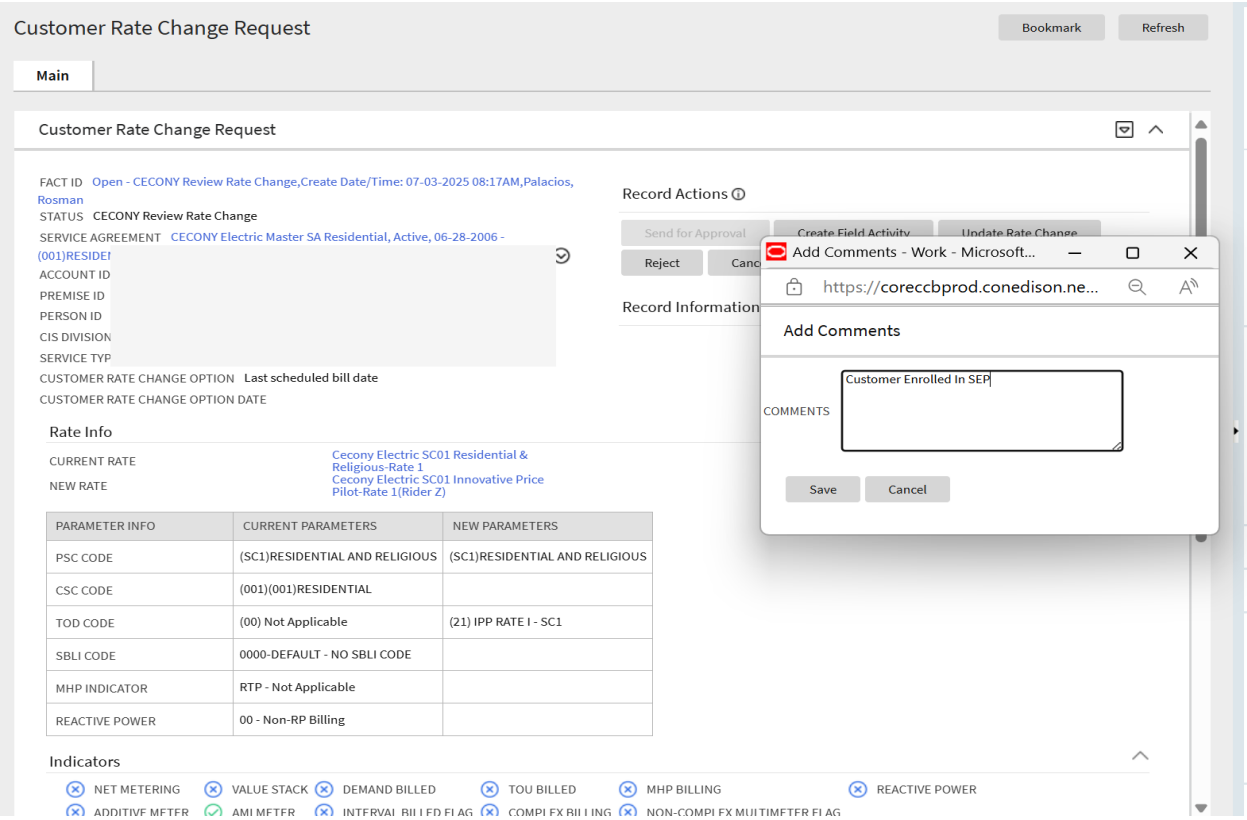

Step 7. Click “**Approve.**”

conEdison CCBPROD Oracle Utilities Customer Care and Billing

Home Menu Admin Search Menu History

Customer Rate Change Request

Bookmark Refresh

Main

Customer Rate Change Request

FACT ID Open - Approve,Create Date/Time: 07-03-2025 08:17AM,Palacios, Rosman
STATUS Approve
SERVICE AG
(001)RESIDE
ACCOUNT ID
PREMISE ID
PERSON ID
CIS DIVISIOI
SERVICE TYI
CUSTOMER
CUSTOMER RATE CHANGE OPTION DATE

Record Actions

Approve Decline Return To CSR Cancel

Record Information

Rate Info

CURRENT RATE Cecony Electric SC01 Residential & Religious-Rate 1
NEW RATE Cecony Electric SC01 Innovative Price Pilot-Rate 1(Rider Z)

PARAMETER INFO	CURRENT PARAMETERS	NEW PARAMETERS
PSC CODE	(SC1)RESIDENTIAL AND RELIGIOUS	(SC1)RESIDENTIAL AND RELIGIOUS
CSC CODE	(001)(001)RESIDENTIAL	
TOD CODE	(00) Not Applicable	(21) IPP RATE I - SC1
SBLI CODE	0000-DEFAULT - NO SBLI CODE	
MHP INDICATOR	RTP - Not Applicable	
REACTIVE POWER	00 - Non-RP Billing	

Indicators

NET METERING VALUE STACK DEMAND BILLED TOU BILLED MHP BILLING REACTIVE POWER
ADDITIVE METER AMI METER INTERVAL BILLED FLAG COMPLEX BILLING NON-COMPLEX MULTIMETER FLAG

Step 8. Click on Service Agreement Hyper link as below.

istomer Rate Change Request

Bookmark

Main

Customer Rate Change Request

FACT ID Open - Approve,Create Date/Time: 07-03-2025 09:50AM,Ren, Xuliejun
STATUS Approve
SERVICE AGREEMENT CECONY Electric Master SA Residential, Active, 08-01-2017 - (001)RESIDENTIAL, Cecony Electric SC01 Residential & Religious-Rate 1, !
ACCOUNT ID
PREMISE ID
PERSON ID
CIS DIVISION
SERVICE TYPE E
CUSTOMER RATE CHANGE OPTION Last scheduled bill date
CUSTOMER RATE CHANGE OPTION DATE

Record Actions

Approve Decline Return To CSR Cancel

Record Information

Rate Info

CURRENT RATE
NEW RATE

Step 9. Then, Verify Updated Rate

- Navigate to the **Rate Info** tab.
- Confirm that the updated rate is reflected correctly.
- Ensure the **Effective Date** is set to one day after the latest bill end date.

Important: No mid-cycle rate changes are allowed. The rate change must take effect **after the latest scheduled bill date**.

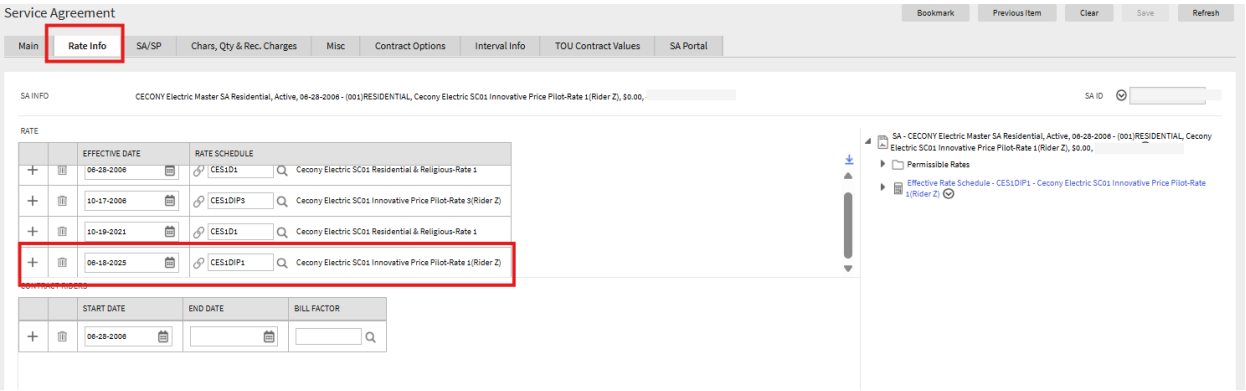

Step 10. In the Service Agreement, navigate to the "**Chars, Qty, & Rec. Charges**" option. Locate the updated TOD code and underneath, add a new line item.

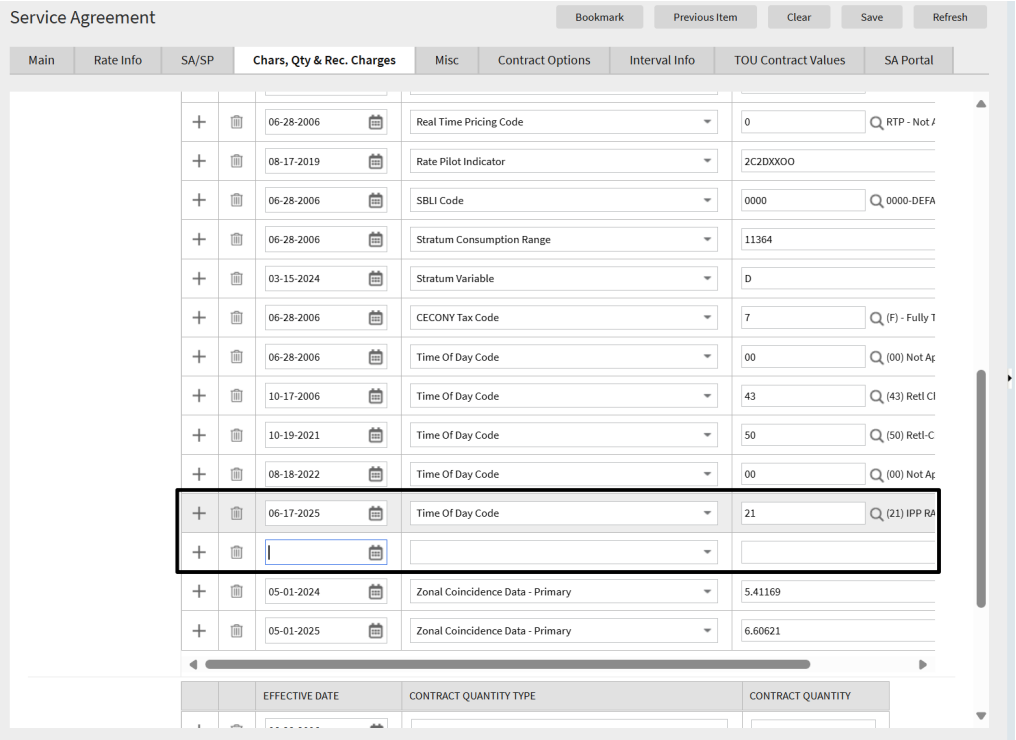

In the new line item, add the same date as the new TOD code for the “**Effective date**” field. In the “**Characteristic Type**” field, type in or search for **Rate Pilot Indicator.** Lastly, in the “**Characteristic Value**” field, Type in “**5AXXXXAE.**”

Step 11. Click “Save” at the top of the page.

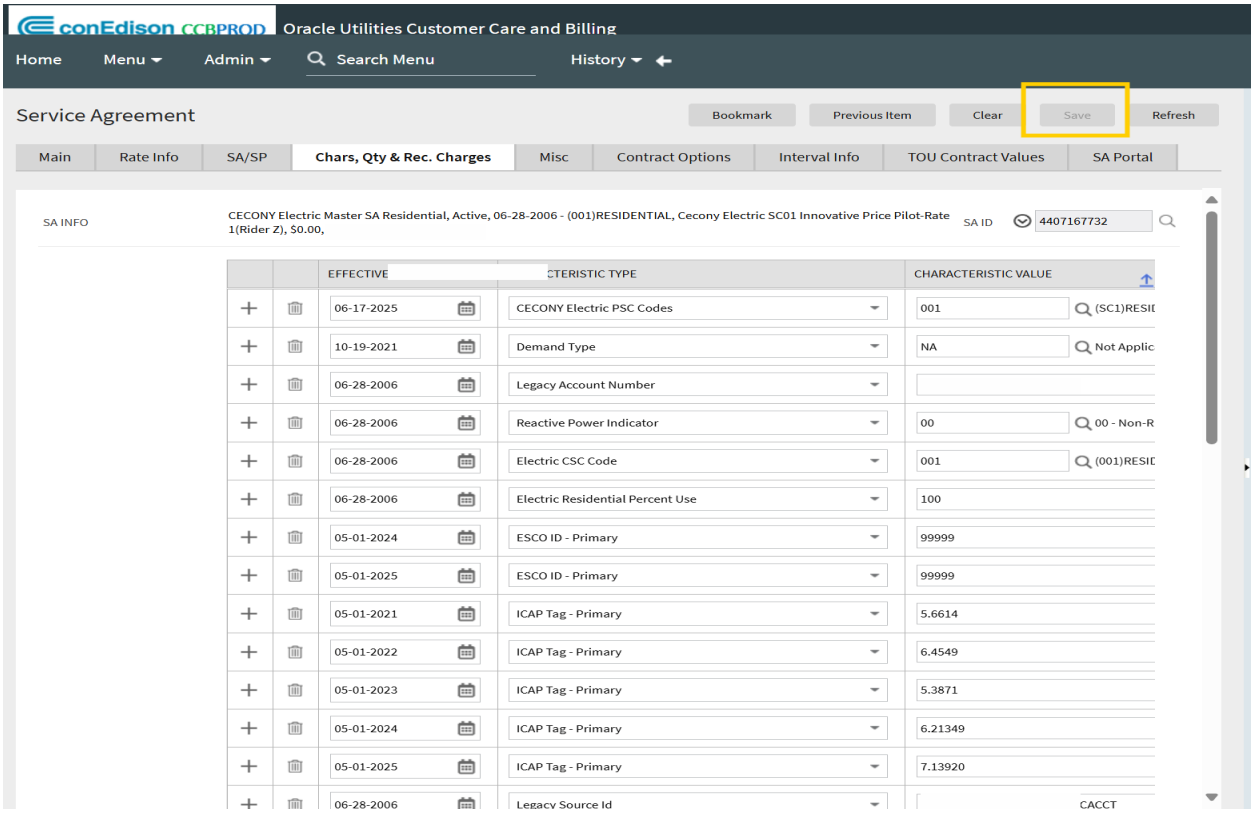

The changes in CC&B are complete. Now RevDemo must be updated. RevDemo stores and tracks all Smart Energy Plan customers and so any changes made to customer information in CC&B must also be updated in RevDemo.

RevDemo Enrollment

Step 12. Open RevDemo and go to "**Manage Customers"**. Input the customer account number and click "**search**." If the customer was once apart of IPP, the account will populate.

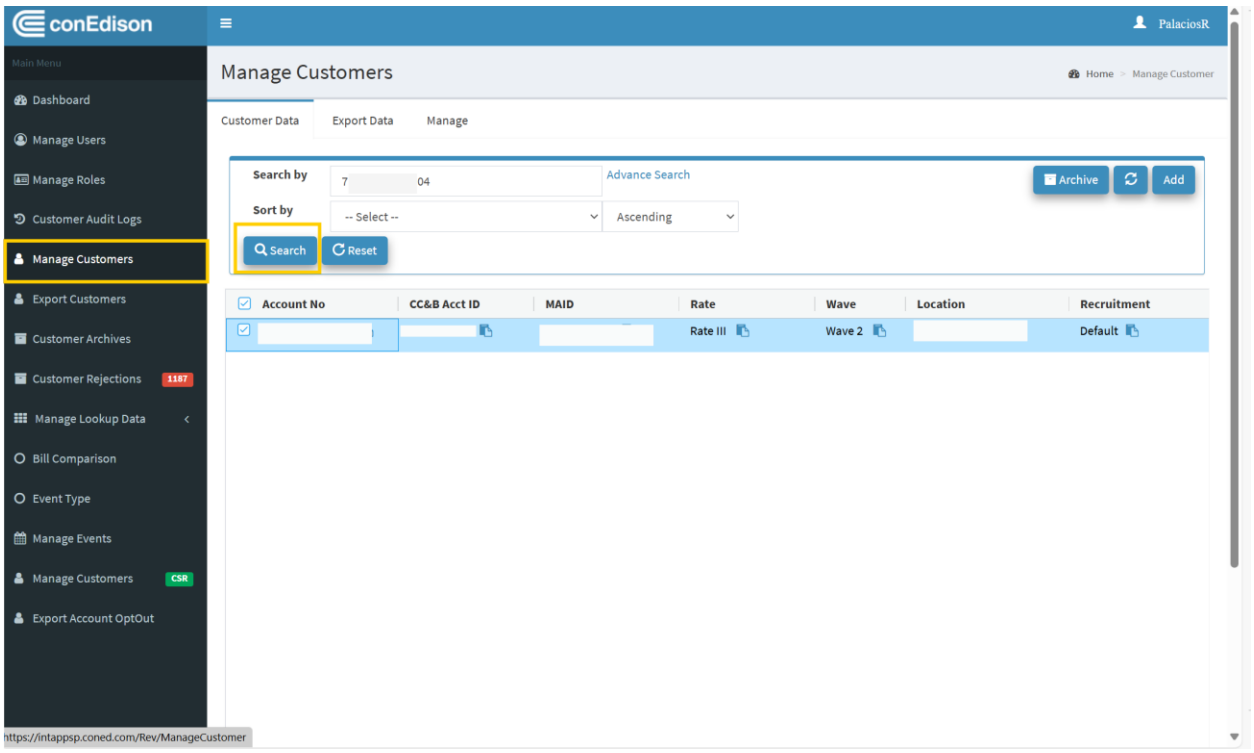

If the account has never been a part of Smart Energy Plan, you will need to add the account to Rev. To add the account, click "**Add**" on the top right corner and input the customer information.

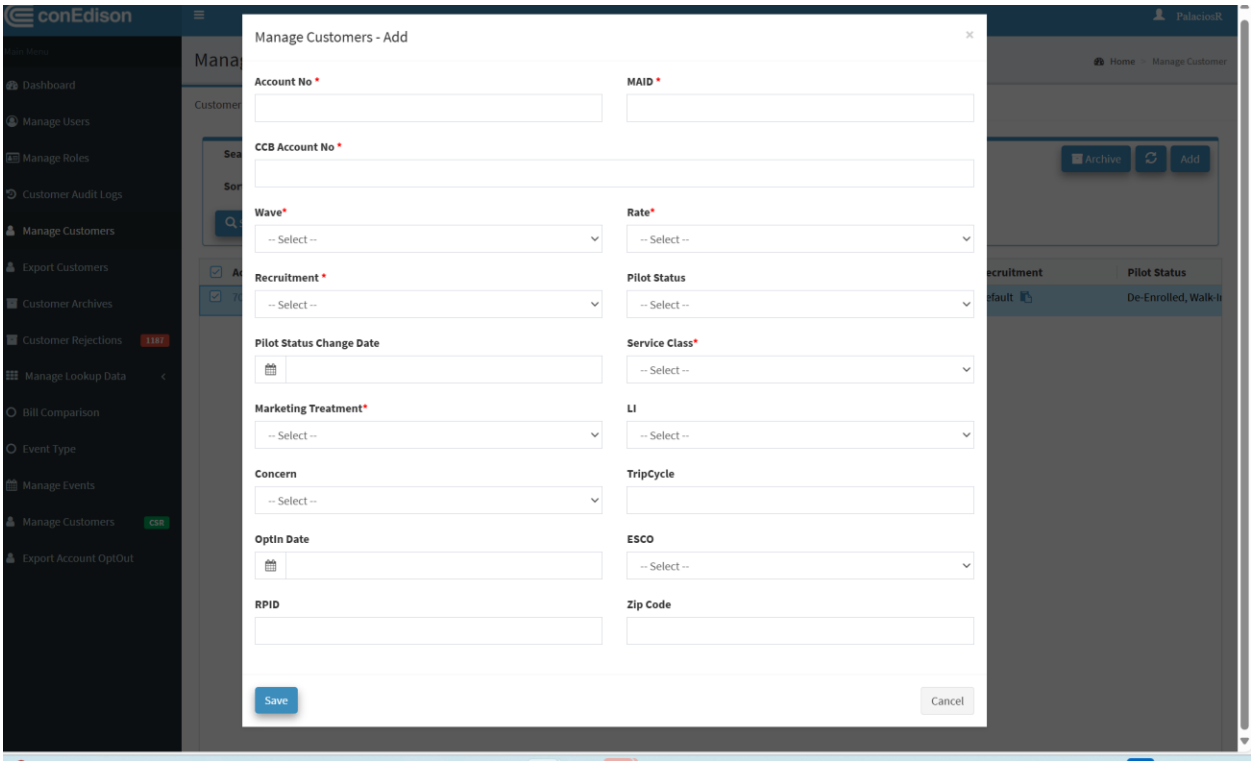

Step 13

- If this a returning customer, click the account in RevDemo and update the following sections:

  Pilot Status – Update status to "**De-Enrolled, Walk-In Enrolled**."
  RPID – Update to Walk-In code "**5AXXXXAE**"

  Click "**Save.**"

- If this is a new customer, click "**add**" and input all the customer information. Be sure to include the following:

  Acct No, MAID & CCB Accout No – **Refer to CC&B**
  Wave – **Walk- In**
  Rate – **Rate I**
  Recruitment – **Walk-In**
  Service Class – **Refer to CC&B**
  Marketing Treatment – **Walk-In**
  LI - **Refer to CC&B**
  Concern - **Refer to CC&B**
  Opt in date - **Refer to CC&B**

Esco - **Refer to CC&B**
RPID - **5AXXXXAE**
Zip- **Refer to CC&B**

Here's where you can find this information in CC&B

Account Number

Account number for RevDemo is the Legacy Account Number. This can be found in the **"Chars, Qty & Rec. Charges"** tab of the Service Agreement page.

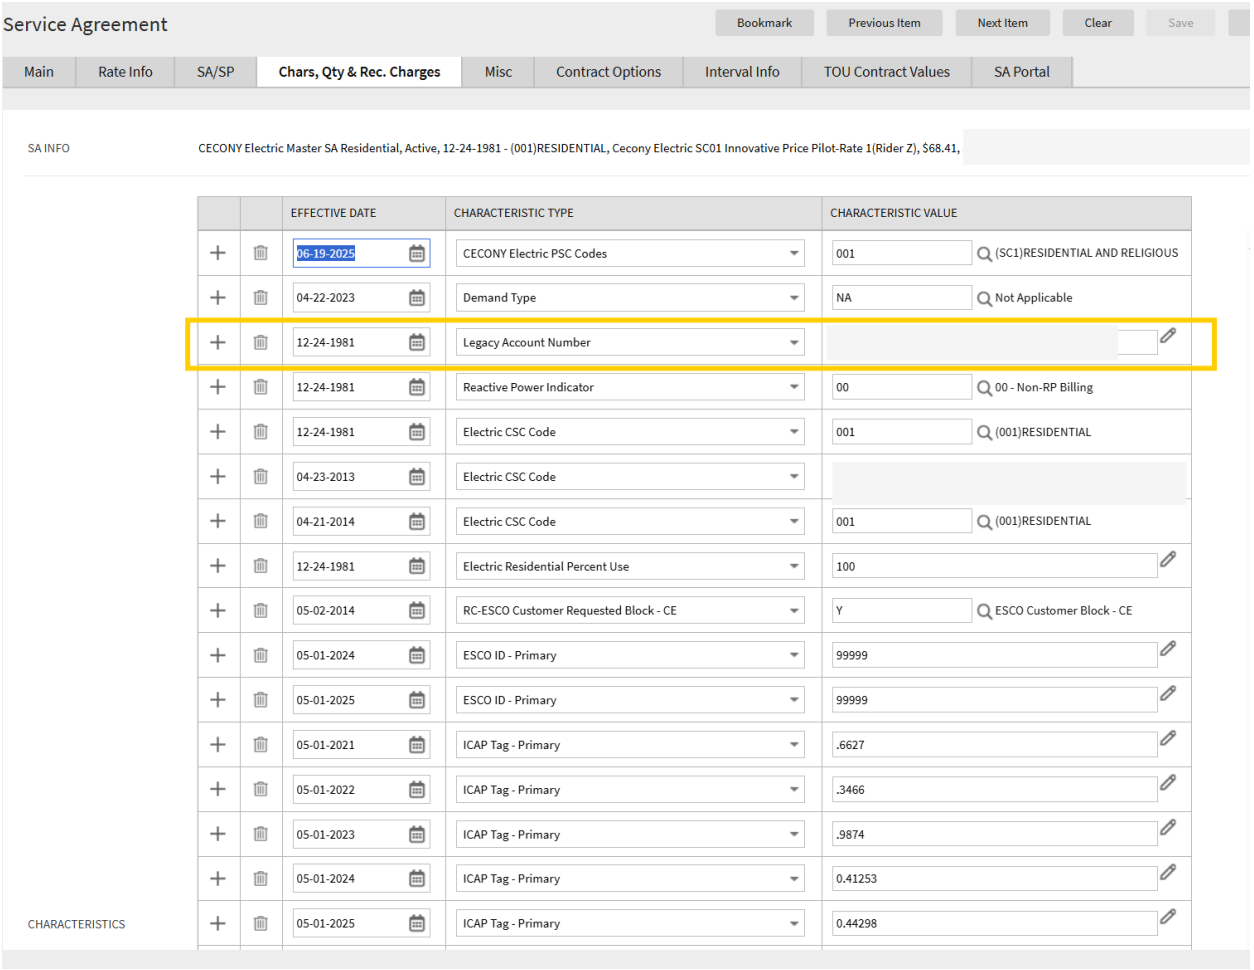

EFFECTIVE DATE	CHARACTERISTIC TYPE	CHARACTERISTIC VALUE	
06-19-2025	CECONY Electric PSC Codes	001	(SC1)RESIDENTIAL AND RELIGIOUS
04-22-2023	Demand Type	NA	Not Applicable
12-24-1981	Legacy Account Number		
12-24-1981	Reactive Power Indicator	00	00 - Non-RP Billing
12-24-1981	Electric CSC Code	001	(001)RESIDENTIAL
04-23-2013	Electric CSC Code		
04-21-2014	Electric CSC Code	001	(001)RESIDENTIAL
12-24-1981	Electric Residential Percent Use	100	
05-02-2014	RC-ESCO Customer Requested Block - CE	Y	ESCO Customer Block - CE
05-01-2024	ESCO ID - Primary	99999	
05-01-2025	ESCO ID - Primary	99999	
05-01-2021	ICAP Tag - Primary	.6627	
05-01-2022	ICAP Tag - Primary	.3466	
05-01-2023	ICAP Tag - Primary	.9874	
05-01-2024	ICAP Tag - Primary	0.41253	
05-01-2025	ICAP Tag - Primary	0.44298	

CC&B Number

CC&B number can be found on the Main tab of the Service Agreement page under "**Account ID**."

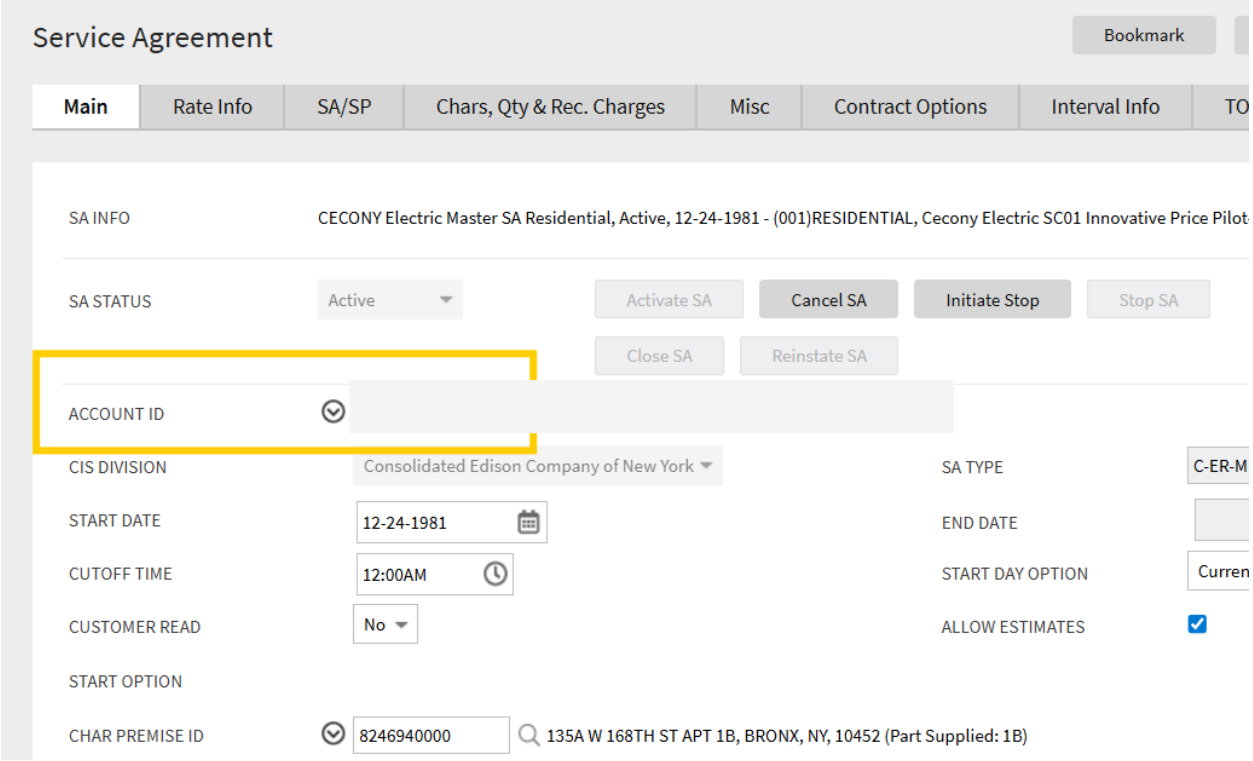

MAID

Go to Current Context, click the drop down next to “Account” and click “Go To Account.”

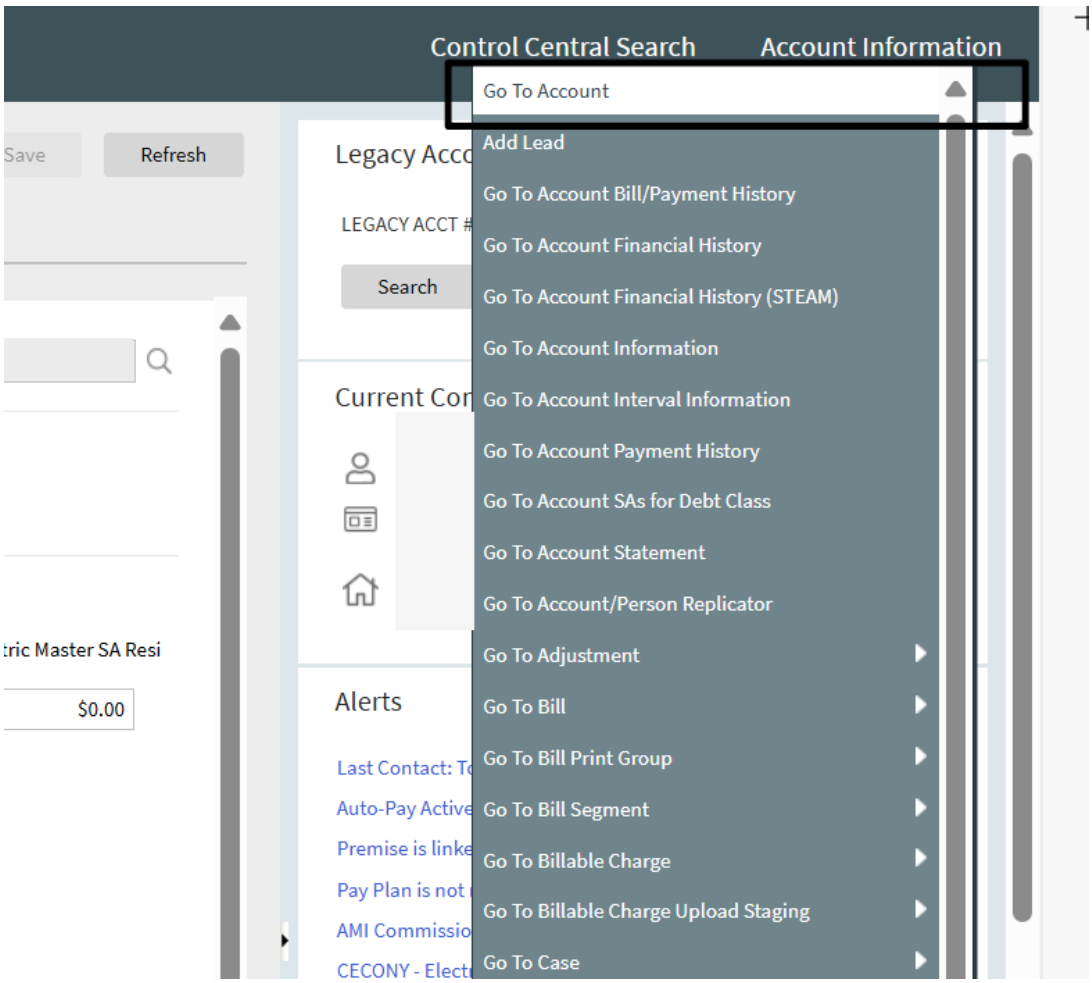

Then, click on “Characteristic”, then look for “Masked Account ID” also known as the MAID.

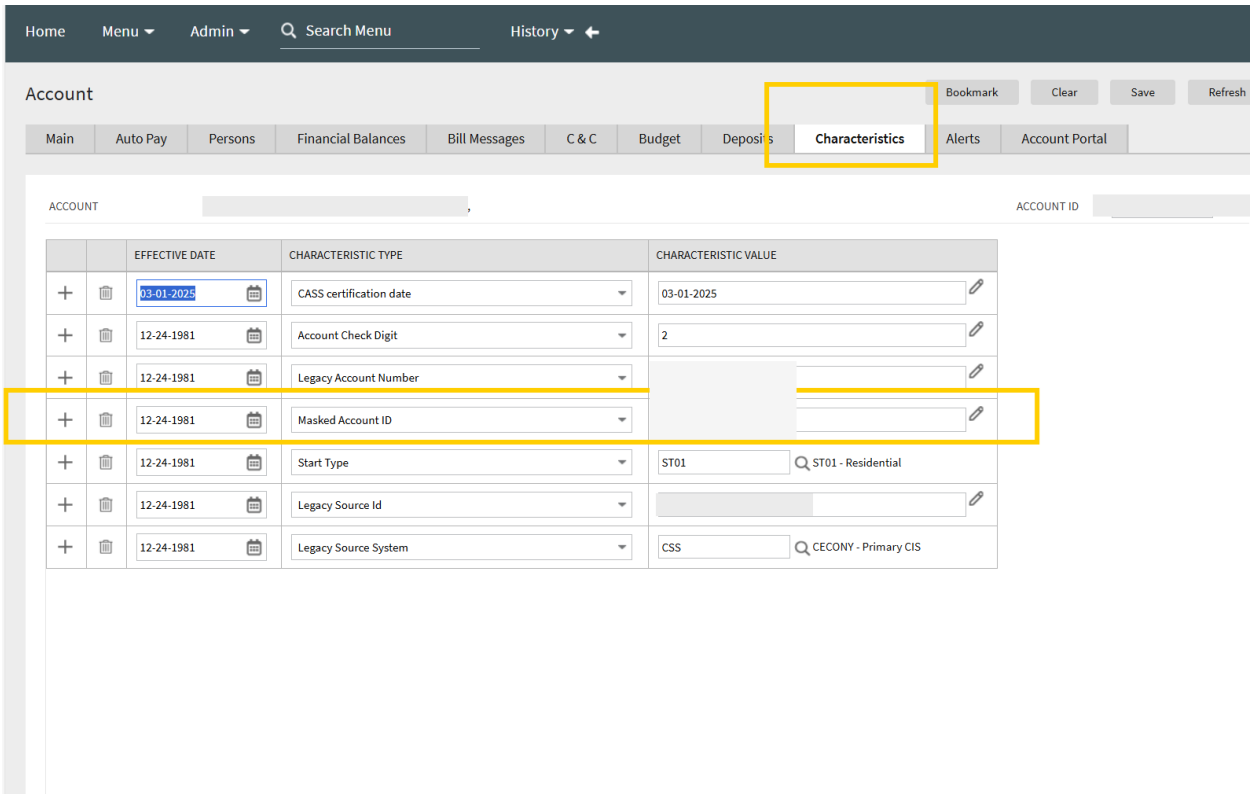

Service Class

Residential customers are considered Service Class 1 or SC1. Non-Residential customers are considered Service Class 2 (SC2) or above. This information can be found in the Current Context Section.

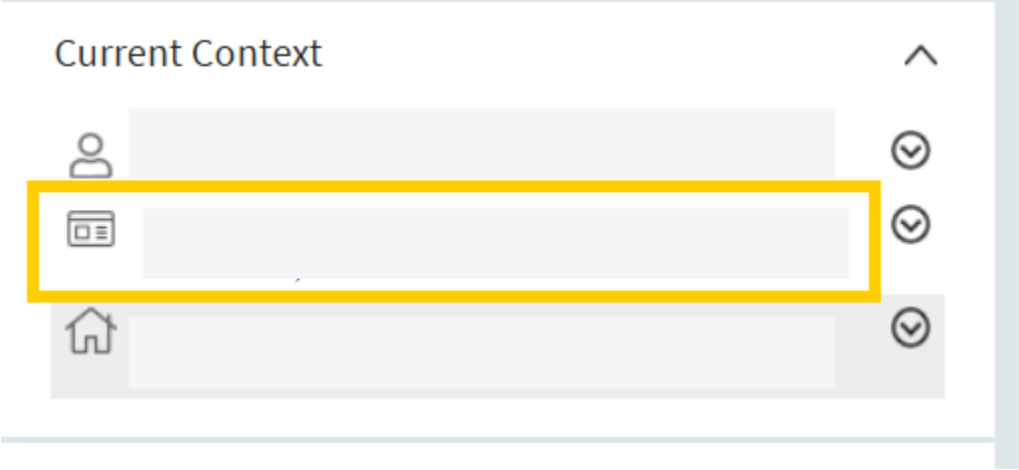

Low Income/ Concern

Customers in the Low-income or Concern categories will have indicators in the Alerts section of the Service Agreement. Indicators can also be found in the SA info section at the top of the page.

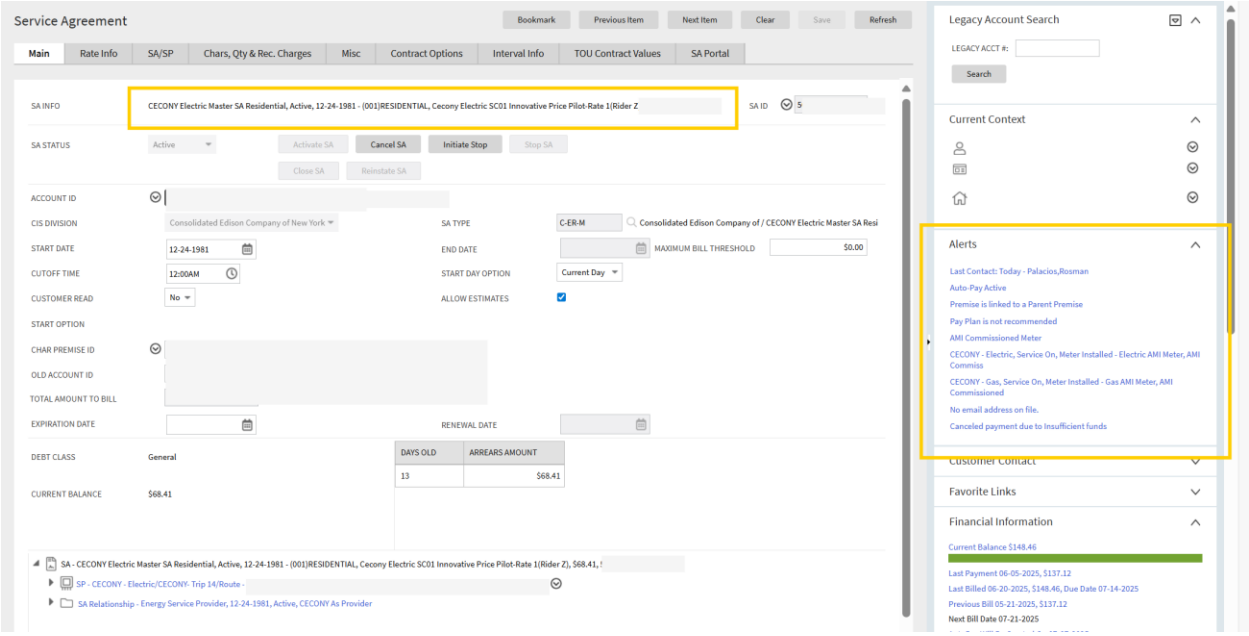

Opt in date

Should be the last scheduled bill date. This date also coincides with the latest Time of Day Code update in the **"Chars, Qty, Rec. Charges"** tab of the Service Agreement.

12-24-1981	Legacy Source System	CSS	CECONY - Primary CIS
12-24-1981	Real Time Pricing Code	0	RTP - Not Applicable
02-13-2023	Rate Pilot Indicator	2A45W4AE	
04-22-2025	Rate Pilot Indicator	2A45W4OO	
06-19-2025	Rate Pilot Indicator	5AXXXXAE	
12-24-1981	SBLI Code	0000	0000-DEFAULT - NO SBLI CODE
12-24-1981	Stratum Consumption Range	3106	
03-15-2024	Stratum Variable	B	
12-24-1981	CECONY Tax Code	7	(F) - Fully Taxable
12-24-1981	Time Of Day Code	00	(00) Not Applicable
04-22-2023	Time Of Day Code	21	(21) IPP RATE I - SC1
04-22-2025	Time Of Day Code	00	(00) Not Applicable
06-19-2025	Time Of Day Code	21	(21) IPP RATE I - SC1
05-01-2024	Zonal Coincidence Data - Primary	0.35930	
05-01-2025	Zonal Coincidence Data - Primary	0.40991	

Esco

Esco indicator will be found in the “Alerts” section of the Service Agreement Page. Electric Esco indicator will be found in the Electric Service portion of the Service Agreement.

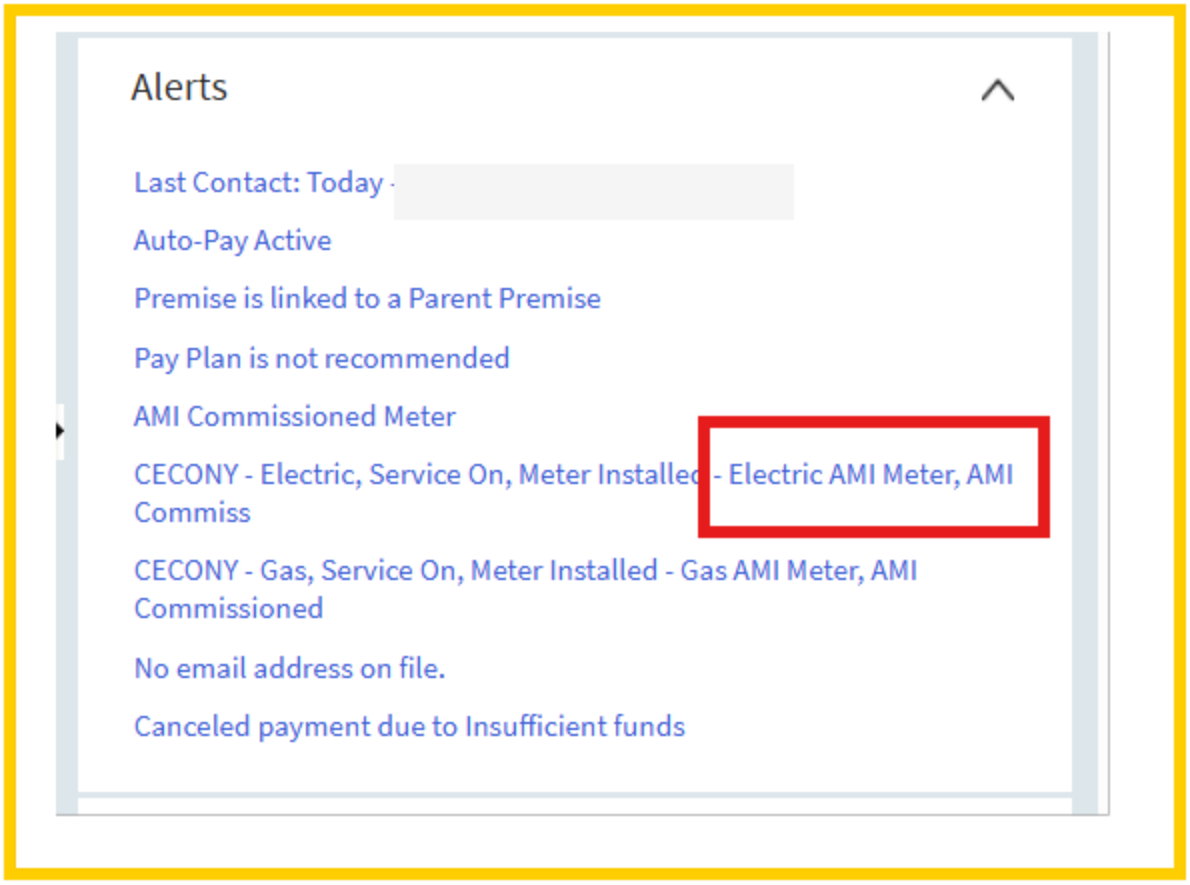

Zip Code

Customer Zip code can be found in the Current Context Section in CC&B.

Step 14. Click “**Save.**”

De Enrollments

Follow these steps to de-enroll a customer from the Smart Energy Plan.

Step 1. Retrieve customer account.

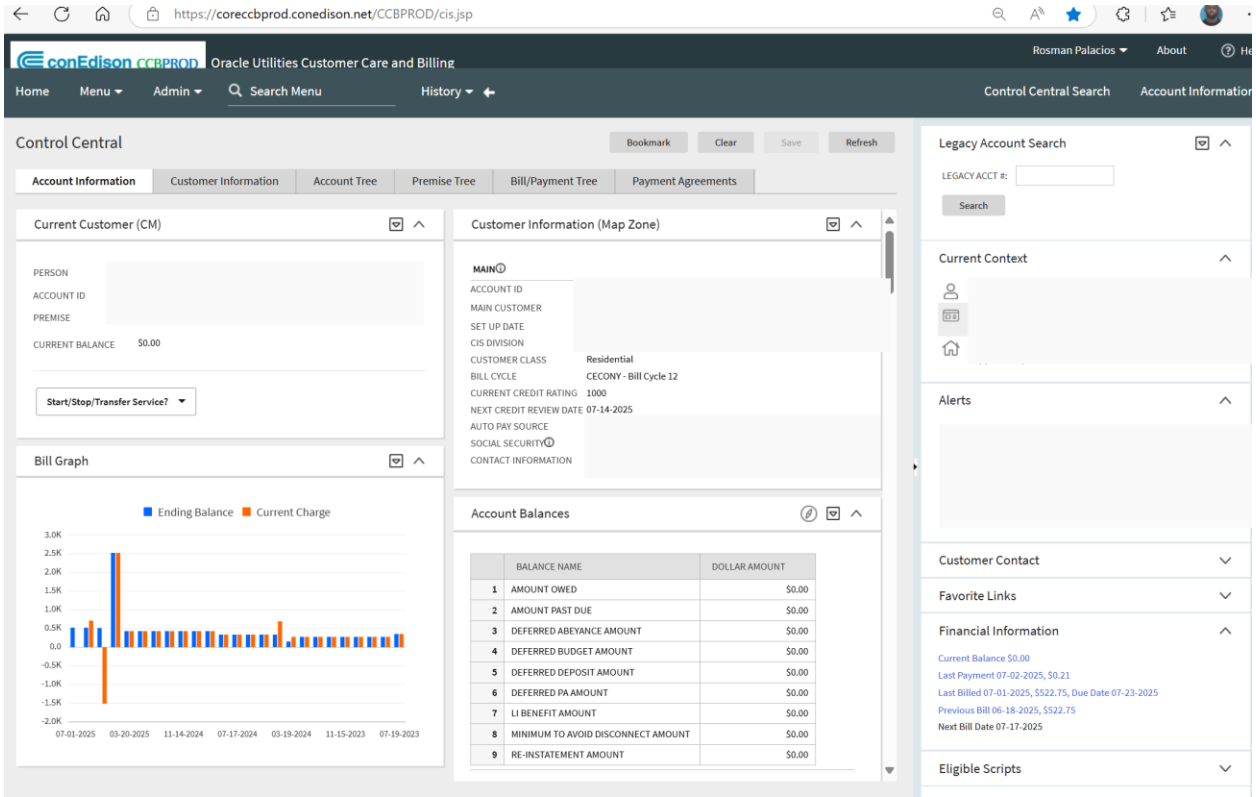

Step 2. In the "**Current Context menu**", find "**Go to Account,**" then click the dropdown arrow labeled "**Show Account Context Menu,**" select "**Go to Customer Rate Change Request**" near the bottom, and click "**Add.**"

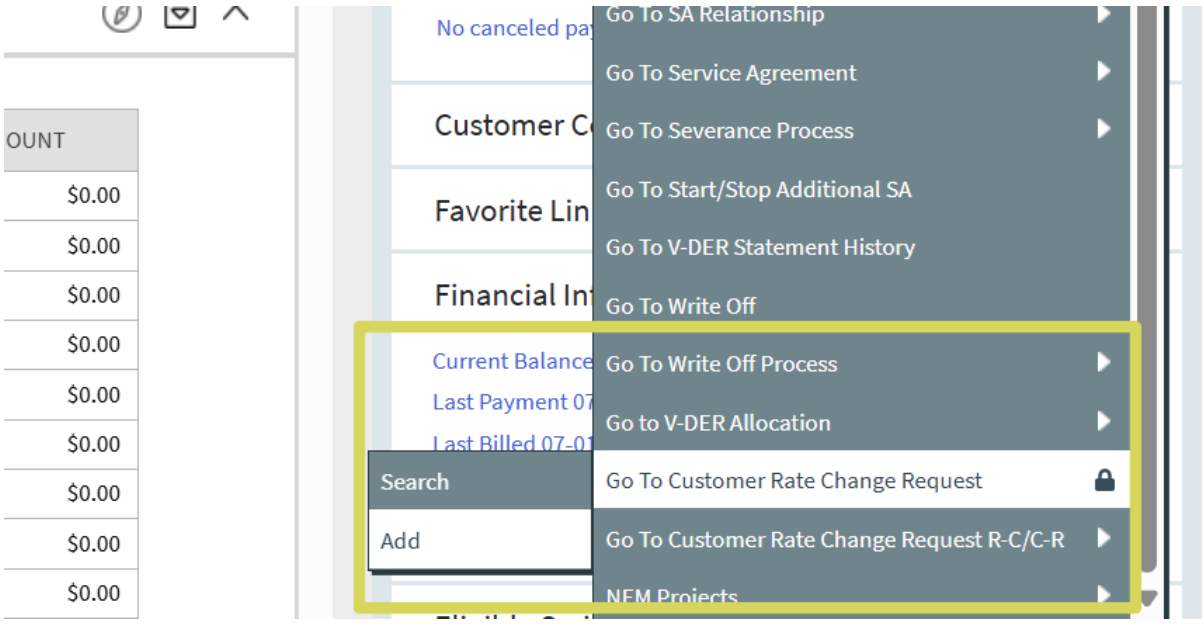

Step 3. In the Customer Rate Change Screen, for “Service Type” click “**Electric Service.”** You may sometimes see “Gas Service” as an option, but in this process, it will always be “Electric Service” only. Click **“Save.”**

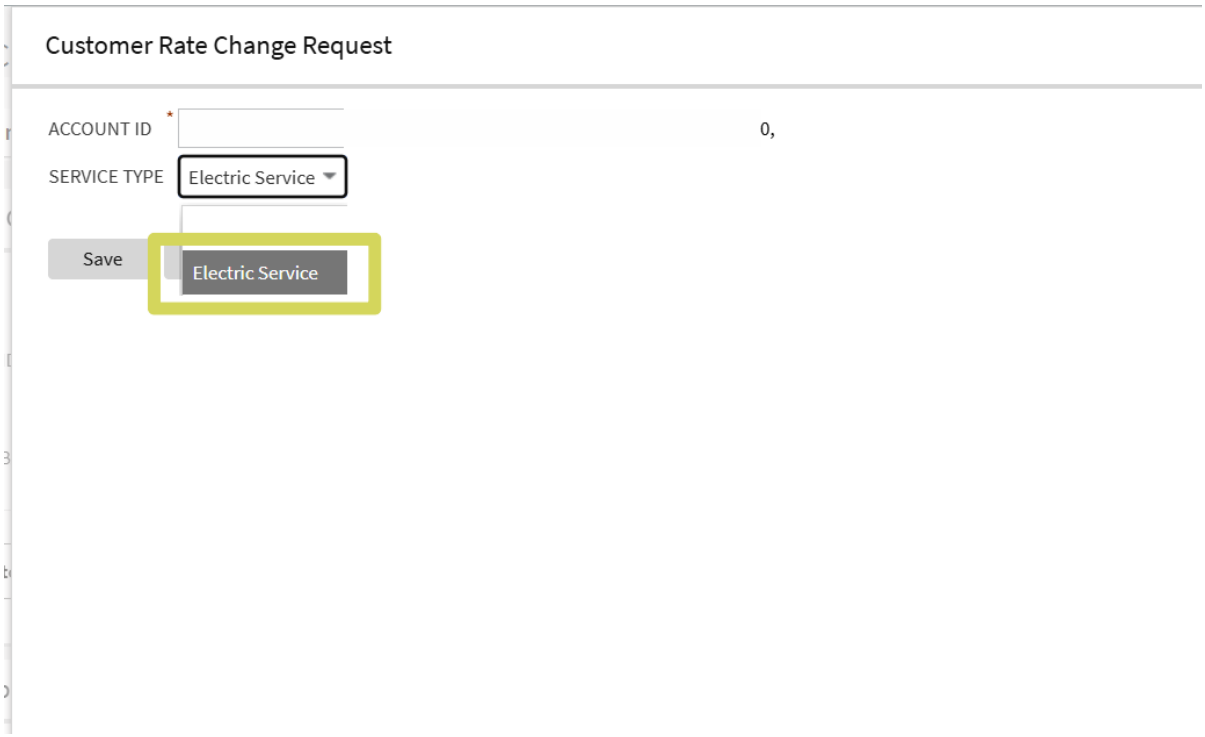

Step 4. * Follow the steps in the photo in order.

In Customer Rate Change option, click “Last scheduled bill date.” Next, in the Rate Info section, go to the “TOD CODE” and look for “(**00) Not Applicable.”** Lastly, click “Save.”

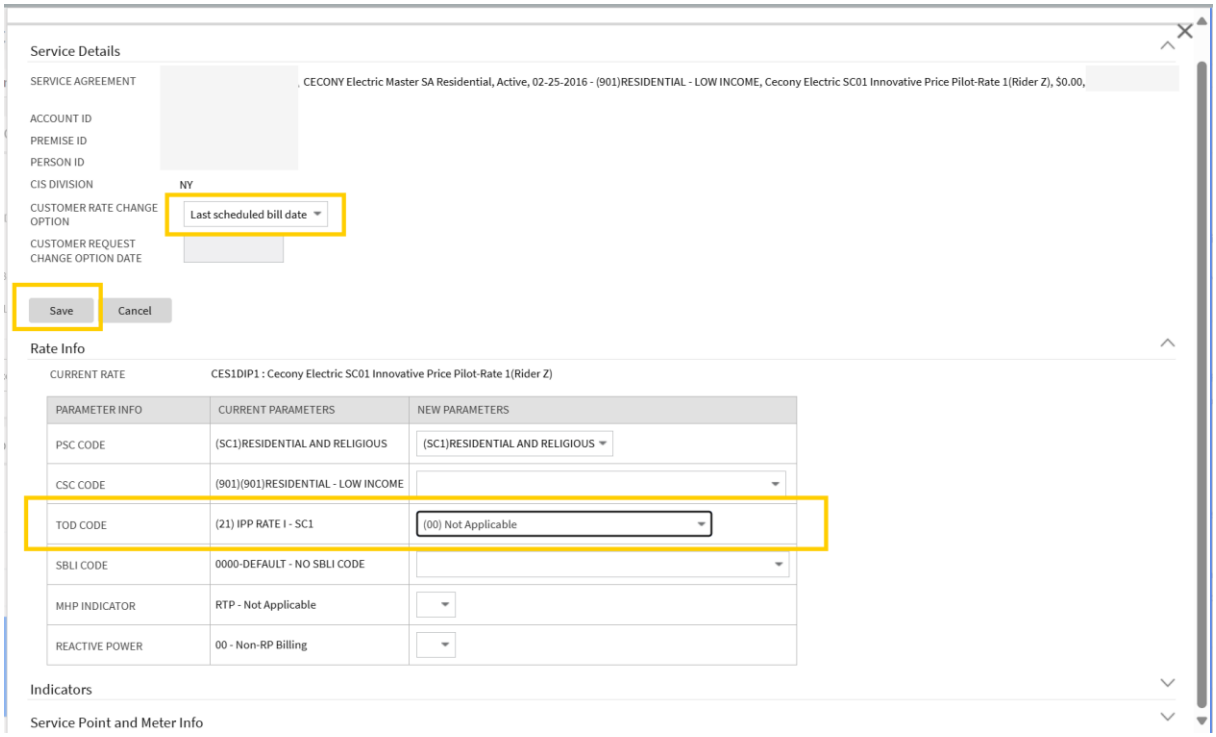

Step 5. Click "**Send for Approval.**"

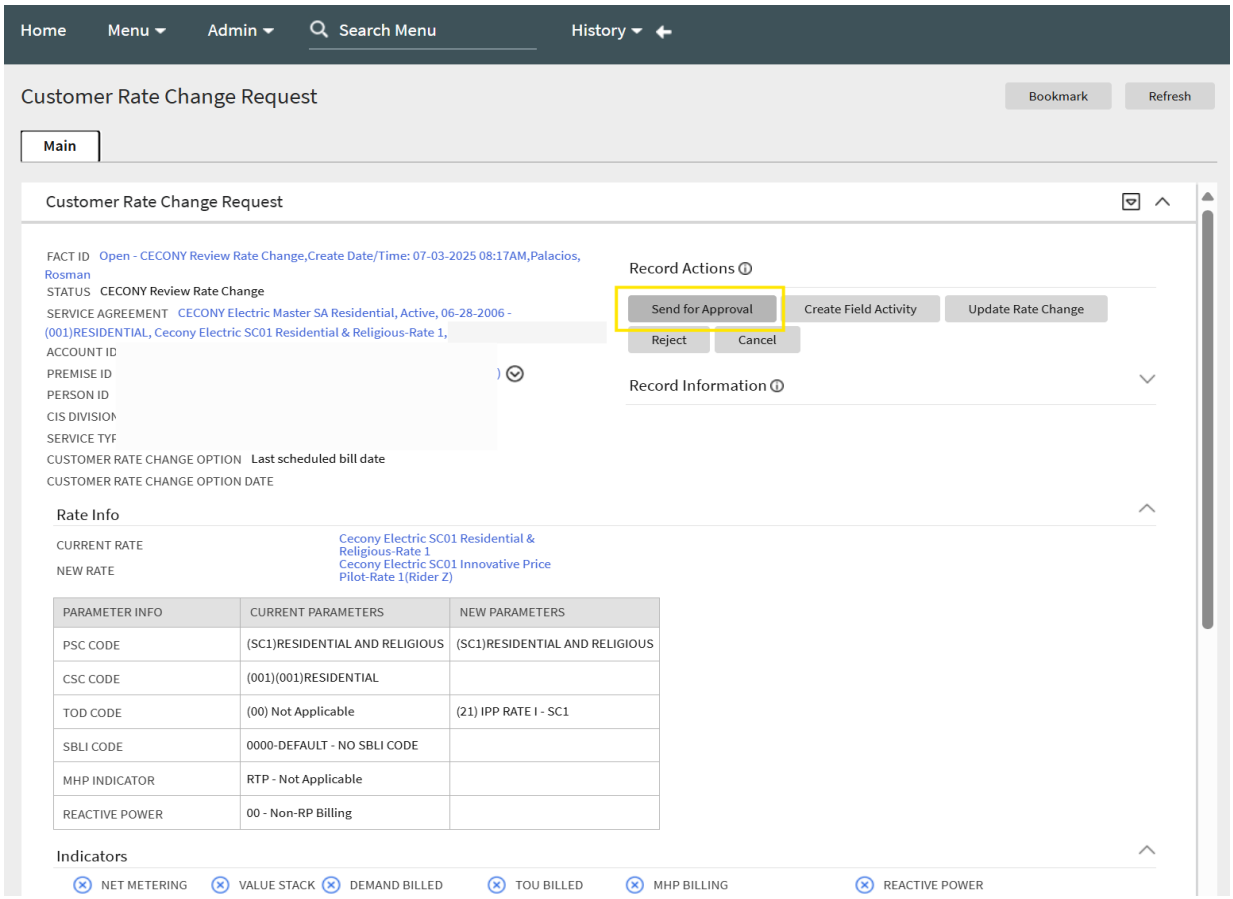

Step 6. You will be asked to provide a comment on this rate change. You can input something like "**customer requested to be de enrolled from the rate**." Once you provide a simple comment, click "**save**."

Step 7. click "**Approve**"

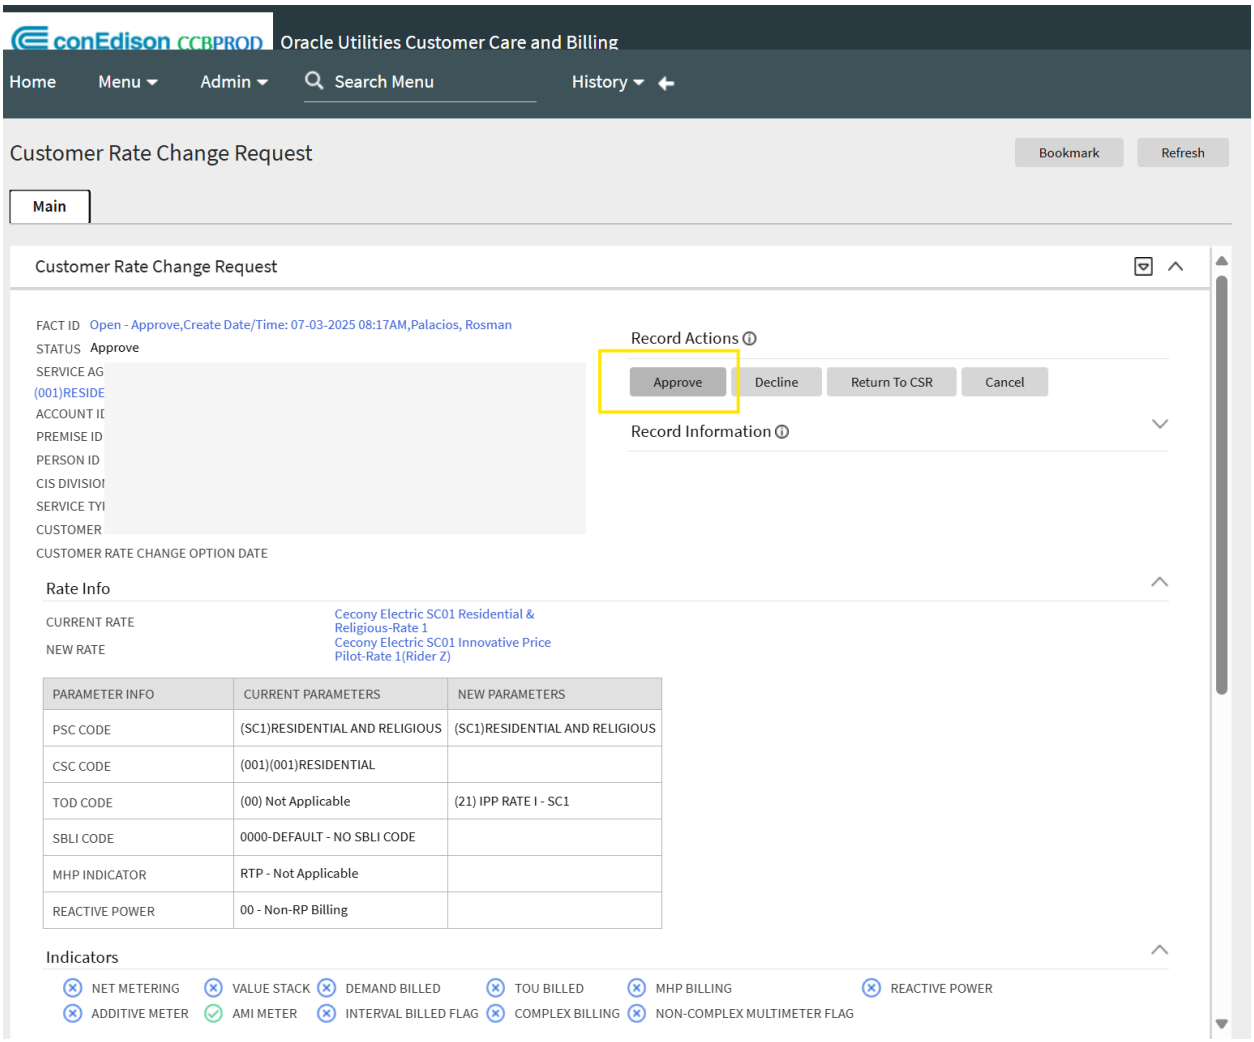

Step 8. Click on Service Agreement Hyper link as below.

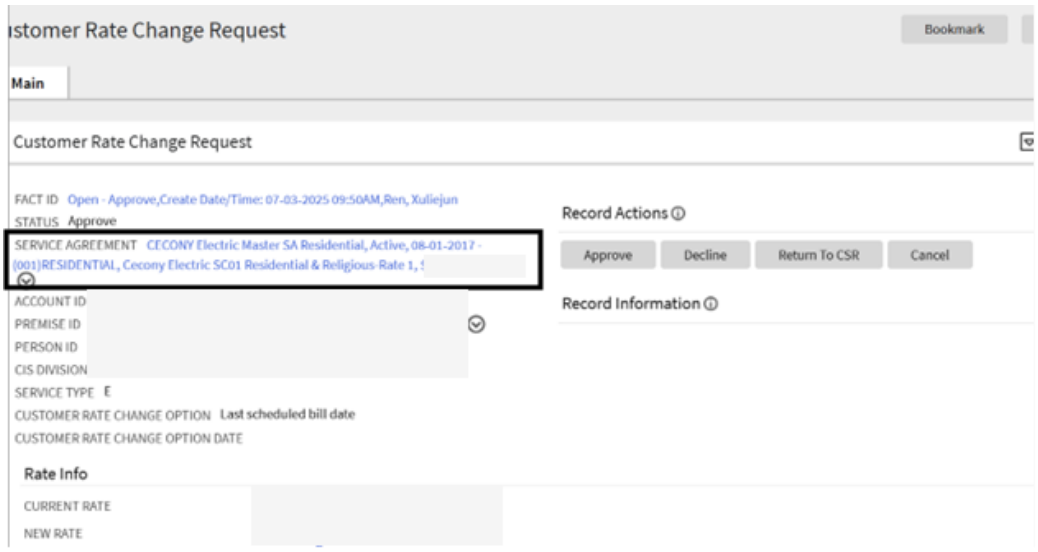

Step 9. Then, Verify Updated Rate

- Navigate to the **Rate Info** tab.
- Confirm that the updated rate is reflected correctly.
- Ensure the **Effective Date** is set to one day after the latest bill end date.

Important: No mid-cycle rate changes are allowed. The rate change must take effect **after the latest scheduled bill date**.

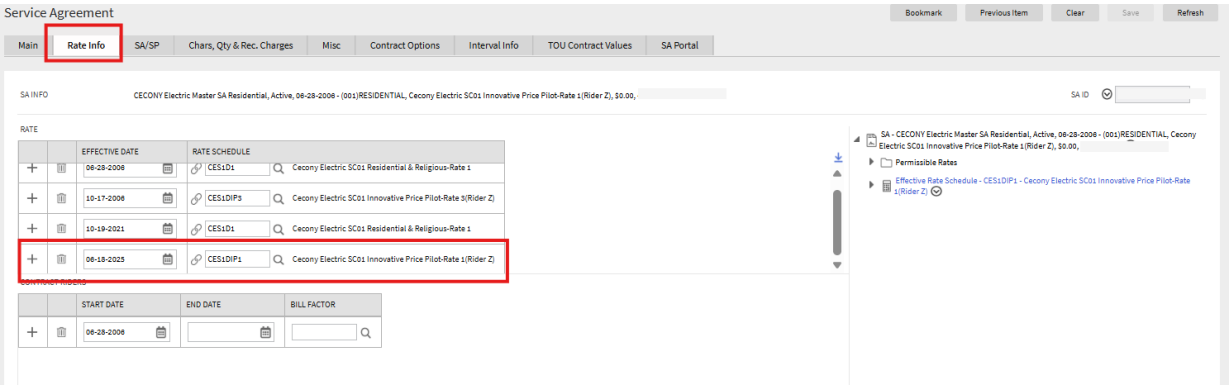

Step 10. In the Service Agreement, navigate to the "**Chars, Qty, & Rec. Charges**" option. Locate the updated TOD code and underneath, add a new line item.

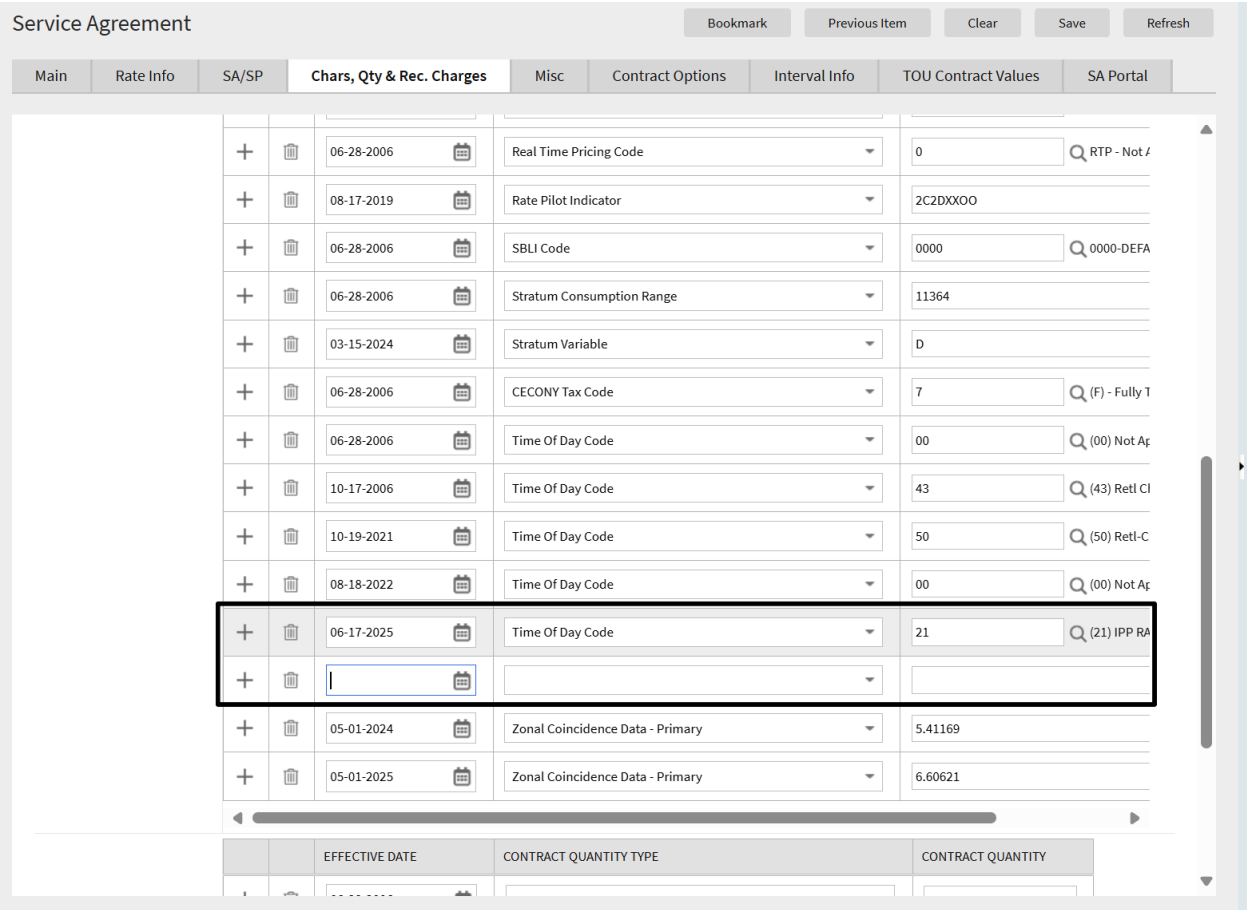

Step 11. In the new line item, add the same date as the new TOD code for the "**Effective date**" field. In the "Characteristic Type" field, type in or look for **Rate Pilot Indicator.** Lastly, in the "Characteristic Value" field, Type in "**5AXXXXOO**".

Step 12. Click "**Save**" at the top of the page.

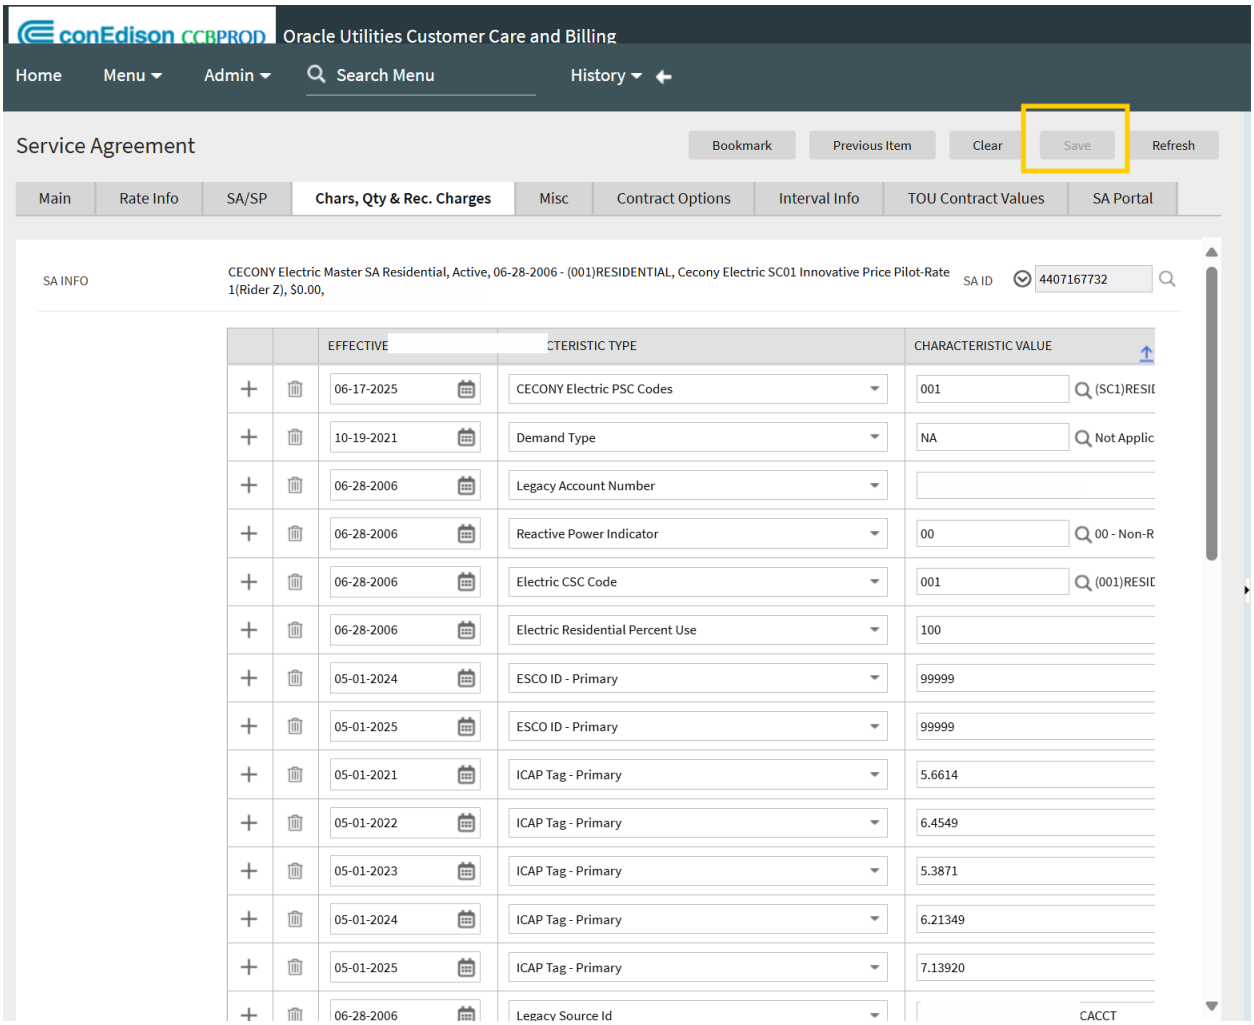

The changes in CC&B are complete. Now RevDemo must be updated. RevDemo stores and tracks all Smart Energy Plan customers and so any changes made to customer information in CC&B must also be updated in RevDemo.

RevDemo De-Enrollment

Step 13. Open RevDemo and go to "**Manage Customers.**" Input the customer account number and click "**search.**"

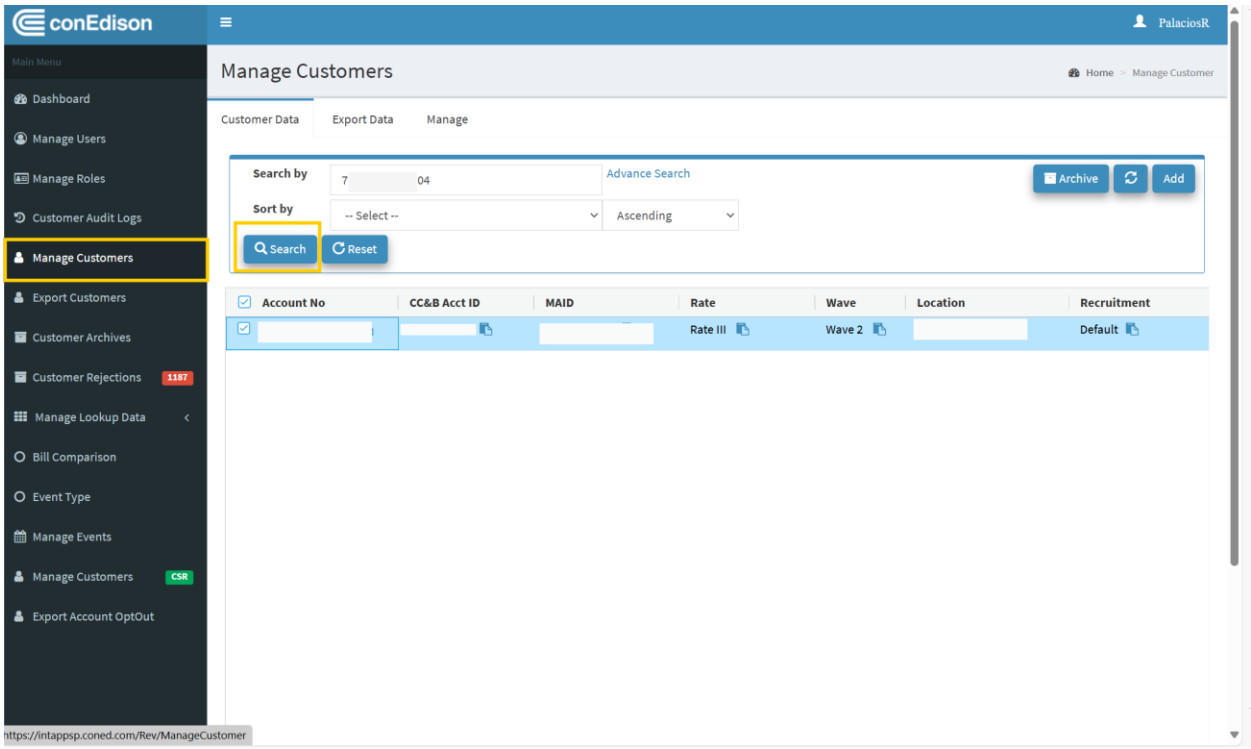

Step 14. Click on the account number hyper link and update the account with the following information:

Pilot Status: Update to **De-Enrolled**

RPID: **Update to** 5AXXXX**OO**

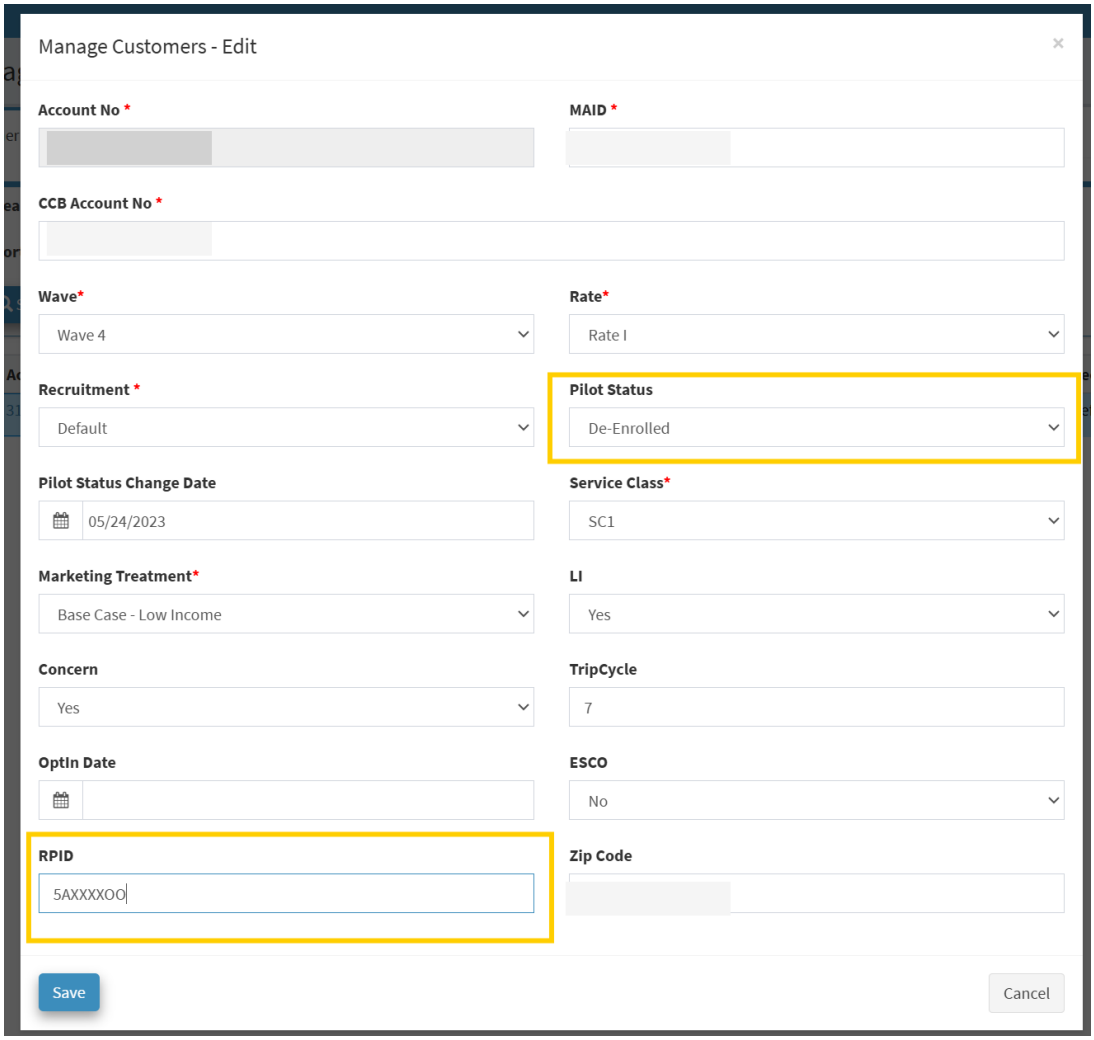

Step 15. Click “**Save.**”