





গণপ্রজাতন্ত্রী বাংলাদেশ







PARADOXES











BEAR







100%





$$K_P(\tau) = k \exp \left\{ -D \tau^2 \log(2)/2 \right\} = \frac{p_t^2}{2 \log(2)} \pi \lambda \left(\frac{h \varphi_{RX}}{\sin^2(\epsilon)} \right)^2 \exp \left\{ -v_{\text{sat}}^2 \tau^2 / (h^2 \varphi_{RX}^2) \log(2)/2 \right\} ,$$















ESPRESSO

















expanding world + new world



Fig 1(a): True $P(t)$, GPR estimate & forecast, and 300-sample MA & forecast


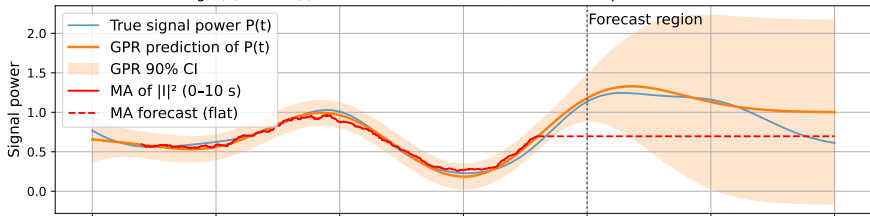


Fig 1(b): Non-stationary Gaussian noise $I(t)$ with sampled observations







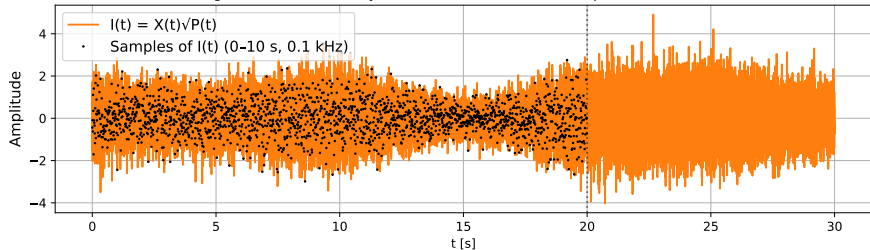

Q I L A R 2019









$$S_{\text{RX}}(t) = \frac{A}{l(d_0)} \sqrt{\frac{K}{K+1}} e^{-2i\pi\tau_0(t)f_c} e^{-2i\pi\theta} + \sum_{j=1}^{100} \frac{A}{l(d_j) \sqrt{100} \sqrt{K+1}} e^{-2i\pi\tau_j(t)f_c} e^{-2i\pi\theta},$$




















QWERTY

$$v = \sqrt{\frac{GM}{h + R_{\oplus}}},$$

WELCOME TO THE











20

—

12

.

100



$$T_c = \frac{1}{8D_g} \approx 10^{-3}$$
























$$1 = e^{-\frac{\pi^2}{2\sqrt{P}}}$$






$$] = 1 - \left(1 - e^{-\frac{\pi^2}{2\sqrt{P/N}}} \right)^N,$$





192








$$t \rightarrow \text{order} \rightarrow \frac{\sin(2\pi B t)}{\pi t}$$





$$\mathbb{Z} \ni i \mapsto \frac{\sin\left(2\pi \frac{B_L}{f_c} i\right)}{\pi i},$$

$$i \mapsto \delta[i] - \frac{\sin(2\pi \frac{B_H}{f_c} i)}{\pi i},$$



WAVELENGTH



WINNERS


$$\mu = \exp\left(\mu_{\text{LN}} + \frac{\sigma_{\text{LN}}^2}{2}\right)$$

$\sin^2 \theta = 1 - \sin^2 \theta$











WORLD OF





1991-10-1

$$S(t) = \sum_{n=0}^{N-1} x[n]$$
















$$H = \begin{pmatrix} -a & -0 & -1 & 0 & 0 & 0 & ar & 0 & r \\ 0 & 0 & 0 & -a & -0 & -1 & 0 & 0 & 0 \\ -c & -b^2/a & -1 & 0 & 0 & 0 & 0 & 0 & 0 \\ 0 & 0 & 0 & -c & -b^2/a & -1 & cr & rb^2/a & r \\ a & 0 & -1 & 0 & 0 & 0 & ar & 0 & -r \\ 0 & 0 & 0 & a & 0 & -1 & 0 & 0 & 0 \\ -c & b^2/a & -1 & 0 & 0 & 0 & 0 & 0 & 0 \\ 0 & 0 & 0 & -c & b^2/a & -1 & -rc & rb^2/ar & -r \end{pmatrix}$$

$$\lim_{x \rightarrow \infty} - \frac{\log \mathbb{P}(X \geq x)}{x},$$







$$= \lim_{x \rightarrow \infty} - \frac{\log \mathbb{P}(X > x)}{x} = \lim_{x \rightarrow \infty} - \frac{\log(e^{-x/\theta})}{x}$$

$$= \lim_{x \rightarrow \infty} \frac{-x/\theta}{x} = 1/\theta.$$



$$= \lim_{x \rightarrow \infty} - \frac{\log \mathbb{P}(X > x)}{x} = \lim_{x \rightarrow \infty} - \frac{\log(1 - \gamma(k, x/\theta)/\Gamma(k))}{x}$$

$$= \lim_{x \rightarrow \infty} - \frac{\log(\Gamma(\kappa, x/\theta)/\Gamma(\kappa))}{x}$$

$$\begin{aligned}
 &\stackrel{(a)}{=} \lim_{x \rightarrow \infty} - \frac{\log(\Gamma(k, x/\theta))}{x} = \lim_{x \rightarrow \infty} - \frac{\log(x^{k-1} e^{-x/\theta})}{x}
 \end{aligned}$$

$$= \lim_{x \rightarrow \infty} - \frac{\log(e^{-x/\theta})}{x} = 1/\theta.$$



$$\lim_{x \rightarrow \infty} \frac{\Gamma(s, x)}{x^{s-1} e^{-x}} = 1.$$







$$\begin{aligned}
&= \lim_{x \rightarrow \infty} - \frac{\log \mathbb{P}(X > x)}{x} = - \lim_{x \rightarrow \infty} \frac{\log \operatorname{erfc} \left(\frac{x - \mu}{\sigma \sqrt{2}} \right)}{x} \stackrel{(b)}{\geq} - \lim_{x \rightarrow \infty} \frac{\log \left(\sqrt{\frac{e}{2\pi}} e^{-2 \left(\frac{x - \mu}{\sigma \sqrt{2}} \right)^2} \right)}{x}
\end{aligned}$$

$$\geq - \lim_{x \rightarrow \infty} \frac{\log \left(e^{-2 \left(\frac{x-\mu}{\sigma \sqrt{2}} \right)^2} \right)}{x} = - \lim_{x \rightarrow \infty} \frac{-2 \left(\frac{x-\mu}{\sigma \sqrt{2}} \right)^2}{x} = \frac{1}{\sigma^2} \lim_{x \rightarrow \infty} \frac{x^2 - 2x\mu + \mu^2}{x} = \infty,$$



$$\psi(x) \geq \sqrt{\frac{2e}{\pi}} \frac{\sqrt{\beta-1}}{\beta} e^{-\beta x^2},$$


































2020年12月20日



Q1 2024

2023年12月21日



$$\mathbb{E}[(S_1 + S_2)^2] = \int_0^1 (\cos(2\pi t) + \cos(2\pi t + \pi))^2 dt = \int_0^1 0 dt = 0,$$



1921 + 1921

$$= \int_0^1 \cos^2(2\pi t) dt + \int_0^1 \cos^2(2\pi t + \pi) dt$$

$$= \int_0^1 2 \cos^2(2\pi t) dt = \int_0^1 \cos(4\pi t) dt + 1 = 1.$$





$$E[S_1^2 + S_2^2] = E[S_1^2] + E[S_2^2] = E[S_1^2] + 2E[S_1 S_2] + E[S_2^2]$$

1991 + 1991 + 1991

1992-93

$$\mathbb{E}[S_1 S_2] = \int_0^1 \cos(2\pi t) \cos(2\pi t + \pi) dt = \int_0^1 -\cos^2(2\pi t) dt = -\frac{1}{2} \int_0^1 \cos(4\pi t) dt - \frac{1}{2} = -\frac{1}{2},$$

01

,

02

E

1021

2024 + 2025

2023-03-20

$$\mathbb{E} \phi_1 \phi_2 [\mathbb{E} [S_1^2 + S_2^2]] = \mathbb{E} \phi_1 [\mathbb{E} [S_1^2]] + \mathbb{E} \phi_2 [\mathbb{E} [S_2^2]] + \mathbb{E} \phi_1 \phi_2 [\mathbb{E} [S_1 S_2]]$$

$$= \frac{1}{2\pi} \int_0^{2\pi} \int_0^1 (\cos(2\pi t + \phi_1))^2 dt d\phi_1 + \frac{1}{2\pi} \int_0^{2\pi} \int_0^1 (\cos(2\pi t + \phi_2))^2 dt d\phi_2$$

$$+ \frac{1}{2\pi} \int_0^{2\pi} \int_0^{2\pi} \int_0^1 \cos(2\pi t + \phi_1) \cos(2\pi t + \phi_2) dt d\phi_1 d\phi_2$$

$$= \frac{1}{2\pi} \int_0^{2\pi} \int_0^1 (\cos(2\pi t + \phi_1))^2 dt d\phi_1 + \frac{1}{2\pi} \int_0^{2\pi} \int_0^1 (\cos(2\pi t + \phi_2))^2 dt d\phi_2 = 1/2 + 1/2 = 1.$$

1992

212122222





$${}_3F_2(1,1,1+b;2,2;x)=\sum_{n=0}^{\infty}\frac{(1)_n(1)_n(1+b)_n}{(2)_n(2)_n}\frac{x^n}{n!}$$

$$= \sum_{n=0}^{\infty} \frac{(1+b)_n}{(n+1)^2 n!} x^n = \frac{1}{b!} \sum_{n=0}^{\infty} \frac{(n+1)_b}{(n+1)^2} x^n$$

$$\underline{\underline{(a)}} \quad \frac{1}{b!} \sum_{n=0}^{\infty} \frac{\sum_{k=1}^b \begin{bmatrix} b \\ k \end{bmatrix} (n+1)^k}{(n+1)^2} x^n$$

$$\begin{aligned}
 &= \frac{1}{b!} \sum_{k=1}^b \left[\begin{matrix} b \\ k \end{matrix} \right] \sum_{n=0}^{\infty} \frac{x^n}{(n+1)^{2-k}} \stackrel{(b)}{=} \frac{1}{b!} \sum_{k=1}^b \left[\begin{matrix} b \\ k \end{matrix} \right] \frac{\operatorname{Li}_{2-k}(x)}{x},
 \end{aligned}$$

b

1

