


Getting started with the KMC Bus Production Tracker

1. Go to the log-in page using the link below.
kmc-tracker.vercel.app
2. Click on the **Request Access** button to create a new account.

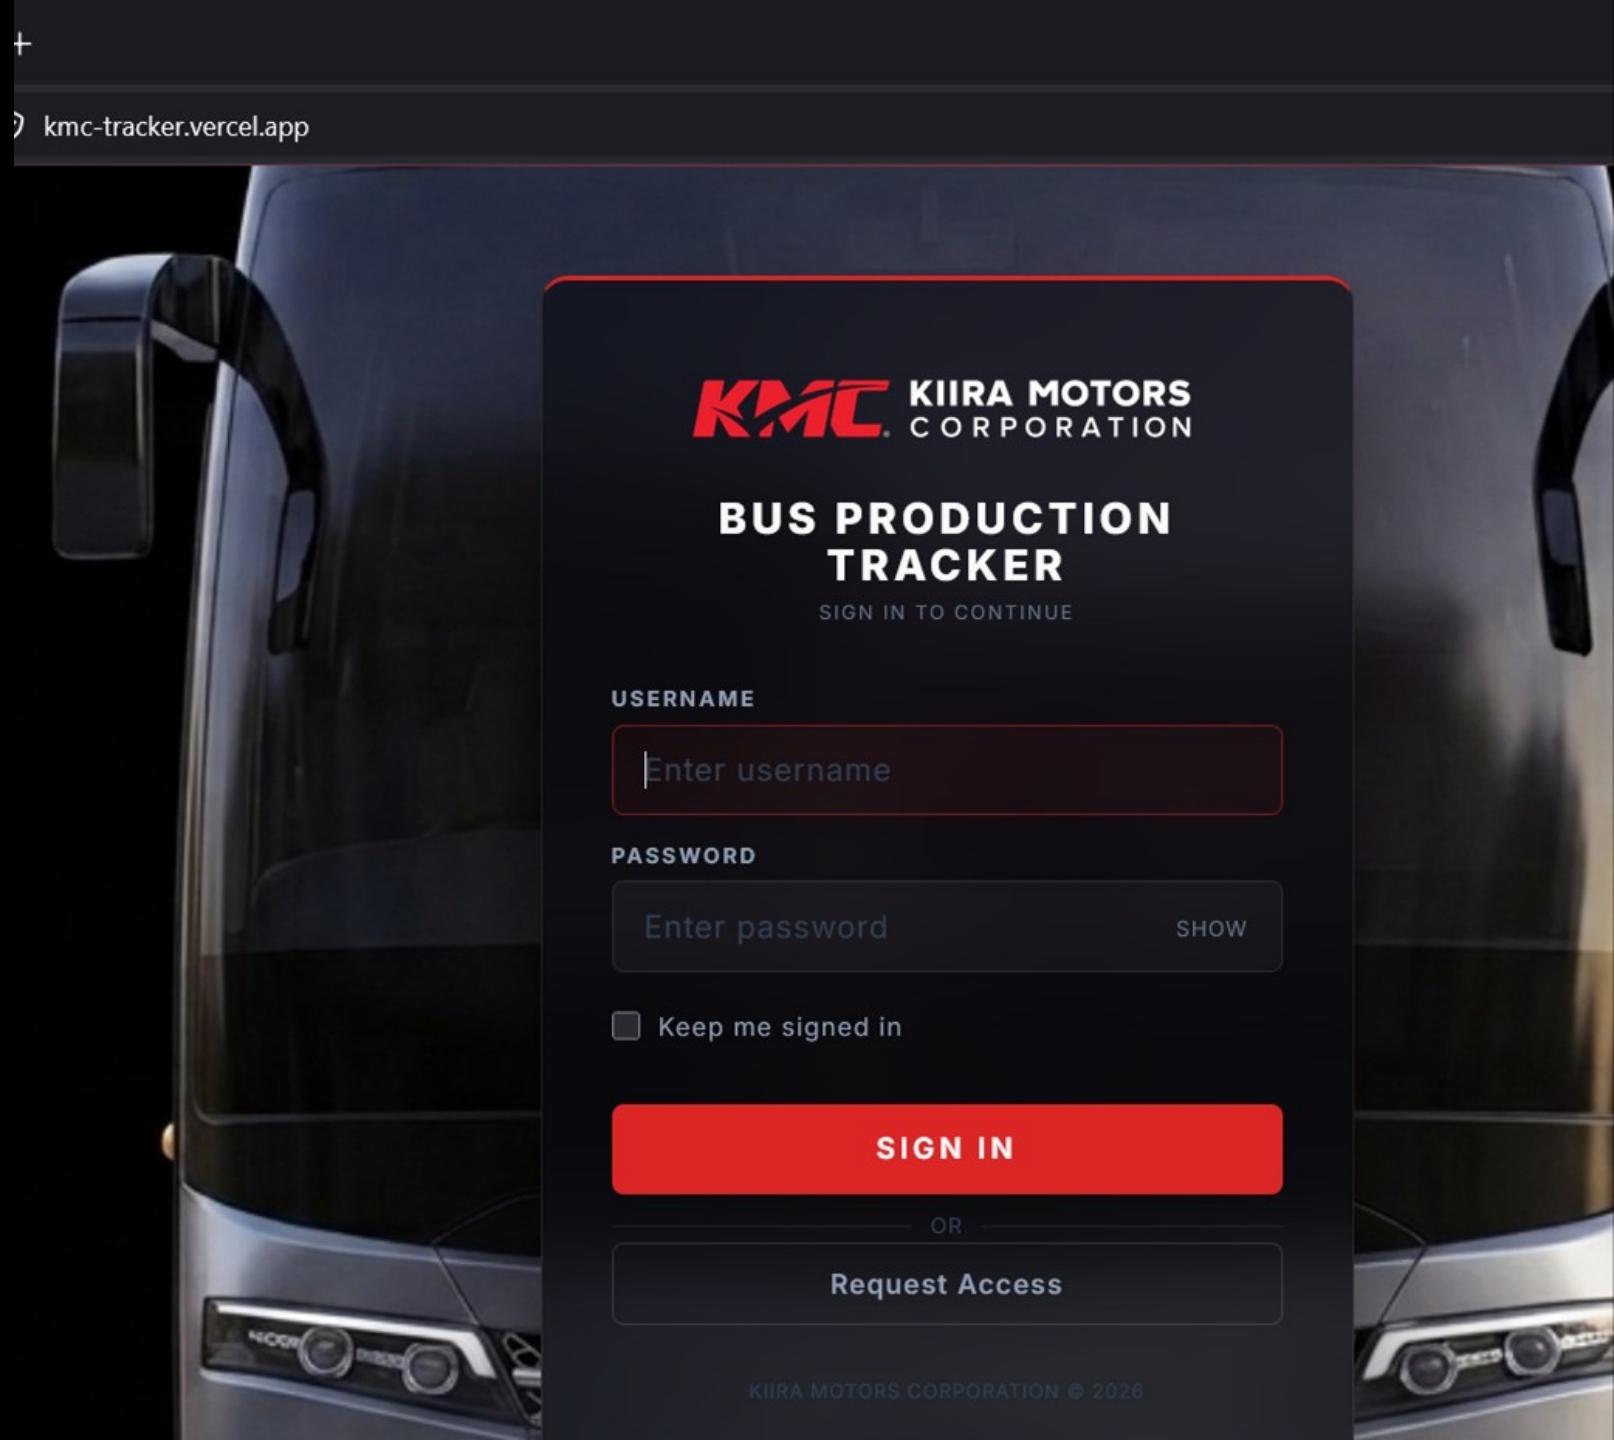

Request Access Page

1. Fill in the details required, including **Preferred Username** and **Password**.
2. Click on the **Submit Request** button.

REQUEST ACCESS

Your request will be reviewed by the system administrator.

FULL NAME * **EMAIL ADDRESS ***

John Doe you@kmc.go.ug

PREFERRED USERNAME * **JOB TITLE / POSITION ***

john.doe Production Engineer

DEPARTMENT *

Select department... ▾

PASSWORD * **CONFIRM PASSWORD ***

Min. 8 characters SHOW Repeat password

REASON FOR ACCESS (optional)


Briefly describe why you need access to this system...

Cancel **SUBMIT REQUEST**

The system administrator will review your request and assign your role and access level.

Go back to the Log-in page

1. Enter **Username** and **Password**.
2. Click on the **Sign In** button.

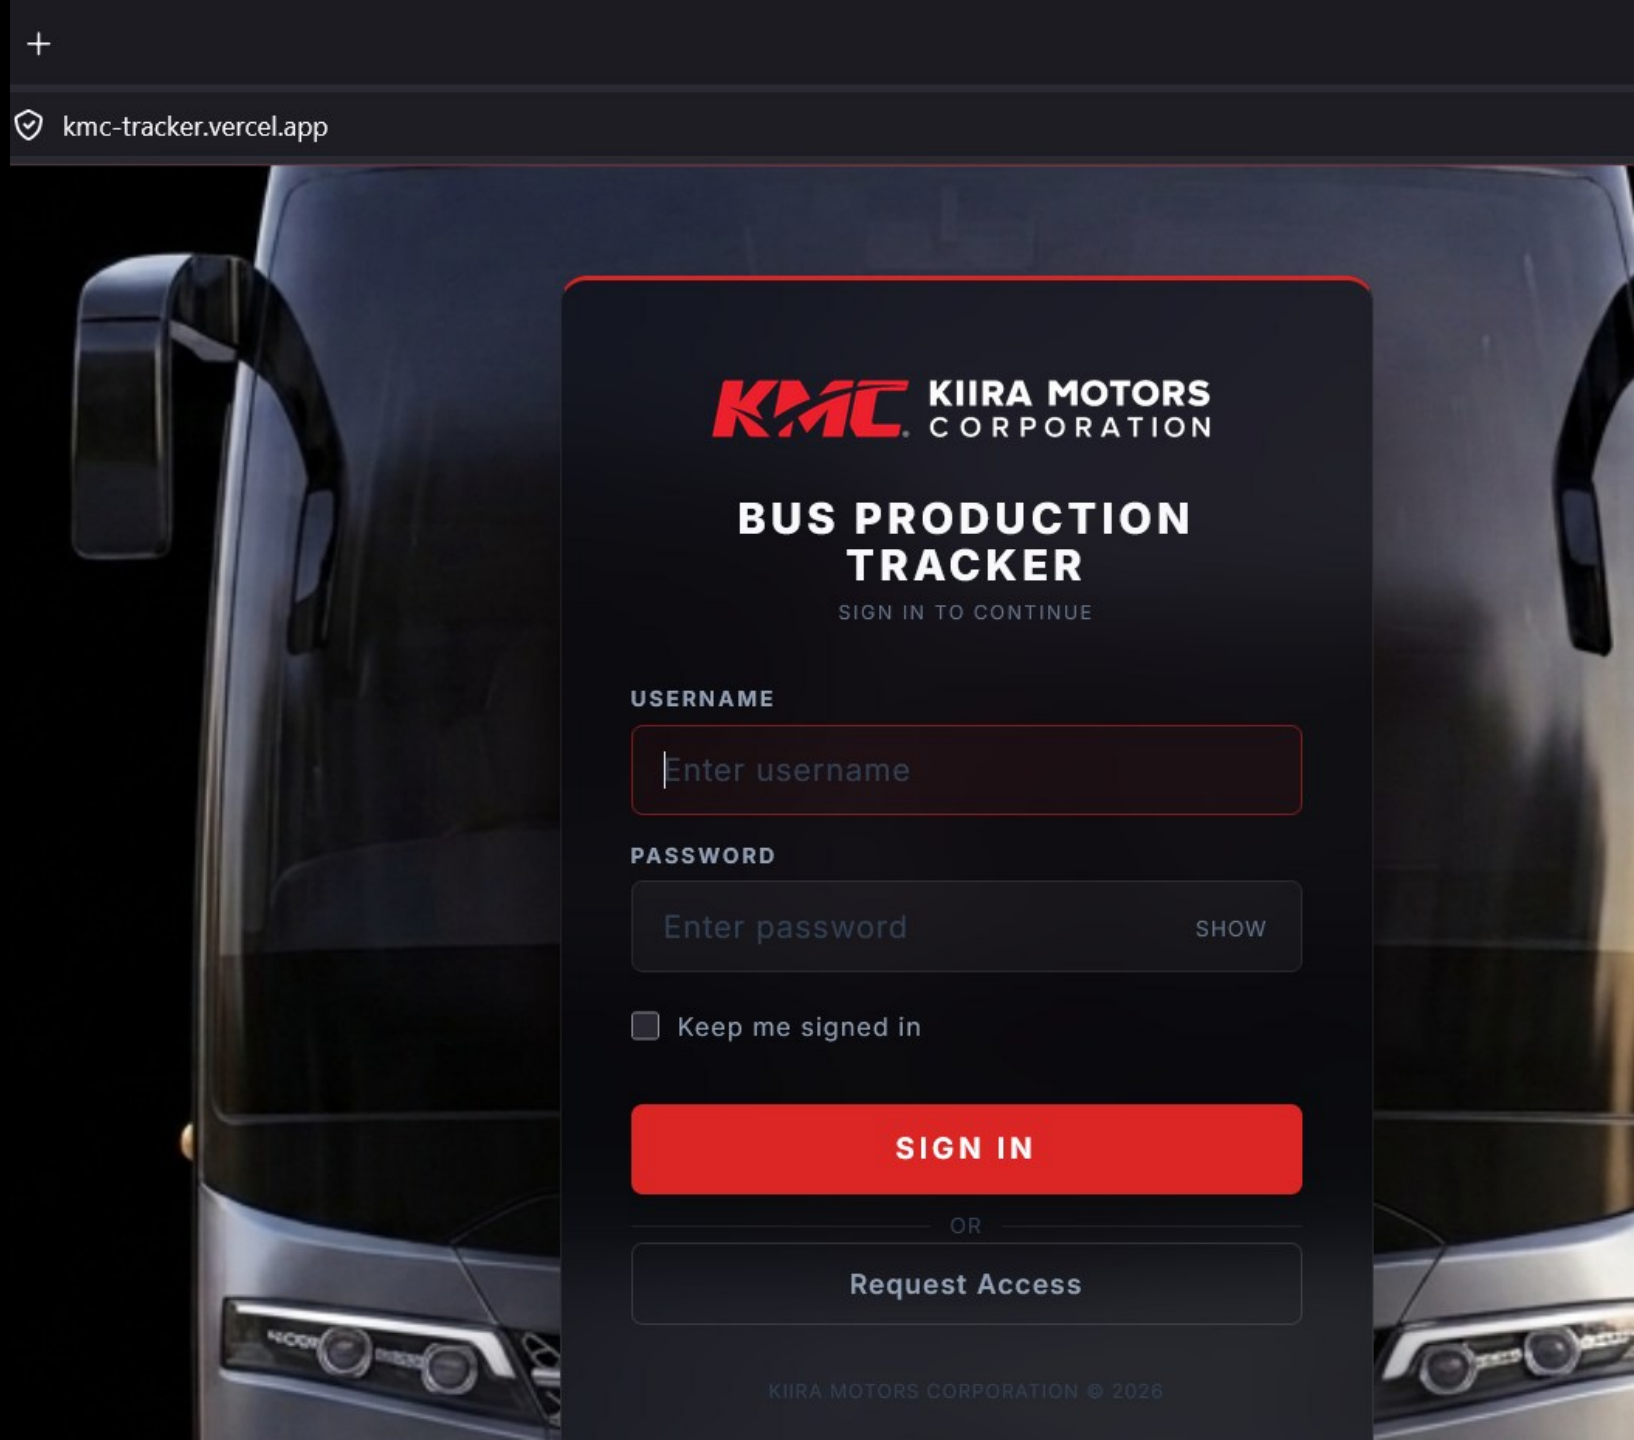

+

🔒 kmc-tracker.vercel.app

KMC KIIRA MOTORS CORPORATION

BUS PRODUCTION TRACKER

SIGN IN TO CONTINUE

USERNAME

Enter username

PASSWORD

Enter password [SHOW](#)

☐ Keep me signed in

SIGN IN

OR

Request Access

KIIRA MOTORS CORPORATION © 2026



BUS PRODUCTION TRACKER

SELECT A MODULE TO CONTINUE




SUPERVISOR



Click on the
Travel Card to
begin.

Use the drop-down menus to add the **Project Name**, **Bus Model**, **Bus VIN**, **Production Line**, and the **Station**. Take note of the **Designated time** for the activity.

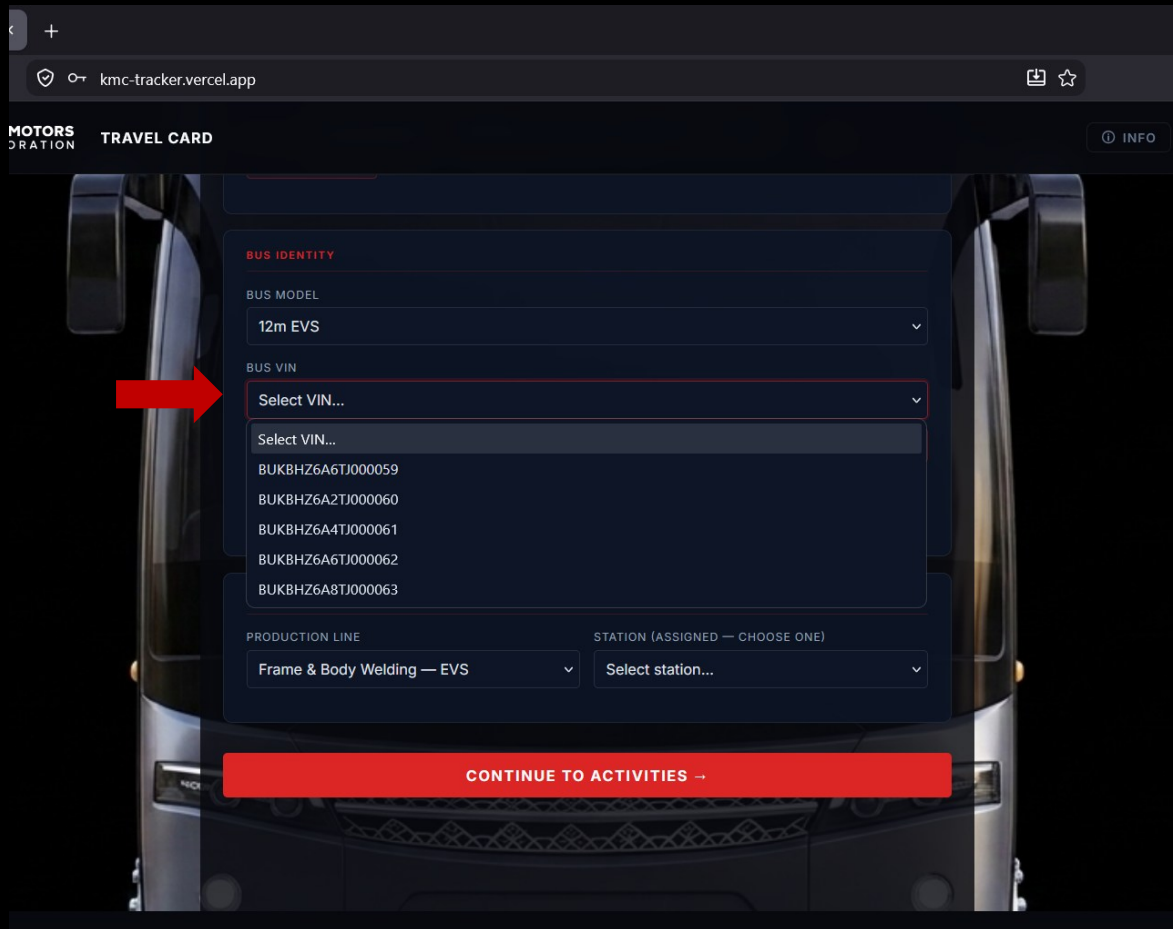

MOTORS DRATION TRAVEL CARD ⓘ INFO

BUS IDENTITY


BUS MODEL
12m EVS

BUS VIN
Select VIN...
Select VIN...
BUKBHZ6A6TJ000059
BUKBHZ6A2TJ000060
BUKBHZ6A4TJ000061
BUKBHZ6A6TJ000062
BUKBHZ6A8TJ000063

PRODUCTION LINE
Frame & Body Welding — EVS

STATION (ASSIGNED — CHOOSE ONE)
Select station...

CONTINUE TO ACTIVITIES →

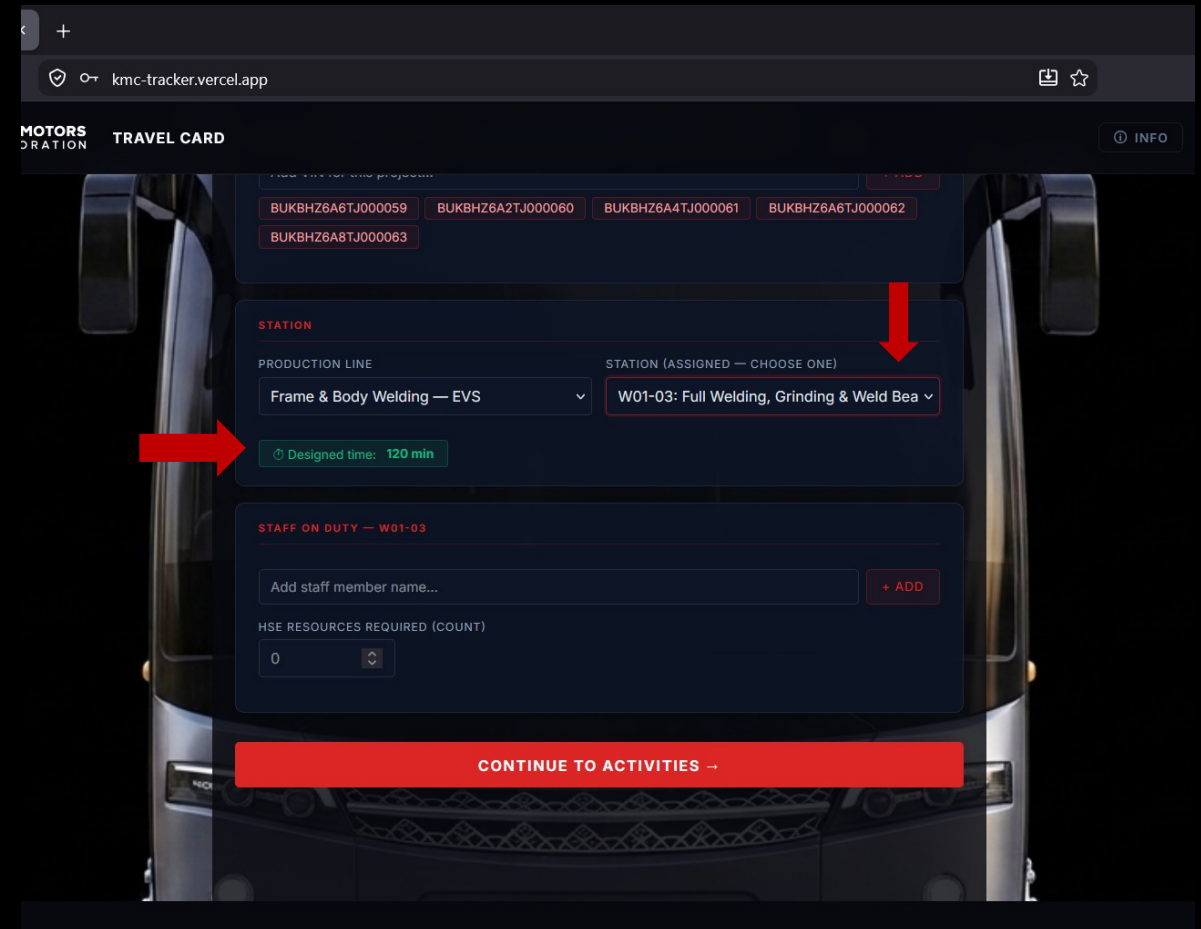

MOTORS DRATION TRAVEL CARD ⓘ INFO

Project Name: [Project Name] [ADD]

BUKBHZ6A6TJ000059 BUKBHZ6A2TJ000060 BUKBHZ6A4TJ000061 BUKBHZ6A6TJ000062
BUKBHZ6A8TJ000063

STATION

PRODUCTION LINE
Frame & Body Welding — EVS

STATION (ASSIGNED — CHOOSE ONE)
W01-03: Full Welding, Grinding & Weld Bea

⌚ Designed time: 120 min


STAFF ON DUTY — W01-03

Add staff member name... + ADD


HSE RESOURCES REQUIRED (COUNT)
0

CONTINUE TO ACTIVITIES →

Type the staff member name and click on **Add**. Do the same as before to add another staff member name. Add the quantity of **HSE Resources Required** and click on **Continue To Activities** to proceed.

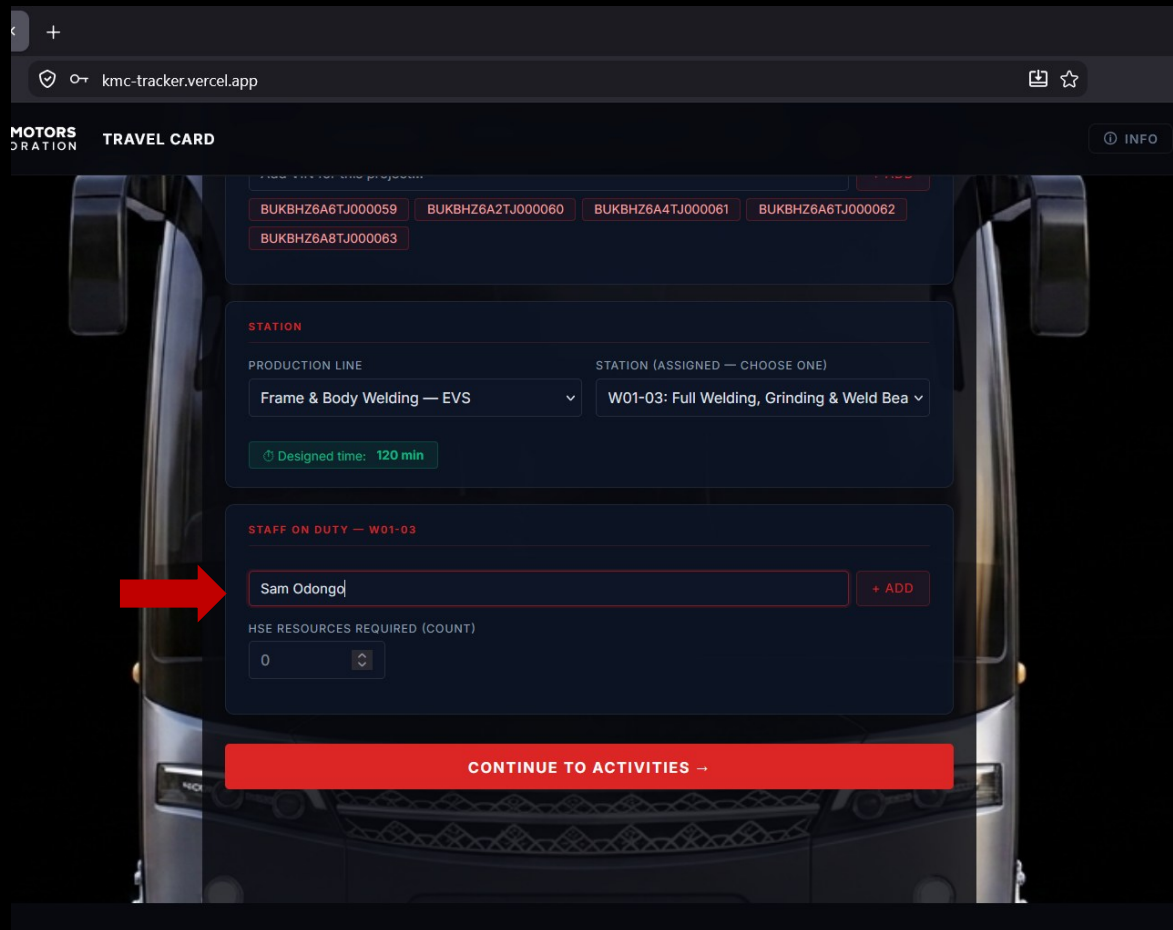

The screenshot shows the 'MOTORS TRAVEL CARD' form. The 'STATION' section is set to 'W01-03: Full Welding, Grinding & Weld Bea'. The 'STAFF ON DUTY — W01-03' section has a text input field containing 'Sam Odongo' and a red '+ ADD' button. A red arrow points to the input field. Below the staff list is the 'HSE RESOURCES REQUIRED (COUNT)' section with a numeric input field set to '0'. At the bottom is a red button labeled 'CONTINUE TO ACTIVITIES --'.

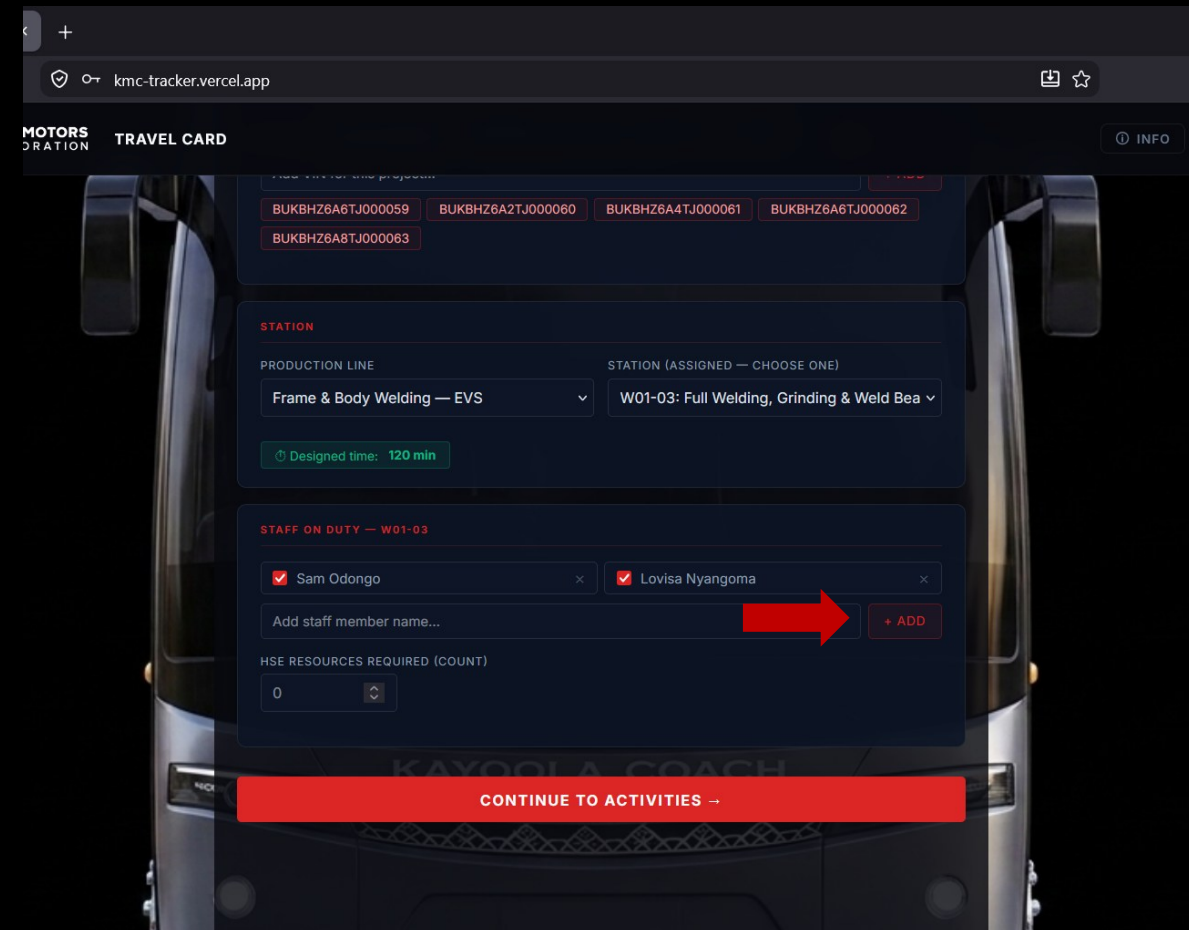

The screenshot shows the 'MOTORS TRAVEL CARD' form with two staff members added: 'Sam Odongo' and 'Lovisa Nyangoma'. The 'STAFF ON DUTY — W01-03' section shows two entries, each with a red checkmark and a red 'x' button. Below the list is a text input field with the placeholder 'Add staff member name...' and a red '+ ADD' button. A red arrow points to the '+ ADD' button. The 'HSE RESOURCES REQUIRED (COUNT)' section remains at '0'. The red 'CONTINUE TO ACTIVITIES --' button is at the bottom.

Edit the **Clock In** date and time. Use the drop-down menus to report each activity as **Complete**, **Incomplete**, **Note Needed**, or **Rework Needed**, as appropriate.

Browser: kmc-tracker.vercel.app

TRAVEL CARD

KMC KIIRA MOTORS CORPORATION **PRODUCTION TRAVEL CARD** KMC.DPN.05/26-FM004 · Rev #01 [Save Session](#)

IDENTITY ACTIVITIES DOWNTIME SIGN-OFF DONE

CLOCK IN

CLOCK IN TIME
29 / 07 / 2026 , 08 : 00

Clock-out was recorded automatically when you completed the identity page.
⌚ Time used excludes scheduled breaks (tea 10:00-10:30, lunch 13:00-14:00). Default shift 08:00-18:00.

ACTIVITIES — W01-03 [ALL COMPLETE](#) [CLEAR](#)

Full welding Complete

Grinding Complete

Weld bead protection Complete

OTHER ACTIVITY (NOT IN LIST)
Activity description... [+ ADD](#)

CONSUMABLES & MATERIALS USED

Welding Wire ER70S-6 (kg)	2	x
CO ₂ Gas (L)	2	x
Grinding Disc 115mm	3	x
Weld Bead Protection Compound (L)	1	x

Browser: kmc-tracker.vercel.app

MOTORS CORPORATION TRAVEL CARD [INFO](#)

KMC KIIRA MOTORS CORPORATION **PRODUCTION TRAVEL CARD** KMC.DPN.05/26-FM004 · Rev #01 [Save Session](#)

IDENTITY ACTIVITIES DOWNTIME SIGN-OFF DONE

CLOCK IN

CLOCK IN TIME
29 / 07 / 2026 , 08 : 00

Clock-out was recorded automatically when you completed the identity page.
⌚ Time used excludes scheduled breaks (tea 10:00-10:30, lunch 13:00-14:00). Default shift 08:00-18:00.

ACTIVITIES — W01-03 [ALL COMPLETE](#) [CLEAR](#)

Full welding Complete

Grinding Complete

Weld bead protection Complete

OTHER ACTIVITY (NOT IN LIST)
Activity description... [+ ADD](#)

CONSUMABLES & MATERIALS USED

In the **Consumables and Materials used** section, use the drop-downs to add the quantities used.

Use the **Add** button to add other consumables not seen on the page.

Click on **Continue** to proceed.

The screenshot shows a mobile application interface for a "TRAVEL CARD" titled "MOTORS CORPORATION". The background features a dark image of a truck. The interface includes a top navigation bar with a back arrow, a plus icon, the URL "kmc-tracker.vercel.app", and share and star icons. An "INFO" button is located in the top right corner. The main content area is divided into two sections: "CONSUMABLES & MATERIALS USED" and "HEALTH, SAFETY & ENVIRONMENT".

CONSUMABLES & MATERIALS USED

Welding Wire ER70S-6 (kg)	2	×
CO ₂ Gas (L)	2	×
Grinding Disc 115mm	3	×
Weld Bead Protection Compound (L)	1	×

OTHER CONSUMABLE / MATERIAL (NOT IN LIST)

Cutting Disc 4-inch	2	+ ADD
---------------------	---	-------

HEALTH, SAFETY & ENVIRONMENT

OHS ISSUE?

☒ No issue

WASTE GENERATED

(1) Metal offcuts generated. |

At the bottom, there are two buttons: "← BACK" and "CONTINUE →".

The **Downtime Page** will show if the activity time has gone beyond the designated time. In this case, use the **Root Cause** menu to choose the root causes as shown and enter the time delay caused by each.

The screenshot shows the 'DOWNTIME' tab of the 'PRODUCTION TRAVEL CARD'. A yellow warning banner at the top states: 'Station time exceeded. Please identify the root cause below before proceeding to sign-off.' Below this, three summary boxes are displayed: '120 DESIGNED (MIN)', '203 ACTUAL (MIN)', and '+83 DOWNTIME (MIN)'. A note below these boxes states: 'Actual excludes 30 min of scheduled breaks (gross 233 min)'. The 'ROOT CAUSE — 6MS (select all that apply)' section contains six categories: Man (Operator skill, fatigue, attendance), Machine (Equipment, tooling, fixtures), Method (Process, sequence, instructions), Material (Parts, consumables, supply), Measurement (Inspection, gauging, data), and Mother Nature (Environment, temperature, power). At the bottom, there is an 'OTHER CAUSE (NOT ONE OF THE 6MS)' section with an 'Add another cause...' button and a '+ ADD' button.

This screenshot shows the 'ROOT CAUSE DETAIL' section for 'Mother Nature'. It includes a dropdown menu for 'MOTHER NATURE — SPECIFIC CAUSE' with 'Power fluctuation / outage' selected. Below this, a 'DELAY CAUSED' input field shows '83 min'. A note at the bottom states: 'Causes account for 83 min of the 83 min downtime.' The background of the interface remains the same as the previous screenshot.

Fill in the details for the root cause analysis as shown, including the **Cause Evidence** (if applicable) **Immediate Corrective Action**, **RCA method** and **Preventive Action**. Then click on **Continue To Sign-Off** to go to the final page.

The screenshot shows the 'ROOT CAUSE DETAIL' form in the KMC Tracker app. The form is titled 'ROOT CAUSE DETAIL (add the delay each cause took)' and is set against a background image of a bus. The form contains the following sections:

- MOTHER NATURE — SPECIFIC CAUSE:** A dropdown menu with 'Power fluctuation / outage' selected.
- DELAY CAUSED:** A text input field with '83' and a unit dropdown set to 'min'.
- Causes account for 83 min of the 83 min downtime.**
- RESPONSE:**
 - IMMEDIATE CORRECTIVE ACTION TAKEN:** A text input field with 'Stabiliser control unit inspection.'
 - ADDITIONAL COMMENTS:** A text input field with 'The stabilizer's under/over-voltage trip thresholds and response delay times were adjusted.'
- CAPA ANALYSIS:** A section header with a timestamp 'KMC.DOHSE.02/26-PR0010'.
- RCA METHOD:** A dropdown menu with '5-Why' selected.
- 5M CATEGORY (PRIMARY DRIVER):** A dropdown menu with 'Mother Nature — Environment / power / temperature' selected.
- 5-WHY DRILL-DOWN:**
 - WHY 1 — WHY DID THE DOWNTIME OCCUR?:** A text input field with 'Power outage'.
 - WHY 2 — WHY DID THAT HAPPEN?:** A text input field with 'The stabilizer over-voltage threshold was lower than required.'

The screenshot shows the 'CAPA ANALYSIS' form in the KMC Tracker app. The form is titled 'CAPA ANALYSIS' and is set against a background image of a bus. The form contains the following sections:

- CAPA ANALYSIS:** A section header with a timestamp 'KMC.DOHSE.02/26-PR0010'.
- RCA METHOD:** A dropdown menu with '5-Why' selected.
- 5M CATEGORY (PRIMARY DRIVER):** A dropdown menu with 'Mother Nature — Environment / power / temperature' selected.
- 5-WHY DRILL-DOWN:**
 - WHY 1 — WHY DID THE DOWNTIME OCCUR?:** A text input field with 'Power outage'.
 - WHY 2 — WHY DID THAT HAPPEN?:** A text input field with 'The stabilizer over-voltage threshold was lower than required.'
 - WHY 3:** A text input field with 'Continue...'.
- PREVENTIVE ACTION (TO STOP RECURRENCE):** A text input field with 'The stabilizer's under/over-voltage trip thresholds and response delay times were adjusted.'
- EVIDENCE ATTACHMENT (optional):**
 - PHOTO OR DOCUMENT SHOWING CAUSE / EVIDENCE:** A file selection area with a folder icon and the text 'Tap to select file... Images (JPG, PNG) or PDF — max 5 MB'.
 - The file will be uploaded to Google Drive and the link saved alongside this downtime record.**
- Navigation:** A red button labeled 'CONTINUE TO SIGN-OFF' and a 'BACK' button.

The final page will show that the travel card has been submitted, with the details you entered on the previous pages. The **Station Report** and **Full Bus Report** can be downloaded with the so-named buttons on the same page as shown.

