




EPLAN GmbH & Co. KG

An der alten Ziegelei 2
40789 Monheim am Rhein
Phone +213 6571

Company / customer	Muster GmbH
Project description	Industrial Electrical Control Cabinet Design using EPLAN Electric P8 and Pro Panel, including power distribution,
Job number	IEC_bas003_sample_project
Commission	EPLAN
Manufacturer (company)	EPLAN GmbH & Co. KG
Path	Page structure with function designation and location designation and document type
Project name	New project(2)
Make	
Type	
Place of installation	
Responsible for project	EPL
Part feature	
Created on	6/21/2026
Edit date	9/4/2026
	by (short name) A
	Number of pages 30

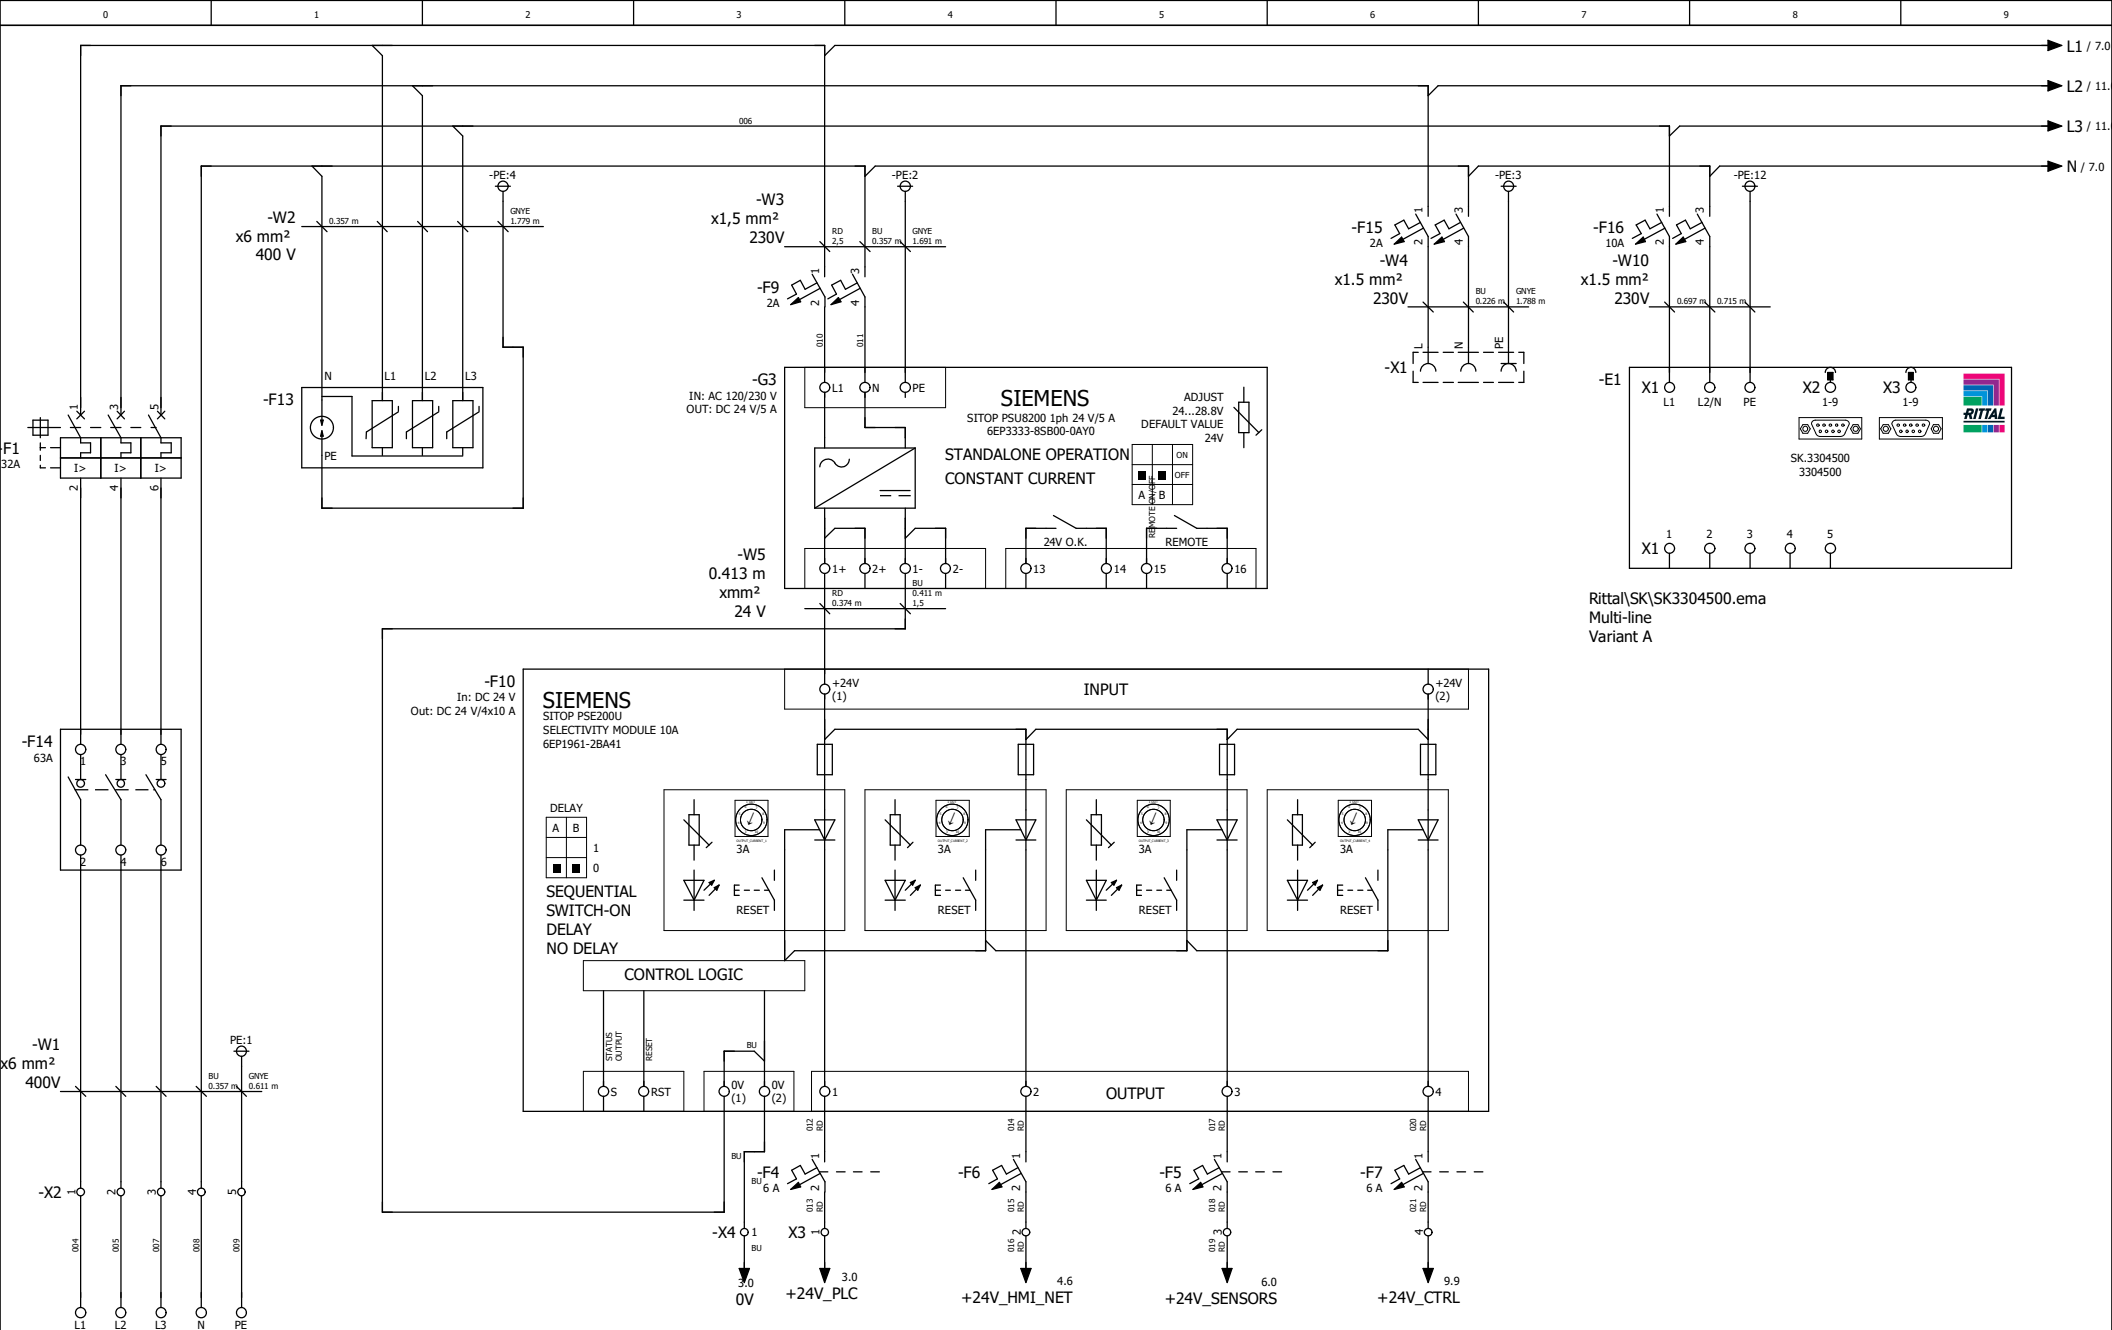


1				3			
			Date	9/4/2026	EPLAN	EPLAN GmbH & Co. KG	POWER DISTRIBUTION
			Ed.	A			
			Appr.		Industrial Electrical Control Cabinet Design using EPLAN Electric P8 and Pro Panel, including power distribution, PLC, VFDs, P		
Modification	Date	Name	Original		Replacement of	Replaced by	




and 3D panel layout.

IEC_bas003_sample_project





			Date	9/4/2026	EPLAN	EPLAN GmbH & Co. KG	PLC HARDWARE CONFIGURATION AND POWER SUPPLY		=	
			Ed.	A					+	
			Appr.		Industrial Electrical Control Cabinet Design using EPLAN Electric P8 and Pro Panel, including power distribution, PLC, VFDs, P			and 3D panel layout.	IEC_bas003_sample_project	Page 3
Modification	Date	Name	Original		Replacement of	Replaced by				Page 3 / 30



-A3

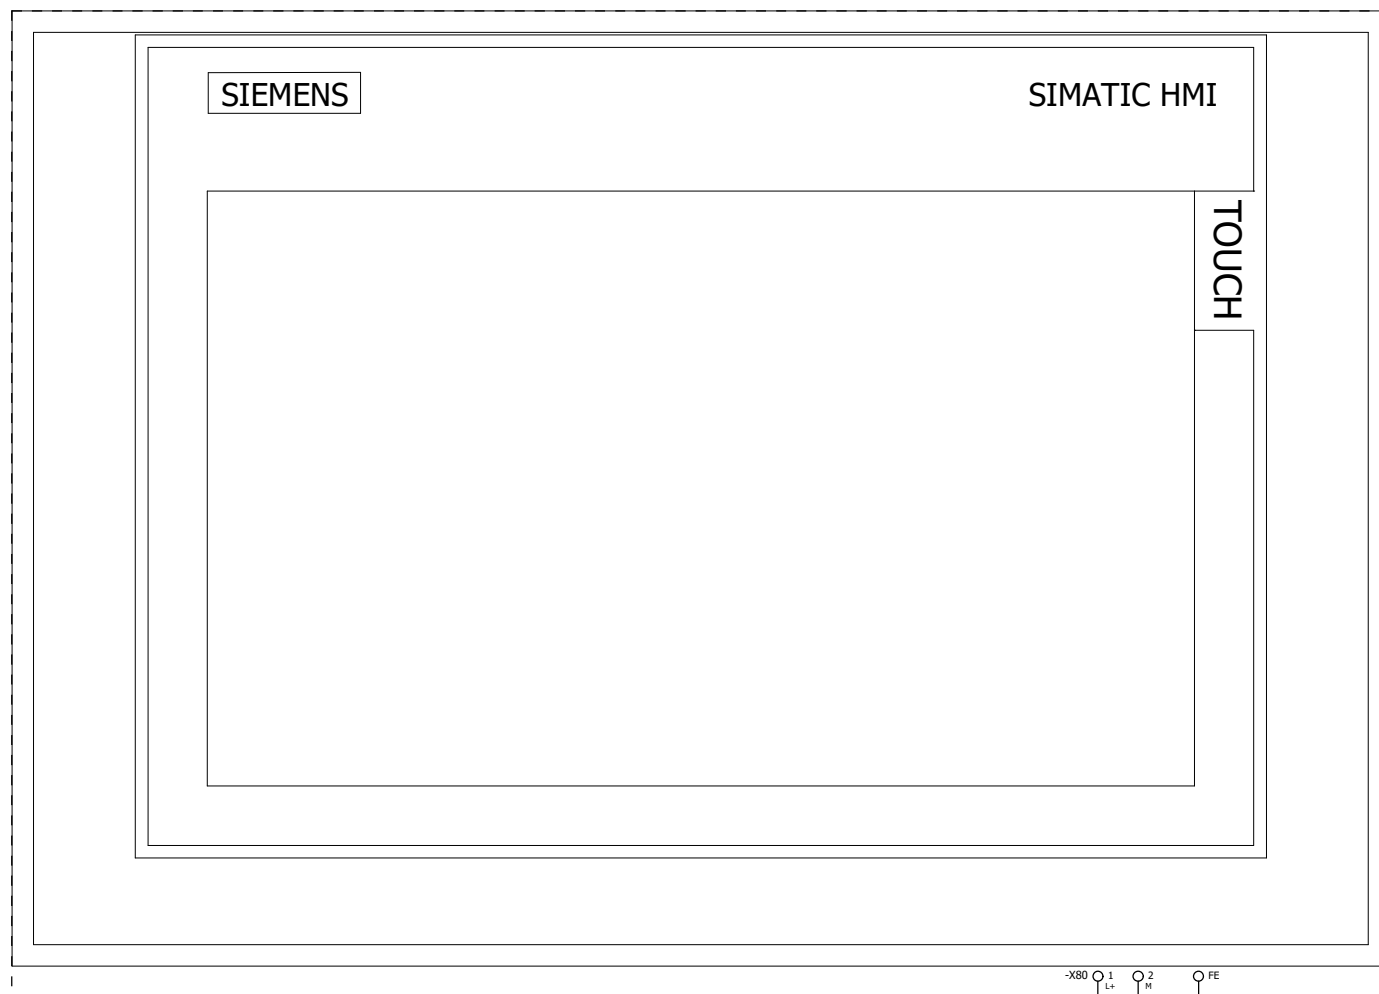

Siemens\Automation_Systems\COMFORT_PANEL\6AV2124-0JC01-0AX0.ema
Multi-line
Variant E
2021-12 / P8 2.9
TP900 Comfort
Rack layout








ANALOG OUTPUT (AO) WIRING – CONTROL VALVES

-A1.4
/9.7

RESERVE

RESERVE

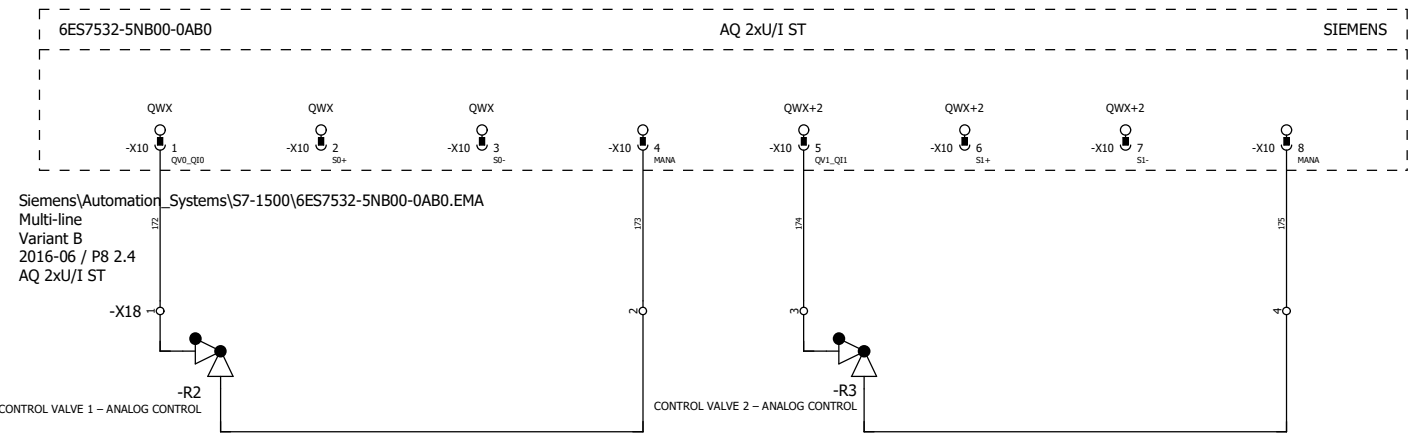


-A1.4

/3.6

ANALOG OUTPUT MODULE – 4–20 mA / 0–10 V

SIE.6ES7532-5NB00-0AB0

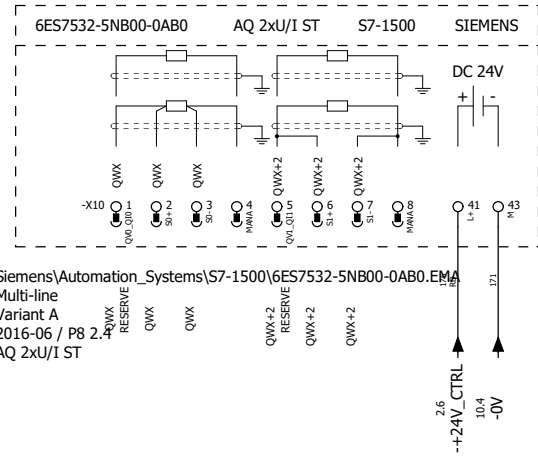

			Date	9/4/2026	EPLAN	EPLAN GmbH & Co. KG	Analog Output Wiring		=
			Ed.	A					+
			Appr.		Industrial Electrical Control Cabinet Design using EPLAN Electric P8 and Pro Panel, including power distribution, PLC, VFDs, P				
Modification	Date	Name	Original		Replacement of	Replaced by			



and 3D panel layout.

IEC_bas003_sample_project

SIEMENS
3SK1111-1AB30
SIRIUS SAFETY RELAY STD RELAYS 3NO+1NC

EMERGENCY STOP - CHANNEL 1
-S1

EMERGENCY STOP - CHANNEL 2
-S2


Logic

Autostart / Monitored Start


Terminals: 177, 180, 181, 182, 138, 139, 139, 139, 13, 23, 33, 41, 14, 24, 34, 42, 183, 11.9, 11.8, 6.3

Outputs: SAFETY_OUT_1, SAFETY_OUT_2, SAFETY_SPARE, SAFETY_OK

			Date	9/4/2026	EPLAN	EPLAN GmbH & Co. KG	Safety Circuit			=	
			Ed.	A						+	
			Appr.		Industrial Electrical Control Cabinet Design using EPLAN Electric P8 and Pro Panel, including power distribution, PLC, VFDs, P				and 3D panel layout.	IEC_bas003_sample_project	Page 10 / 30
Modification	Date	Name	Original		Replacement of	Replaced by					Page 10 / 30

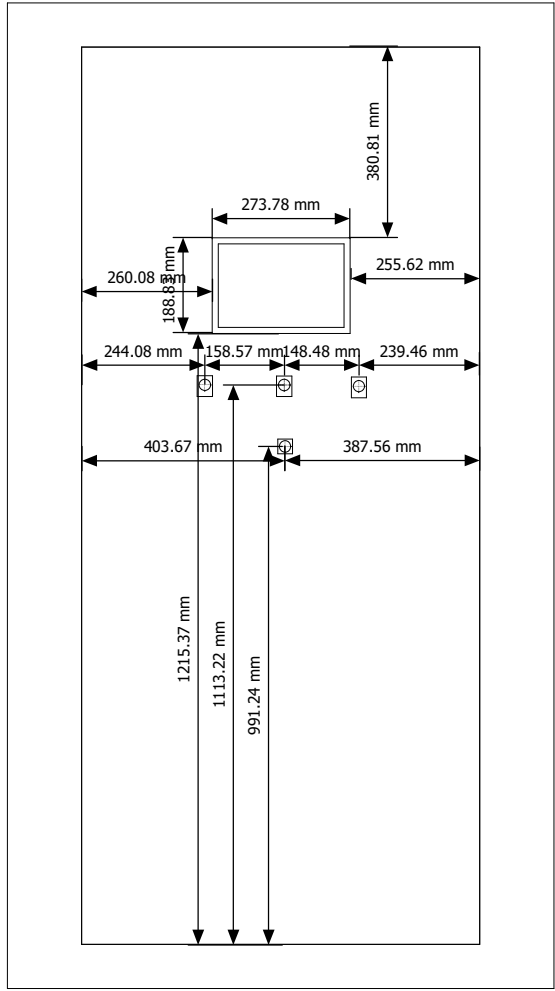


DOOR DRILLING VIEW

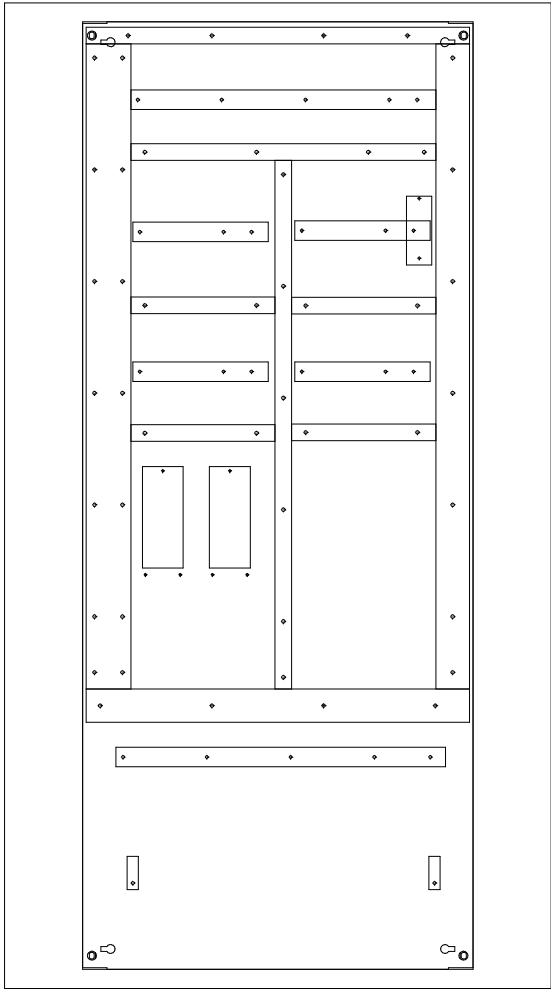


FRONT MONTING PANEL DRILLING VIEW




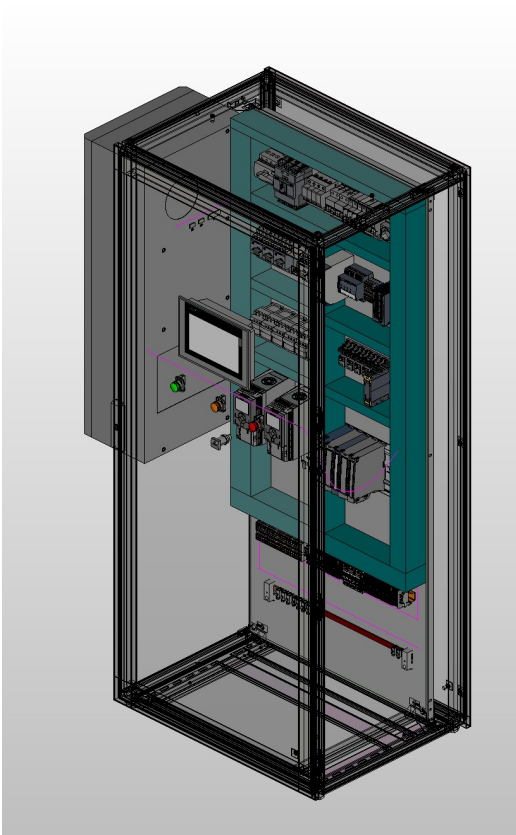

ENCLOUSURE VIEW

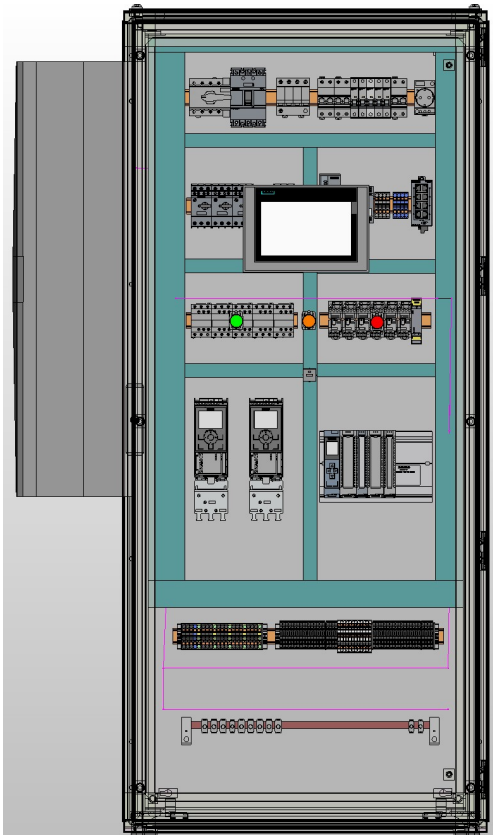

OUTSIDE FRONT VIEW

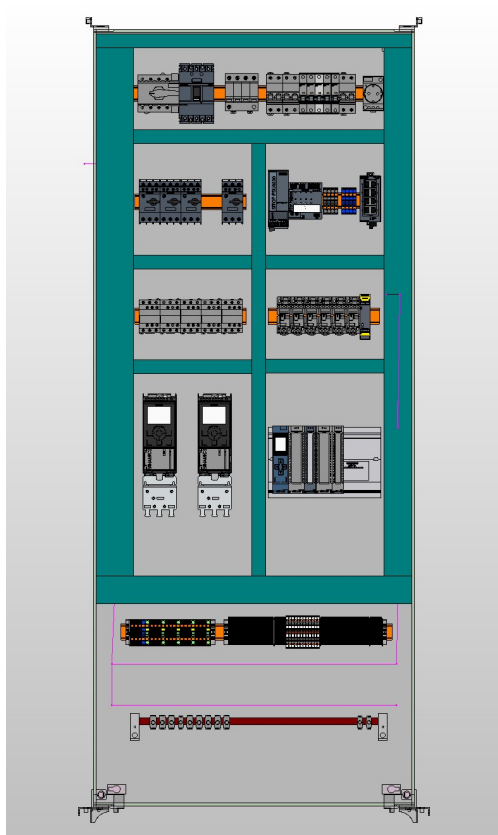

FRONT MONTING PANEL VIEW

Table of contents

F06_002

Function designation	Location designation	Page	Page description	supplementary page field	Date	Edited by
		1	cover page		8/4/2026	A
		2	POWER DISTRIBUTION		9/1/2026	A
		3	PLC HARDWARE CONFIGURATION AND POWER SUPPLY		9/1/2026	A
		4	HMI		9/1/2026	A
		5	PROFINET COMMUNICATION NETWORK		9/1/2026	A
		6	Digital Input Wiring		9/1/2026	A
		7	Digital Output Wiring		9/1/2026	A
		8	Analog Input Wiring		9/1/2026	A
		9	Analog Output Wiring		9/1/2026	A
		10	Safety Circuit		9/1/2026	A
		11	Variable Frequency Drive 1		9/1/2026	A
		12	Variable Frequency Drive 2		9/1/2026	A
		13	Motor Power Circuits		9/1/2026	A
		14	2D Layout		9/2/2026	A
		15	2D Drilling View		9/3/2026	A
		16	3D Layout		9/2/2026	A
		17	Table of contents : /1 - /17		9/3/2026	A

Protected by copyright. Passing on as well as reproduction of this document, its utilization and communication of its contents are prohibited in as far as not expressly permitted.

Structure identifier overview

F24_002

Full designation	Labeling	Structure description
=GAA	Function designation	400 V power supply
=GAB1	Function designation	24 V device power supply
=GAB2	Function designation	24 V supply PLC signals
=GQA	Function designation	Compressed air supply
=EA	Function designation	Lighting
=F	Function designation	Emergency-stop control
=EC	Function designation	Cooling
=K1	Function designation	PLC controller
=K2	Function designation	Valve control
=S1	Function designation	Machine operation enclosure
=S2	Function designation	Machine operation control panel
=GL1	Function designation	Feed workpiece: Transport
=MM1	Function designation	Feed workpiece: Position
=GL2	Function designation	Work workpiece: Transport
=MM2	Function designation	Work workpiece: Position
=MM3	Function designation	Work workpiece: Position
=TM1	Function designation	Work workpiece: Grind
=TM2	Function designation	Work workpiece: Grind
=GL3	Function designation	Provide workpiece: Transport
=HK1	Function designation	Paint workpiece
=HK1.HW1	Function designation	Prepare basic color red
=HK1.HW2	Function designation	Mix paint color red
=HK1.HW3	Function designation	Feed process liquid
=HK1.HW4	Function designation	Feed additive
+A1	Location designation	Enclosure 1
+A2	Location designation	Enclosure 2
+A3	Location designation	Air-conditioning unit
+A4	Location designation	Enclosure 3

Protected by copyright. Passing on as well as reproduction of this document, its utilization and communication of its contents are prohibited in as far as not expressly permitted.

Protected by copyright. Passing on as well as reproduction of this document, its utilization and communication of its contents are prohibited in as far as not expressly permitted.

Full designation	Labeling	Structure description
+A5	Location designation	Enclosure 4
+B1	Location designation	Station "Feed"
+B1.X1	Location designation	Station "Feed": Terminal box
+B2	Location designation	Station "Work"
+B2.X1	Location designation	Station "Work": Terminal box
+B2.Y1	Location designation	Station "Work": Pneumatic manifold
+B3	Location designation	Station "Provide"
+B3.X1	Location designation	Station "Provide": Terminal box
+C2	Location designation	Control panel
+B4	Location designation	Field
&AAA1	Document type	Title page / cover sheet
&AAB1	Document type	Table of contents
&ADB1	Document type	Structure description
&MFS11	Document type	Pneumatics schematic
&MFA11	Document type	Overview "Valve terminal pneumatics"
&EFS1	Document type	Electrical engineering schematic
&EFA1	Document type	Overview PLC
&EFA2	Document type	Overview "PROFINET"
&EFA3	Document type	Overview "Valve terminal electrical engineering"
&EFA4	Document type	Overview topology
&EPA1	Document type	Summarized parts list
&APB	Document type	Device tag list
&EMB1	Document type	Cable overview
&EMB2	Document type	Cable diagram
&EMA1	Document type	Terminal-strip overview
&EMA2	Document type	Terminal diagram
&EMA3	Document type	Connection list
&ETC1	Document type	Model view

Structure identifier overview

F24_002

Full designation	Labeling	Structure description
&MTC1	Document type	Model view
&PFB	Document type	P&I diagrams
&EDB	Document type	Explanatory documents
&MPB1	Document type	Device tag list fluid power
&MMA1	Document type	Connection list fluid power

Protected by copyright. Passing on as well as reproduction of this document, its utilization and communication of its contents are prohibited in as far as not expressly permitted.

Parts list

F01_002

Device tag	Quantity	Designation	Type number	Manufacturer	Part number	Pos.
Placement	QU		Order number	Supplier	Function text	
=+-1 + (1)	1	Variable speed drive - 4kW - 380...500V - 3 phase - compact	ATV320U40N4C ATV320U40N4C	SE SE	SE.ATV320U40N4C	
+ -1 + (control panel .S1)	3 Stück	End cover	D-PT 6 3212044	PXC PXC	PXC.3212044	
+ -1 + (control panel .S1)	4 Stück	End clamp	CLIPFIX 35 3022218	PXC PXC	PXC.3022218	
=+-11 + (6SL3255-0AA00-4JA2)	1	SINAMICS G INTELLIG.OPERAT.PANEL IOP-2	6SL3255-0AA00-4JA2 6SL3255-0AA00-4JA2	SIE	SIE.6SL3255-0AA00-4JA2	
=+-22 + (2)	1	SINAMICS G INTELLIG.OPERAT.PANEL IOP-2	6SL3255-0AA00-4JA2 6SL3255-0AA00-4JA2	SIE	SIE.6SL3255-0AA00-4JA2	
=+-39 /8.1	1 PCE	Humidity probe 4-20mA Wall mounting	TM1SH304 TM1SH304	SE SE	SE.TM1SH304	
=+-?1 + (1.S1)	1 PCE	Modicon M171 Optimized Wall thermostat with backlight	TM171DWAL2L TM171DWAL2L	SE SE	SE.TM171DWAL2L	
=+-?1 + (1.S1)	1 pc(s).	SK Blue e cooling unit, Wall-mounted, 1.1 kW, 230 V, 1~, 50/60 Hz, Sheet steel SK Blue e cooling unit, Wall-mounted, 1.1 kW, 230 V, 1~, 50/60 Hz, Sheet steel, WHD: 400x530x600mm	SK.3304500 SK.3304500	RIT RIT	RIT.3304500	
=+-A1 /3.2	1 piece	SIMATIC S7-1500 CPU 1511-1 PN Central processing unit	6ES7511-1AK02-0AB0 6ES7511-1AK02-0AB0	SIE	SIE.6ES7511-1AK02-0AB0	
=+-A1.1 /6.2	1	S7-1500, DI 16X24VDC SRC BA SIMATICDI 16x24VDC SRC BA	6ES7521-1BH50-0AA0 6ES7521-1BH50-0AA0	SIE SIE	SIE.6ES7521-1BH50-0AA0	
=+-A1.2 /3.4	1	S7-1500, DQ 16X24VDC/0.5A BA SIMATIC, S7-1500	6ES7522-1BH10-0AA0 6ES7522-1BH10-0AA0	SIE SIE	SIE.6ES7522-1BH10-0AA0	
=+-A1.3 /8.0	1	S7-1500, AI 8XU/I/RTD/TC ST SIMATIC, S7-1500	6ES7531-7KF00-0AB0 6ES7531-7KF00-0AB0	SIE SIE	SIE.6ES7531-7KF00-0AB0	
=+-A1.4 /9.7	1	S7-1500, AQ 2XU/I ST SIMATIC, S7-1500	6ES7532-5NB00-0AB0 6ES7532-5NB00-0AB0	SIE SIE	SIE.6ES7532-5NB00-0AB0 ANALOG OUTPUT MODULE – 4–20 mA / 0–10 V	
=+-A2 /5.4	1 piece	SCALANCE XB008 SCALANCE XB-000	6GK5008-0BA10-1AB2 6GK5008-0BA10-1AB2	SIE	SIE.6GK5008-0BA10-1AB2	
=+-A3 /4.1	1 piece	SIMATIC HMI TP900 COMFORT SIMATIC, HMI	6AV2124-0JC01-0AX0 6AV2124-0JC01-0AX0	SIE	SIE.6AV2124-0JC01-0AX0	
=+-B4 /8.3	1 PCE	Thermal probe PT1000 1,5m IP68 5x20 -50+110°C Green	TM1STPTTSN52015 TM1STPTTSN52015	SE SE	SE.TM1STPTTSN52015 HIGH LEVEL SENSOR	
=+-BG2 /6.6	1 Piece	Photoelectric retro-reflective sensor W9 Laser, Photoelectric retro-reflective sensor, Standard optics	WL9L-P430 1023958	SICK SICK	SICK.1023958	
=+-E1 /2.7	1 pc(s).	SK Blue e cooling unit, Wall-mounted, 1.1 kW, 230 V, 1~, 50/60 Hz, Sheet steel SK Blue e cooling unit, Wall-mounted, 1.1 kW, 230 V, 1~, 50/60 Hz, Sheet steel, WHD: 400x530x600mm	SK.3304500 SK.3304500	RIT RIT	RIT.3304500	

Protected by copyright. Passing on as well as reproduction of this document, its utilization and communication of its contents are prohibited in as far as not expressly permitted.

Parts list

F01_002

Device tag	Quantity	Designation	Type number	Manufacturer	Part number	Pos.
Placement	QU		Order number	Supplier	Function text	
==F1 /2.0	1	MCCB_IEC_FS160_32A_3P_55KA_TM_ ATAM SENTRON Molded case circuit breaker	3VA1132-5EF32-0AA0 3VA1132-5EF32-0AA0	SIE	SIE.3VA1132-5EF32-0AA0	
==F2 /6.4	1	TRANSVERSE AUX. SWITCH, 1NO+1NC, SCREW CONNECTION, FOR CIRCUIT-BREAKERS, SZ 500/S0	3RV2901-1E 3RV29011E	SIE SIE	SIE.3RV2901-1E	
==F2 /11.1	1	CIRCUIT-BREAKER SCREW CONNECTION 10A SIRIUS Circuit breaker	3RV2011-1JA10 3RV2011-1JA10	SIE	SIE.3RV2011-1JA10	
==F3 /6.4	1	TRANSVERSE AUX. SWITCH, 1NO+1NC, SCREW CONNECTION, FOR CIRCUIT-BREAKERS, SZ 500/S0	3RV2901-1E 3RV29011E	SIE SIE	SIE.3RV2901-1E	
==F3 /12.1	1	CIRCUIT-BREAKER SCREW CONNECTION 10A SIRIUS Circuit breaker	3RV2011-1JA10 3RV2011-1JA10	SIE	SIE.3RV2011-1JA10	
==F4 /2.3	1 Piece	CIRCUIT BREAKER 230/400V 10KA, 1-POLE, C, 6A, D=70MM	5SY4106-7 5SY4106-7	SIE SIE	SIE.5SY4106-7	
==F5 /2.5	1 Piece	CIRCUIT BREAKER 230/400V 10KA, 1-POLE, C, 6A, D=70MM	5SY4106-7 5SY4106-7	SIE SIE	SIE.5SY4106-7	
==F6 /2.4	1 Piece	SENTRON Miniature circuit breaker	5SY4102-7 5SY4102-7	SIE	SIE.5SY4102-7	
==F7 /2.6	1 Piece	CIRCUIT BREAKER 230/400V 10KA, 1-POLE, C, 6A, D=70MM	5SY4106-7 5SY4106-7	SIE SIE	SIE.5SY4106-7	
==F8 + (control panel .S1)	1 Piece	CIRCUIT BREAKER 230/400V 10KA, 1-POLE, C, 6A, D=70MM	5SY4106-7 5SY4106-7	SIE SIE	SIE.5SY4106-7	
==F9 /2.3	1	Miniature circuit breaker iC60N, 2P, 2A, C	A9F74202 A9F74202	SE SE	SE.A9F74202	
==F10 /2.2	1 piece	SITOP PSE200U SELECTIVITY MODULE 10A	6EP1961-2BA41 6EP1961-2BA41	SIE	SIE.6EP1961-2BA41	
==F11 /6.4	1	TRANSVERSE AUX. SWITCH, 1NO+1NC, SCREW CONNECTION, FOR CIRCUIT-BREAKERS, SZ 500/S0	3RV2901-1E 3RV29011E	SIE SIE	SIE.3RV2901-1E	
==F11 /13.1	1	CIRCUIT-BREAKER SCREW CONNECTION 10A SIRIUS Circuit breaker	3RV2011-1JA10 3RV2011-1JA10	SIE	SIE.3RV2011-1JA10	
==F12 /6.4	1	TRANSVERSE AUX. SWITCH, 1NO+1NC, SCREW CONNECTION, FOR CIRCUIT-BREAKERS, SZ 500/S0	3RV2901-1E 3RV29011E	SIE SIE	SIE.3RV2901-1E	
==F12 /13.6	1	CIRCUIT-BREAKER SCREW CONNECTION 10A SIRIUS Circuit breaker	3RV2011-1JA10 3RV2011-1JA10	SIE	SIE.3RV2011-1JA10	
==F13 /2.1	1	Modular surge arrester iPRF1 12.5r, 3P+N, 350 V - with remote transfer	A9L16634 A9L16634	SE SE	SE.A9L16634	
==F14 /2.0	1	Switch-disconnector Compact INS63 - 3 poles - 63A	28902 28902	SE SE	SE.28902	

Protected by copyright. Passing on as well as reproduction of this document, its utilization and communication of its contents are prohibited in as far as not expressly permitted.

Parts list

F01_002

Device tag	Quantity	Designation	Type number	Manufacturer	Part number	Pos.
Placement	QU		Order number	Supplier	Function text	
=+-F15 /2.6	1	Miniature circuit breaker IC60N, 2P, 2A, C	A9F74202 A9F74202	SE SE	SE.A9F74202	
=+-F16 /2.7	1	Miniature circuit breaker IC60N, 2P, 10A, C	A9F77210 A9F77210	SE SE	SE.A9F77210	
=+-G1 /11.5	1 piece	SINAMICS G120C PN 2,2KW UNFIL SINAMICS G120C	6SL3210-1KE15-8UF2 6SL3210-1KE15-8UF2	SIE SIE	SIE.6SL3210-1KE15-8UF2	
=+-G1 /11.5	1	SINAMICS G INTELLIG.OPERAT.PANEL IOP-2	6SL3255-0AA00-4JA2 6SL3255-0AA00-4JA2	SIE	SIE.6SL3255-0AA00-4JA2	
=+-G2 /12.5	1 piece	SINAMICS G120C PN 2,2KW UNFIL SINAMICS G120C	6SL3210-1KE15-8UF2 6SL3210-1KE15-8UF2	SIE SIE	SIE.6SL3210-1KE15-8UF2	
=+-G2 /12.5	1	SINAMICS G INTELLIG.OPERAT.PANEL IOP-2	6SL3255-0AA00-4JA2 6SL3255-0AA00-4JA2	SIE	SIE.6SL3255-0AA00-4JA2	
=+-G3 /2.3	1 piece	SITOP PSU8200 1ph 24 V/5 A	6EP3333-8SB00-0AY0 6EP3333-8SB00-0AY0	SIE	SIE.6EP3333-8SB00-0AY0	
=+-K13 + (1.S1)	1 piece	SIMATIC HMI TP900 COMFORT SIMATIC, HMI	6AV2124-0JC01-0AX0 6AV2124-0JC01-0AX0	SIE	SIE.6AV2124-0JC01-0AX0	
=+-K15 + (1)	1 piece	SCALANCE XB008 SCALANCE XB-000	6GK5008-0BA10-1AB2 6GK5008-0BA10-1AB2	SIE	SIE.6GK5008-0BA10-1AB2	
=+-K16 + (1)	1 piece	SINAMICS G120C PN 2,2KW UNFIL SINAMICS G120C	6SL3210-1KE15-8UF2 6SL3210-1KE15-8UF2	SIE SIE	SIE.6SL3210-1KE15-8UF2	
=+-K17 + (1)	1 piece	SINAMICS G120C DP 1,5KW UNFIL SINAMICS G120C	6SL3210-1KE14-3UP2 6SL3210-1KE14-3UP2	SIE	SIE.6SL3210-1KE14-3UP2	
=+-K18 + (1)	1 piece	SINAMICS G120C PN 55,0KW UNFIL SINAMICS G120C	6SL3210-1KE31-1UF1 6SL3210-1KE31-1UF1	SIE	SIE.6SL3210-1KE31-1UF1	
=+-K19 + (1)	1 piece	SINAMICS G120C PN 2,2KW UNFIL SINAMICS G120C	6SL3210-1KE15-8UF2 6SL3210-1KE15-8UF2	SIE SIE	SIE.6SL3210-1KE15-8UF2	
=+-K20 + (1)	1 piece	SINAMICS G120C PN 2,2KW UNFIL SINAMICS G120C	6SL3210-1KE15-8UF2 6SL3210-1KE15-8UF2	SIE SIE	SIE.6SL3210-1KE15-8UF2	
=+-K24 + (1)	1 piece	SCALANCE XB008 SCALANCE XB-000	6GK5008-0BA10-1AB2 6GK5008-0BA10-1AB2	SIE	SIE.6GK5008-0BA10-1AB2	
=+-K26 + (6GK5008-0BA10-1AB2)	1 piece	SCALANCE XB008 SCALANCE XB-000	6GK5008-0BA10-1AB2 6GK5008-0BA10-1AB2	SIE	SIE.6GK5008-0BA10-1AB2	
=+-K27 + (6SL3255-0AA00-4JA2)	1 piece	SINAMICS G120C PN 2,2KW UNFIL SINAMICS G120C	6SL3210-1KE15-8UF2 6SL3210-1KE15-8UF2	SIE SIE	SIE.6SL3210-1KE15-8UF2	
=+-K30 + (control panel .S1)	1	MOUNTING RAIL 245MM (9.6") SIMATIC, S7-1500	6ES7590-1AC40-0AA0 6ES7590-1AC40-0AA0	SIE SIE	SIE.6ES7590-1AC40-0AA0	

Protected by copyright. Passing on as well as reproduction of this document, its utilization and communication of its contents are prohibited in as far as not expressly permitted.

Parts list

F01_002

Device tag	Quantity	Designation	Type number	Manufacturer	Part number	Pos.
Placement	QU		Order number	Supplier	Function text	
==+K37 + (control panel .S1)	1 piece	U-TYPE-CONNECTOR S7-1500 (SPARE PART) SIMATIC, S7-1500	6ES7590-0AA00-0AA0 6ES7590-0AA00-0AA0	SIE	SIE.6ES7590-0AA00-0AA0	
==+K39 + (control panel .S1)	1 piece	U-TYPE-CONNECTOR S7-1500 (SPARE PART) SIMATIC, S7-1500	6ES7590-0AA00-0AA0 6ES7590-0AA00-0AA0	SIE	SIE.6ES7590-0AA00-0AA0	
==+K42 + (control panel .S1)	1 piece	U-TYPE-CONNECTOR S7-1500 (SPARE PART) SIMATIC, S7-1500	6ES7590-0AA00-0AA0 6ES7590-0AA00-0AA0	SIE	SIE.6ES7590-0AA00-0AA0	
==+K44 + (control panel .S1)	1 piece	U-TYPE-CONNECTOR S7-1500 (SPARE PART) SIMATIC, S7-1500	6ES7590-0AA00-0AA0 6ES7590-0AA00-0AA0	SIE	SIE.6ES7590-0AA00-0AA0	
==+K46 + (2)	1 piece	SINAMICS G120C PN 2,2KW UNFIL SINAMICS G120C	6SL3210-1KE15-8UF2 6SL3210-1KE15-8UF2	SIE SIE	SIE.6SL3210-1KE15-8UF2	
==+KM1 /7.0	1	Contactor TeSys LC1-D - 3P - AC-3 440V 9 A, Coil 230 V AC Coil 230 V AC	LC1-D 3P 9A LC1D09P7	SE SE	SE.LC1D09P7	
==+KM2 /7.2	1	Contactor TeSys LC1-D - 3P - AC-3 440V 9 A, Coil 230 V AC Coil 230 V AC	LC1-D 3P 9A LC1D09P7	SE SE	SE.LC1D09P7	
==+KM3 /7.4	1	Contactor TeSys LC1-D - 3P - AC-3 440V 9 A, Coil 230 V AC Coil 230 V AC	LC1-D 3P 9A LC1D09P7	SE SE	SE.LC1D09P7	
==+KM4 /7.6	1	Contactor TeSys LC1-D - 3P - AC-3 440V 9 A, Coil 230 V AC Coil 230 V AC	LC1-D 3P 9A LC1D09P7	SE SE	SE.LC1D09P7	
==+KM5 /7.8	1	Contactor TeSys LC1-D - 3P - AC-3 440V 9 A, Coil 230 V AC Coil 230 V AC	LC1-D 3P 9A LC1D09P7	SE SE	SE.LC1D09P7	
==+KSR1 /10.3	1	SIRIUS SAFETY RELAY STD RELAYS 3NO+1NC SIRIUS safety relays	3SK1111-1AB30 3SK1111-1AB30	SIE	SIE.3SK1111-1AB30 SAFETY RELAY – EMERGENCY STOP MONITORING	
==+P1 /7.4	1 Piece	Green complete pilot light Ø22 plain lens with integral LED 24V AC/DC	XB5AVB3 XB5AVB3	SE SE	SE.XB5AVB3	
==+P2 /7.5	1 Piece	Orange complete pilot light Ø22 plain lens with integral LED 24V	XB5AVB5 XB5AVB5	SE SE	SE.XB5AVB5	
==+P3 /7.5	1 Piece	Red complete pilot light Ø22 plain lens with integral LED 24V	XB5AVB4 XB5AVB4	SE SE	SE.XB5AVB4	
++PE /2.1;/2.2;/2.4;/2.8;/11.2;/12.2;/13.2;/13.7	8 pc(s).	SV Conductor connection clamp, 2,5-16 mm², clamping area WH: 8x8 mm SV Conductor connection clamp, 2,5-16 mm², clamping area WH: 8x8 mm, for bar thickness 5 mm	SV.3451500 SV.3451500	RIT RIT	RIT.3451500	
++PE /2.7;/4.7;/5.5	3 pc(s).	SV Conductor connection clamp, 1-4 mm², for bar thickness 5 mm SV Conductor connection clamp, 1-4 mm², for bar thickness 5 mm	SV.3450500 3450500	RIT RIT	RIT.3450500	
++PE + (control panel .S1)	1 pc(s).	SV Busbar E-Cu, WH: 15x5 mm, L: 2400 mm SV Busbar E-Cu, WH: 15x5 mm, L: 2400 mm	SV.3581000 3581000	RIT RIT	RIT.3581000	
==+Q1 + (control panel .S1)	1	Socket RXZ - mixed contact -10A - < 250V - screw clamp	RXZE2M114 RXZE2M114	SE SE	SE.RXZE2M114	

Protected by copyright. Passing on as well as reproduction of this document, its utilization and communication of its contents are prohibited in as far as not expressly permitted.

Protected by copyright. Passing on as well as reproduction of this document, its utilization and communication of its contents are prohibited in as far as not expressly permitted.

Parts list

F01_002

Device tag	Quantity	Designation	Type number	Manufacturer	Part number	Pos.
Placement	QU		Order number	Supplier	Function text	
=+-Q1 + (control panel .S1)	1 1	Miniature Plug-in relay - Zelio RXM 2 C/O 24 V DC 12 A with LED	RXM2AB2BD RXM2AB2BD	SE SE	SE.RXM2AB2BD	
=+-Q2 + (control panel .S1)	1	Socket RXZ - mixed contact -10A - < 250V - screw clamp	RXZE2M114 RXZE2M114	SE SE	SE.RXZE2M114	
=+-Q2 + (control panel .S1)	1 1	Miniature Plug-in relay - Zelio RXM 2 C/O 24 V DC 12 A with LED	RXM2AB2BD RXM2AB2BD	SE SE	SE.RXM2AB2BD	
=+-Q3 + (control panel .S1)	1	Socket RXZ - mixed contact -10A - < 250V - screw clamp	RXZE2M114 RXZE2M114	SE SE	SE.RXZE2M114	
=+-Q3 + (control panel .S1)	1 1	Miniature Plug-in relay - Zelio RXM 2 C/O 24 V DC 12 A with LED	RXM2AB2BD RXM2AB2BD	SE SE	SE.RXM2AB2BD	
=+-Q4 + (control panel .S1)	1	Socket RXZ - mixed contact -10A - < 250V - screw clamp	RXZE2M114 RXZE2M114	SE SE	SE.RXZE2M114	
=+-Q4 + (control panel .S1)	1 1	Miniature Plug-in relay - Zelio RXM 2 C/O 24 V DC 12 A with LED	RXM2AB2BD RXM2AB2BD	SE SE	SE.RXM2AB2BD	
=+-Q5 + (control panel .S1)	1	Socket RXZ - mixed contact -10A - < 250V - screw clamp	RXZE2M114 RXZE2M114	SE SE	SE.RXZE2M114	
=+-Q5 + (control panel .S1)	1 1	Miniature Plug-in relay - Zelio RXM 2 C/O 24 V DC 12 A with LED	RXM2AB2BD RXM2AB2BD	SE SE	SE.RXM2AB2BD	
=+-Q6 + (control panel .S1)	1	Socket RXZ - mixed contact -10A - < 250V - screw clamp	RXZE2M114 RXZE2M114	SE SE	SE.RXZE2M114	
=+-Q6 + (control panel .S1)	1 1	Miniature Plug-in relay - Zelio RXM 2 C/O 24 V DC 12 A with LED	RXM2AB2BD RXM2AB2BD	SE SE	SE.RXM2AB2BD	
=+-R1 /8.8	1	Head Ø22 + mounting base + potentiometer 100K	XB5AD912R100K XB5AD912R100K	SE SE	SE.XB5AD912R100K SETPOINT POTENTIOMETER – 0–24V	
=+-S7 /7.4	1	Annunciator 24 V AC/DC 85 dB	XB5KSB XB5KSB	SE SE	SE.XB5KSB	
+ -U1 + (1.S1);+ (control panel);+ (control panel .S1)	4 pc(s).	SZ Support rail to EN 60 715, version TS 35/15, L: 2000 mm SZ Support rail to EN 60 715, version TS 35/15, L: 2000 mm	SZ.2313150 2313150	RIT RIT	RIT.2313150	
+ -U1 + (control panel .S1)	1 pc(s).	VX Baying enclosure system, WHD: 800x1800x600 mm, single door VX Baying enclosure system, WHD: 800x1800x600 mm, sheet steel, with mounting plate, single door on the front	VX.8886000 8886000	RIT RIT	RIT.8886000	
+ -U2 + (1.S2)	1 piece	VX Baying enclosure system, WHD: 800x2000x600 mm, single door VX Baying enclosure system, WHD: 800x2000x600 mm, sheet steel, with mounting plate, single door on the front	VX.8806000 8806000	RIT	RIT.8806000	
+ -U3 + (control panel .S1)	1 pc(s).	TS Cable duct for mounting plate, WHD: 30x2000x80 mm TS Cable duct for mounting plate, WHD: 30x2000x80 mm	TS.8800750 8800750	RIT RIT	RIT.8800750	
+ -U4 + (control panel .S1)	1 pc(s).	TS Cable duct for mounting plate, WHD: 80x2000x80 mm TS Cable duct for mounting plate, WHD: 80x2000x80 mm	TS.8800753 8800753	RIT RIT	RIT.8800753	

19.3

19.5

			Project name New project(2)	Job number IEC_bas003_sample_project	EPLAN GmbH & Co. KG		Parts list : SE.RXM2AB2BD - RIT.8800753		=	&	
			Industrial Electrical Control Cabinet Design using EPLAN Electric P8 and Pro Panel, including power distribution, P	Drawing number							
Modification	Date	Name	Creator A	Approved by					Date 9/3/2026	Ed.	A

Parts list

F01_002

Device tag	Quantity	Designation	Type number	Manufacturer	Part number	Pos.
Placement	QU		Order number	Supplier	Function text	
+U5 + (control panel .S1)	1 pc(s).	TS Cable duct for mounting plate, WHD: 60x2000x80 mm TS Cable duct for mounting plate, WHD: 60x2000x80 mm	TS.8800752 8800752	RIT RIT	RIT.8800752	
+U6 + (control panel .S1)	1 pc(s).	TS Cable duct for mounting plate, WHD: 60x2000x80 mm TS Cable duct for mounting plate, WHD: 60x2000x80 mm	TS.8800752 8800752	RIT RIT	RIT.8800752	
+U7 + (control panel .S1)	1 pc(s).	TS Cable duct for mounting plate, WHD: 30x2000x80 mm TS Cable duct for mounting plate, WHD: 30x2000x80 mm	TS.8800750 8800750	RIT RIT	RIT.8800750	
+U8 + (control panel .S1)	1 pc(s).	SZ Support rail to EN 60 715, version TS 35/15, L: 2000 mm SZ Support rail to EN 60 715, version TS 35/15, L: 2000 mm	SZ.2313150 2313150	RIT RIT	RIT.2313150	
+U12 + (control panel .S1)	3 pc(s).	SZ Support rail to EN 60 715, version TS 35/15, L: 2000 mm SZ Support rail to EN 60 715, version TS 35/15, L: 2000 mm	SZ.2313150 2313150	RIT RIT	RIT.2313150	
+U13 + (control panel .S1)	1 pc(s).	TS Cable duct for mounting plate, WHD: 30x2000x80 mm TS Cable duct for mounting plate, WHD: 30x2000x80 mm	TS.8800750 8800750	RIT RIT	RIT.8800750	
+U14 + (control panel .S1)	2 pc(s).	TS Cable duct for mounting plate, WHD: 30x2000x80 mm TS Cable duct for mounting plate, WHD: 30x2000x80 mm	TS.8800750 8800750	RIT RIT	RIT.8800750	
+U15 + (control panel .S1)	1 pc(s).	TS Cable duct for mounting plate, WHD: 30x2000x80 mm TS Cable duct for mounting plate, WHD: 30x2000x80 mm	TS.8800750 8800750	RIT RIT	RIT.8800750	
+U16 + (control panel .S1)	1 pc(s).	SZ Support rail to EN 60 715, version TS 35/15, L: 2000 mm SZ Support rail to EN 60 715, version TS 35/15, L: 2000 mm	SZ.2313150 2313150	RIT RIT	RIT.2313150	
+U18 + (control panel .S1)	1 pc(s).	TS Cable duct for mounting plate, WHD: 30x2000x80 mm TS Cable duct for mounting plate, WHD: 30x2000x80 mm	TS.8800750 8800750	RIT RIT	RIT.8800750	
+U20 + (control panel .S1)	1 pc(s).	SV Busbar support, 1-pole, for busbar WH: 12x5-30x10 mm SV Busbar support, 1-pole, for busbar WH: 12x5-30x10 mm	SV.9340030 9340030	RIT RIT	RIT.9340030	
+U21 + (control panel .S1)	1 pc(s).	SV Busbar support, 1-pole, for busbar WH: 12x5-30x10 mm SV Busbar support, 1-pole, for busbar WH: 12x5-30x10 mm	SV.9340030 9340030	RIT RIT	RIT.9340030	
+W2 + (1.S2)	1	SINAMICS G120 IOP/BOP-2 DOOR MOUNT KIT	6SL3256-0AP00-0JA0 6SL3256-0AP00-0JA0	SIE SIE	SIE.6SL3256-0AP00-0JA0	
=+-X1 /2.6	1 pc(s).	SZ Socket for mounting on support rails, Schuko, CEE 7/4 SZ Socket for mounting on support rails, Schuko, CEE 7/4	SZ.2506100 2506100	RIT RIT	RIT.2506100	
+X2 /2.0	3 Piece	Feed-through terminal block	PT 6 BK 3211814	PXC PXC	PXC.3211814	
+X2 /2.0	1 Piece	Feed-through terminal block	PT 6 BU 3211819	PXC PXC	PXC.3211819	
+X2 /2.1	1 Piece	Ground modular terminal block	PT 6-PE 3211822	PXC PXC	PXC.3211822	
+X3 /2.3.../2.6	4 Piece	Feed-through terminal block	PT 6 3211813	PXC PXC	PXC.3211813	

Protected by copyright. Passing on as well as reproduction of this document, its utilization and communication of its contents are prohibited in as far as not expressly permitted.

Parts list

F01_002

Device tag	Quantity	Designation	Type number	Manufacturer	Part number	Pos.
Placement	QU		Order number	Supplier	Function text	
+X4 + (control panel .S1);/2.3;/3.1;/5.5	4 Piece	Feed-through terminal block	PT 6 BU 3211819	PXC PXC	PXC.3211819	
+X11 /11.1;/11.2	3 Piece	Feed-through terminal block	PT 6 BK 3211814	PXC PXC	PXC.3211814	
+X11 /11.2	1 Piece	Ground modular terminal block	PT 6-PE 3211822	PXC PXC	PXC.3211822	
+X12 /12.1;/12.2	3 Piece	Feed-through terminal block	PT 6 BK 3211814	PXC PXC	PXC.3211814	
+X12 /12.2	1 Piece	Ground modular terminal block	PT 6-PE 3211822	PXC PXC	PXC.3211822	
+X13 /13.1	3 Piece	Feed-through terminal block	PT 6 BK 3211814	PXC PXC	PXC.3211814	
+X13 /13.2	1 Piece	Ground modular terminal block	PT 6-PE 3211822	PXC PXC	PXC.3211822	
+X14 /13.6	3 Piece	Feed-through terminal block	PT 6 BK 3211814	PXC PXC	PXC.3211814	
+X14 /13.7	1 Piece	Ground modular terminal block	PT 6-PE 3211822	PXC PXC	PXC.3211822	
+X15 /8.1.../8.8	14 Stück	Fuse terminal block	ST 4-HESILED 60 (5X20) 3036550	PXC PXC	PXC.3036550	
+X16 /8.3	1 Stück	Fuse terminal block	ST 4-HESILED 60 (5X20) 3036550	PXC PXC	PXC.3036550	
+X17 /8.4;/8.8	2 Stück	Fuse terminal block	ST 4-HESILED 60 (5X20) 3036550	PXC PXC	PXC.3036550	
+X18 /9.0;/9.3;/9.6	4 Stück	Fuse terminal block	ST 4-HESILED 60 (5X20) 3036550	PXC PXC	PXC.3036550	
+X19 /6.2.../6.5	16 Stück	Fuse terminal block	ST 4-HESILED 60 (5X20) 3036550	PXC PXC	PXC.3036550	
+X20 + (control panel);/7.4	8 Stück	Fuse terminal block	ST 4-HESILED 60 (5X20) 3036550	PXC PXC	PXC.3036550	
+X20 /7.0.../7.9	12 Stück	Test disconnect terminal block	PTME 4 WH 3212140	PXC PXC	PXC.3212140	

Protected by copyright. Passing on as well as reproduction of this document, its utilization and communication of its contents are prohibited in as far as not expressly permitted.

F02_006

19.6

			Project name	New project(2)	Job number	 EPLAN	Summarized parts list : SE.ATV320U40N4C - SIE.6EP3333-8SB00-0AY0		=		&				
				Industrial Electrical Control Cabinet Design using EPLAN Electric P8 and Pro Panel, including power distribution, P	IEC_bas003_sample_project										
					Drawing number										
Modification	Date	Name	Creator	A	Approved by				Date	9/3/2026	Ed.	A		Page	28

Summarized parts list

F02_006

Order number	Quantity	Designation	Type number	Supplier	Pos.
6SL3210-1KE14-3UP2	1	SINAMICS G120C DP 1,5KW UNFIL	6SL3210-1KE14-3UP2		29
6SL3210-1KE31-1UF1	1	SINAMICS G120C PN 55,0KW UNFIL	6SL3210-1KE31-1UF1		30
6ES7590-1AC40-0AA0	1	MOUNTING RAIL 245MM (9.6")	6ES7590-1AC40-0AA0	SIE	31
6ES7590-0AA00-0AA0	4	U-TYPE-CONNECTOR S7-1500 (SPARE PART)	6ES7590-0AA00-0AA0		32
LC1D09P7	5	Contactore TeSys LC1-D - 3P - AC-3 440V 9 A, Coil 230 V AC	LC1-D 3P 9A	SE	33
3SK1111-1AB30	1	SIRIUS SAFETY RELAY STD RELAYS 3NO+1NC	3SK1111-1AB30		34
XB5AVB3	1	Green complete pilot light Ø22 plain lens with integral LED 24V AC/DC	XB5AVB3	SE	35
XB5AVB5	1	Orange complete pilot light Ø22 plain lens with integral LED 24V	XB5AVB5	SE	36
XB5AVB4	1	Red complete pilot light Ø22 plain lens with integral LED 24V	XB5AVB4	SE	37
3451500	8	SV Conductor connection clamp, 2,5-16 mm², clamping area WH: 8x8 mm	SV.3451500	RIT	38
3450500	3	SV Conductor connection clamp, 1-4 mm², for bar thickness 5 mm	SV.3450500	RIT	39
3581000	1	SV Busbar E-Cu, WH: 15x5 mm, L: 2400 mm	SV.3581000	RIT	40
RXZE2M114	6	Socket RXZ - mixed contact -10A - < 250V - screw clamp	RXZE2M114	SE	41
RXM2AB2BD	6	Miniature Plug-in relay - Zelio RXM 2 C/O 24 V DC 12 A with LED	RXM2AB2BD	SE	42
XB5AD912R100K	1	Head Ø22 + mounting base + potentiometer 100K	XB5AD912R100K	SE	43
XB5KSB	1	Annunciator 24 V AC/DC 85 dB	XB5KSB	SE	44
2313150	9	SZ Support rail to EN 60 715, version TS 35/15, L: 2000 mm	SZ.2313150	RIT	45
8886000	1	VX Baying enclosure system, WHD: 800x1800x600 mm, single door	VX.8886000	RIT	46
8806000	1	VX Baying enclosure system, WHD: 800x2000x600 mm, single door	VX.8806000		47
8800750	7	TS Cable duct for mounting plate, WHD: 30x2000x80 mm	TS.8800750	RIT	48
8800753	1	TS Cable duct for mounting plate, WHD: 80x2000x80 mm	TS.8800753	RIT	49
8800752	2	TS Cable duct for mounting plate, WHD: 60x2000x80 mm	TS.8800752	RIT	50
9340030	2	SV Busbar support, 1-pole, for busbar WH: 12x5-30x10 mm	SV.9340030	RIT	51
6SL3256-0AP00-0JA0	1	SINAMICS G120 IOP/BOP-2 DOOR MOUNT KIT	6SL3256-0AP00-0JA0	SIE	52
2506100	1	SZ Socket for mounting on support rails, Schuko, CEE 7/4	SZ.2506100	RIT	53
3211814	15	Feed-through terminal block	PT 6 BK	PXC	54
3211819	5	Feed-through terminal block	PT 6 BU	PXC	55
3211822	5	Ground modular terminal block	PT 6-PE	PXC	56

Protected by copyright. Passing on as well as reproduction of this document, its utilization and communication of its contents are prohibited in as far as not expressly permitted.

Summarized parts list

F02_006

Order number	Quantity	Designation	Type number	Supplier	Pos.
3211813	4	Feed-through terminal block	PT 6	PXC	57
3036550	45	Fuse terminal block	ST 4-HESILED 60 (5X20)	PXC	58
3212140	12	Test disconnect terminal block	PTME 4 WH	PXC	59

Protected by copyright. Passing on as well as reproduction of this document, its utilization and communication of its contents are prohibited in as far as not expressly permitted.