

Cucumber Report

Oct 22, 2023, 3:03:54 PM

Start : Oct 22, 3:03:49.954 PM

End : Oct 22, 3:03:52.855 PM

Duration : 2.901 s

Features







PASSED - 0
FAILED - 11
SKIPPED - 0

Scenarios

PASSED - 0
FAILED - 173
SKIPPED - 0

Steps

PASSED - 0
FAILED - 0
SKIPPED - 590

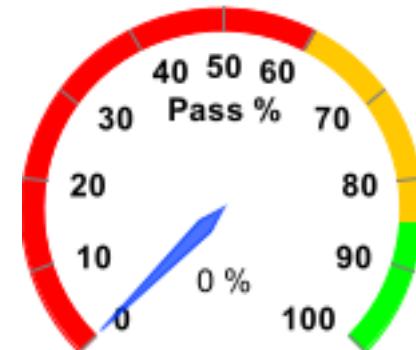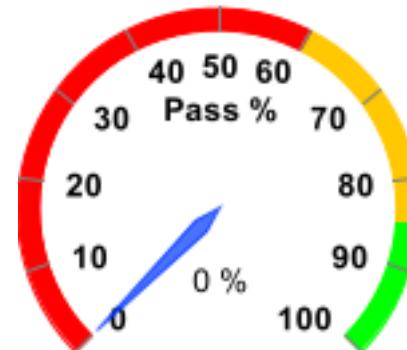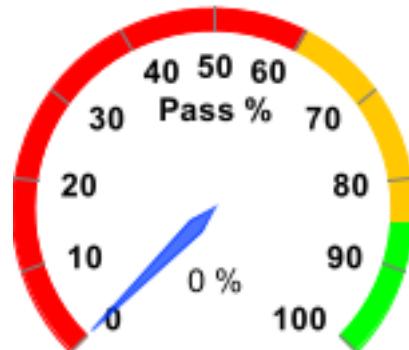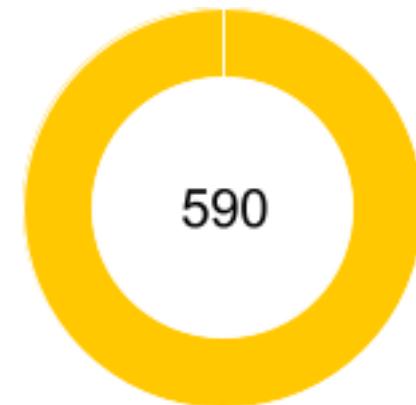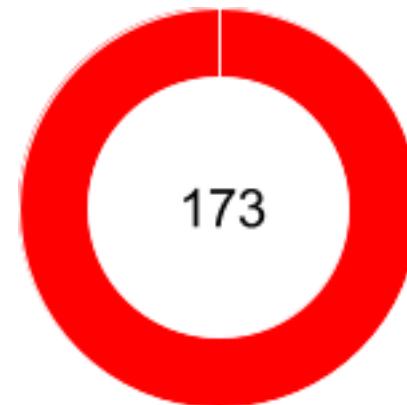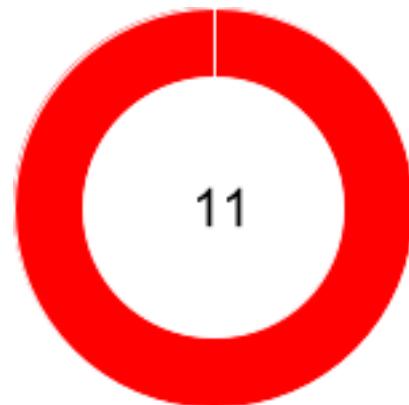

| Feature | | Scenario | | | | Step | | | |
|---|-----------------|-----------------|----------|----------|----------|-------------|----------|----------|----------|
| Name | Duration | T | P | F | S | T | P | F | S |
| <u>portal page</u> | 0.048 s | 1 | 0 | 1 | 0 | 4 | 0 | 0 | 4 |
| <u>User launch home page of an dsalgo project</u> | 0.228 s | 9 | 0 | 9 | 0 | 27 | 0 | 0 | 27 |
| <u>user registers with username and password</u> | 0.144 s | 5 | 0 | 5 | 0 | 15 | 0 | 0 | 15 |
| <u>User Logins in with credentials</u> | 0.184 s | 10 | 0 | 10 | 0 | 30 | 0 | 0 | 30 |
| <u>Datastructure feature</u> | 0.008 s | 1 | 0 | 1 | 0 | 10 | 0 | 0 | 10 |
| <u>Testing Array Module</u> | 0.267 s | 17 | 0 | 17 | 0 | 51 | 0 | 0 | 51 |
| <u>Testing Linked List Module</u> | 0.439 s | 31 | 0 | 31 | 0 | 108 | 0 | 0 | 108 |
| <u>user log in with credentials</u> | 0.221 s | 15 | 0 | 15 | 0 | 52 | 0 | 0 | 52 |
| <u>user log in with credentials</u> | 0.243 s | 19 | 0 | 19 | 0 | 66 | 0 | 0 | 66 |
| <u>Testing the tree module</u> | 0.621 s | 55 | 0 | 55 | 0 | 191 | 0 | 0 | 191 |
| <u>Exploring Graph module</u> | 0.106 s | 10 | 0 | 10 | 0 | 36 | 0 | 0 | 36 |

| # | Feature Name | Scenario Name |
|---|---|--|
| 1 | <u>portal page</u> | <u>Launching portal page and getting started</u> |
| 2 | <u>User launch home page of an dsalgo project</u> | <u>User is on Home page and click getstarted link on home page without sign in</u> |
| 3 | | <u>User is on Home page and click getstarted link on home page without sign in</u> |
| 4 | | <u>User is on Home page and click getstarted link on home page without sign in</u> |
| 5 | | <u>User is on Home page and click getstarted link on home page without sign in</u> |
| 6 | | <u>User is on Home page and click getstarted link on home page without sign in</u> |
| 7 | | <u>User is on Home page and click getstarted link on home page without sign in</u> |
| 8 | | <u>User is on Home page and click getstarted link on home page without sign in</u> |

| # | Feature Name | Scenario Name |
|----|---|---|
| 9 | <u>User launch home page of an dsalgo project</u> | <u>User is on Home page and click on Register</u> |
| 10 | | <u>User is on Home page and click on Register</u> |
| 11 | <u>user registers with username and password</u> | <u>The user is presented with error message for empty fields below Username textbox</u> |
| 12 | | <u>The user is presented with error message for empty fields below Password textbox</u> |
| 13 | | <u>The user is presented with error message for invalid username</u> |
| 14 | | <u>The user is presented with error message for password mismatch</u> |
| 15 | | <u>The user is successfully able to register</u> |
| 16 | <u>User Logins in with credentials</u> | <u>The user goes to registration page when register is clicked</u> |
| 17 | | <u>The user is able to signin with registered credential</u> |
| 18 | | <u>User on login page and login with invalid inputs</u> |
| 19 | | <u>User on login page and login with invalid inputs</u> |
| 20 | | <u>User on login page and login with invalid inputs</u> |

| # | Feature Name | Scenario Name |
|----|--|--|
| 21 | <u>User Logins in with credentials</u> | <u>User on login page and login with invalid and valid inputs from Excel</u> |
| 22 | | <u>User on login page and login with invalid and valid inputs from Excel</u> |
| 23 | | <u>User on login page and login with invalid and valid inputs from Excel</u> |
| 24 | | <u>User on login page and login with invalid and valid inputs from Excel</u> |
| 25 | | <u>Verifying signout link</u> |
| 26 | <u>Datastructure feature</u> | <u>User in DataStructure module</u> |
| 27 | <u>Testing Array Module</u> | <u>user is on the array page</u> |
| 28 | | <u>User checks valid code in submodule "Arrays in Python"</u> |
| 29 | | <u>User checks invalid code in submodule "Arrays in Python"</u> |
| 30 | | <u>User checks valid code in submodule "Arrays using List"</u> |
| 31 | | <u>User checks invalid code in submodule "Arrays using List"</u> |
| 32 | | <u>User checks valid code in submodule "Basic operations in List"</u> |
| 33 | | <u>User checks invalid code in submodule "Basic operations in List"</u> |

| # | Feature Name | Scenario Name |
|----|-----------------------------------|--|
| 34 | <u>Testing Array Module</u> | <u>User checks valid code in submodule "Application of Array"</u> |
| 35 | | <u>User checks invalid code in submodule "Application of Array"</u> |
| 36 | | <u>User checks valid code in submodule "Search the array"</u> |
| 37 | | <u>User checks invalid code in submodule "Search the array"</u> |
| 38 | | <u>User checks valid code in submodule "Max Consecutive Ones"</u> |
| 39 | | <u>User checks invalid code in submodule "Max Consecutive Ones"</u> |
| 40 | | <u>User checks valid code in submodule "Find numbers with even number of digits"</u> |
| 41 | | <u>User checks invalid code in submodule "Find numbers with even number of digits"</u> |
| 42 | | <u>User checks valid code in submodule "Squares of Sorted Array"</u> |
| 43 | | <u>User checks invalid code in submodule "Squares of Sorted Array"</u> |
| 44 | <u>Testing Linked List Module</u> | <u>The user is able to signin with registered credential</u> |
| 45 | | <u>User navigated to "linked list" page</u> |

| # | Feature Name | Scenario Name |
|----|-----------------------------------|--|
| 46 | <u>Testing Linked List Module</u> | <u>User navigated to "Introduction" page</u> |
| 47 | | <u>User navigated to tryEditor page with Run button from Introduction page</u> |
| 48 | | <u>The user run the code in tryEditor with valid input for Introduction page</u> |
| 49 | | <u>The user getting error message with invalid python code for Introduction page</u> |
| 50 | | <u>User navigated to "Creating Linked List" page</u> |
| 51 | | <u>User navigated to tryEditor page with Run button from Creating a Linked List page</u> |
| 52 | | <u>The user run the code in tryEditor with valid input for Creating a Linked List page</u> |
| 53 | | <u>The user getting error message with invalid python code for Creating a Linked List page</u> |
| 54 | | <u>User navigated to "Types of linked list" page</u> |
| 55 | | <u>User navigated to tryEditor page with Run button from Types of Linked List</u> |

| # | Feature Name | Scenario Name |
|----|-----------------------------------|--|
| 56 | <u>Testing Linked List Module</u> | <u>The user run the code in tryEditor with valid input for Creating a Linked List page</u> |
| 57 | | <u>The user getting error message with invalid python code for Creating a Linked List page</u> |
| 58 | | <u>user navigated to "Implementation linked list in python" page</u> |
| 59 | | <u>User navigated to tryEditor page with Run button from Types of Linked List</u> |
| 60 | | <u>The user run the code in tryEditor with valid input for Creating a Linked List page</u> |
| 61 | | <u>The user getting error message with invalid python code for Creating a Linked List page</u> |
| 62 | | <u>user navigated to "Traversal" page</u> |
| 63 | | <u>User navigated to tryEditor page with Run button from Types of Linked List</u> |
| 64 | | <u>The user run the code in tryEditor with valid input for Creating a Linked List page</u> |

| # | Feature Name | Scenario Name |
|----|-----------------------------------|--|
| 65 | <u>Testing Linked List Module</u> | <u>The user getting error message with invalid python code for Creating a Linked List page</u> |
| 66 | | <u>user navigated to "Insertion" page</u> |
| 67 | | <u>User navigated to tryEditor page with Run button from Types of Linked List</u> |
| 68 | | <u>The user run the code in tryEditor with valid input for Creating a Linked List page</u> |
| 69 | | <u>The user getting error message with invalid python code for Creating a Linked List page</u> |
| 70 | | <u>user navigated to "Deletion" page</u> |
| 71 | | <u>User navigated to tryEditor page with Run button from Types of Linked List</u> |
| 72 | | <u>The user run the code in tryEditor with valid input for Creating a Linked List page</u> |
| 73 | | <u>The user getting error message with invalid python code for Creating a Linked List page</u> |

| # | Feature Name | Scenario Name |
|----|-------------------------------------|--|
| 74 | <u>Testing Linked List Module</u> | <u>The user validating "Practice Questions" page</u> |
| 75 | <u>user log in with credentials</u> | <u>The user is able to signin with registered credential</u> |
| 76 | | <u>The user is directed to "Stack" Page</u> |
| 77 | | <u>The user is able to navigate "to operations in Stack page"</u> |
| 78 | | <u>The user is able to navigate to a page having an tryEditor</u> |
| 79 | | <u>The user is able to run code in tryEditor</u> |
| 80 | | <u>The user is able to get the error message for invalid syntax</u> |
| 81 | | <u>The user is able to navigate to "Implementation" Page</u> |
| 82 | | <u>The user is able to navigate to Implementation page having an tryeditor</u> |
| 83 | | <u>The user is able to run code in tryEditor</u> |
| 84 | | <u>The user is able to get the error message for invalid syntax</u> |
| 85 | | <u>The user is able to navigate to "Applications" Page</u> |
| 86 | | <u>The user is able to navigate to Applications page having an tryeditor</u> |

| # | Feature Name | Scenario Name |
|----|---|---|
| 87 | <u>user log in with credentials</u> | <u>The user is able to run code in tryEditor</u> |
| 88 | | <u>The user is able to get the error message for invalid syntax</u> |
| 89 | | <u>The user is able to navigate to "Practice Questions" in stack Page</u> |
| 90 | | <u>The user is able to signin with registered credential</u> |
| 91 | | <u>The user is directed to "Queue" Page</u> |
| 92 | | <u>The user is able to navigate to Implementation of Queue in Python link page</u> |
| 93 | | <u>The user should be directed to editor page with run button to test python code</u> |
| 94 | | <u>The user is able to run code in Editor for Implementation of queue page</u> |
| 95 | | <u>The user is presented with error message for invalid code in Editor for Implementation of queue page</u> |
| 96 | | <u>The user is able to navigate to queue page and click on Implementation using collections deque link</u> |

| # | Feature Name | Scenario Name |
|------|-------------------------------------|---|
| 97 | <u>user log in with credentials</u> | <u>The user should be directed to editor page with run button to test python code</u> |
| 98 | | <u>The user is able to run code in Editor for Implementation of queue page</u> |
| 99 | | <u>The user is presented with error message for invalid code in Editor for Implementation of queue page</u> |
| 10-0 | | <u>The user is able to navigate to queue page and click on Implementation using arrays link</u> |
| 10-1 | | <u>The user should be directed to editor page with run button to test python code</u> |
| 10-2 | | <u>The user is able to run code in Editor for Implementation of queue page</u> |
| 10-3 | | <u>The user is presented with error message for invalid code in Editor for Implementation of queue page</u> |
| 10-4 | | <u>The user is able to navigate to queue page and click on Implementation using arrays link</u> |

| # | Feature Name | Scenario Name |
|------|---|---|
| 10-5 | <u>user log in with credentials</u> | <u>The user should be directed to editor page with run button to test python code</u> |
| 10-6 | | <u>The user is able to run code in Editor for Implementation of queue page</u> |
| 10-7 | | <u>The user is presented with error message for invalid code in Editor for Implementation of queue page</u> |
| 10-8 | | <u>The user is able to navigate to QueueOp page and click on Practice Questions</u> |
| 10-9 | <u>Testing the tree module</u> | <u>The user is able to signin with registered credential</u> |
| 11-0 | | <u>User navigated to "Tree" page</u> |
| 11-1 | | <u>The user is able to navigate to Overview of Trees page</u> |
| 11-2 | | <u>The user is able to navigate to a page having an tryEditor</u> |
| 11-3 | | <u>The user is able to run code in tryEditor</u> |
| 11-4 | | <u>The user is able to get the error message for invalid syntax</u> |
| 11-5 | | <u>The user is able to navigate to Terminologies Page</u> |

| # | Feature Name | Scenario Name |
|------|--------------------------------|---|
| 11-6 | <u>Testing the tree module</u> | <u>The user is able to navigate to Terminologies page having an tryEditor</u> |
| 11-7 | | <u>The user is able to run code in tryEditor</u> |
| 11-8 | | <u>The user is able to get the error message for invalid syntax</u> |
| 11-9 | | <u>The user is able to navigate to Types of Trees Page</u> |
| 12-0 | | <u>The user is able to navigate to a page having an tryEditor</u> |
| 12-1 | | <u>The user is able to run code in tryEditor</u> |
| 12-2 | | <u>The user is able to get the error message for invalid syntax</u> |
| 12-3 | | <u>The user is able to navigate to Tree Traversals Page</u> |
| 12-4 | | <u>The user is able to navigate to a page having an tryEditor</u> |
| 12-5 | | <u>The user is able to run code in tryEditor</u> |
| 12-6 | | <u>The user is able to get the error message for invalid syntax</u> |
| 12-7 | | <u>The user is able to navigate to "Traversals illustration" Page</u> |
| 12-8 | | <u>The user is able to navigate to a Page having an tryEditor</u> |


| # | Feature Name | Scenario Name |
|------|--------------------------------|--|
| 12-9 | <u>Testing the tree module</u> | <u>The user is able to run code in tryEditor</u> |
| 13-0 | | <u>The user is able to get the error message for invalid syntax</u> |
| 13-1 | | <u>The user is able to navigate to "Binary trees" Page</u> |
| 13-2 | | <u>The user is able to navigate to a page having an tryEditor</u> |
| 13-3 | | <u>The user is able to run code in tryEditor</u> |
| 13-4 | | <u>The user is able to get the error message for invalid syntax</u> |
| 13-5 | | <u>The user is able to navigate to "Types of Binary trees" Page</u> |
| 13-6 | | <u>The user is able to navigate to a page having an tryEditor</u> |
| 13-7 | | <u>The user is able to run code in tryEditor</u> |
| 13-8 | | <u>The user is able to get the error message for invalid syntax</u> |
| 13-9 | | <u>The user is able to navigate to Implementation in Python Page</u> |
| 14-0 | | <u>The user is able to navigate to a page having an tryEditor</u> |
| 14-1 | | <u>The user is able to run code in tryEditor</u> |

| # | Feature Name | Scenario Name |
|------|--------------------------------|--|
| 14-2 | <u>Testing the tree module</u> | <u>The user is able to get the error message for invalid syntax</u> |
| 14-3 | | <u>The user is able to navigate to binary tree traversals Page</u> |
| 14-4 | | <u>The user is able to navigate to a page having an tryEditor</u> |
| 14-5 | | <u>The user is able to run code in tryEditor</u> |
| 14-6 | | <u>The user is able to get the error message for invalid syntax</u> |
| 14-7 | | <u>The user is able to navigate to Implementation of Binary Trees Page</u> |
| 14-8 | | <u>The user is able to navigate to a page having an tryEditor</u> |
| 14-9 | | <u>The user is able to run code in tryEditor</u> |
| 15-0 | | <u>The user is able to get the error message for invalid syntax</u> |
| 15-1 | | <u>The user is able to navigate to Applications of Binary Trees Page</u> |
| 15-2 | | <u>The user is able to navigate to a page having an tryEditor</u> |
| 15-3 | | <u>The user is able to run code in tryEditor</u> |
| 15-4 | | <u>The user is able to get the error message for invalid syntax</u> |


| # | Feature Name | Scenario Name |
|------|--------------------------------|---|
| 15-5 | <u>Testing the tree module</u> | <u>The user is able to navigate to "Binary Search Trees" Page</u> |
| 15-6 | | <u>The user is able to navigate to a page having an tryEditor</u> |
| 15-7 | | <u>The user is able to run code in tryEditor</u> |
| 15-8 | | <u>The user is able to get the error message for invalid syntax</u> |
| 15-9 | | <u>The user is able to navigate to "Implementation of BST" Page</u> |
| 16-0 | | <u>The user is able to navigate to a page having an tryEditor</u> |
| 16-1 | | <u>The user is able to run code in tryEditor</u> |
| 16-2 | | <u>The user is able to get the error message for invalid syntax</u> |
| 16-3 | | <u>The user validating Practice Questions page</u> |
| 16-4 | <u>Exploring Graph module</u> | <u>User navigated to "Graph" page</u> |
| 16-5 | | <u>The user is able to navigate to Graph page</u> |
| 16-6 | | <u>The user should be directed to editor page with run button to test python code</u> |

| # | Feature Name | Scenario Name |
|------|-------------------------------|---|
| 16-7 | <u>Exploring Graph module</u> | <u>The user run the code in tryEditor with valid input for Graph page</u> |
| 16-8 | | <u>The user getting error message with invalid python code for Graph page</u> |
| 16-9 | | <u>The user is able to navigate to Graph page</u> |
| 17-0 | | <u>User navigated to tryEditor page with Run button from Graph page</u> |
| 17-1 | | <u>The user run the code in tryEditor with valid input for Graph page</u> |
| 17-2 | | <u>The user getting error message with invalid python code for Graph page</u> |
| 17-3 | | <u>The user validating "Practice Questions" page</u> |


| TAG | Scenario | | | | Feature | | | | |
|-----------------------------|-----------------|----------|----------|----------|----------------|----------|----------|----------|----------|
| | Name | T | P | F | S | T | P | F | S |
| <code>@datastructure</code> | | 1 | 0 | 1 | 0 | 1 | 0 | 1 | 0 |

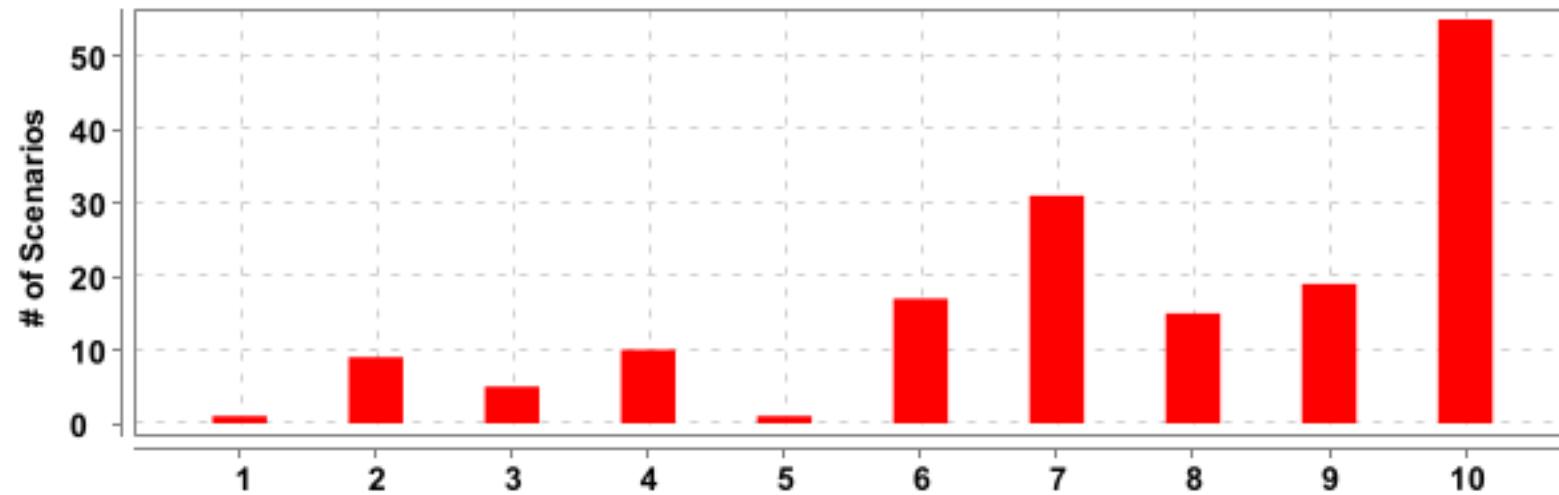

| # | Feature Name | T | P | F | S | Duration |
|----|---|----|---|----|---|----------|
| 1 | <u>portal page</u> | 1 | 0 | 1 | 0 | 0.048 s |
| 2 | <u>User launch home page of an dsalgo project</u> | 9 | 0 | 9 | 0 | 0.228 s |
| 3 | <u>user registers with username and password</u> | 5 | 0 | 5 | 0 | 0.144 s |
| 4 | <u>User Logins in with credentials</u> | 10 | 0 | 10 | 0 | 0.184 s |
| 5 | <u>Datastructure feature</u> | 1 | 0 | 1 | 0 | 0.008 s |
| 6 | <u>Testing Array Module</u> | 17 | 0 | 17 | 0 | 0.267 s |
| 7 | <u>Testing Linked List Module</u> | 31 | 0 | 31 | 0 | 0.439 s |
| 8 | <u>user log in with credentials</u> | 15 | 0 | 15 | 0 | 0.221 s |
| 9 | <u>user log in with credentials</u> | 19 | 0 | 19 | 0 | 0.243 s |
| 10 | <u>Testing the tree module</u> | 55 | 0 | 55 | 0 | 0.621 s |

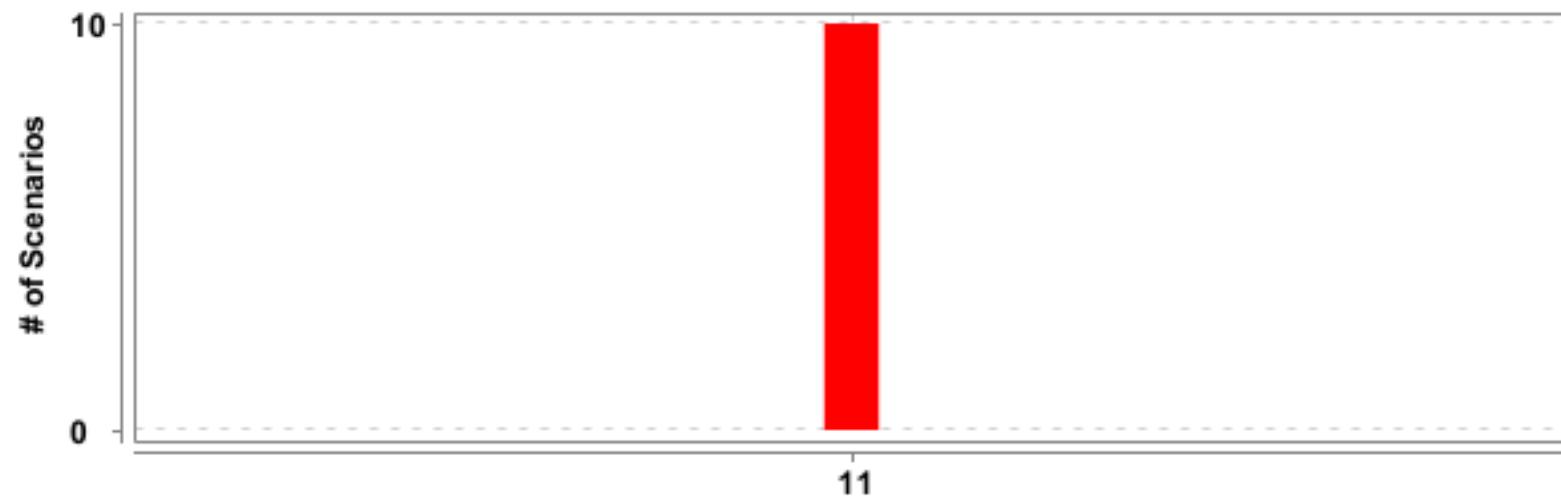


| # | Feature Name | T | P | F | S | Duration |
|----|-------------------------------|----|---|----|---|----------|
| 11 | <u>Exploring Graph module</u> | 10 | 0 | 10 | 0 | 0.106 s |

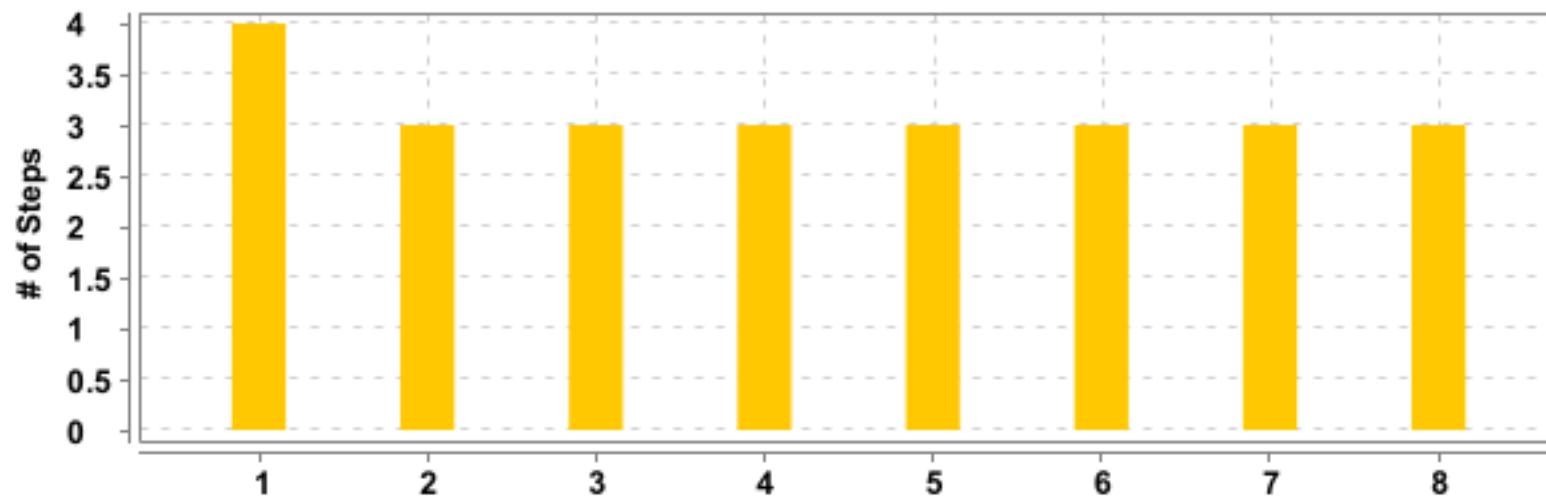


| # | Feature Name | Scenario Name | T | P | F | S | Duration |
|---|---|--|---|---|---|---|----------|
| 1 | <u>portal page</u> | <u>Launching portal page and getting started</u> | 4 | 0 | 0 | 4 | 0.045 s |
| 2 | <u>User launch home page of an dsalgo project</u> | <u>User is on Home page and click getstarted link on home page without sign in</u> | 3 | 0 | 0 | 3 | 0.006 s |
| 3 | | <u>User is on Home page and click getstarted link on home page without sign in</u> | 3 | 0 | 0 | 3 | 0.008 s |
| 4 | | <u>User is on Home page and click getstarted link on home page without sign in</u> | 3 | 0 | 0 | 3 | 0.009 s |
| 5 | | <u>User is on Home page and click getstarted link on home page without sign in</u> | 3 | 0 | 0 | 3 | 0.007 s |
| 6 | | <u>User is on Home page and click getstarted link on home page without sign in</u> | 3 | 0 | 0 | 3 | 0.010 s |
| 7 | | <u>User is on Home page and click getstarted link on home page without sign in</u> | 3 | 0 | 0 | 3 | 0.008 s |

| # | Feature Name | Scenario Name | T | P | F | S | Duration |
|---|---------------------|--|----------|----------|----------|----------|-----------------|
| 8 | | <u>User is on Home page and click getstarted link on home page without sign in</u> | 3 | 0 | 0 | 3 | 0.008 s |

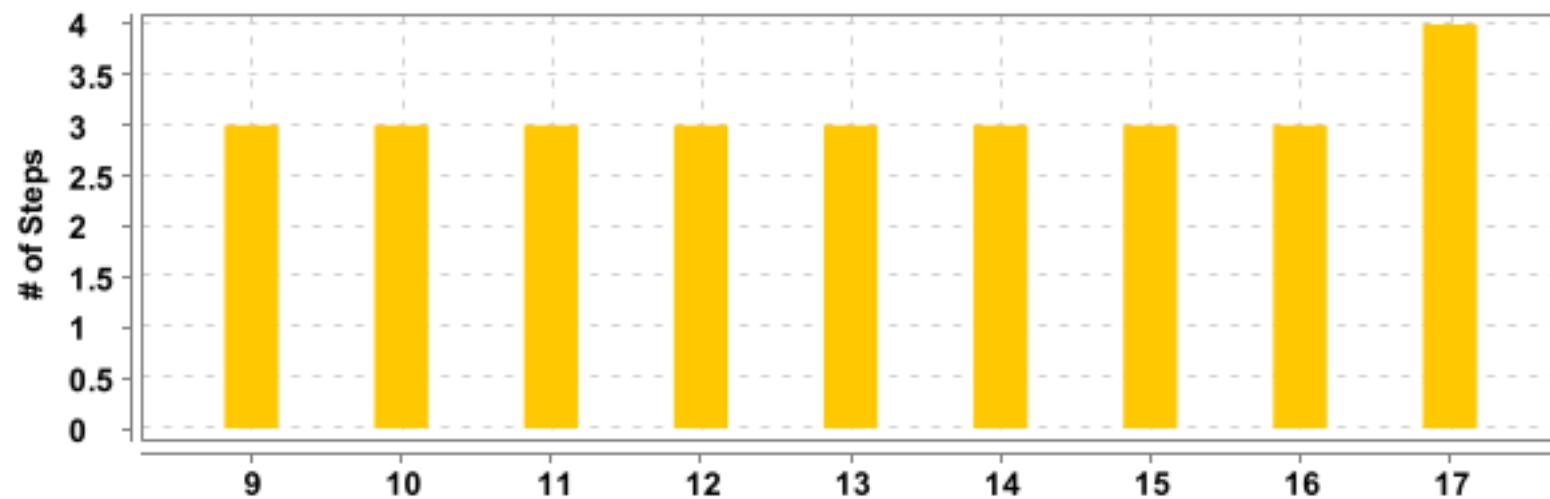


| # | Feature Name | Scenario Name | T | P | F | S | Duration |
|----|---|---|---|---|---|---|----------|
| 9 | <u>User launch home page of an dsalgo project</u> | <u>User is on Home page and click on Register</u> | 3 | 0 | 0 | 3 | 0.008 s |
| 10 | | <u>User is on Home page and click on Register</u> | 3 | 0 | 0 | 3 | 0.005 s |
| 11 | <u>user registers with username and password</u> | <u>The user is presented with error message for empty fields below Username textbox</u> | 3 | 0 | 0 | 3 | 0.008 s |
| 12 | | <u>The user is presented with error message for empty fields below Password textbox</u> | 3 | 0 | 0 | 3 | 0.019 s |
| 13 | | <u>The user is presented with error message for invalid username</u> | 3 | 0 | 0 | 3 | 0.010 s |
| 14 | | <u>The user is presented with error message for password mismatch</u> | 3 | 0 | 0 | 3 | 0.019 s |
| 15 | | <u>The user is successfully able to register</u> | 3 | 0 | 0 | 3 | 0.008 s |
| 16 | <u>User Logins in with credentials</u> | <u>The user goes to registration page when register is clicked</u> | 3 | 0 | 0 | 3 | 0.005 s |

| # | Feature Name | Scenario Name | T | P | F | S | Duration |
|----|--------------|--|---|---|---|---|----------|
| 17 | | <u>The user is able to signin with registered credential</u> | 4 | 0 | 0 | 4 | 0.005 s |

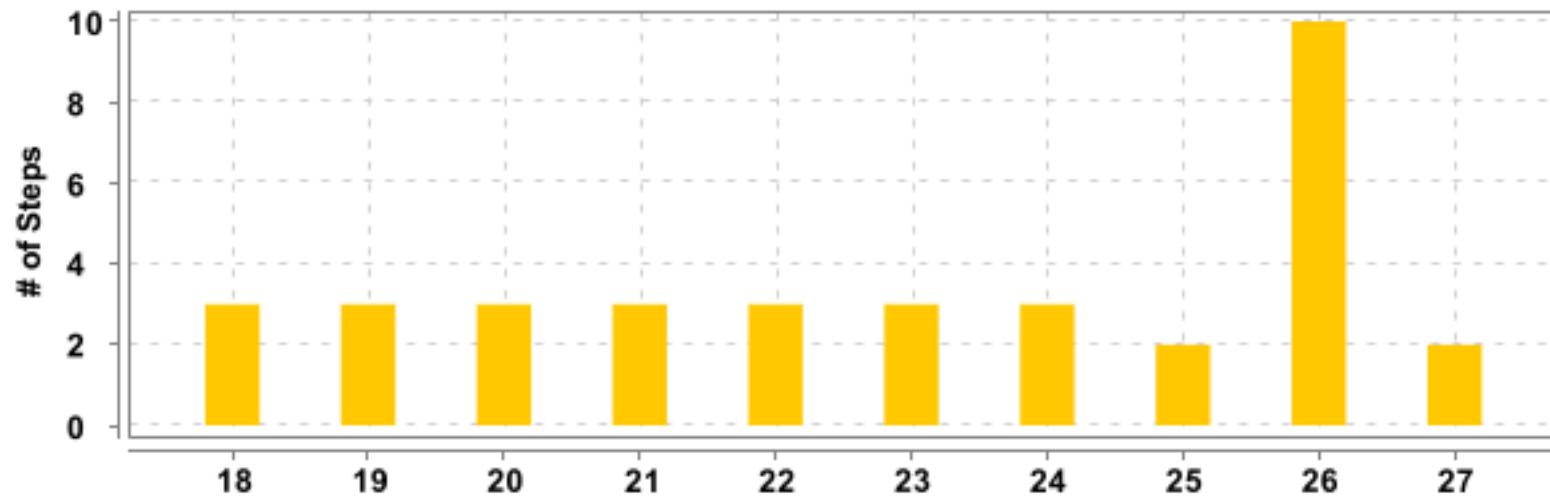


| # | Feature Name | Scenario Name | T | P | F | S | Duration |
|----|--|--|----|---|---|----|----------|
| 18 | <u>User Logins in with credentials</u> | <u>User on login page and login with invalid inputs</u> | 3 | 0 | 0 | 3 | 0.006 s |
| 19 | | <u>User on login page and login with invalid inputs</u> | 3 | 0 | 0 | 3 | 0.004 s |
| 20 | | <u>User on login page and login with invalid inputs</u> | 3 | 0 | 0 | 3 | 0.008 s |
| 21 | | <u>User on login page and login with invalid and valid inputs from Excel</u> | 3 | 0 | 0 | 3 | 0.006 s |
| 22 | | <u>User on login page and login with invalid and valid inputs from Excel</u> | 3 | 0 | 0 | 3 | 0.002 s |
| 23 | | <u>User on login page and login with invalid and valid inputs from Excel</u> | 3 | 0 | 0 | 3 | 0.003 s |
| 24 | | <u>User on login page and login with invalid and valid inputs from Excel</u> | 3 | 0 | 0 | 3 | 0.005 s |
| 25 | | <u>Verifying signout link</u> | 2 | 0 | 0 | 2 | 0.003 s |
| 26 | <u>Datastructure feature</u> | <u>User in DataStructure module</u> | 10 | 0 | 0 | 10 | 0.008 s |

| # | Feature Name | Scenario Name | <i>T</i> | <i>P</i> | <i>F</i> | <i>S</i> | Duration |
|----|-----------------------------|----------------------------------|----------|----------|----------|----------|-----------------|
| 27 | <u>Testing Array Module</u> | <u>user is on the array page</u> | 2 | 0 | 0 | 2 | 0.004 s |

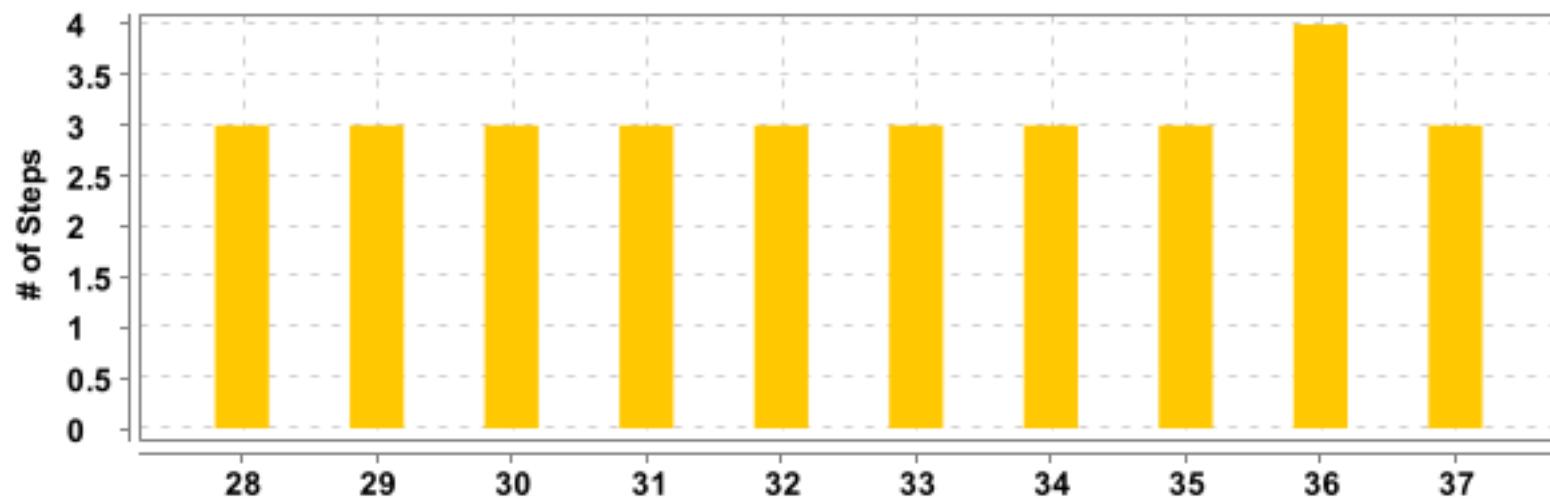


| # | Feature Name | Scenario Name | T | P | F | S | Duration |
|----|-----------------------------|---|---|---|---|---|----------|
| 28 | <u>Testing Array Module</u> | <u>User checks valid code in submodule "Arrays in Python"</u> | 3 | 0 | 0 | 3 | 0.004 s |
| 29 | | <u>User checks invalid code in submodule "Arrays in Python"</u> | 3 | 0 | 0 | 3 | 0.005 s |
| 30 | | <u>User checks valid code in submodule "Arrays using List"</u> | 3 | 0 | 0 | 3 | 0.005 s |
| 31 | | <u>User checks invalid code in submodule "Arrays using List"</u> | 3 | 0 | 0 | 3 | 0.007 s |
| 32 | | <u>User checks valid code in submodule "Basic operations in List"</u> | 3 | 0 | 0 | 3 | 0.005 s |
| 33 | | <u>User checks invalid code in submodule "Basic operations in List"</u> | 3 | 0 | 0 | 3 | 0.003 s |
| 34 | | <u>User checks valid code in submodule "Application of Array"</u> | 3 | 0 | 0 | 3 | 0.004 s |
| 35 | | <u>User checks invalid code in submodule "Application of Array"</u> | 3 | 0 | 0 | 3 | 0.003 s |
| 36 | | <u>User checks valid code in submodule "Search the array"</u> | 4 | 0 | 0 | 4 | 0.008 s |
| 37 | | <u>User checks invalid code in submodule "Search the array"</u> | 3 | 0 | 0 | 3 | 0.002 s |

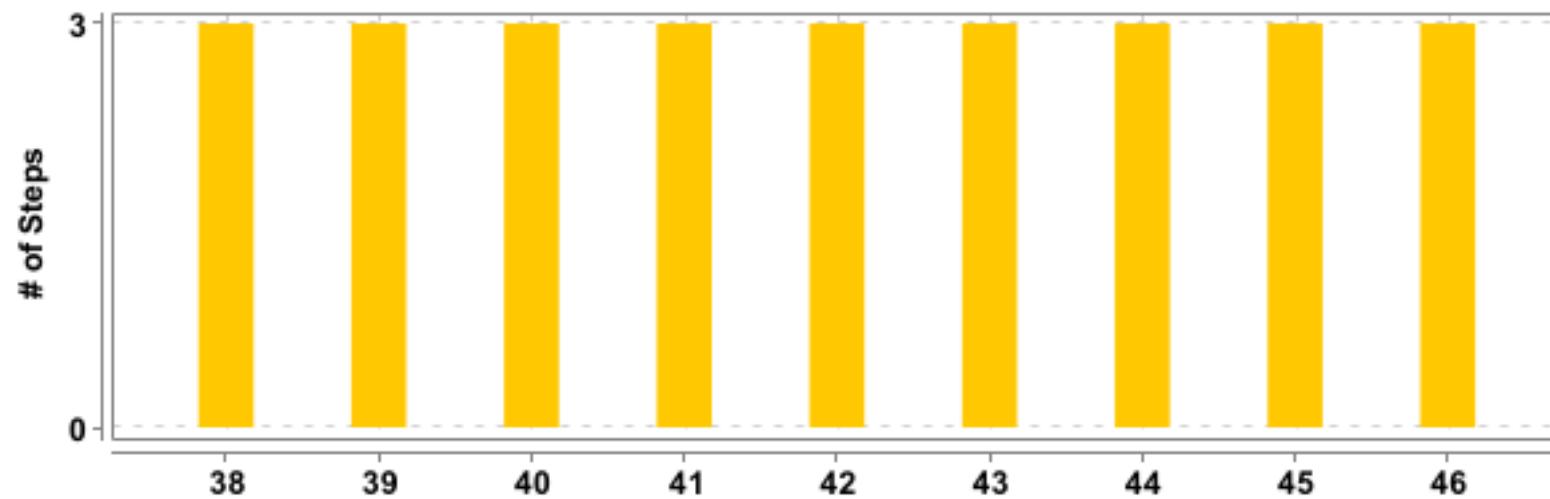


| # | Feature Name | Scenario Name | T | P | F | S | Duration |
|----|-----------------------------|--|---|---|---|---|----------|
| 38 | <u>Testing Array Module</u> | <u>User checks valid code in submodule "Max Consecutive Ones"</u> | 3 | 0 | 0 | 3 | 0.003 s |
| 39 | | <u>User checks invalid code in submodule "Max Consecutive Ones"</u> | 3 | 0 | 0 | 3 | 0.003 s |
| 40 | | <u>User checks valid code in submodule "Find numbers with even number of digits"</u> | 3 | 0 | 0 | 3 | 0.002 s |
| 41 | | <u>User checks invalid code in submodule "Find numbers with even number of digits"</u> | 3 | 0 | 0 | 3 | 0.003 s |
| 42 | | <u>User checks valid code in submodule "Squares of Sorted Array"</u> | 3 | 0 | 0 | 3 | 0.005 s |
| 43 | | <u>User checks invalid code in submodule "Squares of Sorted Array"</u> | 3 | 0 | 0 | 3 | 0.005 s |
| 44 | | <u>The user is able to signin with registered credential</u> | 3 | 0 | 0 | 3 | 0.003 s |

| # | Feature Name | Scenario Name | T | P | F | S | Duration |
|----|---------------------|--|----------|----------|----------|----------|-----------------|
| 45 | | <u>User navigated to "linked list" page</u> | 3 | 0 | 0 | 3 | 0.003 s |
| 46 | | <u>User navigated to "Introduction" page</u> | 3 | 0 | 0 | 3 | 0.003 s |

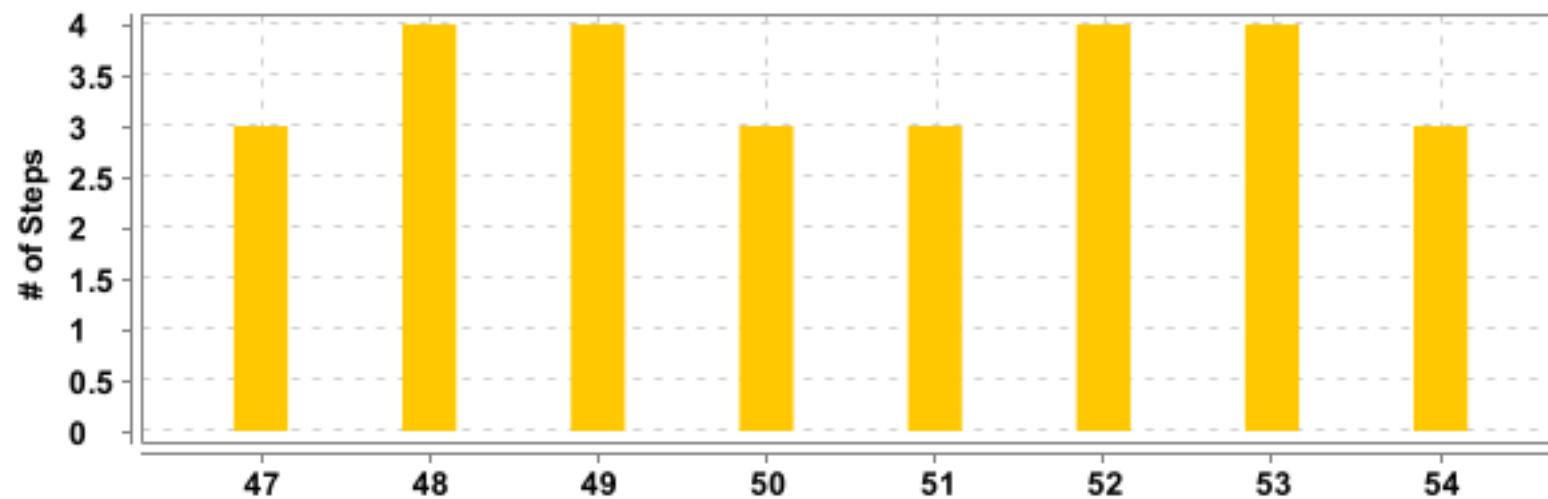


| # | Feature Name | Scenario Name | T | P | F | S | Duration |
|----|-----------------------------------|--|---|---|---|---|----------|
| 47 | <u>Testing Linked List Module</u> | <u>User navigated to tryEditor page with Run button from Introduction page</u> | 3 | 0 | 0 | 3 | 0.003 s |
| 48 | | <u>The user run the code in tryEditor with valid input for Introduction page</u> | 4 | 0 | 0 | 4 | 0.003 s |
| 49 | | <u>The user getting error message with invalid python code for Introduction page</u> | 4 | 0 | 0 | 4 | 0.003 s |
| 50 | | <u>User navigated to "Creating Linked List" page</u> | 3 | 0 | 0 | 3 | 0.003 s |
| 51 | | <u>User navigated to tryEditor page with Run button from Creating a Linked List page</u> | 3 | 0 | 0 | 3 | 0.004 s |
| 52 | | <u>The user run the code in tryEditor with valid input for Creating a Linked List page</u> | 4 | 0 | 0 | 4 | 0.003 s |
| 53 | | <u>The user getting error message with invalid python code for Creating a Linked List page</u> | 4 | 0 | 0 | 4 | 0.002 s |

| # | Feature Name | Scenario Name | T | P | F | S | Duration |
|----|--------------|--|---|---|---|---|----------|
| 54 | | <u>User navigated to "Types of linked list" page</u> | 3 | 0 | 0 | 3 | 0.002 s |

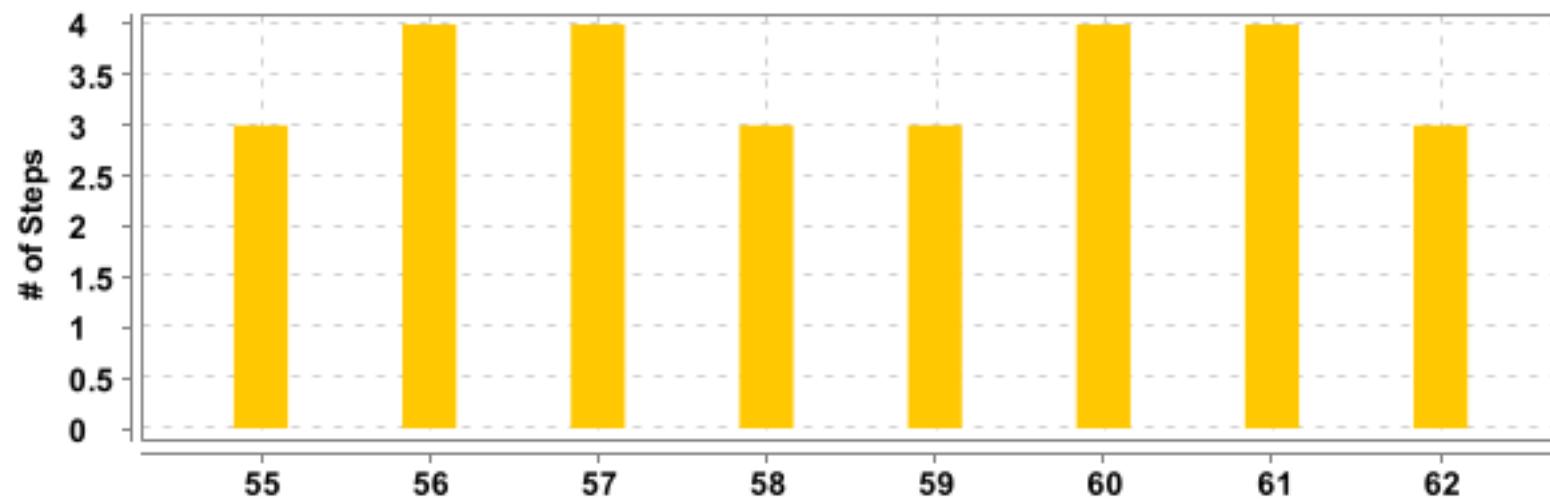


| # | Feature Name | Scenario Name | T | P | F | S | Duration |
|----|-----------------------------------|--|---|---|---|---|----------|
| 55 | <u>Testing Linked List Module</u> | <u>User navigated to tryEditor page with Run button from Types of Linked List</u> | 3 | 0 | 0 | 3 | 0.005 s |
| 56 | | <u>The user run the code in tryEditor with valid input for Creating a Linked List page</u> | 4 | 0 | 0 | 4 | 0.002 s |
| 57 | | <u>The user getting error message with invalid python code for Creating a Linked List page</u> | 4 | 0 | 0 | 4 | 0.003 s |
| 58 | | <u>user navigated to "Implementation linked list in python" page</u> | 3 | 0 | 0 | 3 | 0.002 s |
| 59 | | <u>User navigated to tryEditor page with Run button from Types of Linked List</u> | 3 | 0 | 0 | 3 | 0.003 s |
| 60 | | <u>The user run the code in tryEditor with valid input for Creating a Linked List page</u> | 4 | 0 | 0 | 4 | 0.004 s |
| 61 | | <u>The user getting error message with invalid python code for Creating a Linked List page</u> | 4 | 0 | 0 | 4 | 0.005 s |

| # | Feature Name | Scenario Name | <i>T</i> | <i>P</i> | <i>F</i> | <i>S</i> | Duration |
|----|---------------------|---|----------|----------|----------|----------|-----------------|
| 62 | | <u>user navigated to "Traversal" page</u> | 3 | 0 | 0 | 3 | 0.008 s |

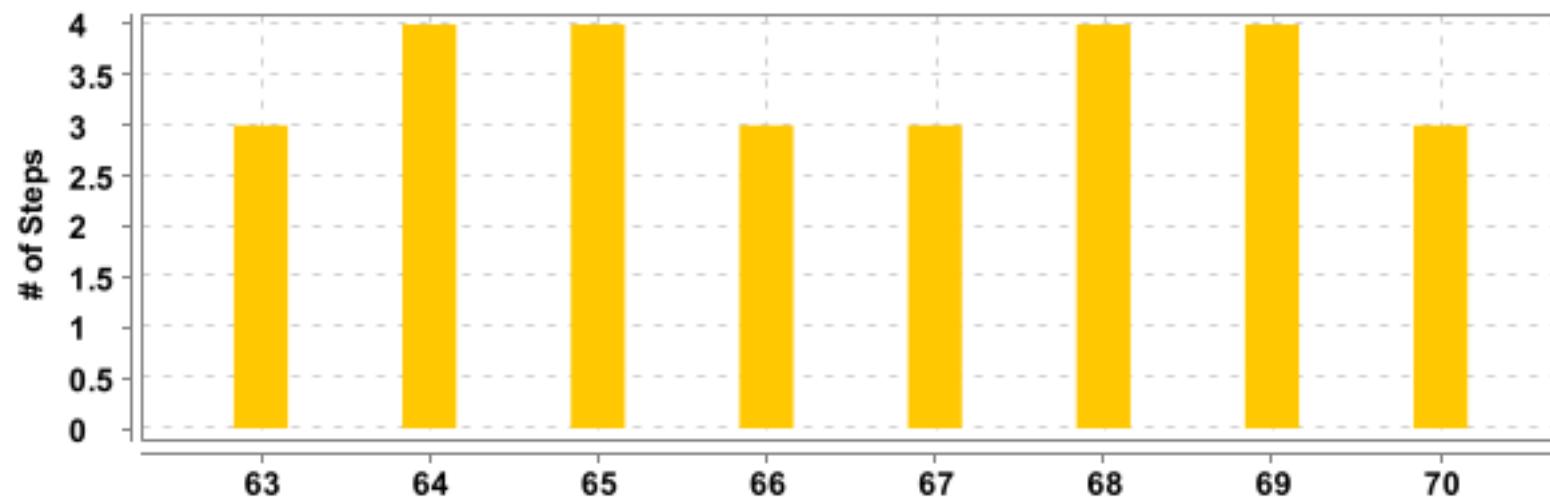


| # | Feature Name | Scenario Name | T | P | F | S | Duration |
|----|-----------------------------------|--|---|---|---|---|----------|
| 63 | <u>Testing Linked List Module</u> | <u>User navigated to tryEditor page with Run button from Types of Linked List</u> | 3 | 0 | 0 | 3 | 0.004 s |
| 64 | | <u>The user run the code in tryEditor with valid input for Creating a Linked List page</u> | 4 | 0 | 0 | 4 | 0.003 s |
| 65 | | <u>The user getting error message with invalid python code for Creating a Linked List page</u> | 4 | 0 | 0 | 4 | 0.003 s |
| 66 | | <u>user navigated to "Insertion" page</u> | 3 | 0 | 0 | 3 | 0.004 s |
| 67 | | <u>User navigated to tryEditor page with Run button from Types of Linked List</u> | 3 | 0 | 0 | 3 | 0.003 s |
| 68 | | <u>The user run the code in tryEditor with valid input for Creating a Linked List page</u> | 4 | 0 | 0 | 4 | 0.003 s |
| 69 | | <u>The user getting error message with invalid python code for Creating a Linked List page</u> | 4 | 0 | 0 | 4 | 0.003 s |

| # | Feature Name | Scenario Name | T | P | F | S | Duration |
|----|---------------------|--|----------|----------|----------|----------|-----------------|
| 70 | | <u>user navigated to "Deletion" page</u> | 3 | 0 | 0 | 3 | 0.002 s |

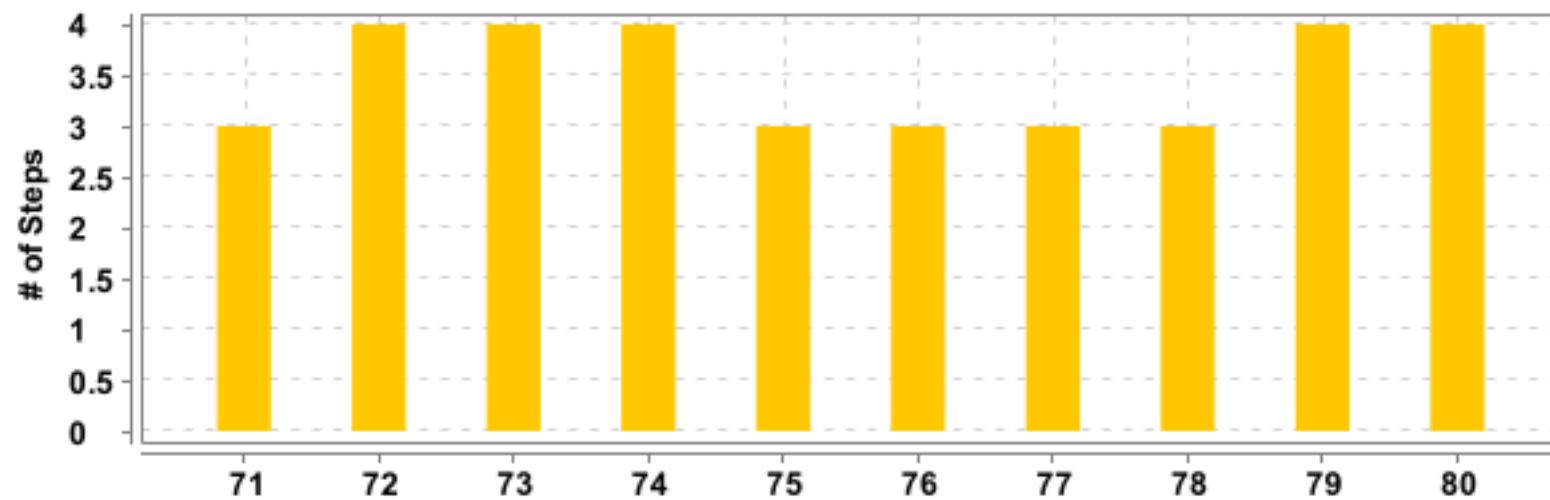


| # | Feature Name | Scenario Name | T | P | F | S | Duration |
|----|-------------------------------------|--|---|---|---|---|----------|
| 71 | <u>Testing Linked List Module</u> | <u>User navigated to tryEditor page with Run button from Types of Linked List</u> | 3 | 0 | 0 | 3 | 0.003 s |
| 72 | | <u>The user run the code in tryEditor with valid input for Creating a Linked List page</u> | 4 | 0 | 0 | 4 | 0.004 s |
| 73 | | <u>The user getting error message with invalid python code for Creating a Linked List page</u> | 4 | 0 | 0 | 4 | 0.003 s |
| 74 | | <u>The user validating "Practice Questions" page</u> | 4 | 0 | 0 | 4 | 0.003 s |
| 75 | <u>user log in with credentials</u> | <u>The user is able to signin with registered credential</u> | 3 | 0 | 0 | 3 | 0.003 s |
| 76 | | <u>The user is directed to "Stack" Page</u> | 3 | 0 | 0 | 3 | 0.003 s |
| 77 | | <u>The user is able to navigate "to operations in Stack page"</u> | 3 | 0 | 0 | 3 | 0.004 s |
| 78 | | <u>The user is able to navigate to a page having an tryEditor</u> | 3 | 0 | 0 | 3 | 0.004 s |
| 79 | | <u>The user is able to run code in tryEditor</u> | 4 | 0 | 0 | 4 | 0.003 s |

| # | Feature Name | Scenario Name | T | P | F | S | Duration |
|----|--------------|--|---|---|---|---|----------|
| 80 | | <u><i>The user is able to get the error message for invalid syntax</i></u> | 4 | 0 | 0 | 4 | 0.003 s |

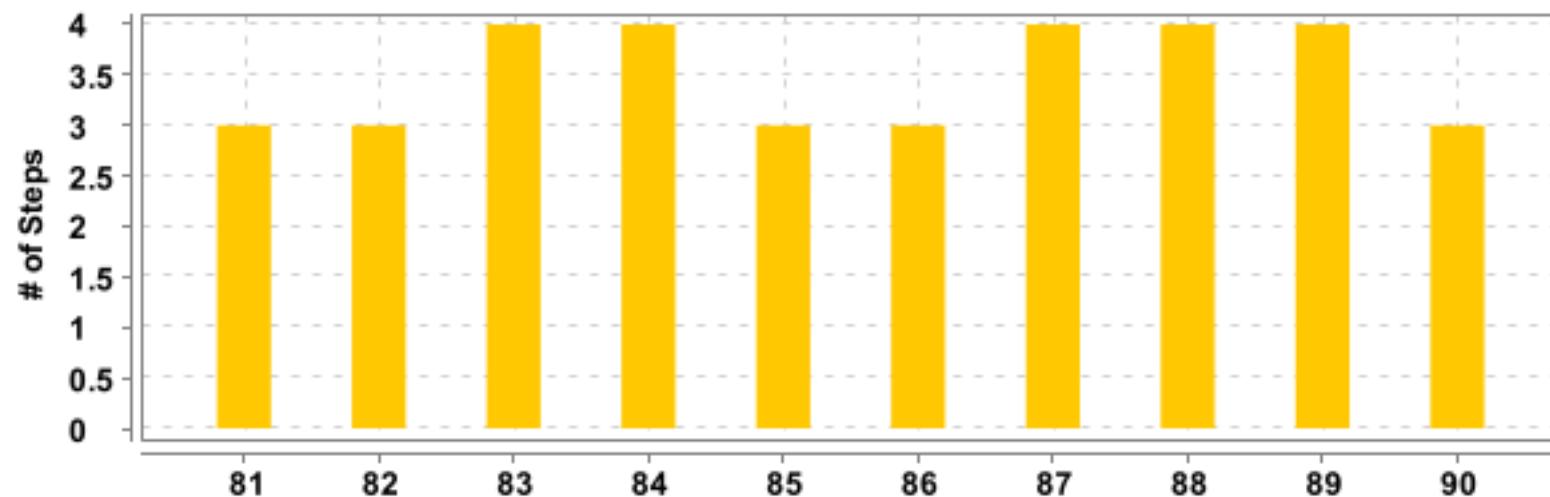


| # | Feature Name | Scenario Name | T | P | F | S | Duration |
|----|-------------------------------------|--|---|---|---|---|----------|
| 81 | <u>user log in with credentials</u> | <u>The user is able to navigate to "Implementation" Page</u> | 3 | 0 | 0 | 3 | 0.003 s |
| 82 | | <u>The user is able to navigate to Implementation page having an tryeditor</u> | 3 | 0 | 0 | 3 | 0.005 s |
| 83 | | <u>The user is able to run code in tryEditor</u> | 4 | 0 | 0 | 4 | 0.002 s |
| 84 | | <u>The user is able to get the error message for invalid syntax</u> | 4 | 0 | 0 | 4 | 0.003 s |
| 85 | | <u>The user is able to navigate to "Applications" Page</u> | 3 | 0 | 0 | 3 | 0.004 s |
| 86 | | <u>The user is able to navigate to Applications page having an tryeditor</u> | 3 | 0 | 0 | 3 | 0.004 s |
| 87 | | <u>The user is able to run code in tryEditor</u> | 4 | 0 | 0 | 4 | 0.004 s |
| 88 | | <u>The user is able to get the error message for invalid syntax</u> | 4 | 0 | 0 | 4 | 0.003 s |
| 89 | | <u>The user is able to navigate to "Practice Questions" in stack Page</u> | 4 | 0 | 0 | 4 | 0.003 s |

| # | Feature Name | Scenario Name | T | P | F | S | Duration |
|----|--------------|---|---|---|---|---|----------|
| 90 | | <u><i>The user is able to signin with registered credential</i></u> | 3 | 0 | 0 | 3 | 0.004 s |

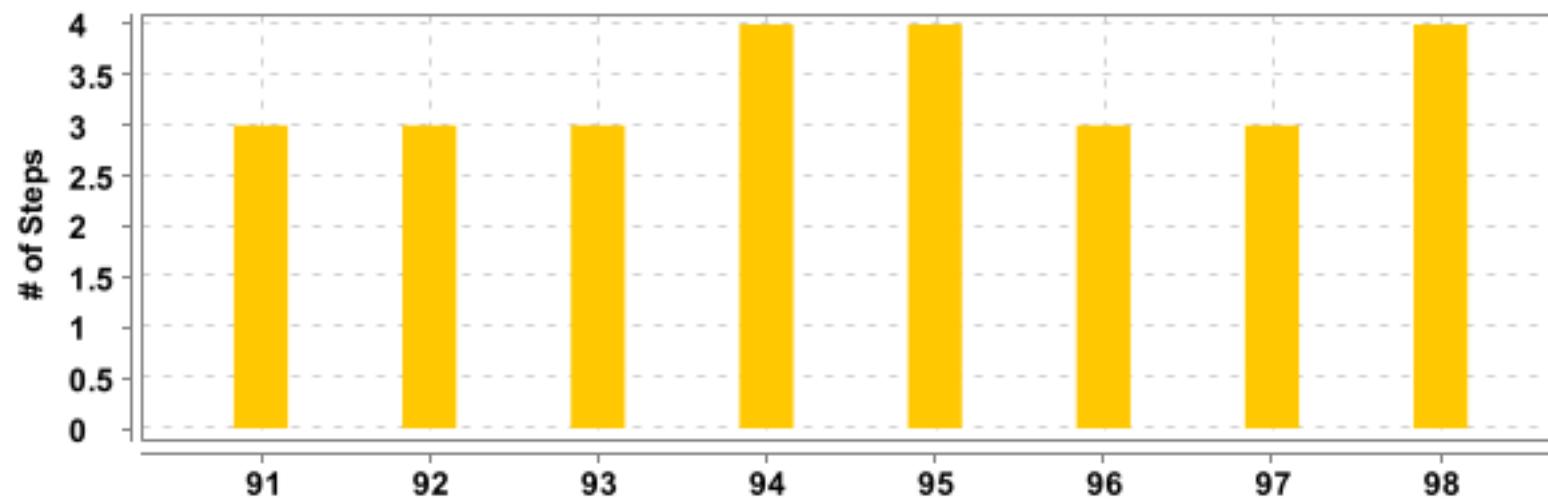


| # | Feature Name | Scenario Name | T | P | F | S | Duration |
|----|-------------------------------------|---|---|---|---|---|----------|
| 91 | <u>user log in with credentials</u> | <u>The user is directed to "Queue" Page</u> | 3 | 0 | 0 | 3 | 0.004 s |
| 92 | | <u>The user is able to navigate to Implementation of Queue in Python link page</u> | 3 | 0 | 0 | 3 | 0.004 s |
| 93 | | <u>The user should be directed to editor page with run button to test python code</u> | 3 | 0 | 0 | 3 | 0.003 s |
| 94 | | <u>The user is able to run code in Editor for Implementation of queue page</u> | 4 | 0 | 0 | 4 | 0.002 s |
| 95 | | <u>The user is presented with error message for invalid code in Editor for Implementation of queue page</u> | 4 | 0 | 0 | 4 | 0.002 s |
| 96 | | <u>The user is able to navigate to queue page and click on Implementation using collections deque link</u> | 3 | 0 | 0 | 3 | 0.002 s |
| 97 | | <u>The user should be directed to editor page with run button to test python code</u> | 3 | 0 | 0 | 3 | 0.003 s |

| # | Feature Name | Scenario Name | T | P | F | S | Duration |
|----|---------------------|--|----------|----------|----------|----------|-----------------|
| 98 | | <i>The user is able to run code in Editor for Implementation of queue page</i> | 4 | 0 | 0 | 4 | 0.002 s |

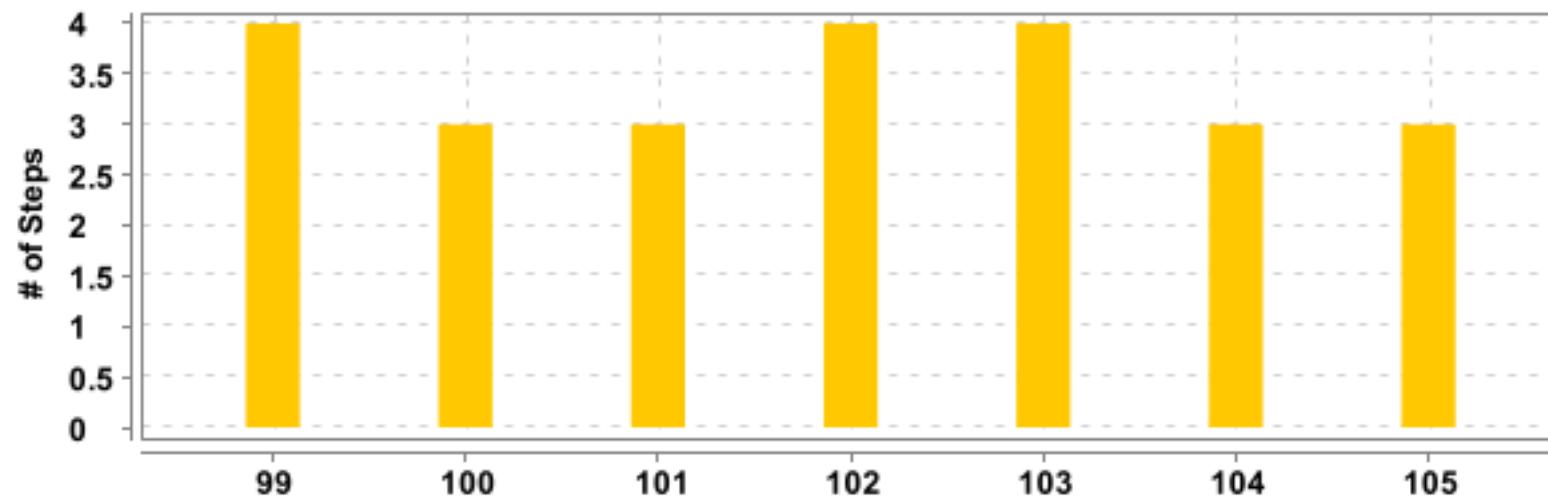


| # | Feature Name | Scenario Name | T | P | F | S | Duration |
|------|-------------------------------------|---|---|---|---|---|----------|
| 99 | <u>user log in with credentials</u> | <u>The user is presented with error message for invalid code in Editor for Implementation of queue page</u> | 4 | 0 | 0 | 4 | 0.003 s |
| 10-0 | | <u>The user is able to navigate to queue page and click on Implementation using arrays link</u> | 3 | 0 | 0 | 3 | 0.003 s |
| 10-1 | | <u>The user should be directed to editor page with run button to test python code</u> | 3 | 0 | 0 | 3 | 0.003 s |
| 10-2 | | <u>The user is able to run code in Editor for Implementation of queue page</u> | 4 | 0 | 0 | 4 | 0.004 s |
| 10-3 | | <u>The user is presented with error message for invalid code in Editor for Implementation of queue page</u> | 4 | 0 | 0 | 4 | 0.002 s |
| 10-4 | | <u>The user is able to navigate to queue page and click on Implementation using arrays link</u> | 3 | 0 | 0 | 3 | 0.002 s |
| 10-5 | | <u>The user should be directed to editor page with run button to test python code</u> | 3 | 0 | 0 | 3 | 0.003 s |

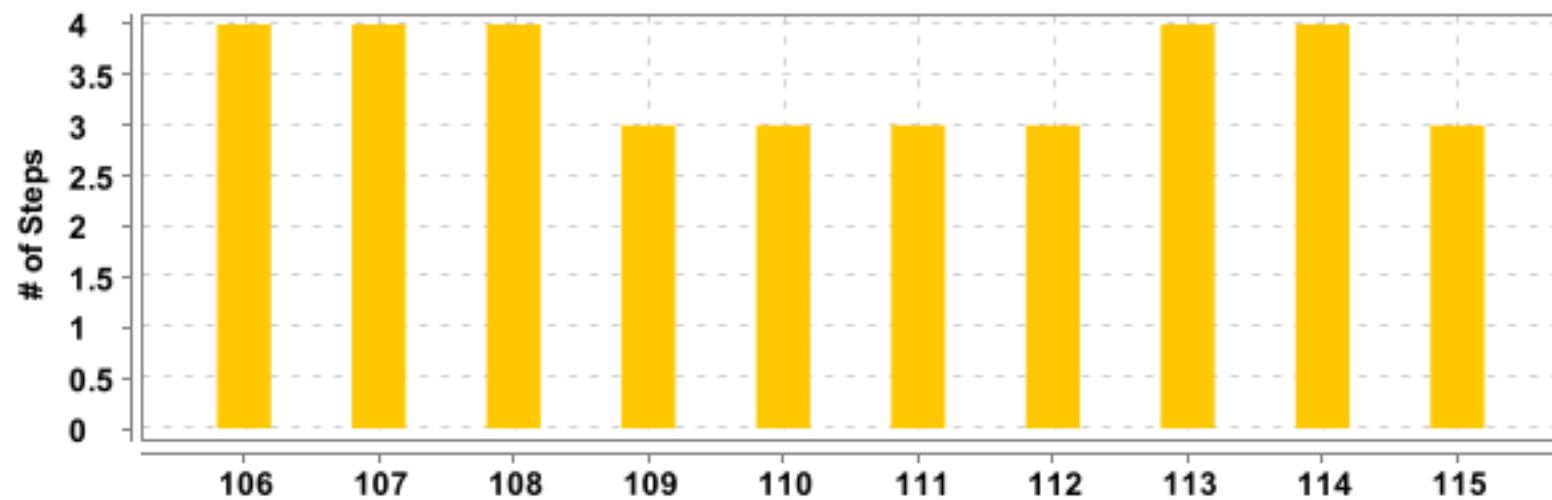


| # | Feature Name | Scenario Name | T | P | F | S | Duration |
|------|-------------------------------------|---|---|---|---|---|----------|
| 10-6 | <u>user log in with credentials</u> | <u>The user is able to run code in Editor for Implementation of queue page</u> | 4 | 0 | 0 | 4 | 0.002 s |
| 10-7 | | <u>The user is presented with error message for invalid code in Editor for Implementation of queue page</u> | 4 | 0 | 0 | 4 | 0.003 s |
| 10-8 | | <u>The user is able to navigate to QueueOp page and click on Practice Questions</u> | 4 | 0 | 0 | 4 | 0.003 s |
| 10-9 | <u>Testing the tree module</u> | <u>The user is able to signin with registered credential</u> | 3 | 0 | 0 | 3 | 0.002 s |
| 11-0 | | <u>User navigated to "Tree" page</u> | 3 | 0 | 0 | 3 | 0.001 s |
| 11-1 | | <u>The user is able to navigate to Overview of Trees page</u> | 3 | 0 | 0 | 3 | 0.003 s |
| 11-2 | | <u>The user is able to navigate to a page having an tryEditor</u> | 3 | 0 | 0 | 3 | 0.002 s |
| 11-3 | | <u>The user is able to run code in tryEditor</u> | 4 | 0 | 0 | 4 | 0.002 s |

| # | Feature Name | Scenario Name | T | P | F | S | Duration |
|------|---------------------|--|----------|----------|----------|----------|-----------------|
| 11-4 | | <u><i>The user is able to get the error message for invalid syntax</i></u> | 4 | 0 | 0 | 4 | 0.002 s |
| 11-5 | | <u><i>The user is able to navigate to Terminologies Page</i></u> | 3 | 0 | 0 | 3 | 0.003 s |

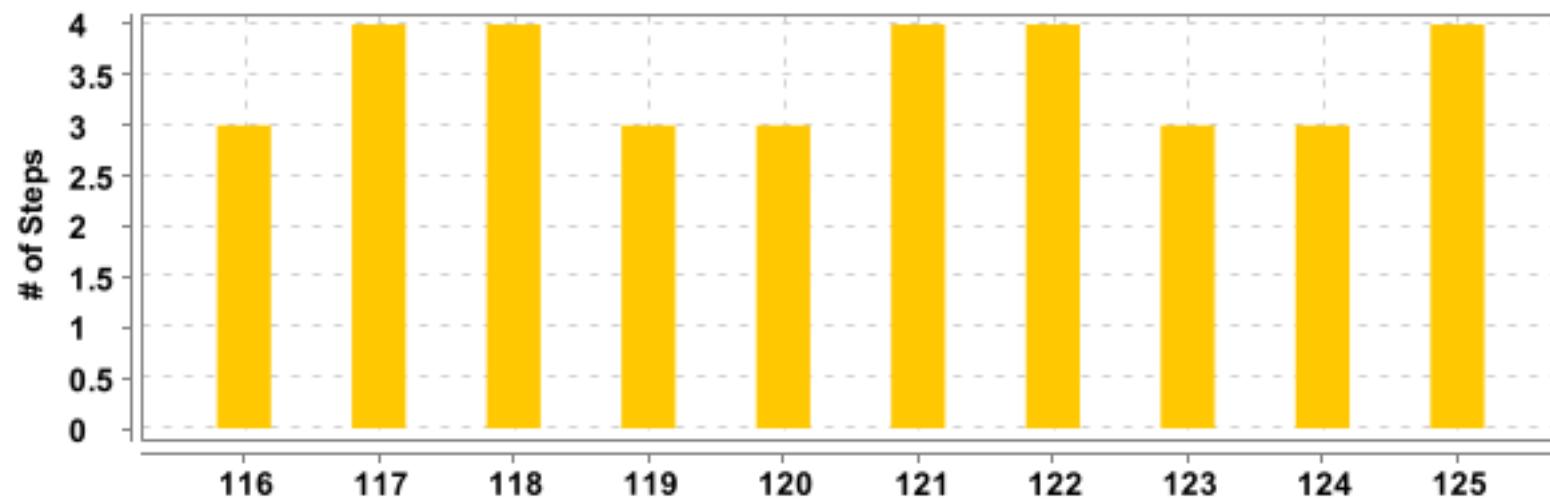


| # | Feature Name | Scenario Name | T | P | F | S | Duration |
|------|--------------------------------|---|---|---|---|---|----------|
| 11-6 | <u>Testing the tree module</u> | <u>The user is able to navigate to Terminologies page having an tryEditor</u> | 3 | 0 | 0 | 3 | 0.004 s |
| 11-7 | | <u>The user is able to run code in tryEditor</u> | 4 | 0 | 0 | 4 | 0.002 s |
| 11-8 | | <u>The user is able to get the error message for invalid syntax</u> | 4 | 0 | 0 | 4 | 0.003 s |
| 11-9 | | <u>The user is able to navigate to Types of Trees Page</u> | 3 | 0 | 0 | 3 | 0.002 s |
| 12-0 | | <u>The user is able to navigate to a page having an tryEditor</u> | 3 | 0 | 0 | 3 | 0.003 s |
| 12-1 | | <u>The user is able to run code in tryEditor</u> | 4 | 0 | 0 | 4 | 0.004 s |
| 12-2 | | <u>The user is able to get the error message for invalid syntax</u> | 4 | 0 | 0 | 4 | 0.004 s |
| 12-3 | | <u>The user is able to navigate to Tree Traversals Page</u> | 3 | 0 | 0 | 3 | 0.003 s |
| 12-4 | | <u>The user is able to navigate to a page having an tryEditor</u> | 3 | 0 | 0 | 3 | 0.002 s |

| # | Feature Name | Scenario Name | T | P | F | S | Duration |
|------|--------------|---|---|---|---|---|----------|
| 12-5 | | <u><i>The user is able to run code in tryEditor</i></u> | 4 | 0 | 0 | 4 | 0.003 s |

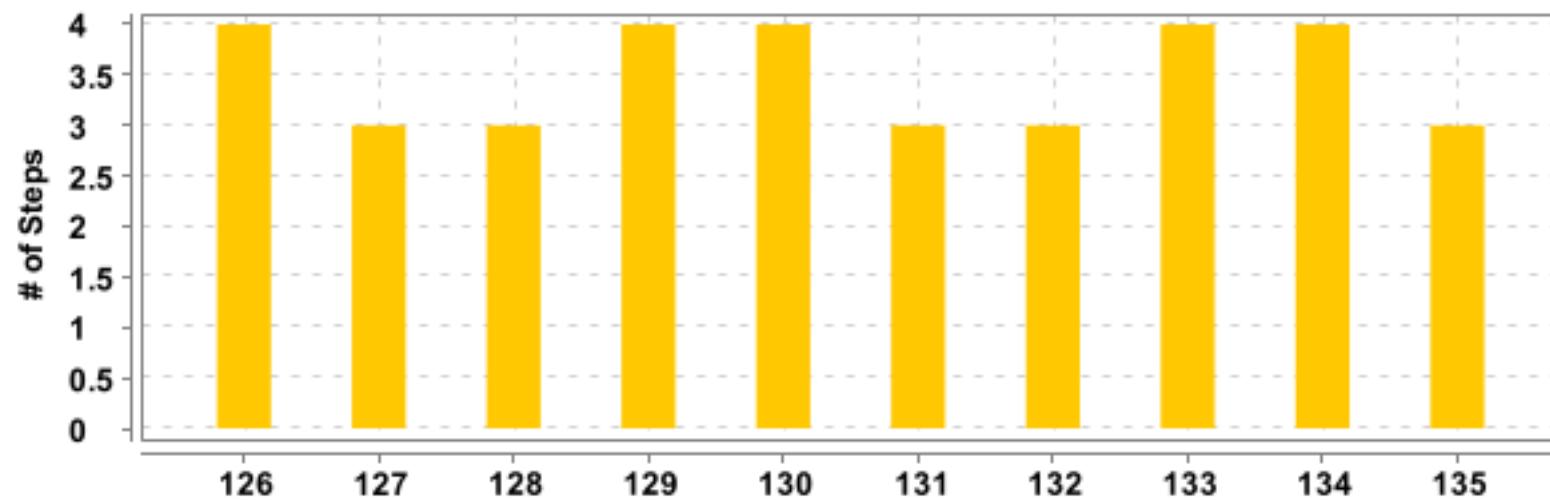


| # | Feature Name | Scenario Name | T | P | F | S | Duration |
|------|--------------------------------|---|---|---|---|---|----------|
| 12-6 | <u>Testing the tree module</u> | <u>The user is able to get the error message for invalid syntax</u> | 4 | 0 | 0 | 4 | 0.003 s |
| 12-7 | | <u>The user is able to navigate to "Traversals illustration" Page</u> | 3 | 0 | 0 | 3 | 0.002 s |
| 12-8 | | <u>The user is able to navigate to a Page having an tryEditor</u> | 3 | 0 | 0 | 3 | 0.004 s |
| 12-9 | | <u>The user is able to run code in tryEditor</u> | 4 | 0 | 0 | 4 | 0.003 s |
| 13-0 | | <u>The user is able to get the error message for invalid syntax</u> | 4 | 0 | 0 | 4 | 0.002 s |
| 13-1 | | <u>The user is able to navigate to "Binary trees" Page</u> | 3 | 0 | 0 | 3 | 0.002 s |
| 13-2 | | <u>The user is able to navigate to a page having an tryEditor</u> | 3 | 0 | 0 | 3 | 0.002 s |
| 13-3 | | <u>The user is able to run code in tryEditor</u> | 4 | 0 | 0 | 4 | 0.001 s |
| 13-4 | | <u>The user is able to get the error message for invalid syntax</u> | 4 | 0 | 0 | 4 | 0.002 s |

| # | Feature Name | Scenario Name | T | P | F | S | Duration |
|------|---------------------|--|----------|----------|----------|----------|-----------------|
| 13-5 | | <u><i>The user is able to navigate to "Types of Binary trees" Page</i></u> | 3 | 0 | 0 | 3 | 0.003 s |

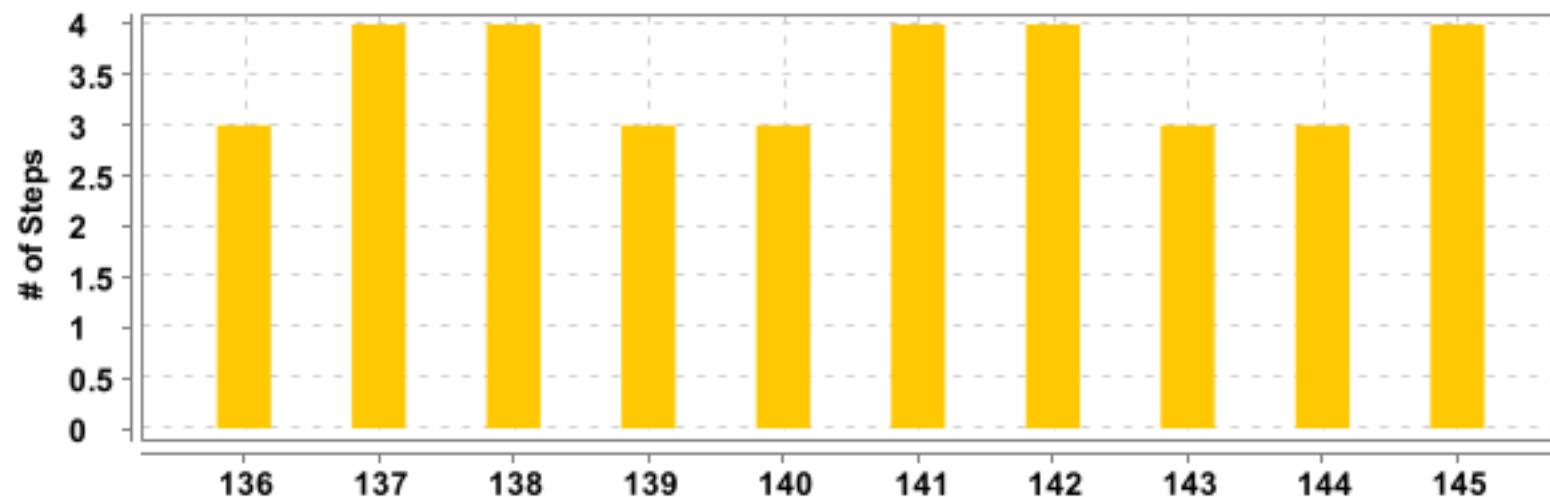


| # | Feature Name | Scenario Name | T | P | F | S | Duration |
|------|--------------------------------|--|---|---|---|---|----------|
| 13-6 | <u>Testing the tree module</u> | <u>The user is able to navigate to a page having an tryEditor</u> | 3 | 0 | 0 | 3 | 0.001 s |
| 13-7 | | <u>The user is able to run code in tryEditor</u> | 4 | 0 | 0 | 4 | 0.001 s |
| 13-8 | | <u>The user is able to get the error message for invalid syntax</u> | 4 | 0 | 0 | 4 | 0.002 s |
| 13-9 | | <u>The user is able to navigate to Implementation in Python Page</u> | 3 | 0 | 0 | 3 | 0.002 s |
| 14-0 | | <u>The user is able to navigate to a page having an tryEditor</u> | 3 | 0 | 0 | 3 | 0.002 s |
| 14-1 | | <u>The user is able to run code in tryEditor</u> | 4 | 0 | 0 | 4 | 0.002 s |
| 14-2 | | <u>The user is able to get the error message for invalid syntax</u> | 4 | 0 | 0 | 4 | 0.003 s |
| 14-3 | | <u>The user is able to navigate to binary tree traversals Page</u> | 3 | 0 | 0 | 3 | 0.002 s |
| 14-4 | | <u>The user is able to navigate to a page having an tryEditor</u> | 3 | 0 | 0 | 3 | 0.003 s |

| # | Feature Name | Scenario Name | T | P | F | S | Duration |
|------|--------------|---|---|---|---|---|----------|
| 14-5 | | <u><i>The user is able to run code in tryEditor</i></u> | 4 | 0 | 0 | 4 | 0.001 s |

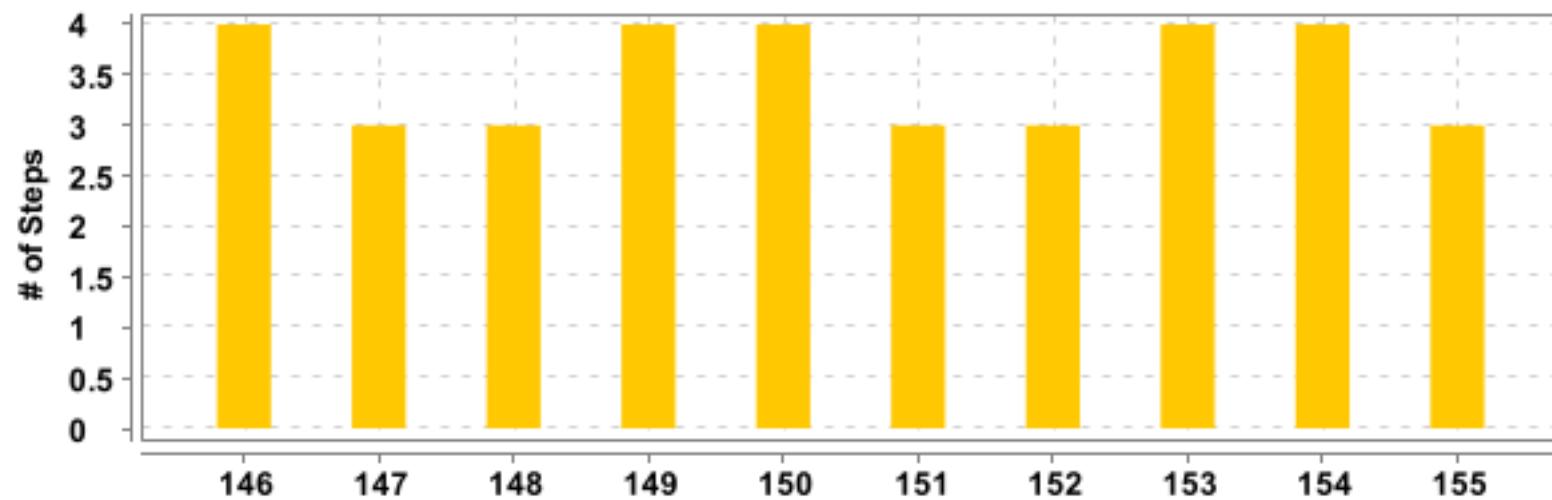


| # | Feature Name | Scenario Name | T | P | F | S | Duration |
|------|--------------------------------|--|---|---|---|---|----------|
| 14-6 | <u>Testing the tree module</u> | <u>The user is able to get the error message for invalid syntax</u> | 4 | 0 | 0 | 4 | 0.002 s |
| 14-7 | | <u>The user is able to navigate to Implementation of Binary Trees Page</u> | 3 | 0 | 0 | 3 | 0.001 s |
| 14-8 | | <u>The user is able to navigate to a page having an tryEditor</u> | 3 | 0 | 0 | 3 | 0.002 s |
| 14-9 | | <u>The user is able to run code in tryEditor</u> | 4 | 0 | 0 | 4 | 0.002 s |
| 15-0 | | <u>The user is able to get the error message for invalid syntax</u> | 4 | 0 | 0 | 4 | 0.002 s |
| 15-1 | | <u>The user is able to navigate to Applications of Binary Trees Page</u> | 3 | 0 | 0 | 3 | 0.002 s |
| 15-2 | | <u>The user is able to navigate to a page having an tryEditor</u> | 3 | 0 | 0 | 3 | 0.001 s |
| 15-3 | | <u>The user is able to run code in tryEditor</u> | 4 | 0 | 0 | 4 | 0.002 s |

| # | Feature Name | Scenario Name | T | P | F | S | Duration |
|------|---------------------|--|----------|----------|----------|----------|-----------------|
| 15-4 | | <u><i>The user is able to get the error message for invalid syntax</i></u> | 4 | 0 | 0 | 4 | 0.001 s |
| 15-5 | | <u><i>The user is able to navigate to "Binary Search Trees" Page</i></u> | 3 | 0 | 0 | 3 | 0.002 s |

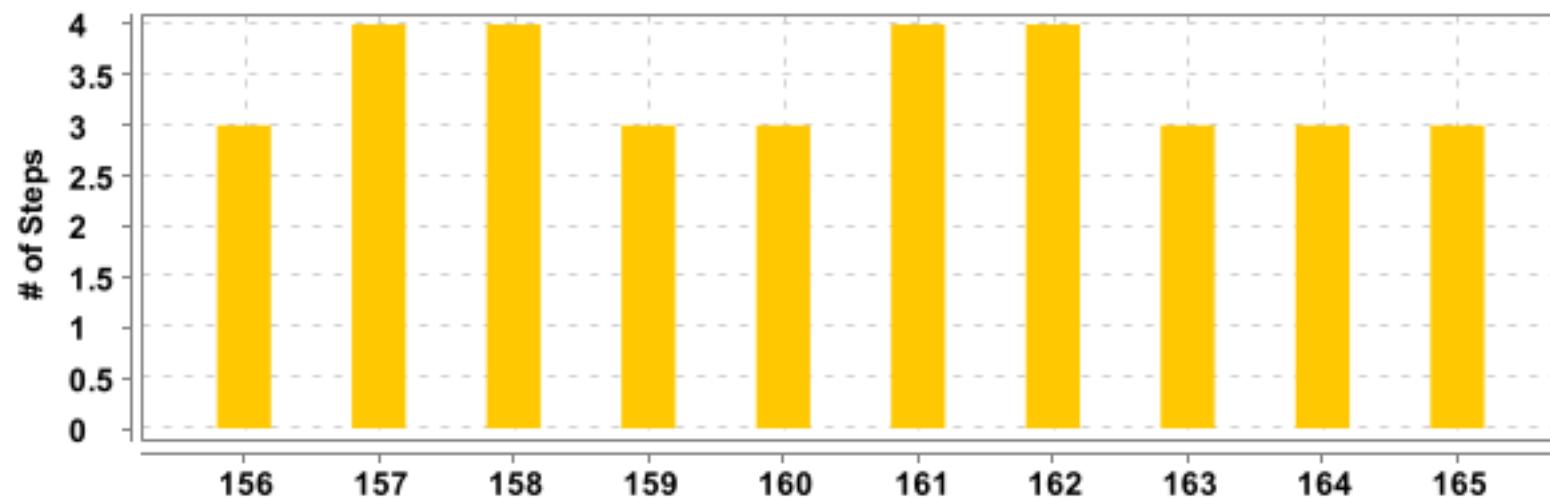

| # | Feature Name | Scenario Name | T | P | F | S | Duration |
|------|--------------------------------|---|---|---|---|---|----------|
| 15-6 | <u>Testing the tree module</u> | <u>The user is able to navigate to a page having an tryEditor</u> | 3 | 0 | 0 | 3 | 0.002 s |
| 15-7 | | <u>The user is able to run code in tryEditor</u> | 4 | 0 | 0 | 4 | 0.002 s |
| 15-8 | | <u>The user is able to get the error message for invalid syntax</u> | 4 | 0 | 0 | 4 | 0.002 s |
| 15-9 | | <u>The user is able to navigate to "Implementation of BST" Page</u> | 3 | 0 | 0 | 3 | 0.002 s |
| 16-0 | | <u>The user is able to navigate to a page having an tryEditor</u> | 3 | 0 | 0 | 3 | 0.003 s |
| 16-1 | | <u>The user is able to run code in tryEditor</u> | 4 | 0 | 0 | 4 | 0.001 s |
| 16-2 | | <u>The user is able to get the error message for invalid syntax</u> | 4 | 0 | 0 | 4 | 0.001 s |
| 16-3 | | <u>The user validating Practice Questions page</u> | 3 | 0 | 0 | 3 | 0.001 s |
| 16-4 | <u>Exploring Graph module</u> | <u>User navigated to "Graph" page</u> | 3 | 0 | 0 | 3 | 0.002 s |

| # | Feature Name | Scenario Name | T | P | F | S | Duration |
|------|--------------|--|---|---|---|---|----------|
| 16-5 | | <u><i>The user is able to navigate to Graph page</i></u> | 3 | 0 | 0 | 3 | 0.002 s |

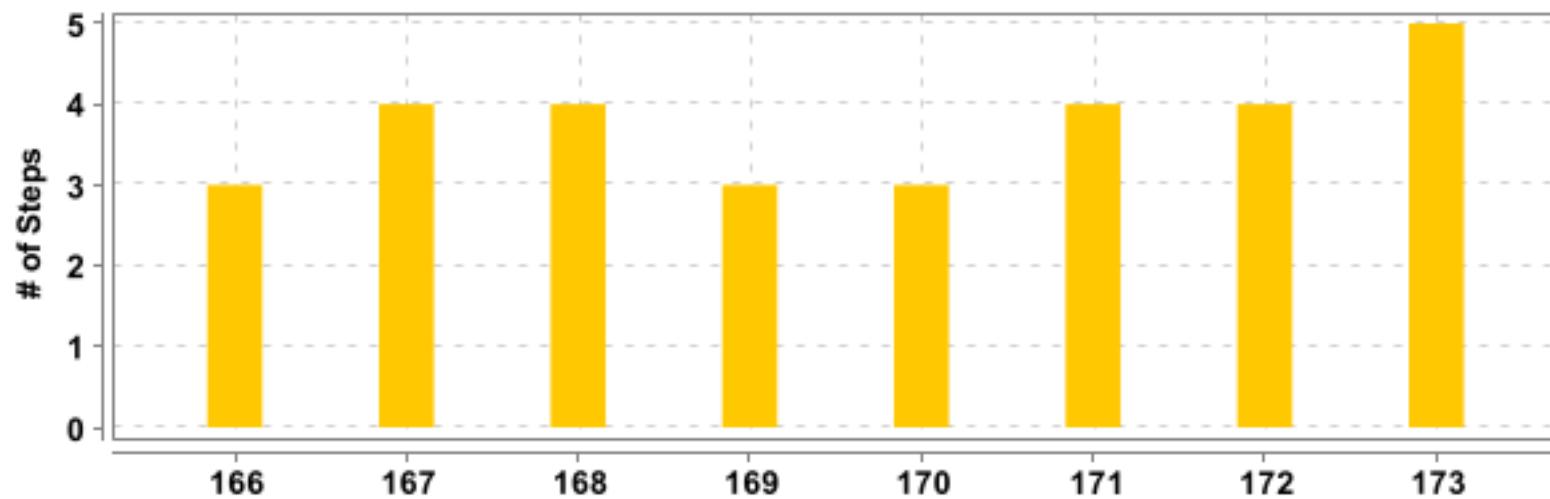


| # | Feature Name | Scenario Name | T | P | F | S | Duration |
|------|-------------------------------|---|---|---|---|---|----------|
| 16-6 | <u>Exploring Graph module</u> | <u>The user should be directed to editor page with run button to test python code</u> | 3 | 0 | 0 | 3 | 0.001 s |
| 16-7 | | <u>The user run the code in tryEditor with valid input for Graph page</u> | 4 | 0 | 0 | 4 | 0.002 s |
| 16-8 | | <u>The user getting error message with invalid python code for Graph page</u> | 4 | 0 | 0 | 4 | 0.002 s |
| 16-9 | | <u>The user is able to navigate to Graph page</u> | 3 | 0 | 0 | 3 | 0.001 s |
| 17-0 | | <u>User navigated to tryEditor page with Run button from Graph page</u> | 3 | 0 | 0 | 3 | 0.002 s |
| 17-1 | | <u>The user run the code in tryEditor with valid input for Graph page</u> | 4 | 0 | 0 | 4 | 0.003 s |
| 17-2 | | <u>The user getting error message with invalid python code for Graph page</u> | 4 | 0 | 0 | 4 | 0.002 s |

| # | Feature Name | Scenario Name | T | P | F | S | Duration |
|------|--------------|---|---|---|---|---|----------|
| 17-3 | | <u><i>The user validating "Practice Questions" page</i></u> | 5 | 0 | 0 | 5 | 0.002 s |

portal page



Launching portal page and getting started

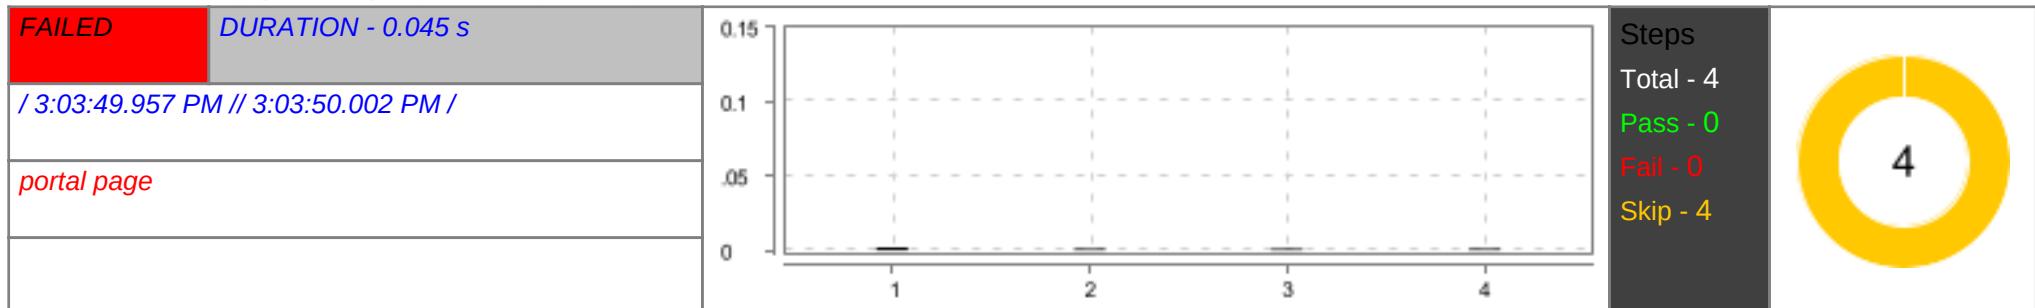


| # | Step / Hook Details | Status | Duration |
|---|---|---------|----------|
| | BEFORE - appHooks.ApplicationHooks.setup() java.lang.NullPointerException: Cannot invoke "org.openqa.selenium.WebDriver.manage()" because the return value of "com.qa.factory.DriverFactory.getDriver()" is null at com.qa.factory.DriverFactory.init_driver(DriverFactory.java:47) at com.qa.factory.DriverFactory.setupdriver(DriverFactory.java:71) at appHooks.ApplicationHooks.setup(ApplicationHooks.java:33) | FAILED | 0.015 s |
| 1 | Given user opens portal page | SKIPPED | 0.002 s |
| 2 | When user clicks getting started button | SKIPPED | 0.001 s |
| 3 | Then user should go to home page | SKIPPED | 0.001 s |
| 4 | And page title should be "NumpyNinja" | SKIPPED | 0.001 s |
| | AFTER - appHooks.ApplicationHooks.tearDown(io.cucumber.java.Scenario) java.lang.NullPointerException: Cannot invoke "org.openqa.selenium.TakesScreenshot.getScreenshotAs(org.openqa.selenium.OutputType)" because the return value of "com.qa.factory.DriverFactory.getDriver()" is null at appHooks.ApplicationHooks.tearDown(ApplicationHooks.java:59) | FAILED | 0.004 s |

User launch home page of an dsalgo project




User is on Home page and click getstarted link on home page without sign in

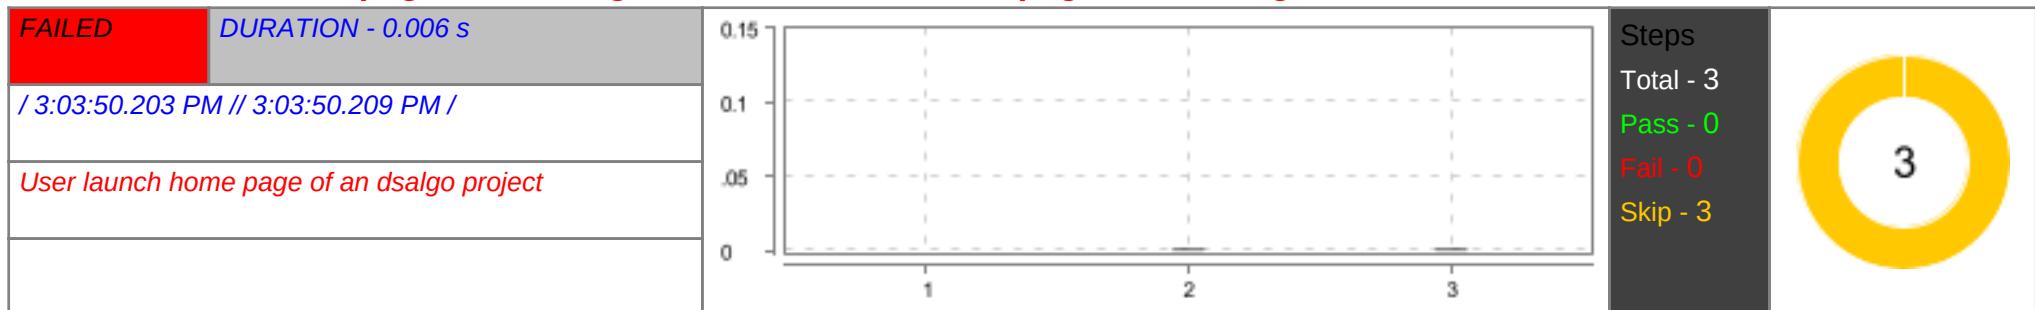


| # | Step / Hook Details | Status | Duration |
|---|---|---------|----------|
| | BEFORE - appHooks.ApplicationHooks.setup() java.lang.NullPointerException: Cannot invoke "org.openqa.selenium.WebDriver.manage()" because the return value of "com.qa.factory.DriverFactory.getDriver()" is null at com.qa.factory.DriverFactory.init_driver(DriverFactory.java:47) at com.qa.factory.DriverFactory.setupdriver(DriverFactory.java:71) at appHooks.ApplicationHooks.setup(ApplicationHooks.java:33) | FAILED | 0.002 s |
| 1 | Given The user opens Home Page | SKIPPED | 0.000 s |
| 2 | When The user clicks on Get Started link on homepage "Datastructures" without login | SKIPPED | 0.001 s |
| 3 | Then The user get warning message "You are not logged in" | SKIPPED | 0.001 s |
| | AFTER - appHooks.ApplicationHooks.tearDown(io.cucumber.java.Scenario) java.lang.NullPointerException: Cannot invoke "org.openqa.selenium.TakesScreenshot.getScreenshotAs(org.openqa.selenium.OutputType)" because the return value of "com.qa.factory.DriverFactory.getDriver()" is null at appHooks.ApplicationHooks.tearDown(ApplicationHooks.java:59) | FAILED | 0.001 s |

User is on Home page and click getstarted link on home page without sign in

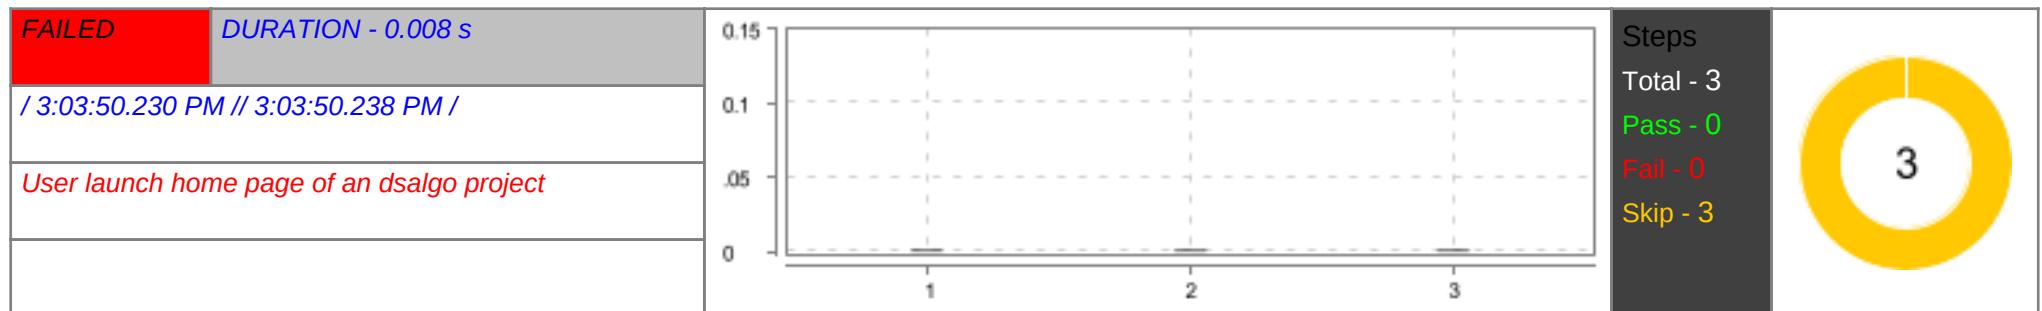

| # | Step / Hook Details | Status | Duration |
|---|---|---------|----------|
| | BEFORE - appHooks.ApplicationHooks.setup() java.lang.NullPointerException: Cannot invoke "org.openqa.selenium.WebDriver.manage()" because the return value of "com.qa.factory.DriverFactory.getDriver()" is null at com.qa.factory.DriverFactory.init_driver(DriverFactory.java:47) at com.qa.factory.DriverFactory.setupdriver(DriverFactory.java:71) at appHooks.ApplicationHooks.setup(ApplicationHooks.java:33) | FAILED | 0.002 s |
| 1 | Given The user opens Home Page | SKIPPED | 0.001 s |
| 2 | When The user clicks on Get Started link on homepage "Arrays" without login | SKIPPED | 0.001 s |
| 3 | Then The user get warning message "You are not logged in" | SKIPPED | 0.001 s |
| | AFTER - appHooks.ApplicationHooks.tearDown(io.cucumber.java.Scenario) java.lang.NullPointerException: Cannot invoke "org.openqa.selenium.TakesScreenshot.getScreenshotAs(org.openqa.selenium.OutputType)" because the return value of "com.qa.factory.DriverFactory.getDriver()" is null at appHooks.ApplicationHooks.tearDown(ApplicationHooks.java:59) | FAILED | 0.001 s |


User is on Home page and click getstarted link on home page without sign in

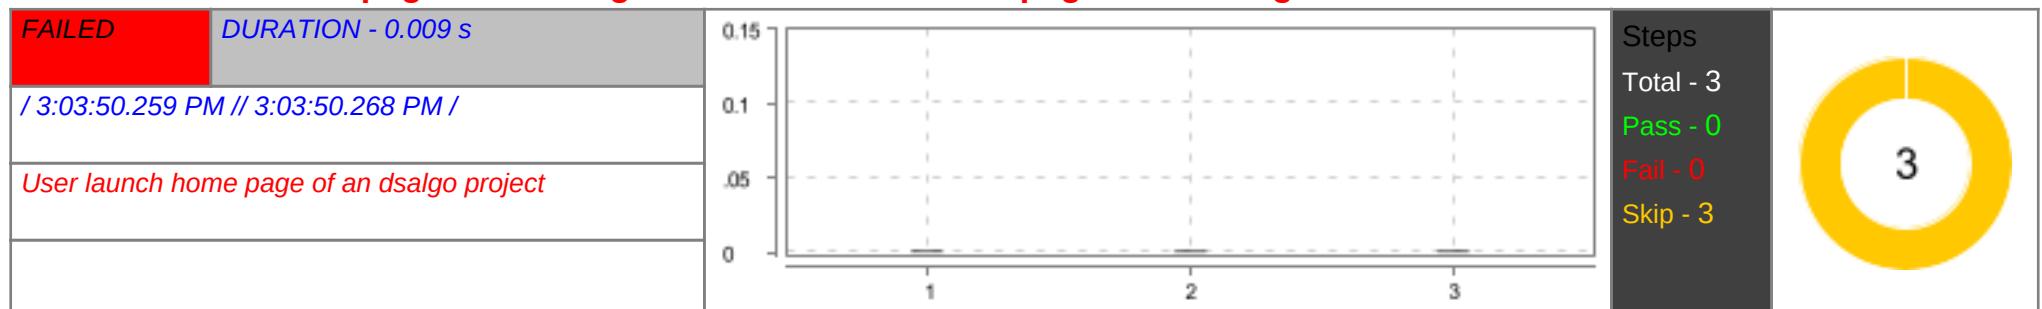

| # | Step / Hook Details | Status | Duration |
|---|--|--------|----------|
| | BEFORE - appHooks.ApplicationHooks.setup() | FAILED | 0.002 s |

| # | Step / Hook Details | Status | Duration |
|---|---|---------|----------|
| | java.lang.NullPointerException: Cannot invoke "org.openqa.selenium.WebDriver.manage()" because the return value of "com.qa.factory.DriverFactory.getDriver()" is null at com.qa.factory.DriverFactory.init_driver(DriverFactory.java:47) at com.qa.factory.DriverFactory.setupdriver(DriverFactory.java:71) at appHooks.ApplicationHooks.setup(ApplicationHooks.java:33) | | |
| 1 | Given The user opens Home Page | SKIPPED | 0.001 s |
| 2 | When The user clicks on Get Started link on homepage "Linkedlist" without login | SKIPPED | 0.001 s |
| 3 | Then The user get warning message "You are not logged in" | SKIPPED | 0.001 s |
| | AFTER - appHooks.ApplicationHooks.tearDown(io.cucumber.java.Scenario) java.lang.NullPointerException: Cannot invoke "org.openqa.selenium.TakesScreenshot.getScreenshotAs(org.openqa.selenium.OutputType)" because the return value of "com.qa.factory.DriverFactory.getDriver()" is null at appHooks.ApplicationHooks.tearDown(ApplicationHooks.java:59) | FAILED | 0.001 s |


User is on Home page and click getstarted link on home page without sign in

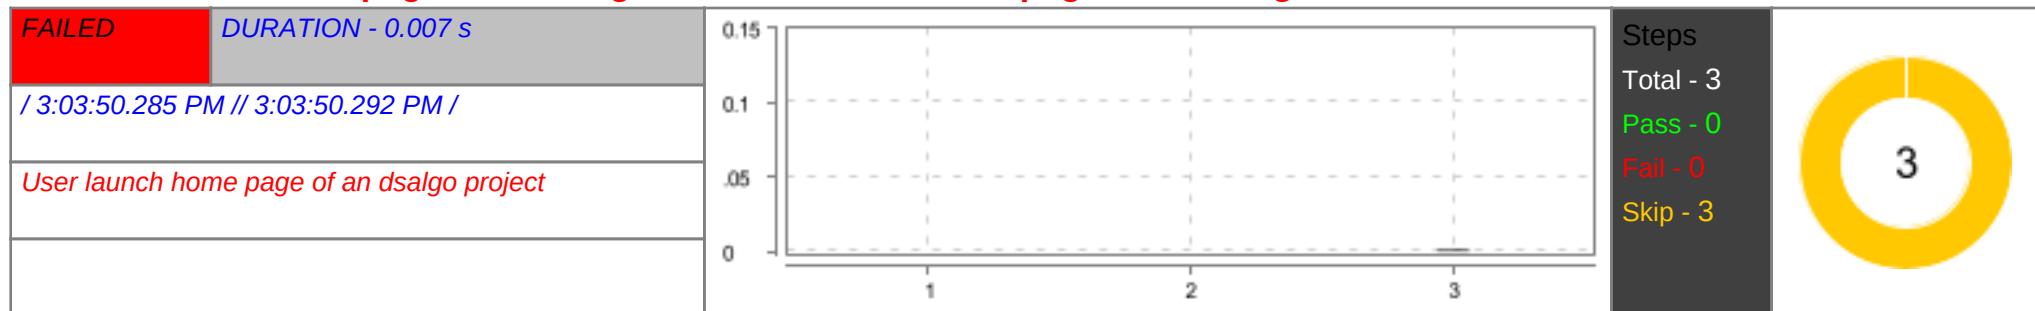

| # | Step / Hook Details | Status | Duration |
|---|---|---------|----------|
| | BEFORE - appHooks.ApplicationHooks.setup() java.lang.NullPointerException: Cannot invoke "org.openqa.selenium.WebDriver.manage()" because the return value of "com.qa.factory.DriverFactory.getDriver()" is null at com.qa.factory.DriverFactory.init_driver(DriverFactory.java:47) at com.qa.factory.DriverFactory.setupdriver(DriverFactory.java:71) at appHooks.ApplicationHooks.setup(ApplicationHooks.java:33) | FAILED | 0.001 s |
| 1 | Given The user opens Home Page | SKIPPED | 0.000 s |
| 2 | When The user clicks on Get Started link on homepage "Stack" without login | SKIPPED | 0.000 s |
| 3 | Then The user get warning message "You are not logged in" | SKIPPED | 0.001 s |
| | AFTER - appHooks.ApplicationHooks.tearDown(io.cucumber.java.Scenario) java.lang.NullPointerException: Cannot invoke "org.openqa.selenium.TakesScreenshot.getScreenshotAs(org.openqa.selenium.OutputType)" | FAILED | 0.002 s |


| # | Step / Hook Details | Status | Duration |
|---|---|--------|----------|
| | because the return value of "com.qa.factory.DriverFactory.getDriver()" is null at appHooks.ApplicationHooks.tearDown(ApplicationHooks.java:59) | | |

User is on Home page and click getstarted link on home page without sign in

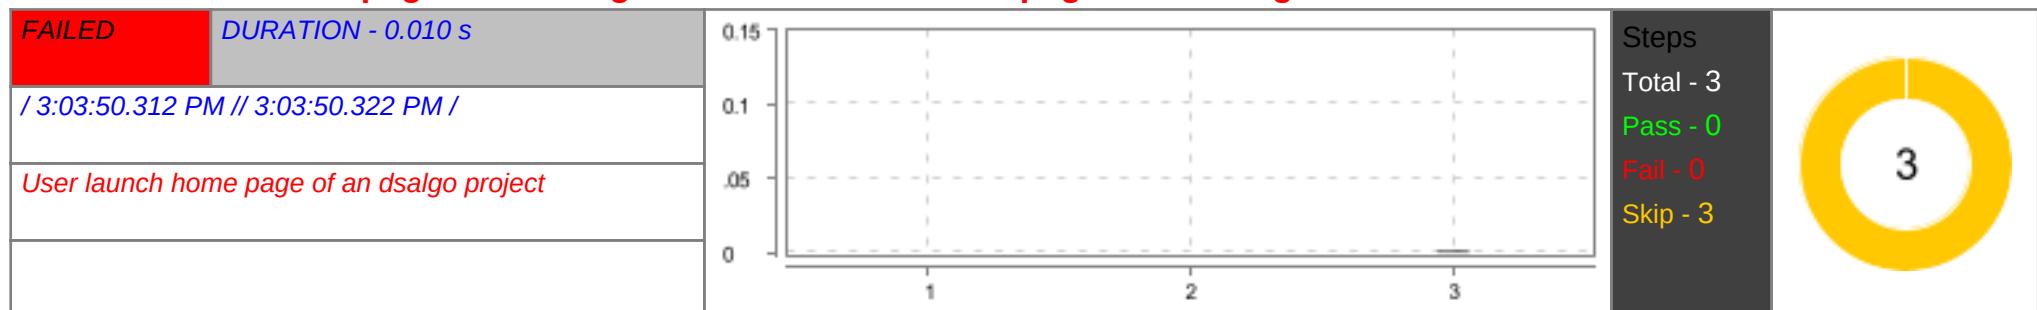


| # | Step / Hook Details | Status | Duration |
|---|---|---------|----------|
| | BEFORE - appHooks.ApplicationHooks.setup() java.lang.NullPointerException: Cannot invoke "org.openqa.selenium.WebDriver.manage()" because the return value of "com.qa.factory.DriverFactory.getDriver()" is null at com.qa.factory.DriverFactory.init_driver(DriverFactory.java:47) at com.qa.factory.DriverFactory.setupdriver(DriverFactory.java:71) at appHooks.ApplicationHooks.setup(ApplicationHooks.java:33) | FAILED | 0.002 s |
| 1 | Given The user opens Home Page | SKIPPED | 0.000 s |
| 2 | When The user clicks on Get Started link on homepage "Queue" without login | SKIPPED | 0.000 s |
| 3 | Then The user get warning message "You are not logged in" | SKIPPED | 0.001 s |
| | AFTER - appHooks.ApplicationHooks.tearDown(io.cucumber.java.Scenario) java.lang.NullPointerException: Cannot invoke "org.openqa.selenium.TakesScreenshot.getScreenshotAs(org.openqa.selenium.OutputType)" because the return value of "com.qa.factory.DriverFactory.getDriver()" is null at appHooks.ApplicationHooks.tearDown(ApplicationHooks.java:59) | FAILED | 0.001 s |

User is on Home page and click getstarted link on home page without sign in

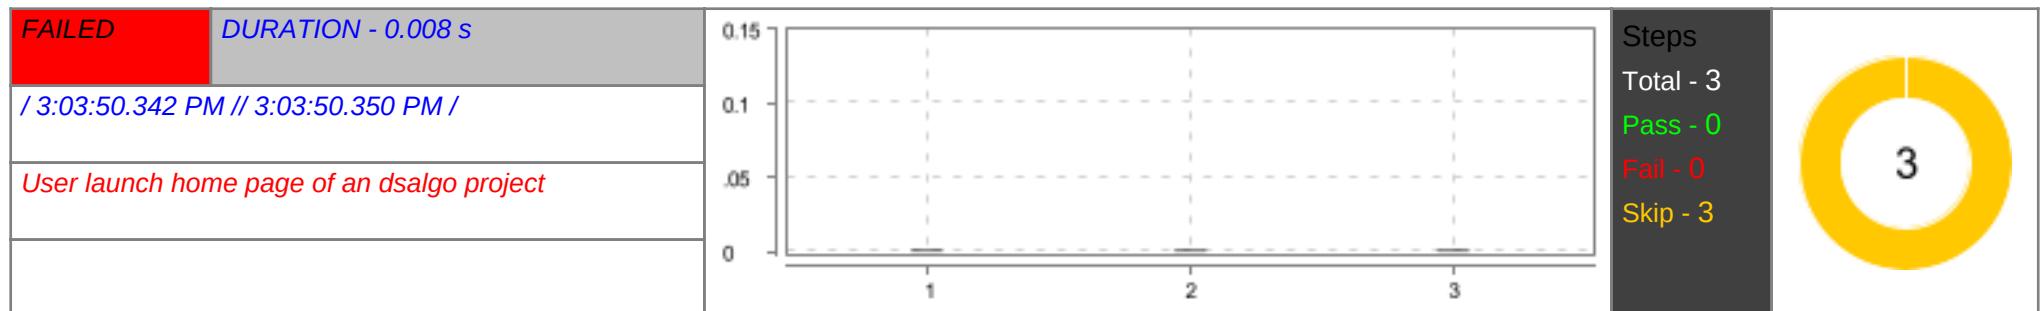

| # | Step / Hook Details | Status | Duration |
|---|---|---------|----------|
| | BEFORE - appHooks.ApplicationHooks.setup() java.lang.NullPointerException: Cannot invoke "org.openqa.selenium.WebDriver.manage()" because the return value of "com.qa.factory.DriverFactory.getDriver()" is null at com.qa.factory.DriverFactory.init_driver(DriverFactory.java:47) at com.qa.factory.DriverFactory.setupdriver(DriverFactory.java:71) at appHooks.ApplicationHooks.setup(ApplicationHooks.java:33) | FAILED | 0.003 s |
| 1 | Given The user opens Home Page | SKIPPED | 0.001 s |
| 2 | When The user clicks on Get Started link on homepage "Tree" without login | SKIPPED | 0.001 s |
| 3 | Then The user get warning message "You are not logged in" | SKIPPED | 0.001 s |
| | AFTER - appHooks.ApplicationHooks.tearDown(io.cucumber.java.Scenario) java.lang.NullPointerException: Cannot invoke "org.openqa.selenium.TakesScreenshot.getScreenshotAs(org.openqa.selenium.OutputType)" because the return value of "com.qa.factory.DriverFactory.getDriver()" is null at appHooks.ApplicationHooks.tearDown(ApplicationHooks.java:59) | FAILED | 0.000 s |


User is on Home page and click getstarted link on home page without sign in

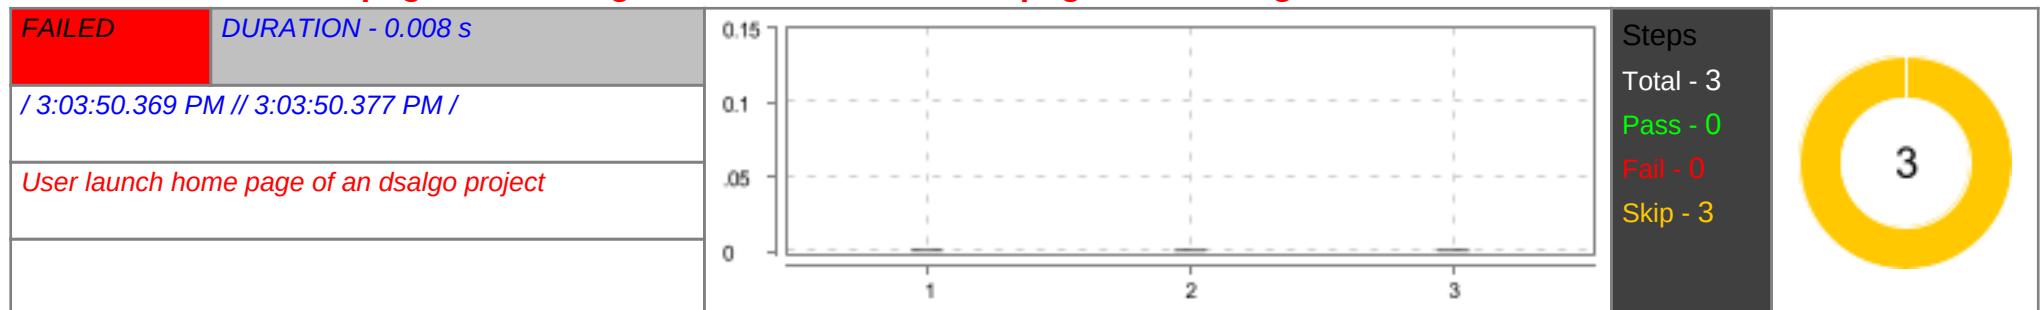

| # | Step / Hook Details | Status | Duration |
|---|--|--------|----------|
| | BEFORE - appHooks.ApplicationHooks.setup() | FAILED | 0.001 s |

| # | Step / Hook Details | Status | Duration |
|---|---|---------|----------|
| | java.lang.NullPointerException: Cannot invoke "org.openqa.selenium.WebDriver.manage()" because the return value of "com.qa.factory.DriverFactory.getDriver()" is null at com.qa.factory.DriverFactory.init_driver(DriverFactory.java:47) at com.qa.factory.DriverFactory.setupdriver(DriverFactory.java:71) at appHooks.ApplicationHooks.setup(ApplicationHooks.java:33) | | |
| 1 | Given The user opens Home Page | SKIPPED | 0.001 s |
| 2 | When The user clicks on Get Started link on homepage "Graph" without login | SKIPPED | 0.001 s |
| 3 | Then The user get warning message "You are not logged in" | SKIPPED | 0.001 s |
| | AFTER - appHooks.ApplicationHooks.tearDown(io.cucumber.java.Scenario) java.lang.NullPointerException: Cannot invoke "org.openqa.selenium.TakesScreenshot.getScreenshotAs(org.openqa.selenium.OutputType)" because the return value of "com.qa.factory.DriverFactory.getDriver()" is null at appHooks.ApplicationHooks.tearDown(ApplicationHooks.java:59) | FAILED | 0.002 s |


User is on Home page and click on Register

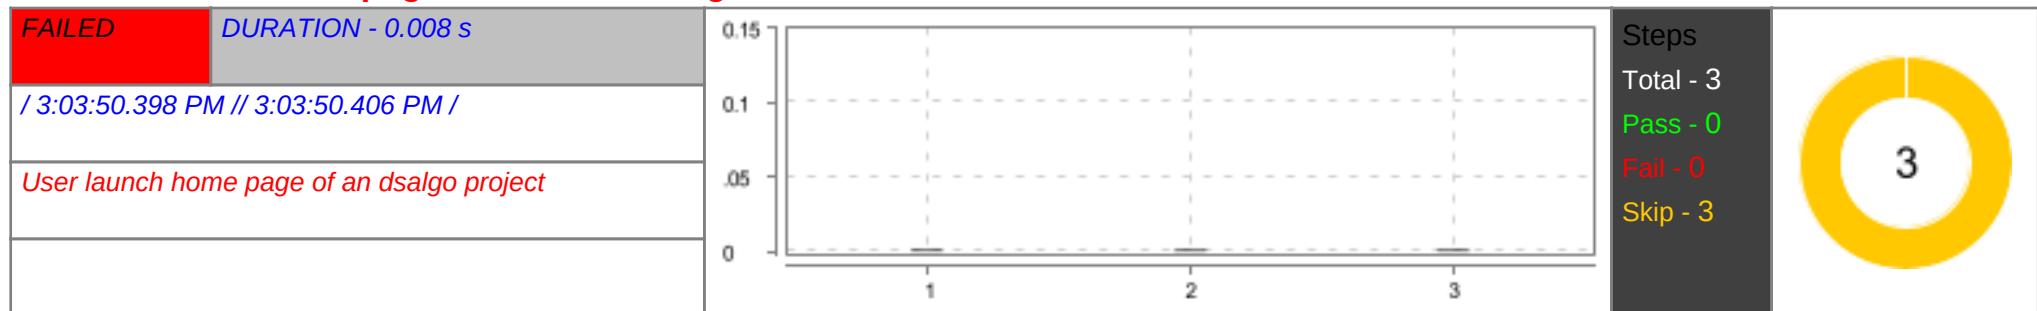

| # | Step / Hook Details | Status | Duration |
|---|---|---------|----------|
| | BEFORE - appHooks.ApplicationHooks.setup() java.lang.NullPointerException: Cannot invoke "org.openqa.selenium.WebDriver.manage()" because the return value of "com.qa.factory.DriverFactory.getDriver()" is null at com.qa.factory.DriverFactory.init_driver(DriverFactory.java:47) at com.qa.factory.DriverFactory.setupdriver(DriverFactory.java:71) at appHooks.ApplicationHooks.setup(ApplicationHooks.java:33) | FAILED | 0.001 s |
| 1 | Given The user opens Home Page | SKIPPED | 0.001 s |
| 2 | When The user clicks Sign in | SKIPPED | 0.001 s |
| 3 | Then The user should be redirected to Sign in page | SKIPPED | 0.001 s |
| | AFTER - appHooks.ApplicationHooks.tearDown(io.cucumber.java.Scenario) java.lang.NullPointerException: Cannot invoke "org.openqa.selenium.TakesScreenshot.getScreenshotAs(org.openqa.selenium.OutputType)" | FAILED | 0.000 s |

| # | Step / Hook Details | Status | Duration |
|---|---|--------|----------|
| | because the return value of "com.qa.factory.DriverFactory.getDriver()" is null at appHooks.ApplicationHooks.tearDown(ApplicationHooks.java:59) | | |

User is on Home page and click on Register

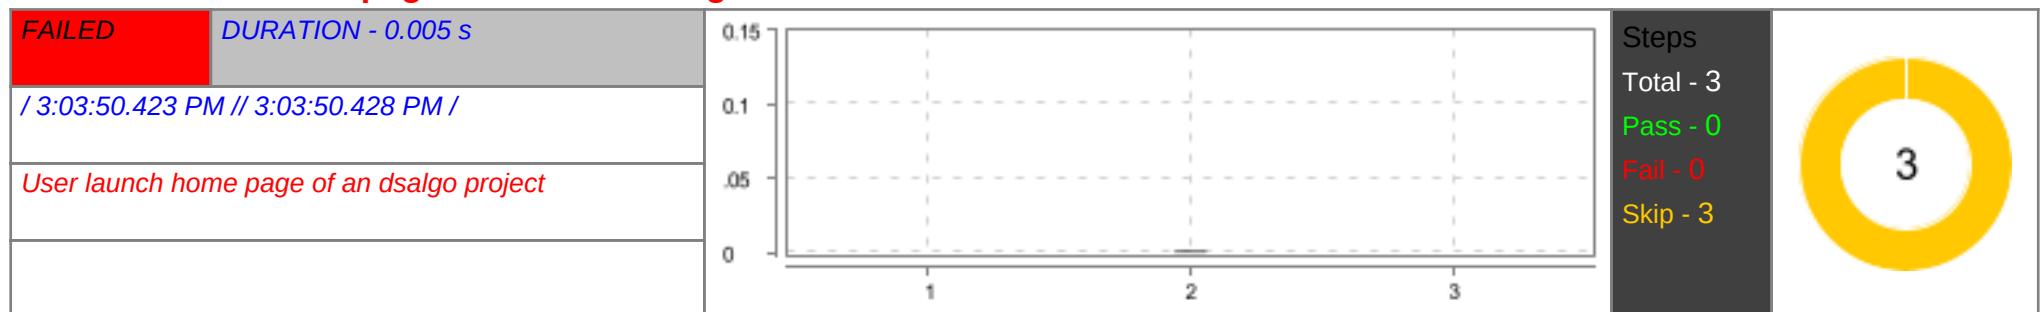


| # | Step / Hook Details | Status | Duration |
|---|---|---------|----------|
| | BEFORE - appHooks.ApplicationHooks.setup() java.lang.NullPointerException: Cannot invoke "org.openqa.selenium.WebDriver.manage()" because the return value of "com.qa.factory.DriverFactory.getDriver()" is null at com.qa.factory.DriverFactory.init_driver(DriverFactory.java:47) at com.qa.factory.DriverFactory.setupdriver(DriverFactory.java:71) at appHooks.ApplicationHooks.setup(ApplicationHooks.java:33) | FAILED | 0.002 s |
| 1 | Given The user opens Home Page | SKIPPED | 0.000 s |
| 2 | When The user clicks Register | SKIPPED | 0.001 s |
| 3 | Then The user should be redirected to Register form | SKIPPED | 0.000 s |
| | AFTER - appHooks.ApplicationHooks.tearDown(io.cucumber.java.Scenario) java.lang.NullPointerException: Cannot invoke "org.openqa.selenium.TakesScreenshot.getScreenshotAs(org.openqa.selenium.OutputType)" because the return value of "com.qa.factory.DriverFactory.getDriver()" is null at appHooks.ApplicationHooks.tearDown(ApplicationHooks.java:59) | FAILED | 0.001 s |

user registers with username and password




The user is presented with error message for empty fields below Username textbox

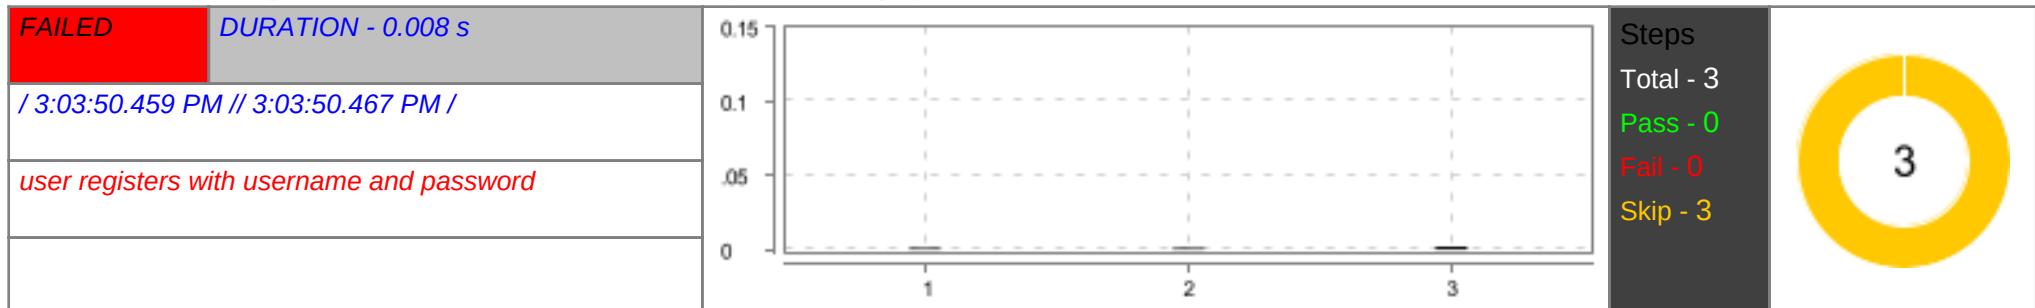


| # | Step / Hook Details | Status | Duration |
|---|---|---------|----------|
| | BEFORE - appHooks.ApplicationHooks.setup() java.lang.NullPointerException: Cannot invoke "org.openqa.selenium.WebDriver.manage()" because the return value of "com.qa.factory.DriverFactory.getDriver()" is null at com.qa.factory.DriverFactory.init_driver(DriverFactory.java:47) at com.qa.factory.DriverFactory.setupdriver(DriverFactory.java:71) at appHooks.ApplicationHooks.setup(ApplicationHooks.java:33) | FAILED | 0.002 s |
| 1 | Given The user opens Register Page | SKIPPED | 0.001 s |
| 2 | When The user clicks Register button with all fields empty | SKIPPED | 0.001 s |
| 3 | Then It should display an error "Please fill out this field." below Username textbox | SKIPPED | 0.002 s |
| | AFTER - appHooks.ApplicationHooks.tearDown(io.cucumber.java.Scenario) java.lang.NullPointerException: Cannot invoke "org.openqa.selenium.TakesScreenshot.getScreenshotAs(org.openqa.selenium.OutputType)" because the return value of "com.qa.factory.DriverFactory.getDriver()" is null at appHooks.ApplicationHooks.tearDown(ApplicationHooks.java:59) | FAILED | 0.000 s |

The user is presented with error message for empty fields below Password textbox

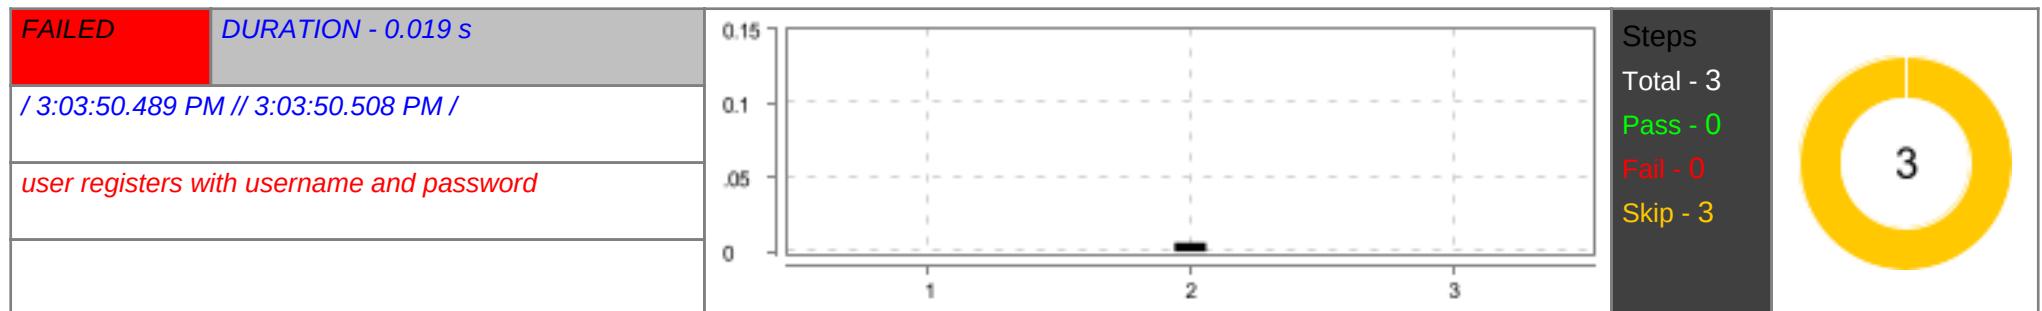


| # | Step / Hook Details | Status | Duration | | |
|----------------|---|----------|----------------|---------|---------|
| | BEFORE - appHooks.ApplicationHooks.setup() java.lang.NullPointerException: Cannot invoke "org.openqa.selenium.WebDriver.manage()" because the return value of "com.qa.factory.DriverFactory.getDriver()" is null at com.qa.factory.DriverFactory.init_driver(DriverFactory.java:47) at com.qa.factory.DriverFactory.setupdriver(DriverFactory.java:71) at appHooks.ApplicationHooks.setup(ApplicationHooks.java:33) | FAILED | 0.001 s | | |
| 1 | Given The user opens Register Page | SKIPPED | 0.000 s | | |
| 2 | When When The user clicks Register button after entering username with other fields empty <table border="1"><tr><td>username</td></tr><tr><td>Numpy@sdet84_1</td></tr></table> | username | Numpy@sdet84_1 | SKIPPED | 0.006 s |
| username | | | | | |
| Numpy@sdet84_1 | | | | | |
| 3 | Then It should display an error "Please fill out this field." below Password textbox | SKIPPED | 0.000 s | | |
| | AFTER - appHooks.ApplicationHooks.tearDown(io.cucumber.java.Scenario) java.lang.NullPointerException: Cannot invoke "org.openqa.selenium.TakesScreenshot.getScreenshotAs(org.openqa.selenium.OutputType)" because the return value of "com.qa.factory.DriverFactory.getDriver()" is null at appHooks.ApplicationHooks.tearDown(ApplicationHooks.java:59) | FAILED | 0.002 s | | |

The user is presented with error message for invalid username

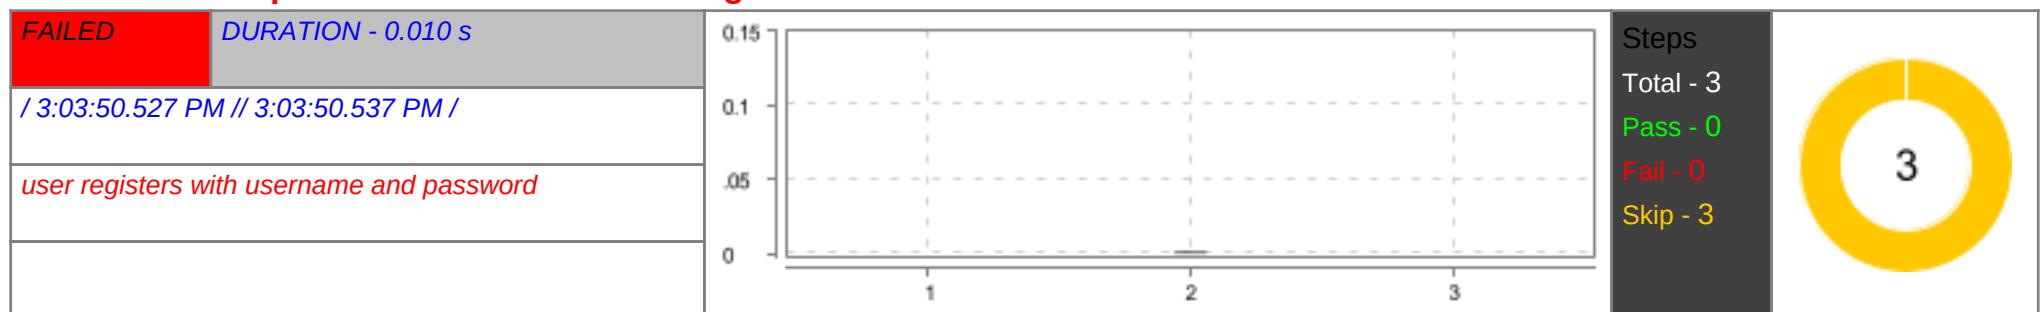

| # | Step / Hook Details | Status | Duration | | | | | | |
|----------|---|-----------------------|----------|-----------------------|--------|--------------|--------------|---------|---------|
| | BEFORE - appHooks.ApplicationHooks.setup() java.lang.NullPointerException: Cannot invoke "org.openqa.selenium.WebDriver.manage()" because the return value of "com.qa.factory.DriverFactory.getDriver()" is null at com.qa.factory.DriverFactory.init_driver(DriverFactory.java:47) at com.qa.factory.DriverFactory.setupdriver(DriverFactory.java:71) at appHooks.ApplicationHooks.setup(ApplicationHooks.java:33) | FAILED | 0.002 s | | | | | | |
| 1 | Given The user opens Register Page | SKIPPED | 0.000 s | | | | | | |
| 2 | When The user enters a username with characters other than Letters, digits and special characters <table border="1"><tr><td>username</td><td>password</td><td>password confirmation</td></tr><tr><td>&*&&*&</td><td>testpassword</td><td>testpassword</td></tr></table> | username | password | password confirmation | &*&&*& | testpassword | testpassword | SKIPPED | 0.001 s |
| username | password | password confirmation | | | | | | | |
| &*&&*& | testpassword | testpassword | | | | | | | |
| 3 | Then It should display an error message "Please enter a valid username" | SKIPPED | 0.000 s | | | | | | |
| | AFTER - appHooks.ApplicationHooks.tearDown(io.cucumber.java.Scenario) java.lang.NullPointerException: Cannot invoke "org.openqa.selenium.TakesScreenshot.getScreenshotAs(org.openqa.selenium.OutputType)" because the return value of "com.qa.factory.DriverFactory.getDriver()" is null at appHooks.ApplicationHooks.tearDown(ApplicationHooks.java:59) | FAILED | 0.001 s | | | | | | |


The user is presented with error message for password mismatch

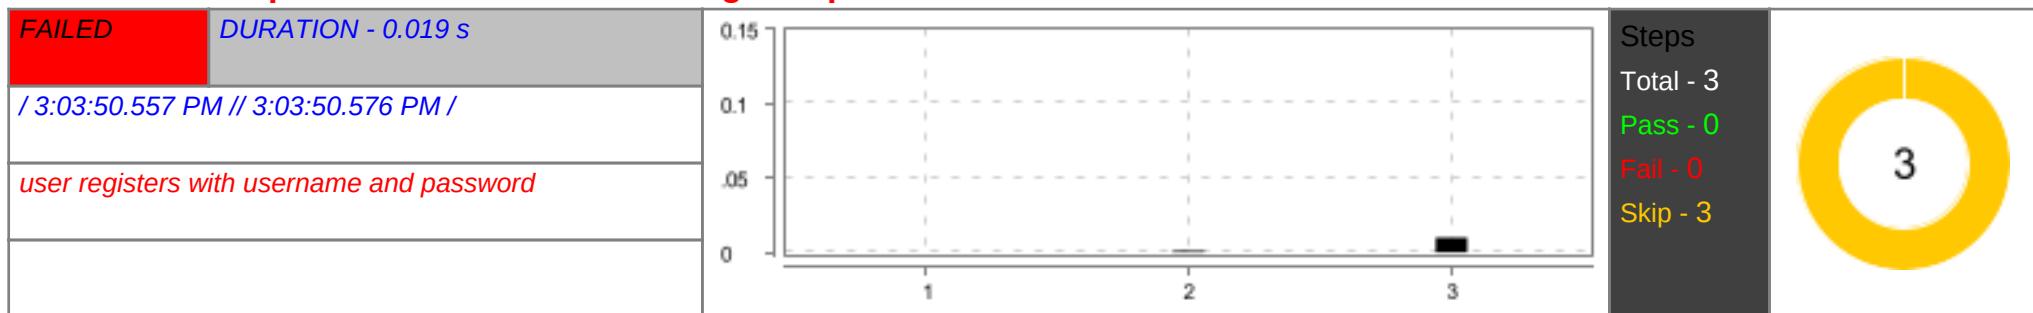

| # | Step / Hook Details | Status | Duration |
|---|---|---------|----------|
| | BEFORE - appHooks.ApplicationHooks.setup() java.lang.NullPointerException: Cannot invoke "org.openqa.selenium.WebDriver.manage()" because the return value of "com.qa.factory.DriverFactory.getDriver()" is null at com.qa.factory.DriverFactory.init_driver(DriverFactory.java:47) at com.qa.factory.DriverFactory.setupdriver(DriverFactory.java:71) at appHooks.ApplicationHooks.setup(ApplicationHooks.java:33) | FAILED | 0.001 s |
| 1 | Given The user opens Register Page | SKIPPED | 0.000 s |
| 2 | When The user clicks Register button after entering valid username and different passwords in password and password | SKIPPED | 0.001 s |

| # | Step / Hook Details | Status | Duration | | | | | | |
|---------------|---|-----------------------|--------------------|-----------------------|---------------|--------------|---------------|--|--|
| | confirmation fields | | | | | | | | |
| | <table border="1"> <tr> <td>username</td> <td>password</td> <td>password confirmation</td> </tr> <tr> <td>aaa@gmail.com</td> <td>testpassword</td> <td>testpassword1</td> </tr> </table> | username | password | password confirmation | aaa@gmail.com | testpassword | testpassword1 | | |
| username | password | password confirmation | | | | | | | |
| aaa@gmail.com | testpassword | testpassword1 | | | | | | | |
| 3 | <p>Then It should display an error message "password_mismatch:The two password fields didn't match."</p> <p>AFTER - appHooks.ApplicationHooks.tearDown(io.cucumber.java.Scenario)</p> <p>java.lang.NullPointerException: Cannot invoke "org.openqa.selenium.TakesScreenshot.getScreenshotAs(org.openqa.selenium.OutputType)" because the return value of "com.qa.factory.DriverFactory.getDriver()" is null at appHooks.ApplicationHooks.tearDown(ApplicationHooks.java:59)</p> | SKIPPED FAILED | 0.010 s 0.001 s | | | | | | |

The user is successfully able to register

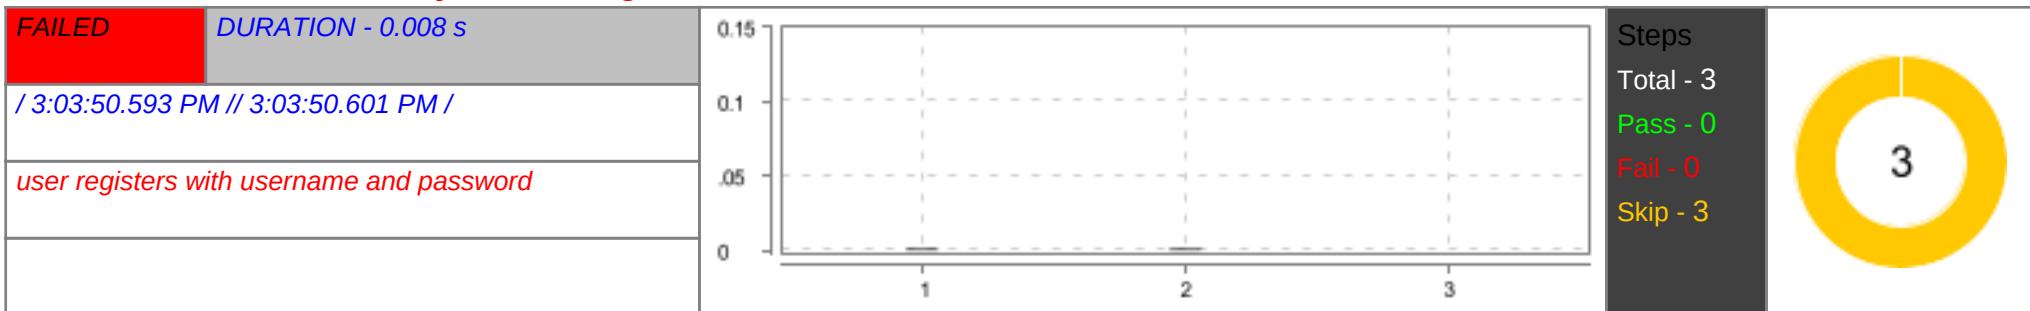


| # | Step / Hook Details | Status | Duration | | | | | | |
|------------------|---|-----------------------|----------|-----------------------|------------------|------------|------------|--|--|
| | BEFORE - appHooks.ApplicationHooks.setup() java.lang.NullPointerException: Cannot invoke "org.openqa.selenium.WebDriver.manage()" because the return value of "com.qa.factory.DriverFactory.getDriver()" is null at com.qa.factory.DriverFactory.init_driver(DriverFactory.java:47) at com.qa.factory.DriverFactory.setupdriver(DriverFactory.java:71) at appHooks.ApplicationHooks.setup(ApplicationHooks.java:33) | FAILED | 0.003 s | | | | | | |
| 1 | Given The user opens Register Page | SKIPPED | 0.001 s | | | | | | |
| 2 | When The user enters a valid username and password and password confirmation | SKIPPED | 0.001 s | | | | | | |
| | <table border="1"> <tr> <td>username</td> <td>password</td> <td>password confirmation</td> </tr> <tr> <td>pluton@gmail.com</td> <td>Nnsdet@115</td> <td>Nnsdet@115</td> </tr> </table> | username | password | password confirmation | pluton@gmail.com | Nnsdet@115 | Nnsdet@115 | | |
| username | password | password confirmation | | | | | | | |
| pluton@gmail.com | Nnsdet@115 | Nnsdet@115 | | | | | | | |
| 3 | Then The user should be redirected to Homepage and pagetitle is "NumpyNinja" | SKIPPED | 0.000 s | | | | | | |
| | <p>AFTER - appHooks.ApplicationHooks.tearDown(io.cucumber.java.Scenario)</p> <p>java.lang.NullPointerException: Cannot invoke "org.openqa.selenium.TakesScreenshot.getScreenshotAs(org.openqa.selenium.OutputType)" because the return value of "com.qa.factory.DriverFactory.getDriver()" is null</p> | FAILED | 0.001 s | | | | | | |

| # | Step / Hook Details | Status | Duration |
|---|---|--------|----------|
| | at appHooks.ApplicationHooks.tearDown(ApplicationHooks.java:59) | | |

User Logins in with credentials




The user goes to registration page when register is clicked

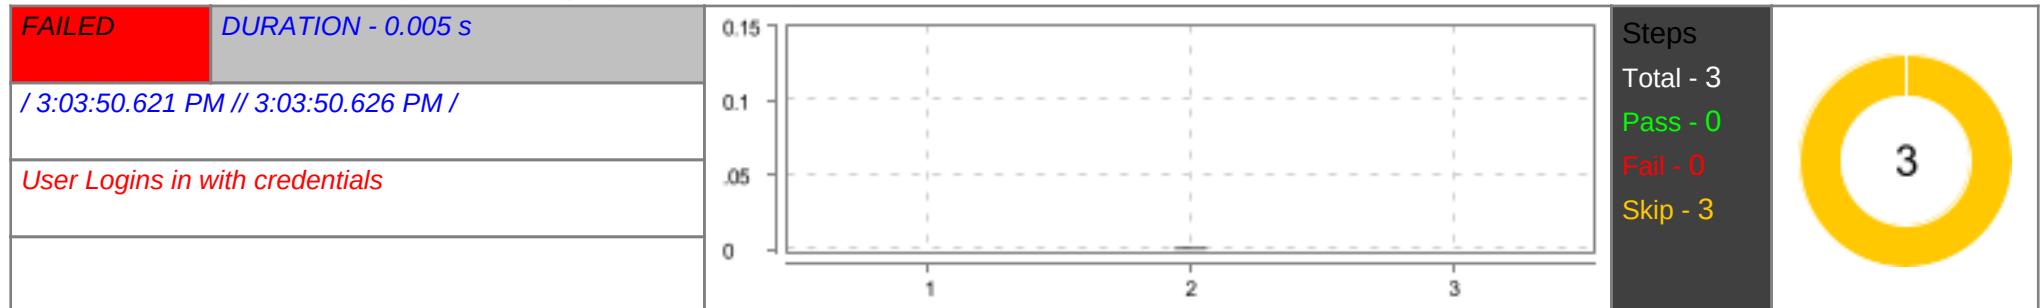


| # | Step / Hook Details | Status | Duration |
|---|---|---------|----------|
| | BEFORE - appHooks.ApplicationHooks.setup() java.lang.NullPointerException: Cannot invoke "org.openqa.selenium.WebDriver.manage()" because the return value of "com.qa.factory.DriverFactory.getDriver()" is null at com.qa.factory.DriverFactory.init_driver(DriverFactory.java:47) at com.qa.factory.DriverFactory.setupdriver(DriverFactory.java:71) at appHooks.ApplicationHooks.setup(ApplicationHooks.java:33) | FAILED | 0.001 s |
| 1 | Given The user is in the Sign in page | SKIPPED | 0.000 s |
| 2 | When The user clicks on register link on signin page | SKIPPED | 0.001 s |
| 3 | Then The user redirected to Registration page from signin page and title is "Registration" | SKIPPED | 0.000 s |
| | AFTER - appHooks.ApplicationHooks.tearDown(io.cucumber.java.Scenario) java.lang.NullPointerException: Cannot invoke "org.openqa.selenium.TakesScreenshot.getScreenshotAs(org.openqa.selenium.OutputType)" because the return value of "com.qa.factory.DriverFactory.getDriver()" is null at appHooks.ApplicationHooks.tearDown(ApplicationHooks.java:59) | FAILED | 0.001 s |

The user is able to signin with registered credential

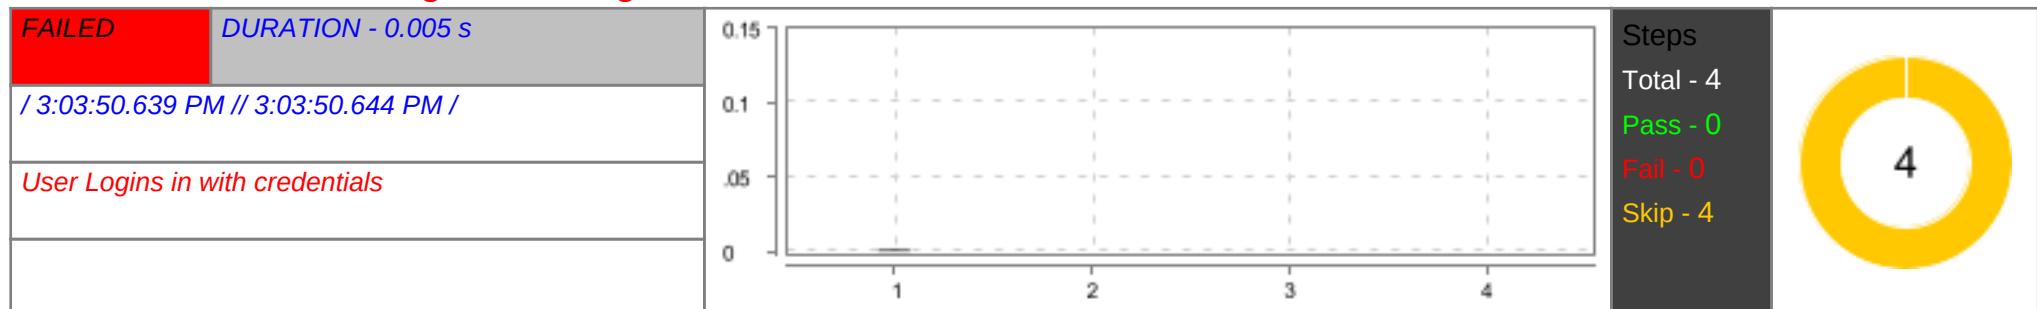


| # | Step / Hook Details | Status | Duration |
|---|---|---------|----------|
| | BEFORE - appHooks.ApplicationHooks.setup() java.lang.NullPointerException: Cannot invoke "org.openqa.selenium.WebDriver.manage()" because the return value of "com.qa.factory.DriverFactory.getDriver()" is null at com.qa.factory.DriverFactory.init_driver(DriverFactory.java:47) at com.qa.factory.DriverFactory.setupdriver(DriverFactory.java:71) at appHooks.ApplicationHooks.setup(ApplicationHooks.java:33) | FAILED | 0.001 s |
| 1 | Given The user is in the Sign in page | SKIPPED | 0.001 s |
| 2 | When The user enters a valid "pluton@gmail.com" and "Nnsdet@115" | SKIPPED | 0.000 s |
| 3 | Then click login button to verify and pagetitle is "NumPyNinja" | SKIPPED | 0.000 s |
| 4 | And logout of the page | SKIPPED | 0.000 s |
| | AFTER - appHooks.ApplicationHooks.tearDown(io.cucumber.java.Scenario) java.lang.NullPointerException: Cannot invoke "org.openqa.selenium.TakesScreenshot.getScreenshotAs(org.openqa.selenium.OutputType)" because the return value of "com.qa.factory.DriverFactory.getDriver()" is null at appHooks.ApplicationHooks.tearDown(ApplicationHooks.java:59) | FAILED | 0.000 s |

User on login page and login with invalid inputs

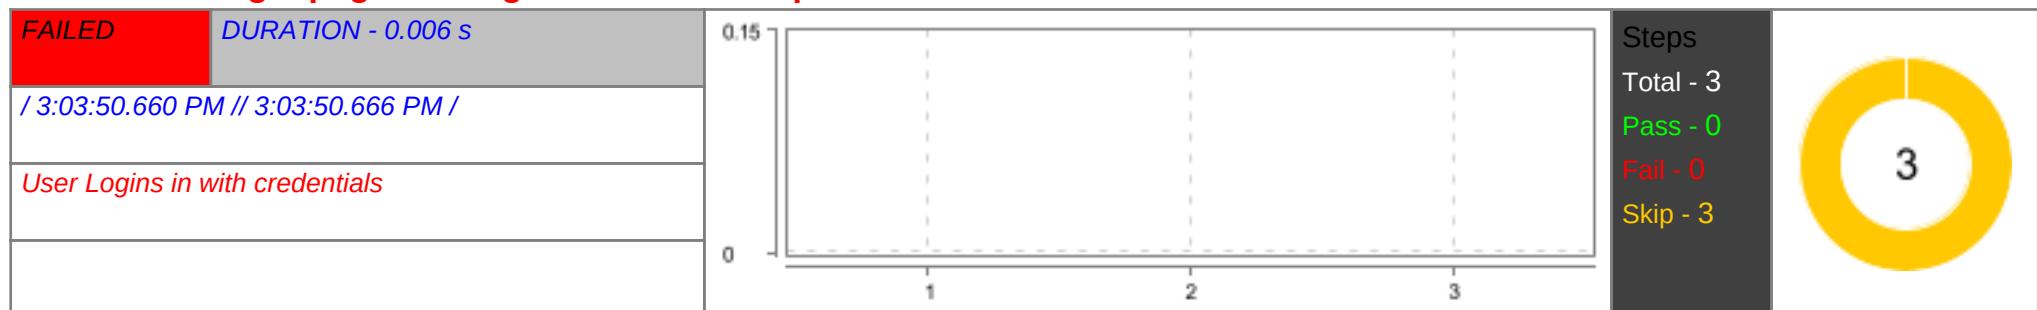

| # | Step / Hook Details | Status | Duration |
|---|---|---------|----------|
| | BEFORE - appHooks.ApplicationHooks.setup() java.lang.NullPointerException: Cannot invoke "org.openqa.selenium.WebDriver.manage()" because the return value of "com.qa.factory.DriverFactory.getDriver()" is null at com.qa.factory.DriverFactory.init_driver(DriverFactory.java:47) at com.qa.factory.DriverFactory.setupdriver(DriverFactory.java:71) at appHooks.ApplicationHooks.setup(ApplicationHooks.java:33) | FAILED | 0.001 s |
| 1 | Given The user is in the Sign in page | SKIPPED | 0.000 s |
| 2 | When The user enter invalid "user" and "abcdefg" | SKIPPED | 0.000 s |
| 3 | Then click login button to verify and pagetitle is "Login" | SKIPPED | 0.000 s |
| | AFTER - appHooks.ApplicationHooks.tearDown(io.cucumber.java.Scenario) java.lang.NullPointerException: Cannot invoke "org.openqa.selenium.TakesScreenshot.getScreenshotAs(org.openqa.selenium.OutputType)" because the return value of "com.qa.factory.DriverFactory.getDriver()" is null at appHooks.ApplicationHooks.tearDown(ApplicationHooks.java:59) | FAILED | 0.001 s |


User on login page and login with invalid inputs

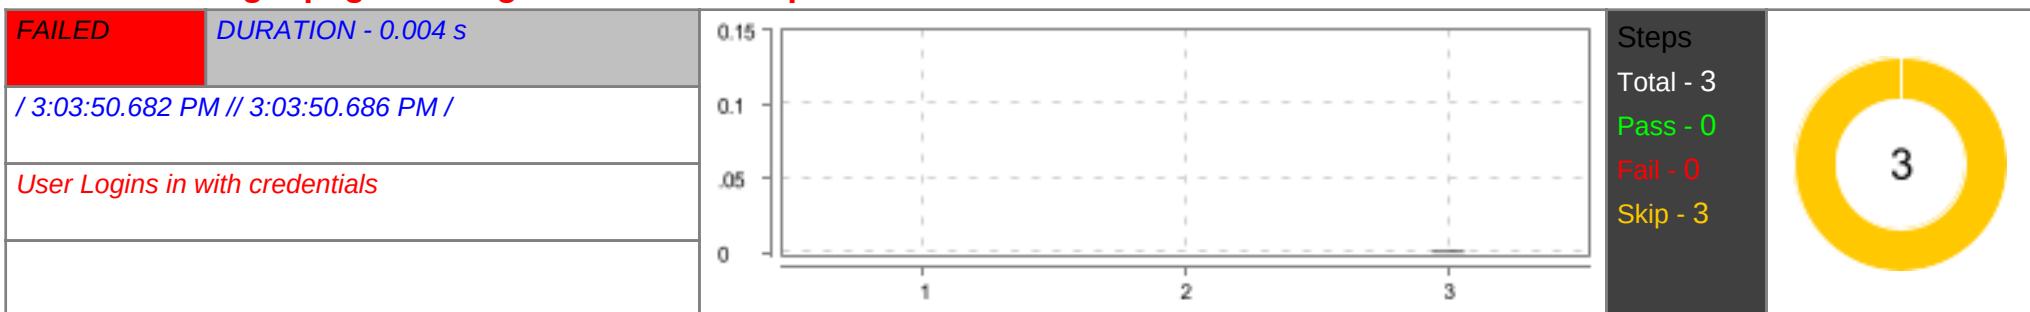

| # | Step / Hook Details | Status | Duration |
|---|---|---------|----------|
| | BEFORE - appHooks.ApplicationHooks.setup() java.lang.NullPointerException: Cannot invoke "org.openqa.selenium.WebDriver.manage()" because the return value of "com.qa.factory.DriverFactory.getDriver()" is null at com.qa.factory.DriverFactory.init_driver(DriverFactory.java:47) at com.qa.factory.DriverFactory.setupdriver(DriverFactory.java:71) at appHooks.ApplicationHooks.setup(ApplicationHooks.java:33) | FAILED | 0.001 s |
| 1 | Given The user is in the Sign in page | SKIPPED | 0.000 s |
| 2 | When The user enter invalid "user1" and "passowrd" | SKIPPED | 0.000 s |
| 3 | Then click login button to verify and pagetitle is "Login" | SKIPPED | 0.001 s |
| | AFTER - appHooks.ApplicationHooks.tearDown(io.cucumber.java.Scenario) | FAILED | 0.000 s |


| # | Step / Hook Details | Status | Duration |
|---|---|--------|----------|
| | java.lang.NullPointerException: Cannot invoke "org.openqa.selenium.TakesScreenshot.getScreenshotAs(org.openqa.selenium.OutputType)" because the return value of "com.qa.factory.DriverFactory.getDriver()" is null at appHooks.ApplicationHooks.tearDown(ApplicationHooks.java:59) | | |

User on login page and login with invalid inputs

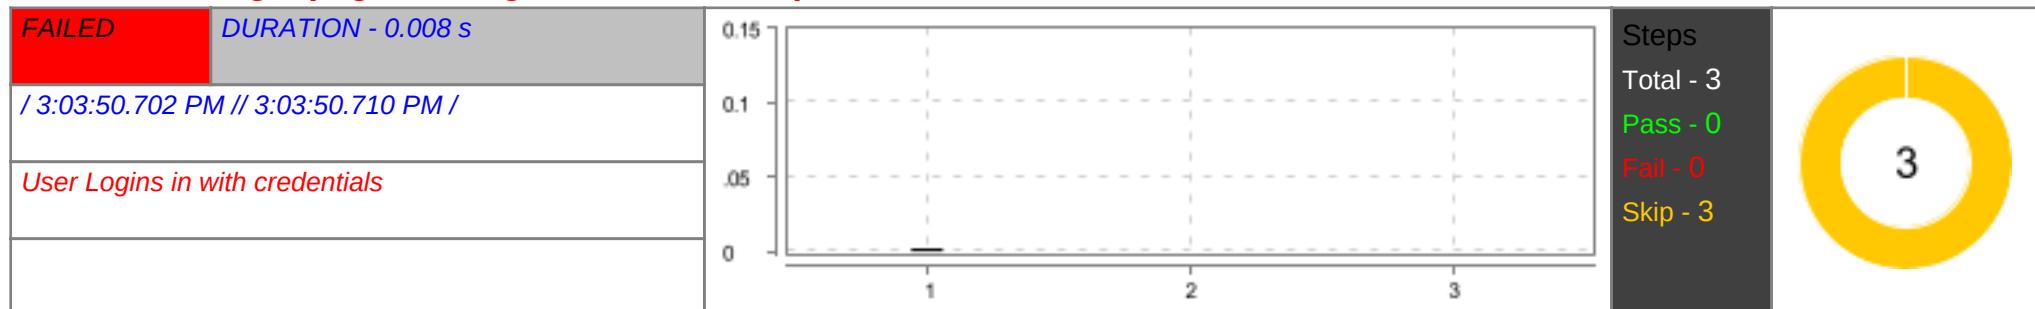


| # | Step / Hook Details | Status | Duration |
|---|---|---------|----------|
| | BEFORE - appHooks.ApplicationHooks.setup() java.lang.NullPointerException: Cannot invoke "org.openqa.selenium.WebDriver.manage()" because the return value of "com.qa.factory.DriverFactory.getDriver()" is null at com.qa.factory.DriverFactory.init_driver(DriverFactory.java:47) at com.qa.factory.DriverFactory.setupdriver(DriverFactory.java:71) at appHooks.ApplicationHooks.setup(ApplicationHooks.java:33) | FAILED | 0.001 s |
| 1 | Given The user is in the Sign in page | SKIPPED | 0.002 s |
| 2 | When The user enter invalid "user3" and "password3" | SKIPPED | 0.000 s |
| 3 | Then click login button to verify and pagetitle is "Login" | SKIPPED | 0.000 s |
| | AFTER - appHooks.ApplicationHooks.tearDown(io.cucumber.java.Scenario) java.lang.NullPointerException: Cannot invoke "org.openqa.selenium.TakesScreenshot.getScreenshotAs(org.openqa.selenium.OutputType)" because the return value of "com.qa.factory.DriverFactory.getDriver()" is null at appHooks.ApplicationHooks.tearDown(ApplicationHooks.java:59) | FAILED | 0.001 s |

User on login page and login with invalid and valid inputs from Excel

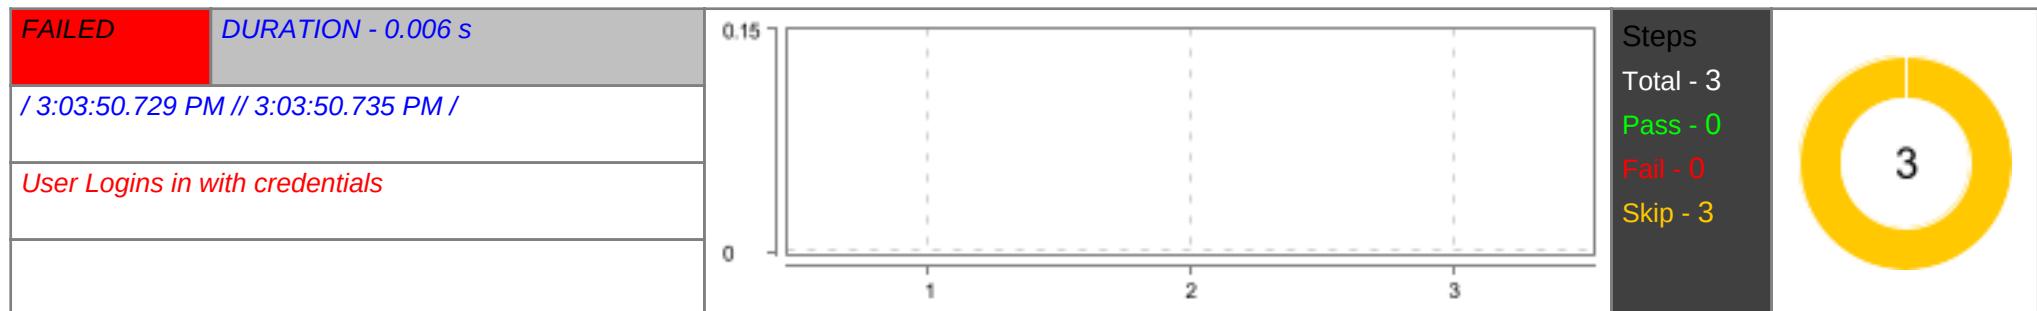

| # | Step / Hook Details | Status | Duration |
|---|---|---------|----------|
| | BEFORE - appHooks.ApplicationHooks.setup() java.lang.NullPointerException: Cannot invoke "org.openqa.selenium.WebDriver.manage()" because the return value of "com.qa.factory.DriverFactory.getDriver()" is null at com.qa.factory.DriverFactory.init_driver(DriverFactory.java:47) at com.qa.factory.DriverFactory.setupdriver(DriverFactory.java:71) at appHooks.ApplicationHooks.setup(ApplicationHooks.java:33) | FAILED | 0.001 s |
| 1 | Given The user is in the Sign in page | SKIPPED | 0.000 s |
| 2 | When The user enter sheet "Sheet1" and 0 | SKIPPED | 0.000 s |
| 3 | Then click login button to verify title of the page "NumPyNinja" | SKIPPED | 0.000 s |
| | AFTER - appHooks.ApplicationHooks.tearDown(io.cucumber.java.Scenario) java.lang.NullPointerException: Cannot invoke "org.openqa.selenium.TakesScreenshot.getScreenshotAs(org.openqa.selenium.OutputType)" because the return value of "com.qa.factory.DriverFactory.getDriver()" is null at appHooks.ApplicationHooks.tearDown(ApplicationHooks.java:59) | FAILED | 0.001 s |


User on login page and login with invalid and valid inputs from Excel

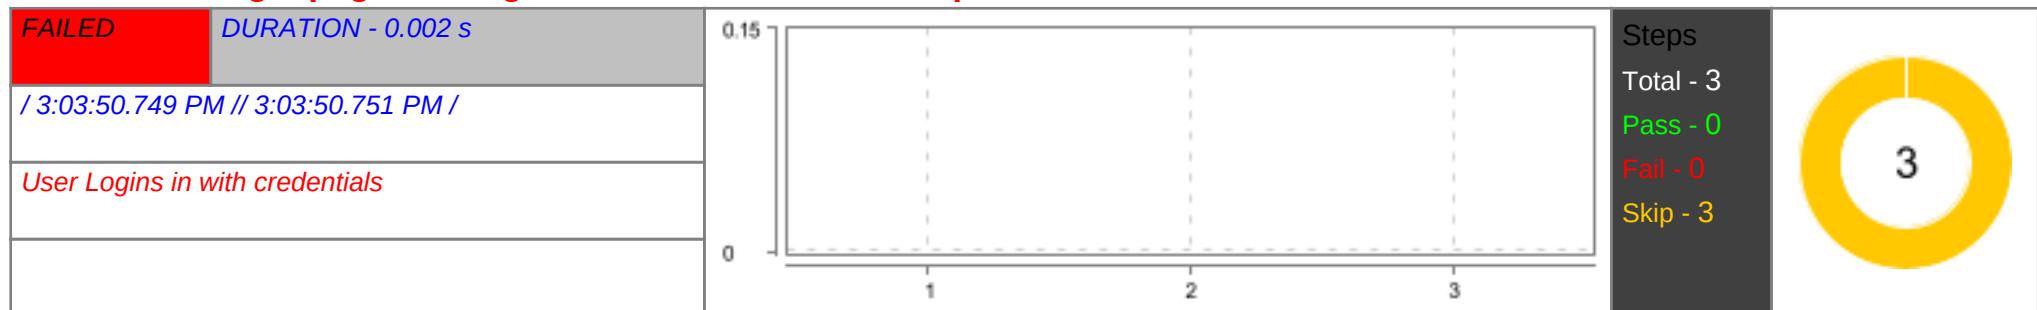

| # | Step / Hook Details | Status | Duration |
|---|--|--------|----------|
| | BEFORE - appHooks.ApplicationHooks.setup() | FAILED | 0.001 s |

| # | Step / Hook Details | Status | Duration |
|---|---|---------|----------|
| | java.lang.NullPointerException: Cannot invoke "org.openqa.selenium.WebDriver.manage()" because the return value of "com.qa.factory.DriverFactory.getDriver()" is null at com.qa.factory.DriverFactory.init_driver(DriverFactory.java:47) at com.qa.factory.DriverFactory.setupdriver(DriverFactory.java:71) at appHooks.ApplicationHooks.setup(ApplicationHooks.java:33) | | |
| 1 | Given The user is in the Sign in page | SKIPPED | 0.000 s |
| 2 | When The user enter sheet "Sheet1" and 1 | SKIPPED | 0.000 s |
| 3 | Then click login button to verify title of the page "NumPyNinja" | SKIPPED | 0.000 s |
| | AFTER - appHooks.ApplicationHooks.tearDown(io.cucumber.java.Scenario) | FAILED | 0.000 s |
| | java.lang.NullPointerException: Cannot invoke "org.openqa.selenium.TakesScreenshot.getScreenshotAs(org.openqa.selenium.OutputType)" because the return value of "com.qa.factory.DriverFactory.getDriver()" is null at appHooks.ApplicationHooks.tearDown(ApplicationHooks.java:59) | | |


User on login page and login with invalid and valid inputs from Excel

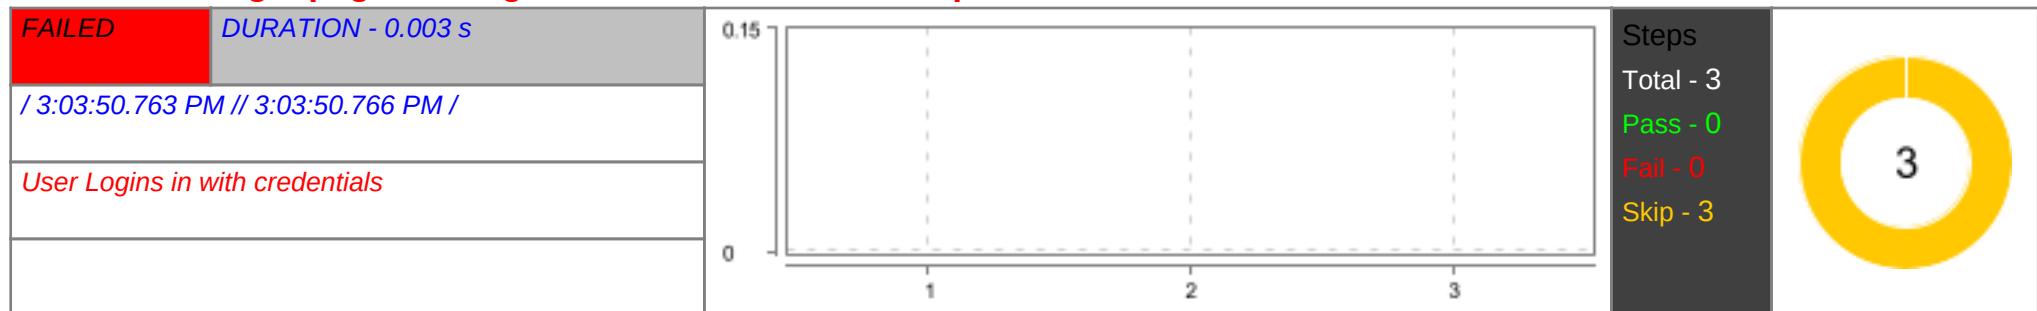

| # | Step / Hook Details | Status | Duration |
|---|---|---------|----------|
| | BEFORE - appHooks.ApplicationHooks.setup() | FAILED | 0.000 s |
| | java.lang.NullPointerException: Cannot invoke "org.openqa.selenium.WebDriver.manage()" because the return value of "com.qa.factory.DriverFactory.getDriver()" is null at com.qa.factory.DriverFactory.init_driver(DriverFactory.java:47) at com.qa.factory.DriverFactory.setupdriver(DriverFactory.java:71) at appHooks.ApplicationHooks.setup(ApplicationHooks.java:33) | | |
| 1 | Given The user is in the Sign in page | SKIPPED | 0.000 s |
| 2 | When The user enter sheet "Sheet1" and 2 | SKIPPED | 0.000 s |
| 3 | Then click login button to verify title of the page "NumPyNinja" | SKIPPED | 0.000 s |
| | AFTER - appHooks.ApplicationHooks.tearDown(io.cucumber.java.Scenario) | FAILED | 0.001 s |
| | java.lang.NullPointerException: Cannot invoke "org.openqa.selenium.TakesScreenshot.getScreenshotAs(org.openqa.selenium.OutputType)" | | |


| # | Step / Hook Details | Status | Duration |
|---|---|--------|----------|
| | because the return value of "com.qa.factory.DriverFactory.getDriver()" is null at appHooks.ApplicationHooks.tearDown(ApplicationHooks.java:59) | | |

User on login page and login with invalid and valid inputs from Excel

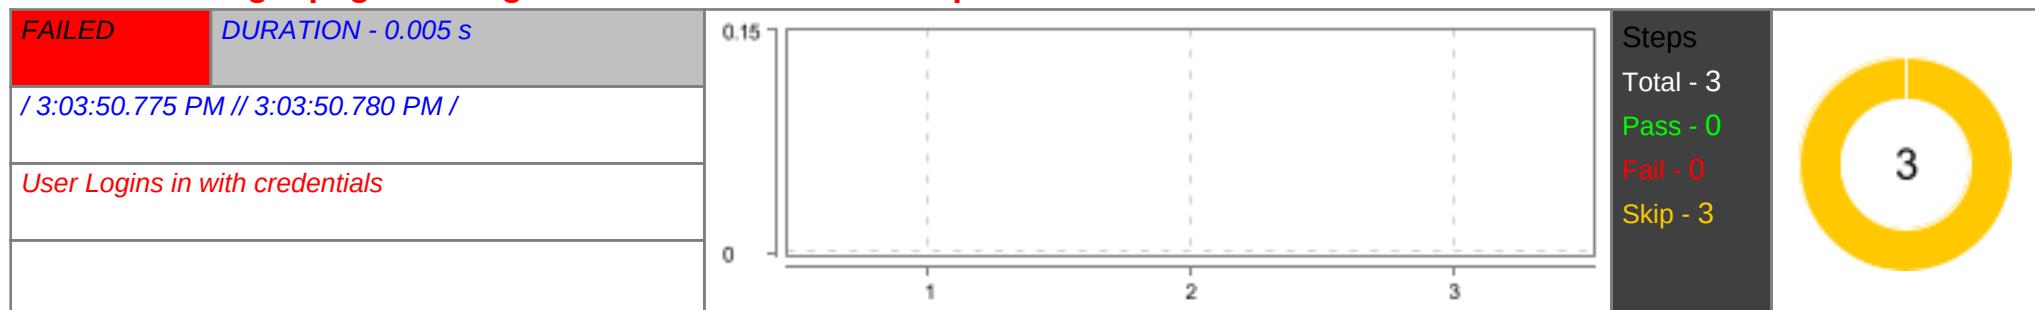


| # | Step / Hook Details | Status | Duration |
|---|---|---------|----------|
| | BEFORE - appHooks.ApplicationHooks.setup() java.lang.NullPointerException: Cannot invoke "org.openqa.selenium.WebDriver.manage()" because the return value of "com.qa.factory.DriverFactory.getDriver()" is null at com.qa.factory.DriverFactory.init_driver(DriverFactory.java:47) at com.qa.factory.DriverFactory.setupdriver(DriverFactory.java:71) at appHooks.ApplicationHooks.setup(ApplicationHooks.java:33) | FAILED | 0.002 s |
| 1 | Given The user is in the Sign in page | SKIPPED | 0.000 s |
| 2 | When The user enter sheet "Sheet1" and 3 | SKIPPED | 0.000 s |
| 3 | Then click login button to verify title of the page "NumPyNinja" | SKIPPED | 0.000 s |
| | AFTER - appHooks.ApplicationHooks.tearDown(io.cucumber.java.Scenario) java.lang.NullPointerException: Cannot invoke "org.openqa.selenium.TakesScreenshot.getScreenshotAs(org.openqa.selenium.OutputType)" because the return value of "com.qa.factory.DriverFactory.getDriver()" is null at appHooks.ApplicationHooks.tearDown(ApplicationHooks.java:59) | FAILED | 0.000 s |

Verifying signout link

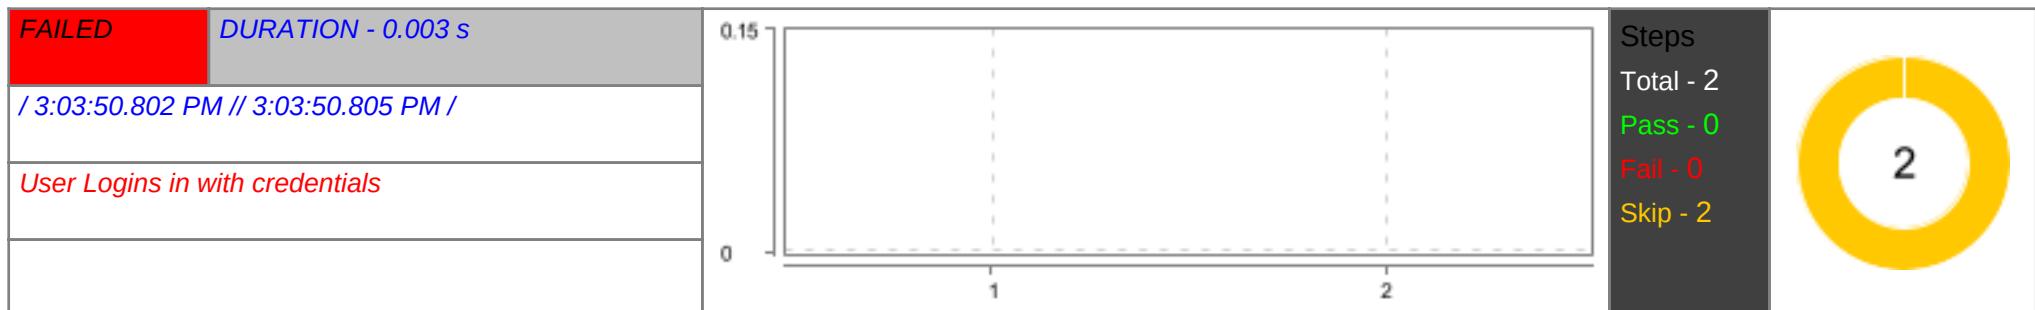


| # | Step / Hook Details | Status | Duration |
|---|---|---------|----------|
| | BEFORE - appHooks.ApplicationHooks.setup() java.lang.NullPointerException: Cannot invoke "org.openqa.selenium.WebDriver.manage()" because the return value of "com.qa.factory.DriverFactory.getDriver()" is null at com.qa.factory.DriverFactory.init_driver(DriverFactory.java:47) at com.qa.factory.DriverFactory.setupdriver(DriverFactory.java:71) at appHooks.ApplicationHooks.setup(ApplicationHooks.java:33) | FAILED | 0.001 s |
| 1 | Given The user is in the Home page with valid log in "pluto@gmail.com" and "Nnsdet@115" | SKIPPED | 0.000 s |
| 2 | When The user clicks Sign out | SKIPPED | 0.000 s |
| | AFTER - appHooks.ApplicationHooks.tearDown(io.cucumber.java.Scenario) java.lang.NullPointerException: Cannot invoke "org.openqa.selenium.TakesScreenshot.getScreenshotAs(org.openqa.selenium.OutputType)" because the return value of "com.qa.factory.DriverFactory.getDriver()" is null at appHooks.ApplicationHooks.tearDown(ApplicationHooks.java:59) | FAILED | 0.001 s |

Datastructure feature

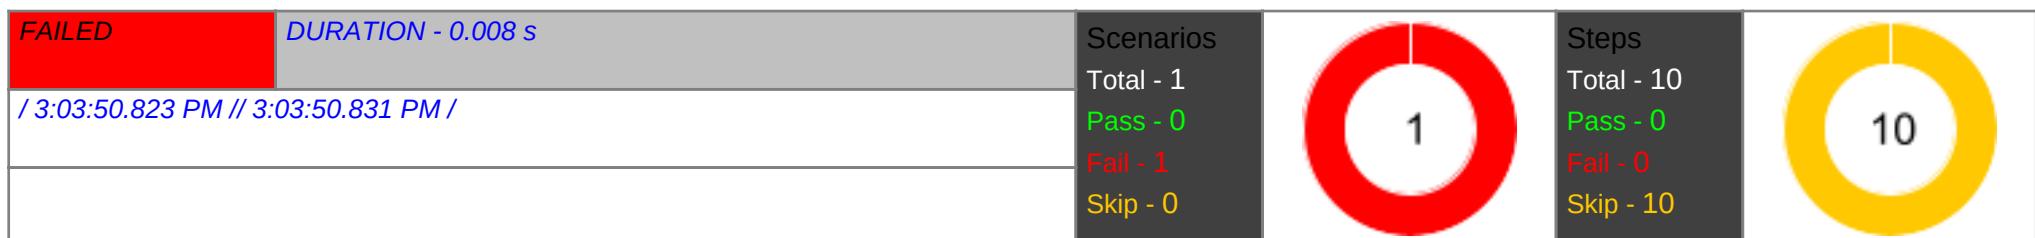


User in DataStructure module

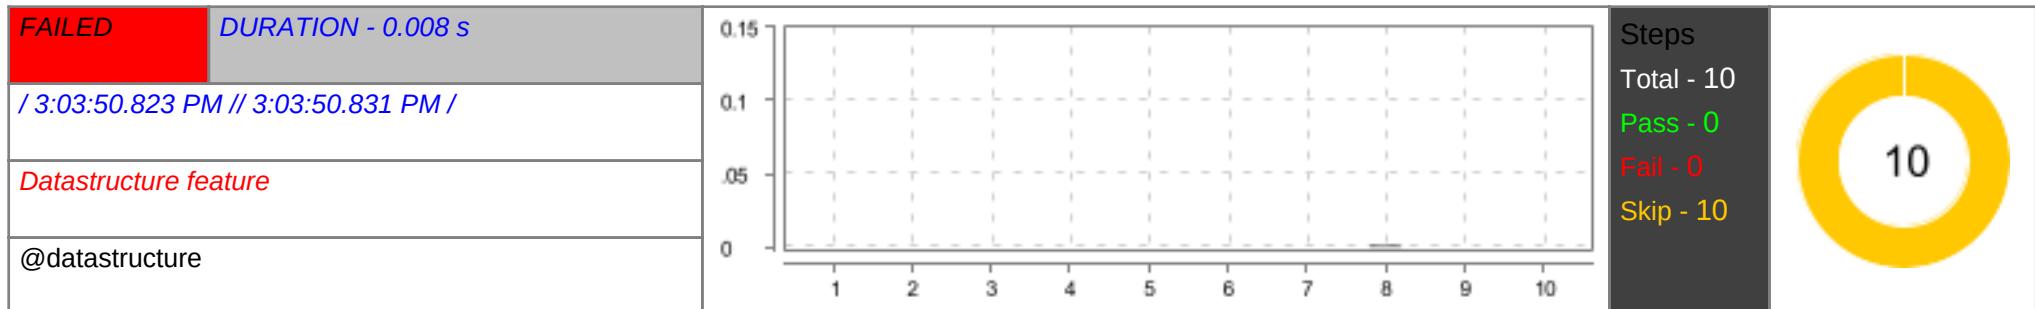


| # | Step / Hook Details | Status | Duration |
|----|---|---------|----------|
| | BEFORE - appHooks.ApplicationHooks.setup() java.lang.NullPointerException: Cannot invoke "org.openqa.selenium.WebDriver.manage()" because the return value of "com.qa.factory.DriverFactory.getDriver()" is null at com.qa.factory.DriverFactory.init_driver(DriverFactory.java:47) at com.qa.factory.DriverFactory.setupdriver(DriverFactory.java:71) at appHooks.ApplicationHooks.setup(ApplicationHooks.java:33) | FAILED | 0.001 s |
| 1 | Given The user is in the Home page after logged in | SKIPPED | 0.000 s |
| 2 | And User is clicks on Datastructuregetstarted button | SKIPPED | 0.000 s |
| 3 | When user clicks on time complexity sub module | SKIPPED | 0.000 s |
| 4 | Then user clicks on tryhere button | SKIPPED | 0.000 s |
| 5 | Given user sends valid pythoncode and click on run button and print the output in console | SKIPPED | 0.000 s |
| 6 | When user navigates refresh | SKIPPED | 0.000 s |
| 7 | Then user sends invalid syntax and click on run button and capture the alert messsage | SKIPPED | 0.000 s |
| 8 | And user navigates back | SKIPPED | 0.001 s |
| 9 | Given user clicks on practice Questions | SKIPPED | 0.000 s |
| 10 | Then user navigates back | SKIPPED | 0.000 s |
| | AFTER - appHooks.ApplicationHooks.tearDown(io.cucumber.java.Scenario) java.lang.NullPointerException: Cannot invoke "org.openqa.selenium.TakesScreenshot.getScreenshotAs(org.openqa.selenium.OutputType)" because the return value of "com.qa.factory.DriverFactory.getDriver()" is null at appHooks.ApplicationHooks.tearDown(ApplicationHooks.java:59) | FAILED | 0.001 s |

Testing Array Module

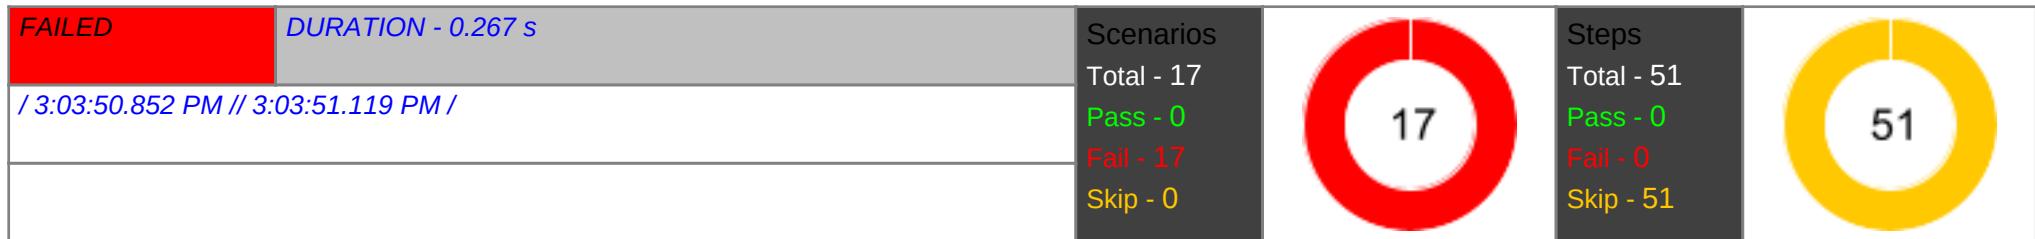


user is on the array page

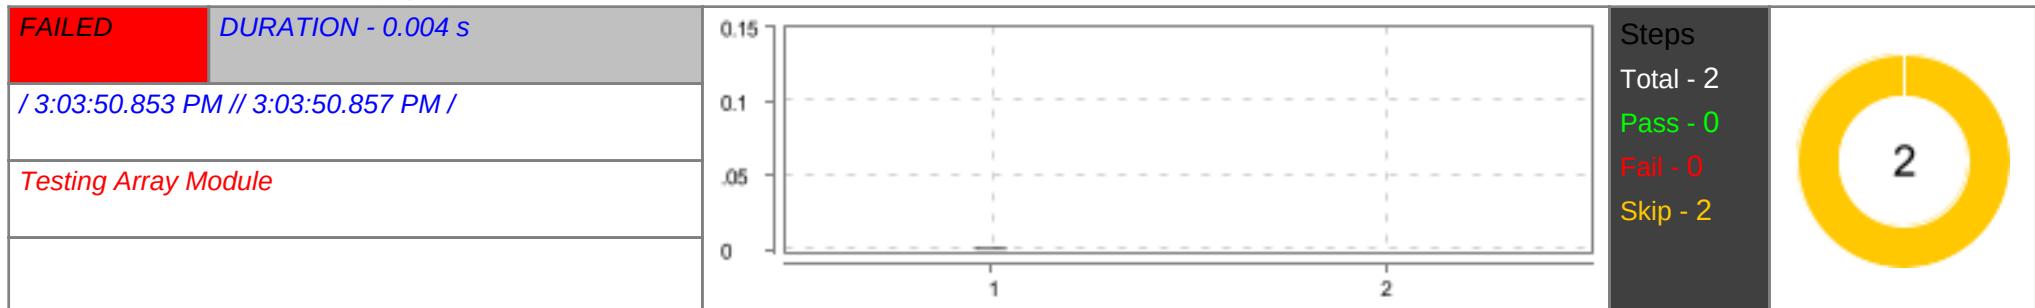


| # | Step / Hook Details | Status | Duration |
|---|---|---------|----------|
| | BEFORE - appHooks.ApplicationHooks.setup() java.lang.NullPointerException: Cannot invoke "org.openqa.selenium.WebDriver.manage()" because the return value of "com.qa.factory.DriverFactory.getDriver()" is null at com.qa.factory.DriverFactory.init_driver(DriverFactory.java:47) at com.qa.factory.DriverFactory.setupdriver(DriverFactory.java:71) at appHooks.ApplicationHooks.setup(ApplicationHooks.java:33) | FAILED | 0.001 s |
| 1 | Given The user is in the Home page after logged in | SKIPPED | 0.001 s |
| 2 | And user clicks on the dropdown in array module | SKIPPED | 0.000 s |
| | AFTER - appHooks.ApplicationHooks.tearDown(io.cucumber.java.Scenario) java.lang.NullPointerException: Cannot invoke "org.openqa.selenium.TakesScreenshot.getScreenshotAs(org.openqa.selenium.OutputType)" because the return value of "com.qa.factory.DriverFactory.getDriver()" is null at appHooks.ApplicationHooks.tearDown(ApplicationHooks.java:59) | FAILED | 0.001 s |

User checks valid code in submodule "Arrays in Python"

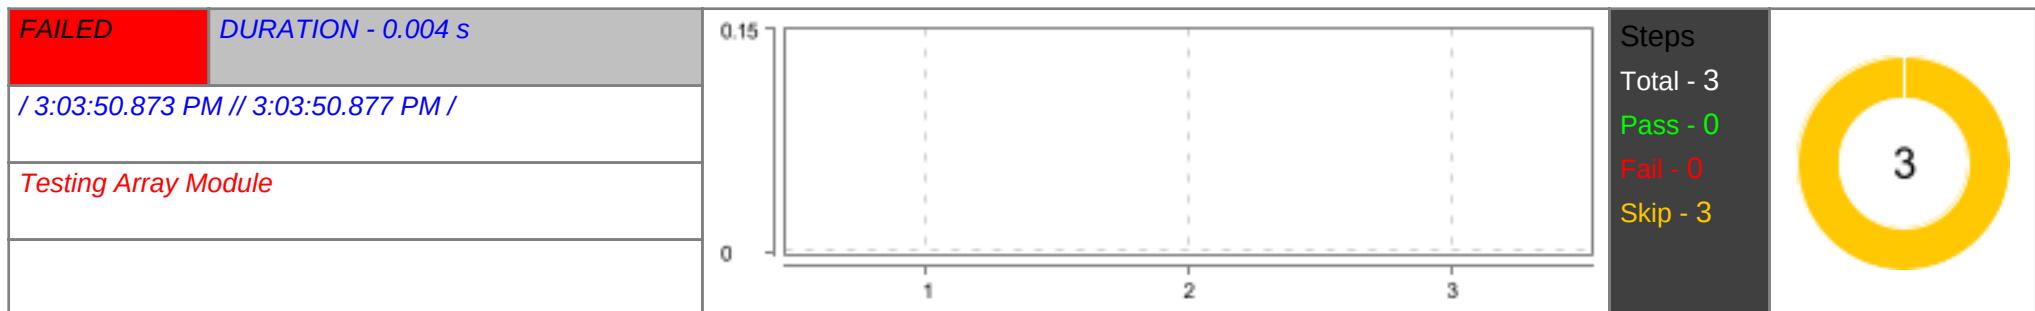

| # | Step / Hook Details | Status | Duration |
|---|---|---------|----------|
| | BEFORE - appHooks.ApplicationHooks.setup() java.lang.NullPointerException: Cannot invoke "org.openqa.selenium.WebDriver.manage()" because the return value of "com.qa.factory.DriverFactory.getDriver()" is null at com.qa.factory.DriverFactory.init_driver(DriverFactory.java:47) at com.qa.factory.DriverFactory.setupdriver(DriverFactory.java:71) at appHooks.ApplicationHooks.setup(ApplicationHooks.java:33) | FAILED | 0.001 s |
| 1 | Given user clicks on array in python submodule and user clicks on tryhere button | SKIPPED | 0.000 s |
| 2 | When user sends valid python code in try editor from excel sheet "pythonCode" and 0 | SKIPPED | 0.000 s |
| 3 | Then user clicks on run button and user get the output in the console | SKIPPED | 0.000 s |
| | AFTER - appHooks.ApplicationHooks.tearDown(io.cucumber.java.Scenario) java.lang.NullPointerException: Cannot invoke "org.openqa.selenium.TakesScreenshot.getScreenshotAs(org.openqa.selenium.OutputType)" because the return value of "com.qa.factory.DriverFactory.getDriver()" is null at appHooks.ApplicationHooks.tearDown(ApplicationHooks.java:59) | FAILED | 0.001 s |


User checks invalid code in submodule "Arrays in Python"

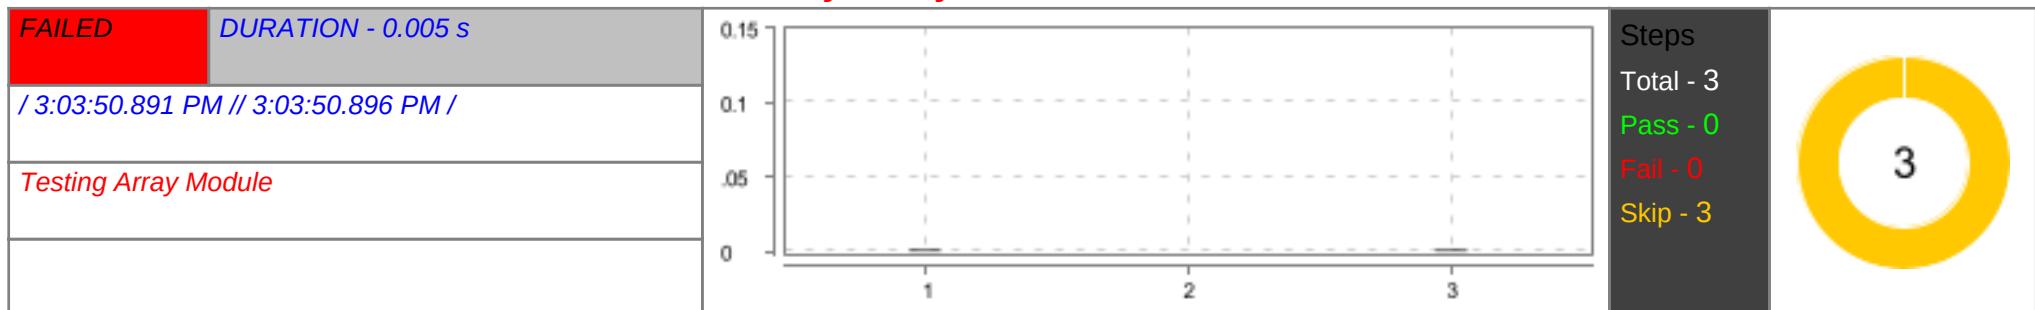

| # | Step / Hook Details | Status | Duration |
|---|--|--------|----------|
| | BEFORE - appHooks.ApplicationHooks.setup() | FAILED | 0.002 s |

| # | Step / Hook Details | Status | Duration |
|---|---|---------|----------|
| | java.lang.NullPointerException: Cannot invoke "org.openqa.selenium.WebDriver.manage()" because the return value of "com.qa.factory.DriverFactory.getDriver()" is null at com.qa.factory.DriverFactory.init_driver(DriverFactory.java:47) at com.qa.factory.DriverFactory.setupdriver(DriverFactory.java:71) at appHooks.ApplicationHooks.setup(ApplicationHooks.java:33) | | |
| 1 | Given user sends invalid syntax in try editor from excel sheet "pythonCode" and 1 | SKIPPED | 0.001 s |
| 2 | When user clicks on run button | SKIPPED | 0.000 s |
| 3 | Then user gets the alert message and navigates back | SKIPPED | 0.001 s |
| | AFTER - appHooks.ApplicationHooks.tearDown(io.cucumber.java.Scenario) java.lang.NullPointerException: Cannot invoke "org.openqa.selenium.TakesScreenshot.getScreenshotAs(org.openqa.selenium.OutputType)" because the return value of "com.qa.factory.DriverFactory.getDriver()" is null at appHooks.ApplicationHooks.tearDown(ApplicationHooks.java:59) | FAILED | 0.001 s |


User checks valid code in submodule "Arrays using List"

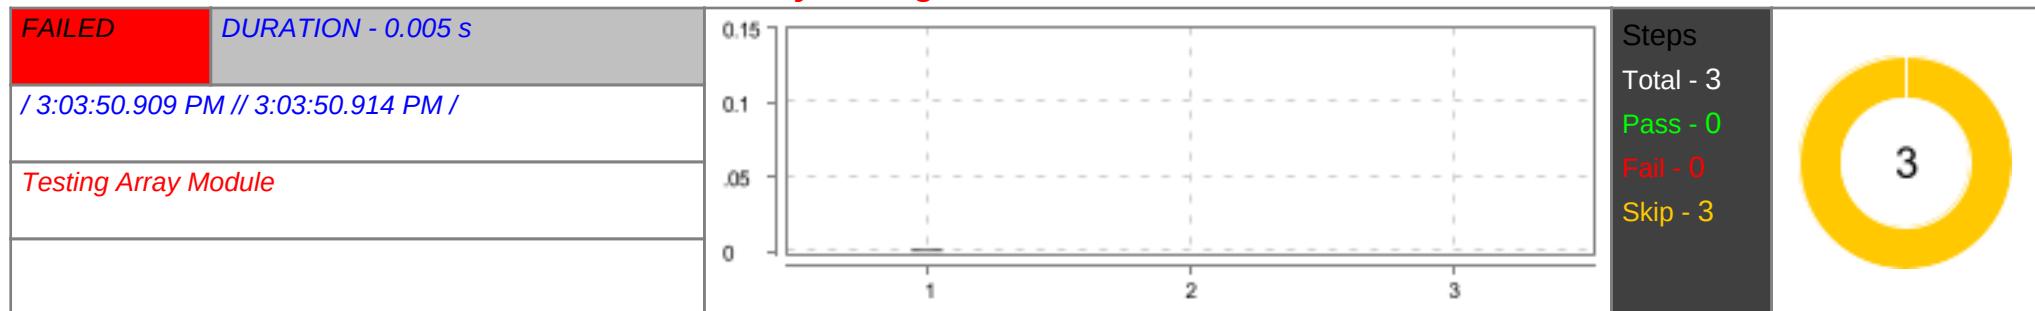

| # | Step / Hook Details | Status | Duration |
|---|---|---------|----------|
| | BEFORE - appHooks.ApplicationHooks.setup() java.lang.NullPointerException: Cannot invoke "org.openqa.selenium.WebDriver.manage()" because the return value of "com.qa.factory.DriverFactory.getDriver()" is null at com.qa.factory.DriverFactory.init_driver(DriverFactory.java:47) at com.qa.factory.DriverFactory.setupdriver(DriverFactory.java:71) at appHooks.ApplicationHooks.setup(ApplicationHooks.java:33) | FAILED | 0.001 s |
| 1 | Given user clicks on array using list submodule and user clicks on tryhere button | SKIPPED | 0.001 s |
| 2 | When user sends valid python code in try editor from excel sheet "pythonCode" and 0 | SKIPPED | 0.000 s |
| 3 | Then user clicks on run button and capture the output in console | SKIPPED | 0.000 s |
| | AFTER - appHooks.ApplicationHooks.tearDown(io.cucumber.java.Scenario) java.lang.NullPointerException: Cannot invoke "org.openqa.selenium.TakesScreenshot.getScreenshotAs(org.openqa.selenium.OutputType)" | FAILED | 0.001 s |


| # | Step / Hook Details | Status | Duration |
|---|---|--------|----------|
| | because the return value of "com.qa.factory.DriverFactory.getDriver()" is null at appHooks.ApplicationHooks.tearDown(ApplicationHooks.java:59) | | |

User checks invalid code in submodule "Arrays using List"

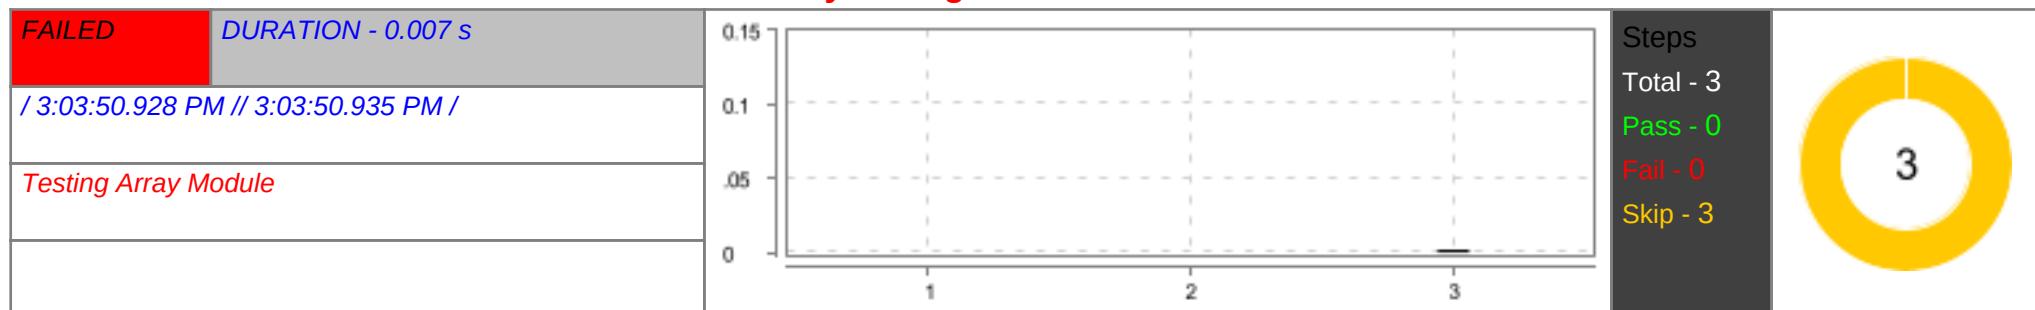


| # | Step / Hook Details | Status | Duration |
|---|---|---------|----------|
| | BEFORE - appHooks.ApplicationHooks.setup() java.lang.NullPointerException: Cannot invoke "org.openqa.selenium.WebDriver.manage()" because the return value of "com.qa.factory.DriverFactory.getDriver()" is null at com.qa.factory.DriverFactory.init_driver(DriverFactory.java:47) at com.qa.factory.DriverFactory.setupdriver(DriverFactory.java:71) at appHooks.ApplicationHooks.setup(ApplicationHooks.java:33) | FAILED | 0.002 s |
| 1 | Given user sends invalid syntax in try editor from excel sheet "pythonCode" and 1 | SKIPPED | 0.000 s |
| 2 | When user clicks on run button | SKIPPED | 0.000 s |
| 3 | Then user gets the alert message and navigates back | SKIPPED | 0.002 s |
| | AFTER - appHooks.ApplicationHooks.tearDown(io.cucumber.java.Scenario) java.lang.NullPointerException: Cannot invoke "org.openqa.selenium.TakesScreenshot.getScreenshotAs(org.openqa.selenium.OutputType)" because the return value of "com.qa.factory.DriverFactory.getDriver()" is null at appHooks.ApplicationHooks.tearDown(ApplicationHooks.java:59) | FAILED | 0.001 s |

User checks valid code in submodule "Basic operations in List"

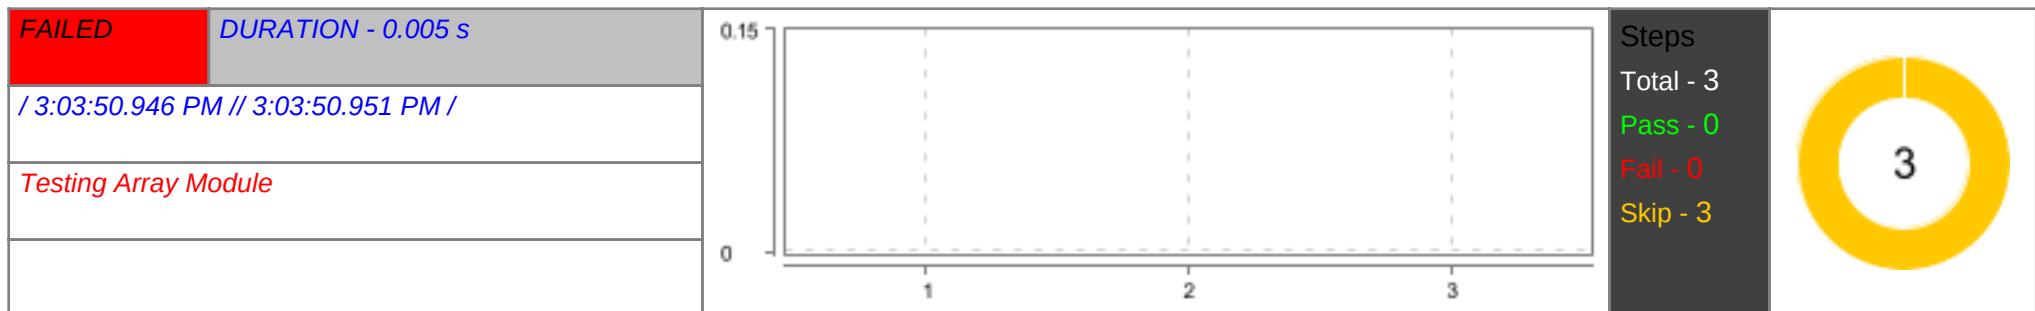

| # | Step / Hook Details | Status | Duration |
|---|---|---------|----------|
| | BEFORE - appHooks.ApplicationHooks.setup() java.lang.NullPointerException: Cannot invoke "org.openqa.selenium.WebDriver.manage()" because the return value of "com.qa.factory.DriverFactory.getDriver()" is null at com.qa.factory.DriverFactory.init_driver(DriverFactory.java:47) at com.qa.factory.DriverFactory.setupdriver(DriverFactory.java:71) at appHooks.ApplicationHooks.setup(ApplicationHooks.java:33) | FAILED | 0.001 s |
| 1 | Given user clicks on Basic operations in list and user clicks on tryhere button | SKIPPED | 0.000 s |
| 2 | When user sends valid python code in try editor from excel sheet "pythonCode" and 0 | SKIPPED | 0.000 s |
| 3 | Then user clicks on run button and capture the output in console | SKIPPED | 0.000 s |
| | AFTER - appHooks.ApplicationHooks.tearDown(io.cucumber.java.Scenario) java.lang.NullPointerException: Cannot invoke "org.openqa.selenium.TakesScreenshot.getScreenshotAs(org.openqa.selenium.OutputType)" because the return value of "com.qa.factory.DriverFactory.getDriver()" is null at appHooks.ApplicationHooks.tearDown(ApplicationHooks.java:59) | FAILED | 0.001 s |


User checks invalid code in submodule "Basic operations in List"

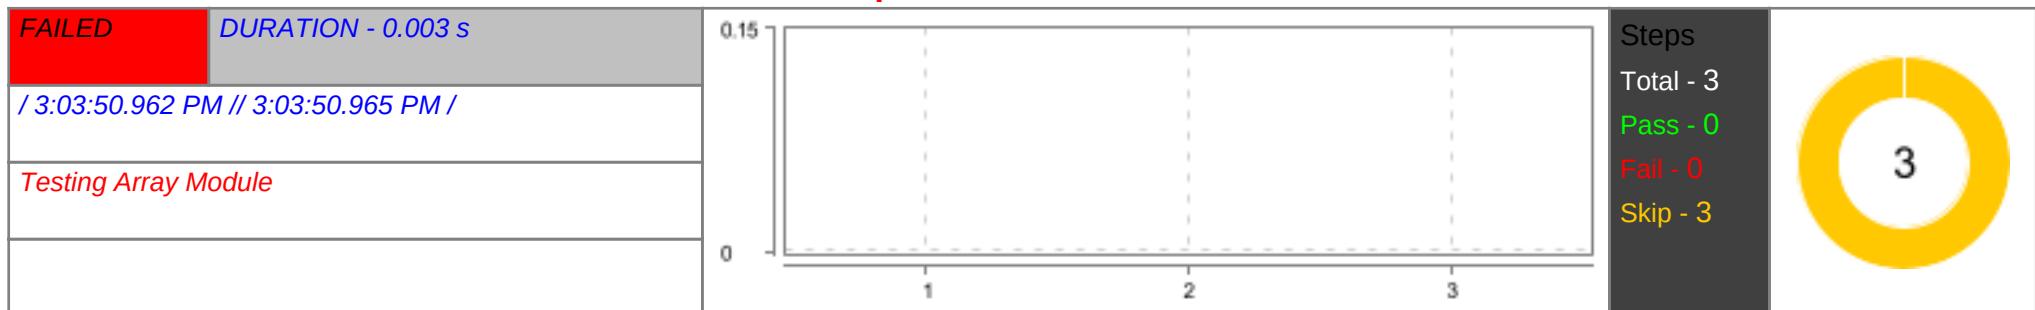

| # | Step / Hook Details | Status | Duration |
|---|--|--------|----------|
| | BEFORE - appHooks.ApplicationHooks.setup() | FAILED | 0.001 s |

| # | Step / Hook Details | Status | Duration |
|---|---|---------|----------|
| | java.lang.NullPointerException: Cannot invoke "org.openqa.selenium.WebDriver.manage()" because the return value of "com.qa.factory.DriverFactory.getDriver()" is null at com.qa.factory.DriverFactory.init_driver(DriverFactory.java:47) at com.qa.factory.DriverFactory.setupdriver(DriverFactory.java:71) at appHooks.ApplicationHooks.setup(ApplicationHooks.java:33) | | |
| 1 | Given user sends invalid syntax in try editor from excel sheet "pythonCode" and 1 | SKIPPED | 0.000 s |
| 2 | When user clicks on run button | SKIPPED | 0.000 s |
| 3 | Then user gets the alert message and navigates back | SKIPPED | 0.000 s |
| | AFTER - appHooks.ApplicationHooks.tearDown(io.cucumber.java.Scenario) | FAILED | 0.001 s |
| | java.lang.NullPointerException: Cannot invoke "org.openqa.selenium.TakesScreenshot.getScreenshotAs(org.openqa.selenium.OutputType)" because the return value of "com.qa.factory.DriverFactory.getDriver()" is null at appHooks.ApplicationHooks.tearDown(ApplicationHooks.java:59) | | |


User checks valid code in submodule "Application of Array"

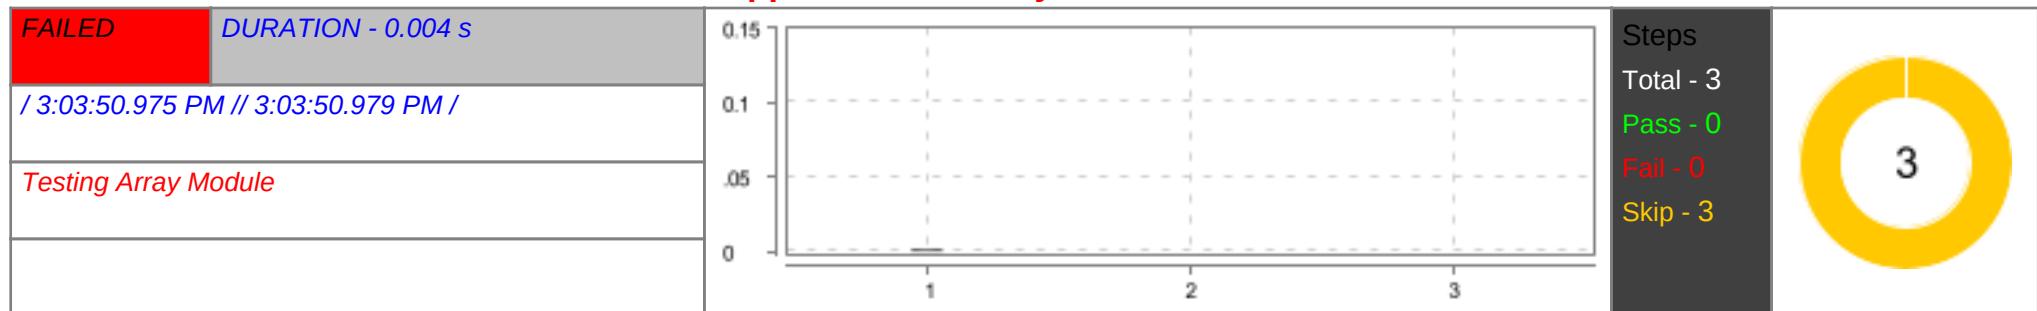

| # | Step / Hook Details | Status | Duration |
|---|---|---------|----------|
| | BEFORE - appHooks.ApplicationHooks.setup() | FAILED | 0.001 s |
| | java.lang.NullPointerException: Cannot invoke "org.openqa.selenium.WebDriver.manage()" because the return value of "com.qa.factory.DriverFactory.getDriver()" is null at com.qa.factory.DriverFactory.init_driver(DriverFactory.java:47) at com.qa.factory.DriverFactory.setupdriver(DriverFactory.java:71) at appHooks.ApplicationHooks.setup(ApplicationHooks.java:33) | | |
| 1 | Given user clicks on Application of array and user clicks on tryhere button | SKIPPED | 0.001 s |
| 2 | When user sends valid python code in try editor from excel sheet "pythonCode" and 0 | SKIPPED | 0.000 s |
| 3 | Then user clicks on run button and capture the output in console | SKIPPED | 0.000 s |
| | AFTER - appHooks.ApplicationHooks.tearDown(io.cucumber.java.Scenario) | FAILED | 0.000 s |
| | java.lang.NullPointerException: Cannot invoke "org.openqa.selenium.TakesScreenshot.getScreenshotAs(org.openqa.selenium.OutputType)" | | |


| # | Step / Hook Details | Status | Duration |
|---|---|--------|----------|
| | because the return value of "com.qa.factory.DriverFactory.getDriver()" is null at appHooks.ApplicationHooks.tearDown(ApplicationHooks.java:59) | | |

User checks invalid code in submodule "Application of Array"

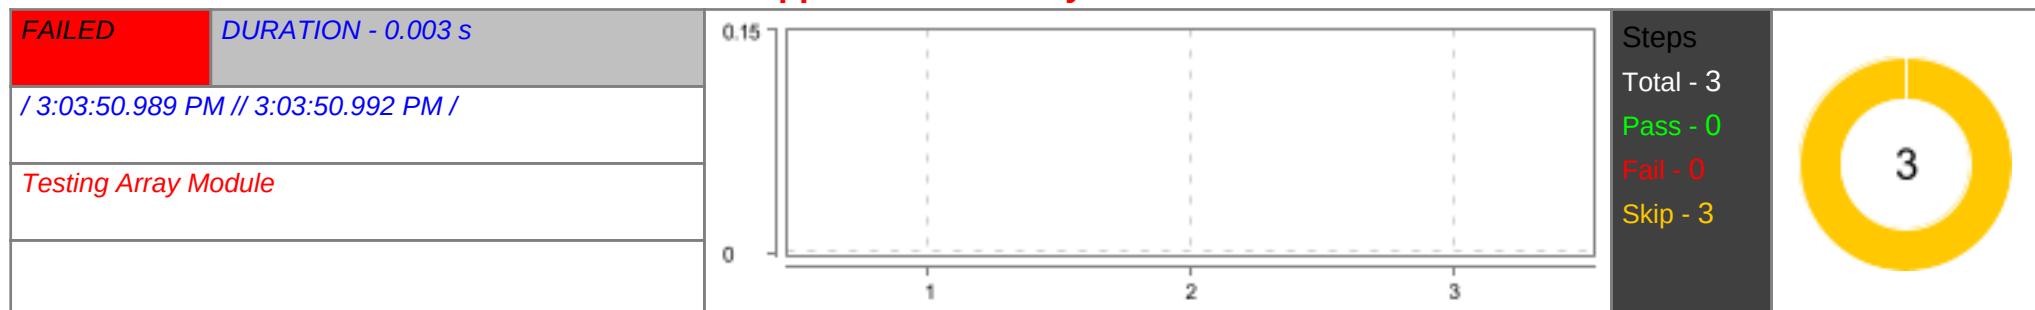


| # | Step / Hook Details | Status | Duration |
|---|---|---------|----------|
| | BEFORE - appHooks.ApplicationHooks.setup() java.lang.NullPointerException: Cannot invoke "org.openqa.selenium.WebDriver.manage()" because the return value of "com.qa.factory.DriverFactory.getDriver()" is null at com.qa.factory.DriverFactory.init_driver(DriverFactory.java:47) at com.qa.factory.DriverFactory.setupdriver(DriverFactory.java:71) at appHooks.ApplicationHooks.setup(ApplicationHooks.java:33) | FAILED | 0.000 s |
| 1 | Given user sends invalid syntax in try editor from excel sheet "pythonCode" and 1 | SKIPPED | 0.000 s |
| 2 | When user clicks on run button | SKIPPED | 0.000 s |
| 3 | Then user gets the alert message and navigates back | SKIPPED | 0.000 s |
| | AFTER - appHooks.ApplicationHooks.tearDown(io.cucumber.java.Scenario) java.lang.NullPointerException: Cannot invoke "org.openqa.selenium.TakesScreenshot.getScreenshotAs(org.openqa.selenium.OutputType)" because the return value of "com.qa.factory.DriverFactory.getDriver()" is null at appHooks.ApplicationHooks.tearDown(ApplicationHooks.java:59) | FAILED | 0.001 s |

User checks valid code in submodule "Search the array"

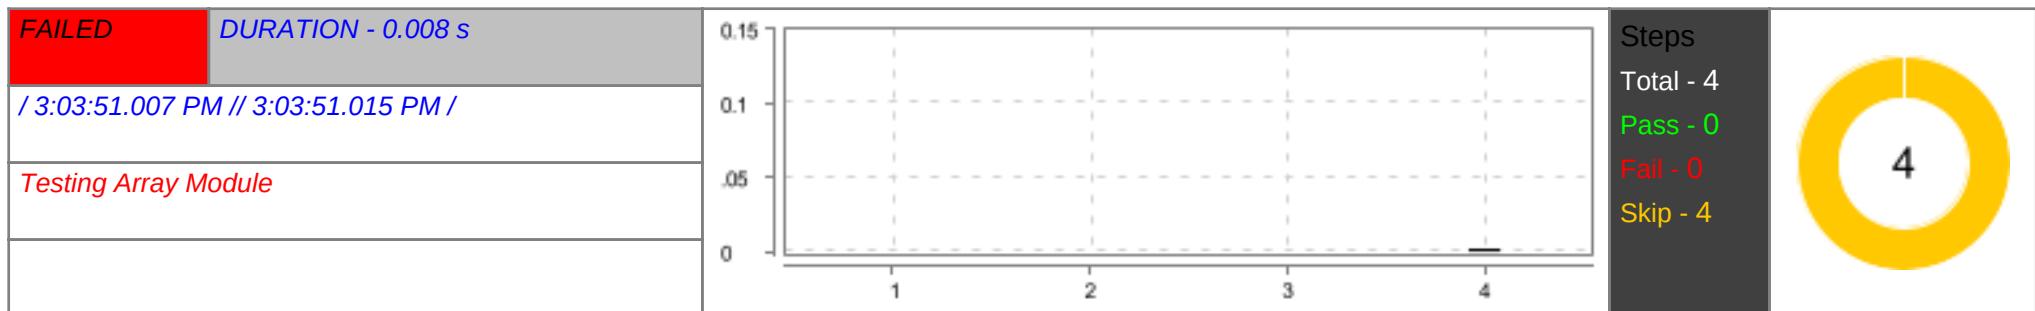


| # | Step / Hook Details | Status | Duration |
|---|---|---------|----------|
| | BEFORE - appHooks.ApplicationHooks.setup() java.lang.NullPointerException: Cannot invoke "org.openqa.selenium.WebDriver.manage()" because the return value of "com.qa.factory.DriverFactory.getDriver()" is null at com.qa.factory.DriverFactory.init_driver(DriverFactory.java:47) at com.qa.factory.DriverFactory.setupdriver(DriverFactory.java:71) at appHooks.ApplicationHooks.setup(ApplicationHooks.java:33) | FAILED | 0.002 s |
| 1 | Given user clicks on Practice Question | SKIPPED | 0.000 s |
| 2 | When user clicks on search the array and clear the try editor | SKIPPED | 0.000 s |
| 3 | Then user sends valid python code in try editor from excel sheet "pythonCode" and 2 | SKIPPED | 0.000 s |
| 4 | And user clicks on submit button and capture the output in console | SKIPPED | 0.002 s |
| | AFTER - appHooks.ApplicationHooks.tearDown(io.cucumber.java.Scenario) java.lang.NullPointerException: Cannot invoke "org.openqa.selenium.TakesScreenshot.getScreenshotAs(org.openqa.selenium.OutputType)" because the return value of "com.qa.factory.DriverFactory.getDriver()" is null at appHooks.ApplicationHooks.tearDown(ApplicationHooks.java:59) | FAILED | 0.001 s |

User checks invalid code in submodule "Search the array"

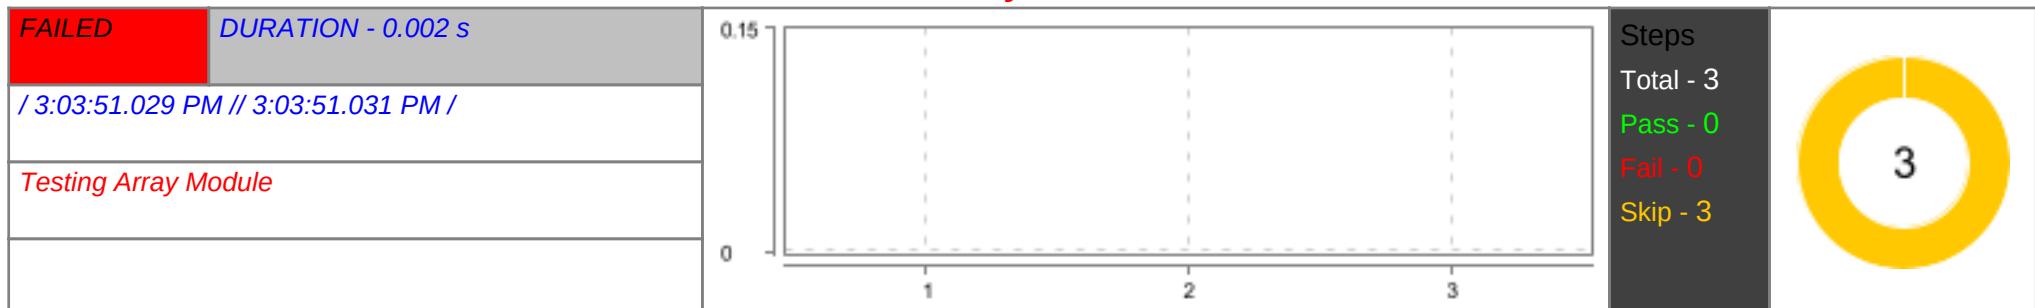

| # | Step / Hook Details | Status | Duration |
|---|---|---------|----------|
| | BEFORE - appHooks.ApplicationHooks.setup() java.lang.NullPointerException: Cannot invoke "org.openqa.selenium.WebDriver.manage()" because the return value of "com.qa.factory.DriverFactory.getDriver()" is null at com.qa.factory.DriverFactory.init_driver(DriverFactory.java:47) at com.qa.factory.DriverFactory.setupdriver(DriverFactory.java:71) at appHooks.ApplicationHooks.setup(ApplicationHooks.java:33) | FAILED | 0.001 s |
| 1 | Given user sends invalid syntax in try editor from excel sheet "pythonCode" and 1 | SKIPPED | 0.000 s |
| 2 | When user clicks on run button | SKIPPED | 0.000 s |
| 3 | Then user gets the alert message and navigates back | SKIPPED | 0.000 s |
| | AFTER - appHooks.ApplicationHooks.tearDown(io.cucumber.java.Scenario) java.lang.NullPointerException: Cannot invoke "org.openqa.selenium.TakesScreenshot.getScreenshotAs(org.openqa.selenium.OutputType)" because the return value of "com.qa.factory.DriverFactory.getDriver()" is null at appHooks.ApplicationHooks.tearDown(ApplicationHooks.java:59) | FAILED | 0.000 s |


User checks valid code in submodule "Max Consecutive Ones"

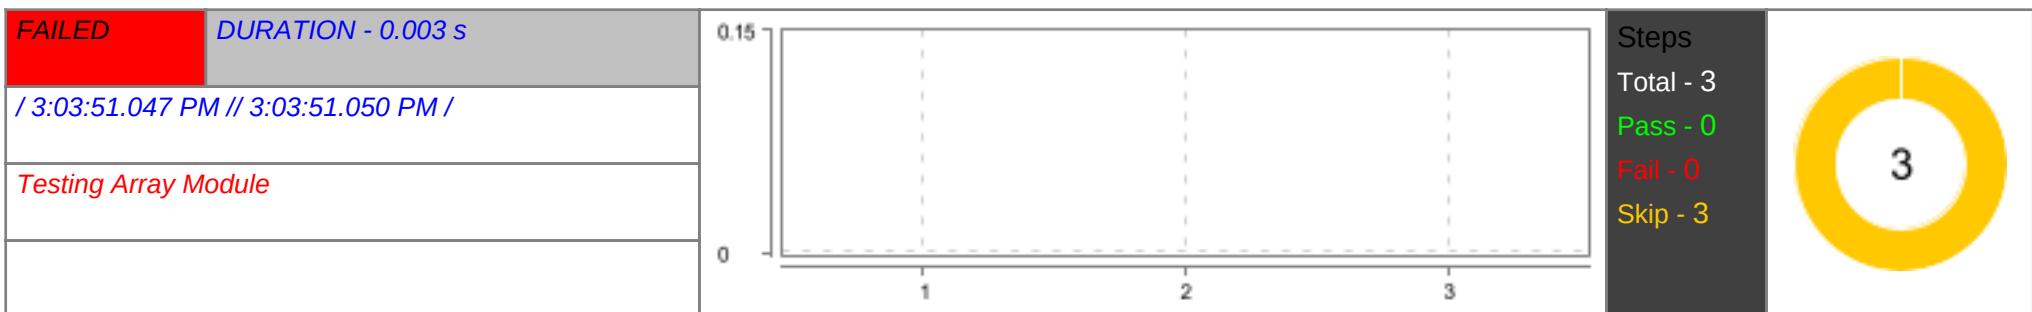

| # | Step / Hook Details | Status | Duration |
|---|---|---------|----------|
| | BEFORE - appHooks.ApplicationHooks.setup() java.lang.NullPointerException: Cannot invoke "org.openqa.selenium.WebDriver.manage()" because the return value of "com.qa.factory.DriverFactory.getDriver()" is null at com.qa.factory.DriverFactory.init_driver(DriverFactory.java:47) at com.qa.factory.DriverFactory.setupdriver(DriverFactory.java:71) at appHooks.ApplicationHooks.setup(ApplicationHooks.java:33) | FAILED | 0.000 s |
| 1 | Given user clicks on max consecutive ones and clear the try editor | SKIPPED | 0.000 s |
| 2 | When user sends valid python code in try editor from excel sheet "pythonCode" and 0 | SKIPPED | 0.000 s |
| 3 | Then user clicks on run button and capture the output in console | SKIPPED | 0.000 s |
| | AFTER - appHooks.ApplicationHooks.tearDown(io.cucumber.java.Scenario) | FAILED | 0.001 s |


| # | Step / Hook Details | Status | Duration |
|---|---|--------|----------|
| | java.lang.NullPointerException: Cannot invoke "org.openqa.selenium.TakesScreenshot.getScreenshotAs(org.openqa.selenium.OutputType)" because the return value of "com.qa.factory.DriverFactory.getDriver()" is null at appHooks.ApplicationHooks.tearDown(ApplicationHooks.java:59) | | |

User checks invalid code in submodule "Max Consecutive Ones"

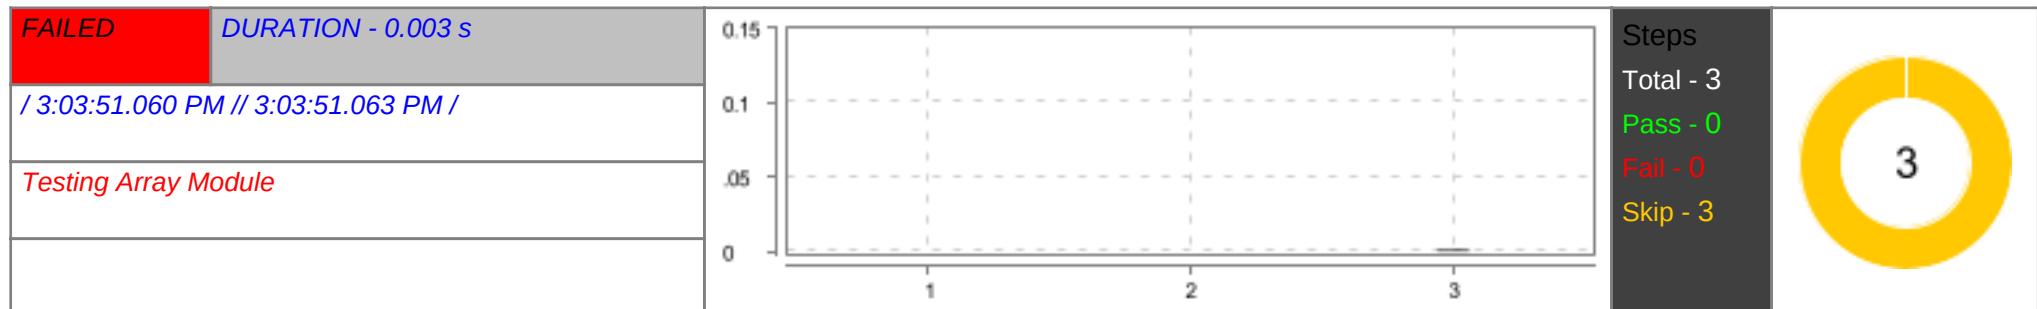


| # | Step / Hook Details | Status | Duration |
|---|---|---------|----------|
| | BEFORE - appHooks.ApplicationHooks.setup() java.lang.NullPointerException: Cannot invoke "org.openqa.selenium.WebDriver.manage()" because the return value of "com.qa.factory.DriverFactory.getDriver()" is null at com.qa.factory.DriverFactory.init_driver(DriverFactory.java:47) at com.qa.factory.DriverFactory.setupdriver(DriverFactory.java:71) at appHooks.ApplicationHooks.setup(ApplicationHooks.java:33) | FAILED | 0.001 s |
| 1 | Given user sends invalid syntax in try editor from excel sheet "pythonCode" and 1 | SKIPPED | 0.000 s |
| 2 | When user clicks on run button | SKIPPED | 0.000 s |
| 3 | Then user gets the alert message and navigates back | SKIPPED | 0.001 s |
| | AFTER - appHooks.ApplicationHooks.tearDown(io.cucumber.java.Scenario) java.lang.NullPointerException: Cannot invoke "org.openqa.selenium.TakesScreenshot.getScreenshotAs(org.openqa.selenium.OutputType)" because the return value of "com.qa.factory.DriverFactory.getDriver()" is null at appHooks.ApplicationHooks.tearDown(ApplicationHooks.java:59) | FAILED | 0.000 s |

User checks valid code in submodule "Find numbers with even number of digits"

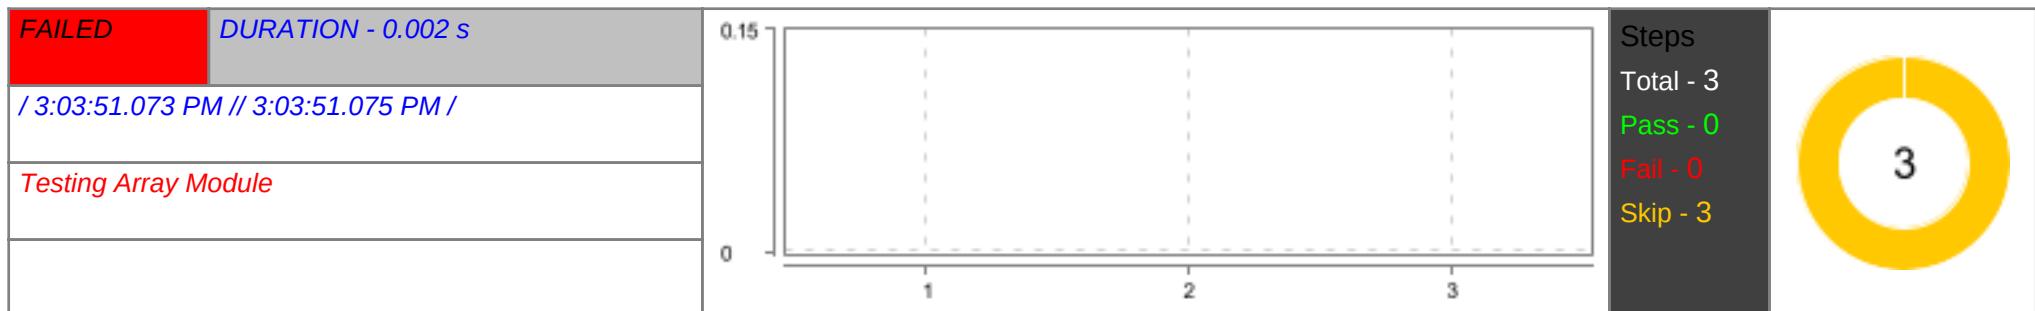

| # | Step / Hook Details | Status | Duration |
|---|---|---------|----------|
| | BEFORE - appHooks.ApplicationHooks.setup() java.lang.NullPointerException: Cannot invoke "org.openqa.selenium.WebDriver.manage()" because the return value of "com.qa.factory.DriverFactory.getDriver()" is null at com.qa.factory.DriverFactory.init_driver(DriverFactory.java:47) at com.qa.factory.DriverFactory.setupdriver(DriverFactory.java:71) at appHooks.ApplicationHooks.setup(ApplicationHooks.java:33) | FAILED | 0.001 s |
| 1 | Given user clicks on Find numbers with even number of digits and clear the try editor | SKIPPED | 0.000 s |
| 2 | When user sends valid python code in try editor from excel sheet "pythonCode" and 0 | SKIPPED | 0.000 s |
| 3 | Then user clicks on run button and capture the output in console | SKIPPED | 0.000 s |
| | AFTER - appHooks.ApplicationHooks.tearDown(io.cucumber.java.Scenario) java.lang.NullPointerException: Cannot invoke "org.openqa.selenium.TakesScreenshot.getScreenshotAs(org.openqa.selenium.OutputType)" because the return value of "com.qa.factory.DriverFactory.getDriver()" is null at appHooks.ApplicationHooks.tearDown(ApplicationHooks.java:59) | FAILED | 0.000 s |


User checks invalid code in submodule "Find numbers with even number of digits"

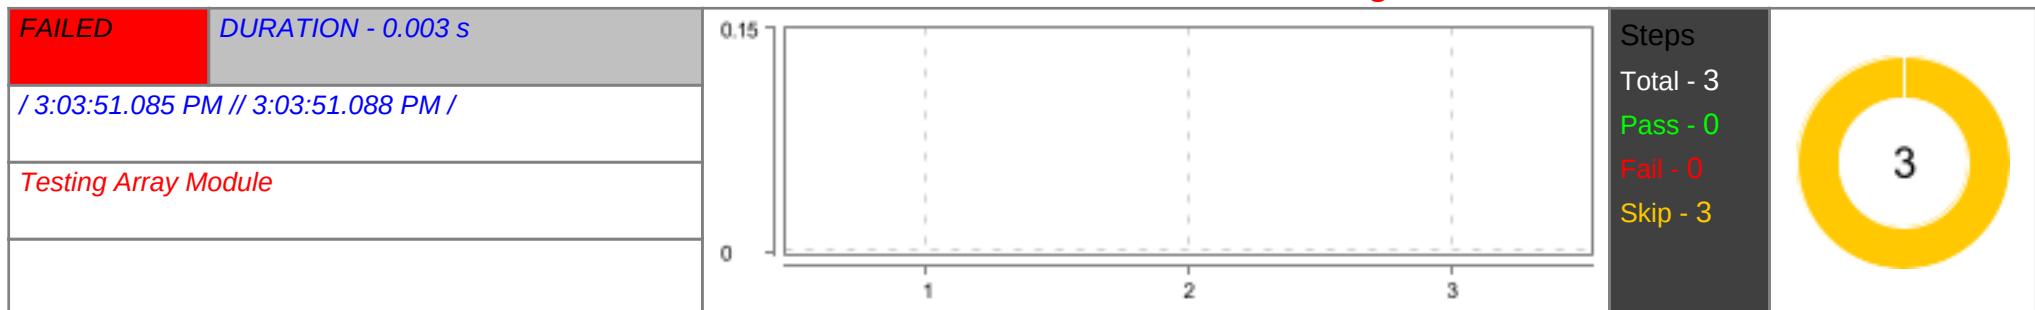

| # | Step / Hook Details | Status | Duration |
|---|--|--------|----------|
| | BEFORE - appHooks.ApplicationHooks.setup() | FAILED | 0.002 s |

| # | Step / Hook Details | Status | Duration |
|---|---|---------|----------|
| | java.lang.NullPointerException: Cannot invoke "org.openqa.selenium.WebDriver.manage()" because the return value of "com.qa.factory.DriverFactory.getDriver()" is null at com.qa.factory.DriverFactory.init_driver(DriverFactory.java:47) at com.qa.factory.DriverFactory.setupdriver(DriverFactory.java:71) at appHooks.ApplicationHooks.setup(ApplicationHooks.java:33) | | |
| 1 | Given user sends invalid syntax in try editor from excel sheet "pythonCode" and 1 | SKIPPED | 0.000 s |
| 2 | When user clicks on run button | SKIPPED | 0.000 s |
| 3 | Then user gets the alert message and navigates back | SKIPPED | 0.000 s |
| | AFTER - appHooks.ApplicationHooks.tearDown(io.cucumber.java.Scenario) java.lang.NullPointerException: Cannot invoke "org.openqa.selenium.TakesScreenshot.getScreenshotAs(org.openqa.selenium.OutputType)" because the return value of "com.qa.factory.DriverFactory.getDriver()" is null at appHooks.ApplicationHooks.tearDown(ApplicationHooks.java:59) | FAILED | 0.001 s |


User checks valid code in submodule "Squares of Sorted Array"

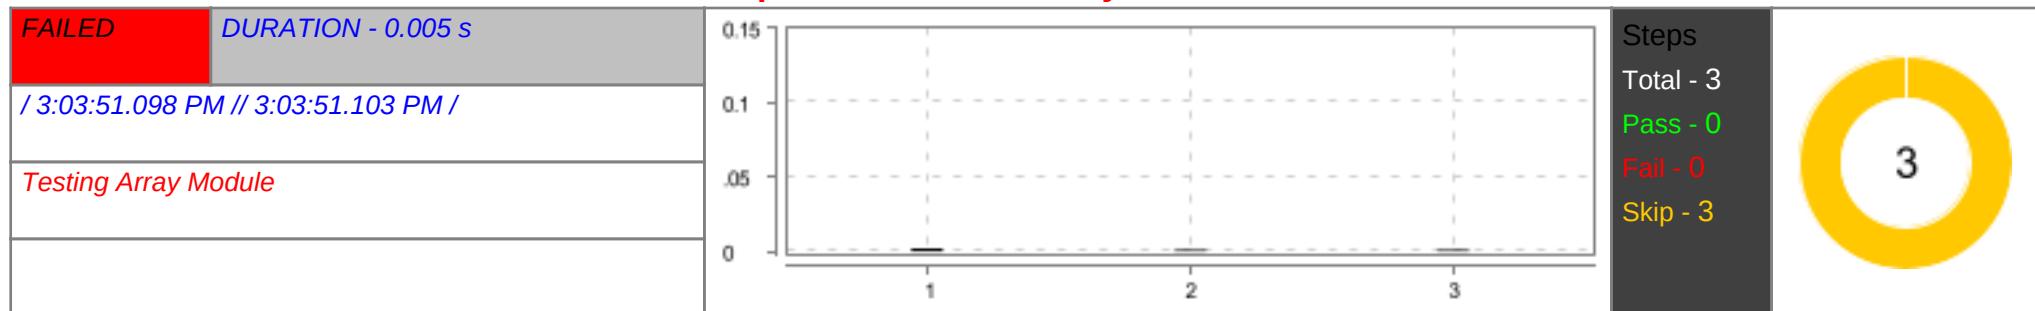

| # | Step / Hook Details | Status | Duration |
|---|---|---------|----------|
| | BEFORE - appHooks.ApplicationHooks.setup() java.lang.NullPointerException: Cannot invoke "org.openqa.selenium.WebDriver.manage()" because the return value of "com.qa.factory.DriverFactory.getDriver()" is null at com.qa.factory.DriverFactory.init_driver(DriverFactory.java:47) at com.qa.factory.DriverFactory.setupdriver(DriverFactory.java:71) at appHooks.ApplicationHooks.setup(ApplicationHooks.java:33) | FAILED | 0.001 s |
| 1 | Given user clicks on the squares of sorted array and clear the try editor | SKIPPED | 0.002 s |
| 2 | When user sends valid python code in try editor from excel sheet "pythonCode" and 0 | SKIPPED | 0.001 s |
| 3 | Then user clicks on run button and capture the output in console | SKIPPED | 0.001 s |
| | AFTER - appHooks.ApplicationHooks.tearDown(io.cucumber.java.Scenario) java.lang.NullPointerException: Cannot invoke "org.openqa.selenium.TakesScreenshot.getScreenshotAs(org.openqa.selenium.OutputType)" | FAILED | 0.000 s |

| # | Step / Hook Details | Status | Duration |
|---|---|--------|----------|
| | because the return value of "com.qa.factory.DriverFactory.getDriver()" is null at appHooks.ApplicationHooks.tearDown(ApplicationHooks.java:59) | | |

User checks invalid code in submodule "Squares of Sorted Array"

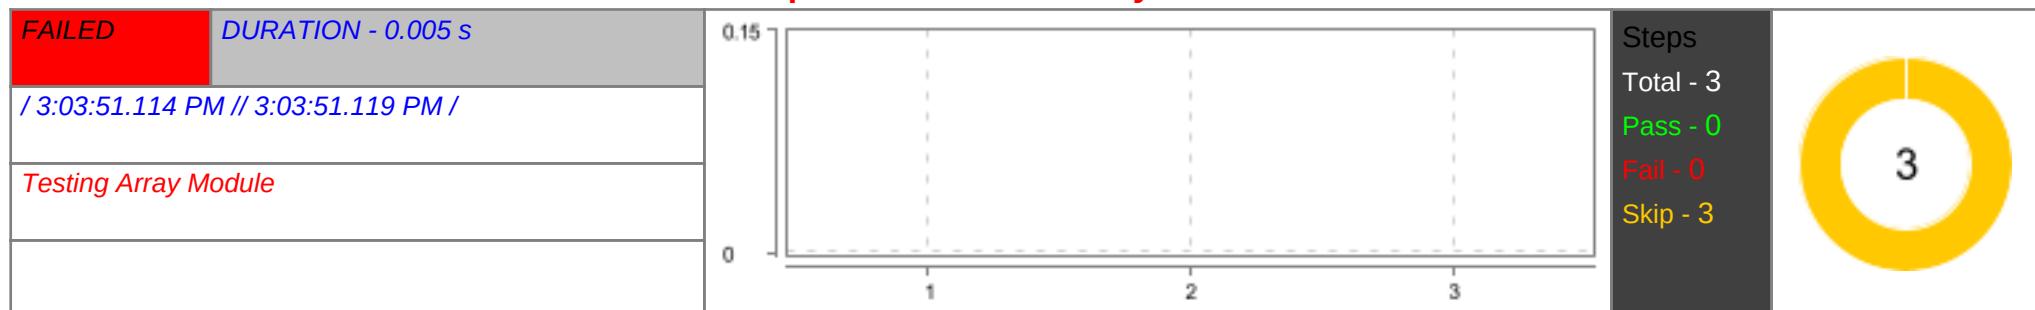


| # | Step / Hook Details | Status | Duration |
|---|---|---------|----------|
| | BEFORE - appHooks.ApplicationHooks.setup() java.lang.NullPointerException: Cannot invoke "org.openqa.selenium.WebDriver.manage()" because the return value of "com.qa.factory.DriverFactory.getDriver()" is null at com.qa.factory.DriverFactory.init_driver(DriverFactory.java:47) at com.qa.factory.DriverFactory.setupdriver(DriverFactory.java:71) at appHooks.ApplicationHooks.setup(ApplicationHooks.java:33) | FAILED | 0.001 s |
| 1 | Given user sends invalid syntax in try editor from excel sheet "pythonCode" and 1 | SKIPPED | 0.000 s |
| 2 | When user clicks on run button | SKIPPED | 0.000 s |
| 3 | Then user gets the alert message and navigates back | SKIPPED | 0.000 s |
| | AFTER - appHooks.ApplicationHooks.tearDown(io.cucumber.java.Scenario) java.lang.NullPointerException: Cannot invoke "org.openqa.selenium.TakesScreenshot.getScreenshotAs(org.openqa.selenium.OutputType)" because the return value of "com.qa.factory.DriverFactory.getDriver()" is null at appHooks.ApplicationHooks.tearDown(ApplicationHooks.java:59) | FAILED | 0.001 s |

Testing Linked List Module




The user is able to signin with registered credential

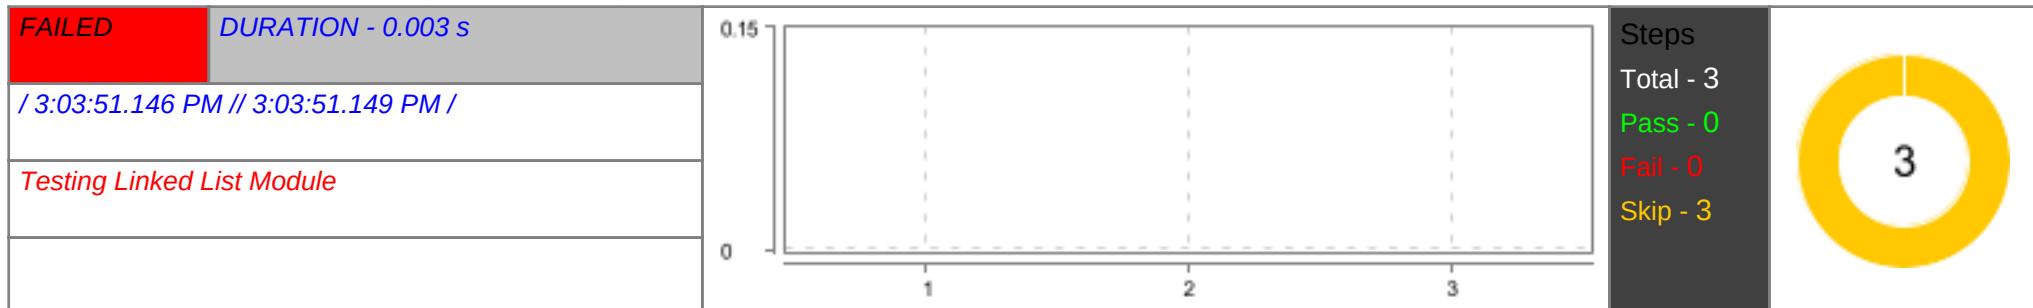


| # | Step / Hook Details | Status | Duration |
|---|---|---------|----------|
| | BEFORE - appHooks.ApplicationHooks.setup() java.lang.NullPointerException: Cannot invoke "org.openqa.selenium.WebDriver.manage()" because the return value of "com.qa.factory.DriverFactory.getDriver()" is null at com.qa.factory.DriverFactory.init_driver(DriverFactory.java:47) at com.qa.factory.DriverFactory.setupdriver(DriverFactory.java:71) at appHooks.ApplicationHooks.setup(ApplicationHooks.java:33) | FAILED | 0.001 s |
| 1 | Given The user is in the Sign in page | SKIPPED | 0.000 s |
| 2 | When The user enters a valid "pluton@gmail.com" and "Nnsdet@115" | SKIPPED | 0.000 s |
| 3 | Then click login button to verify and pagetitle is "NumPyNinja" | SKIPPED | 0.000 s |
| | AFTER - appHooks.ApplicationHooks.tearDown(io.cucumber.java.Scenario) java.lang.NullPointerException: Cannot invoke "org.openqa.selenium.TakesScreenshot.getScreenshotAs(org.openqa.selenium.OutputType)" because the return value of "com.qa.factory.DriverFactory.getDriver()" is null at appHooks.ApplicationHooks.tearDown(ApplicationHooks.java:59) | FAILED | 0.000 s |

User navigated to "linked list" page

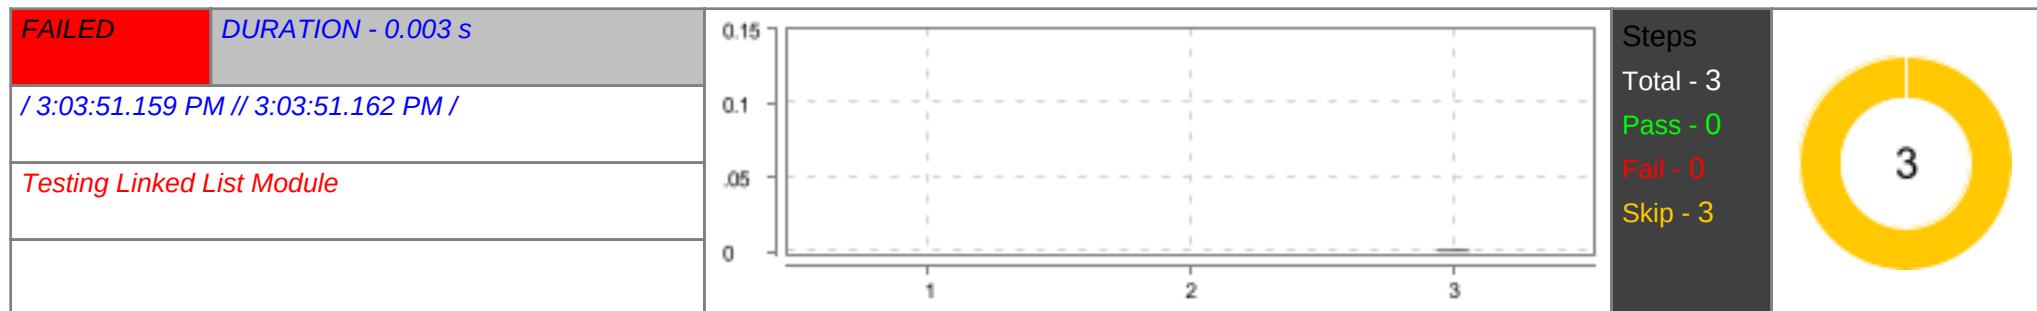

| # | Step / Hook Details | Status | Duration |
|---|---|---------|----------|
| | BEFORE - appHooks.ApplicationHooks.setup() java.lang.NullPointerException: Cannot invoke "org.openqa.selenium.WebDriver.manage()" because the return value of "com.qa.factory.DriverFactory.getDriver()" is null at com.qa.factory.DriverFactory.init_driver(DriverFactory.java:47) at com.qa.factory.DriverFactory.setupdriver(DriverFactory.java:71) at appHooks.ApplicationHooks.setup(ApplicationHooks.java:33) | FAILED | 0.001 s |
| 1 | Given The user is in the Home page after logged in | SKIPPED | 0.000 s |
| 2 | When The user selecting "Linked List" item from the drop down menu | SKIPPED | 0.000 s |
| 3 | Then The user should be directed to "Linked List" Page | SKIPPED | 0.001 s |
| | AFTER - appHooks.ApplicationHooks.tearDown(io.cucumber.java.Scenario) java.lang.NullPointerException: Cannot invoke "org.openqa.selenium.TakesScreenshot.getScreenshotAs(org.openqa.selenium.OutputType)" because the return value of "com.qa.factory.DriverFactory.getDriver()" is null at appHooks.ApplicationHooks.tearDown(ApplicationHooks.java:59) | FAILED | 0.000 s |


User navigated to "Introduction" page

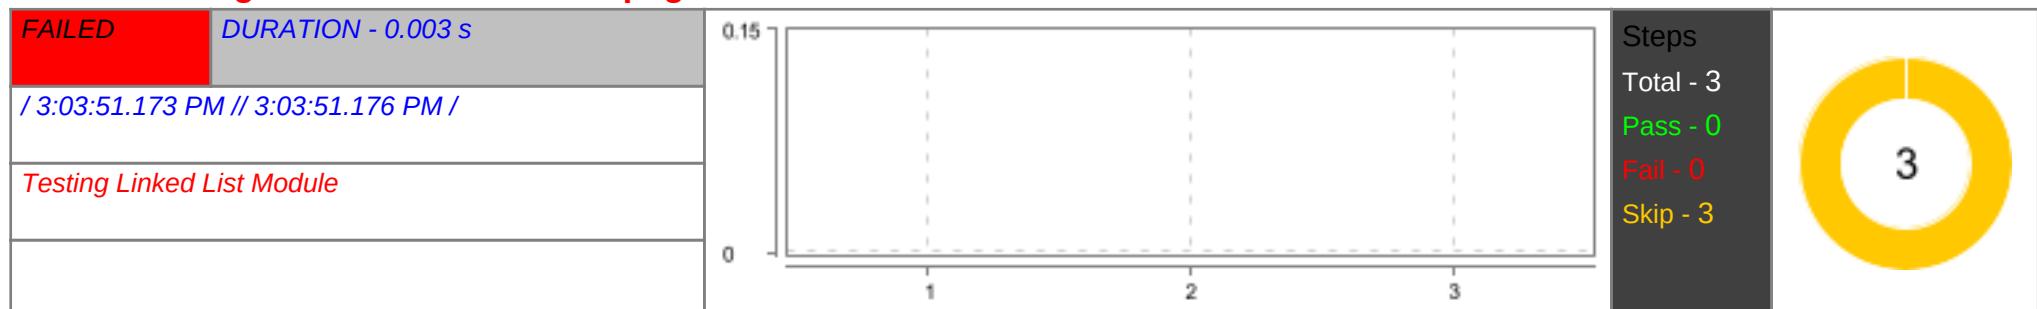

| # | Step / Hook Details | Status | Duration |
|---|--|--------|----------|
| | BEFORE - appHooks.ApplicationHooks.setup() | FAILED | 0.002 s |

| # | Step / Hook Details | Status | Duration |
|---|---|---------|----------|
| | java.lang.NullPointerException: Cannot invoke "org.openqa.selenium.WebDriver.manage()" because the return value of "com.qa.factory.DriverFactory.getDriver()" is null at com.qa.factory.DriverFactory.init_driver(DriverFactory.java:47) at com.qa.factory.DriverFactory.setupdriver(DriverFactory.java:71) at appHooks.ApplicationHooks.setup(ApplicationHooks.java:33) | | |
| 1 | Given The user is in the "Linked List" page after logged in | SKIPPED | 0.000 s |
| 2 | When The user clicks "Introduction" link of Linked List page | SKIPPED | 0.000 s |
| 3 | Then The user should be directed to "Introduction" Page | SKIPPED | 0.000 s |
| | AFTER - appHooks.ApplicationHooks.tearDown(io.cucumber.java.Scenario) | FAILED | 0.000 s |
| | java.lang.NullPointerException: Cannot invoke "org.openqa.selenium.TakesScreenshot.getScreenshotAs(org.openqa.selenium.OutputType)" because the return value of "com.qa.factory.DriverFactory.getDriver()" is null at appHooks.ApplicationHooks.tearDown(ApplicationHooks.java:59) | | |


User navigated to tryEditor page with Run button from Introduction page

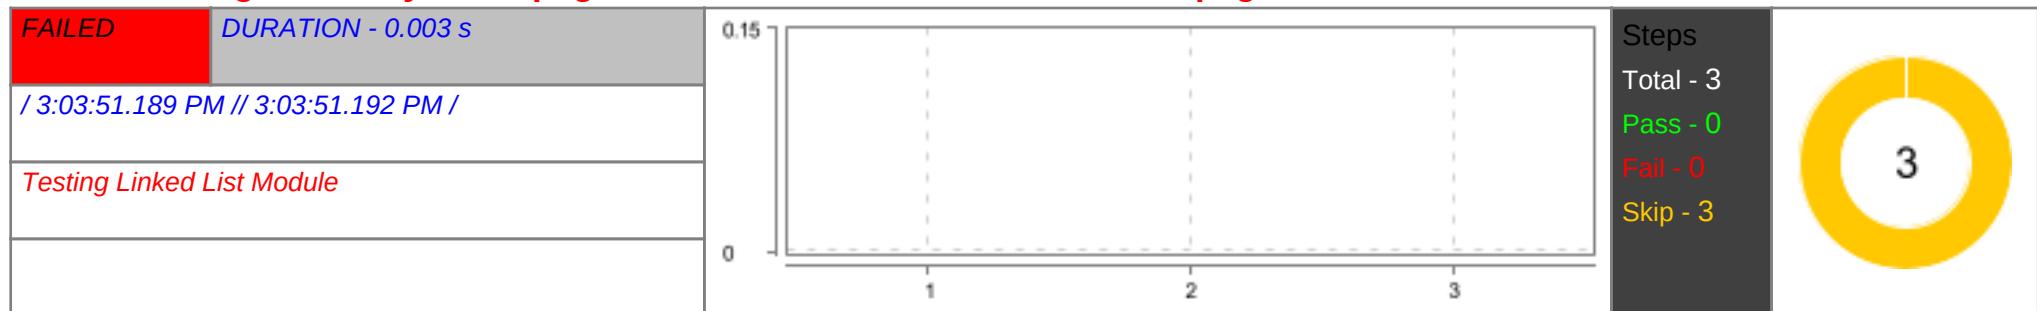

| # | Step / Hook Details | Status | Duration |
|---|---|---------|----------|
| | BEFORE - appHooks.ApplicationHooks.setup() java.lang.NullPointerException: Cannot invoke "org.openqa.selenium.WebDriver.manage()" because the return value of "com.qa.factory.DriverFactory.getDriver()" is null at com.qa.factory.DriverFactory.init_driver(DriverFactory.java:47) at com.qa.factory.DriverFactory.setupdriver(DriverFactory.java:71) at appHooks.ApplicationHooks.setup(ApplicationHooks.java:33) | FAILED | 0.001 s |
| 1 | Given The user is on the "Introduction" page of Linked List after logged in | SKIPPED | 0.000 s |
| 2 | When The user clicks Try Here button | SKIPPED | 0.000 s |
| 3 | Then The user should be redirected to a page having an tryEditor with a Run button to test | SKIPPED | 0.000 s |
| | AFTER - appHooks.ApplicationHooks.tearDown(io.cucumber.java.Scenario) | FAILED | 0.000 s |
| | java.lang.NullPointerException: Cannot invoke "org.openqa.selenium.TakesScreenshot.getScreenshotAs(org.openqa.selenium.OutputType)" | | |


| # | Step / Hook Details | Status | Duration |
|---|---|--------|----------|
| | because the return value of "com.qa.factory.DriverFactory.getDriver()" is null at appHooks.ApplicationHooks.tearDown(ApplicationHooks.java:59) | | |

The user run the code in tryEditor with valid input for Introduction page

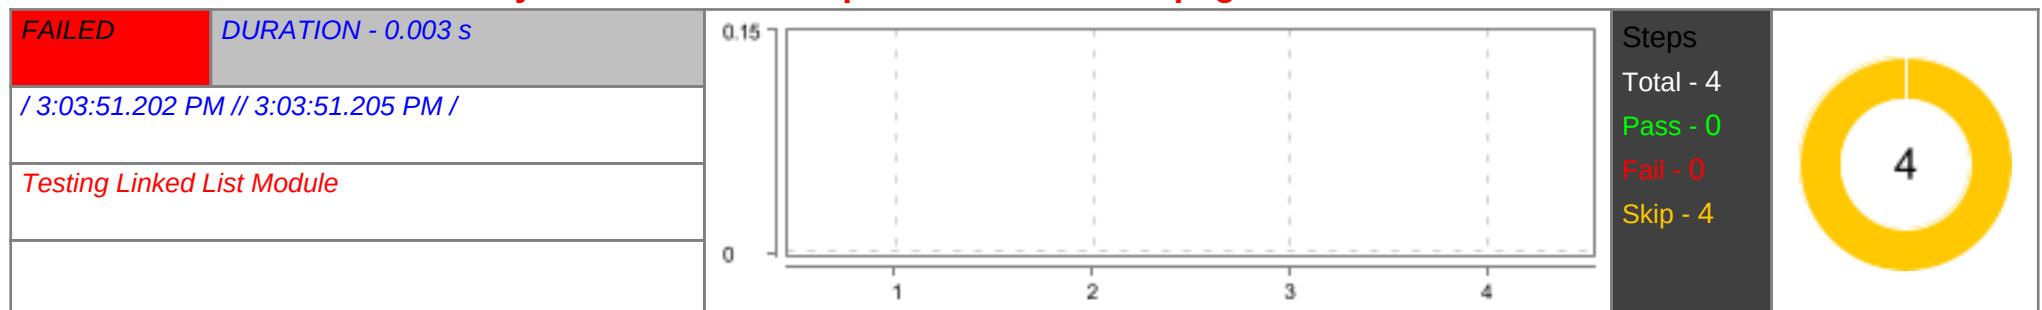


| # | Step / Hook Details | Status | Duration |
|---|---|---------|----------|
| | BEFORE - appHooks.ApplicationHooks.setup() java.lang.NullPointerException: Cannot invoke "org.openqa.selenium.WebDriver.manage()" because the return value of "com.qa.factory.DriverFactory.getDriver()" is null at com.qa.factory.DriverFactory.init_driver(DriverFactory.java:47) at com.qa.factory.DriverFactory.setupdriver(DriverFactory.java:71) at appHooks.ApplicationHooks.setup(ApplicationHooks.java:33) | FAILED | 0.000 s |
| 1 | Given The user is in a try here page having tryEditor with a Run button to test | SKIPPED | 0.000 s |
| 2 | When The user gets input from sheet "pythonCode" and 0 | SKIPPED | 0.000 s |
| 3 | And user click on Run button | SKIPPED | 0.000 s |
| 4 | Then The user should be presented with Run output | SKIPPED | 0.000 s |
| | AFTER - appHooks.ApplicationHooks.tearDown(io.cucumber.java.Scenario) java.lang.NullPointerException: Cannot invoke "org.openqa.selenium.TakesScreenshot.getScreenshotAs(org.openqa.selenium.OutputType)" because the return value of "com.qa.factory.DriverFactory.getDriver()" is null at appHooks.ApplicationHooks.tearDown(ApplicationHooks.java:59) | FAILED | 0.001 s |

The user getting error message with invalid python code for Introduction page

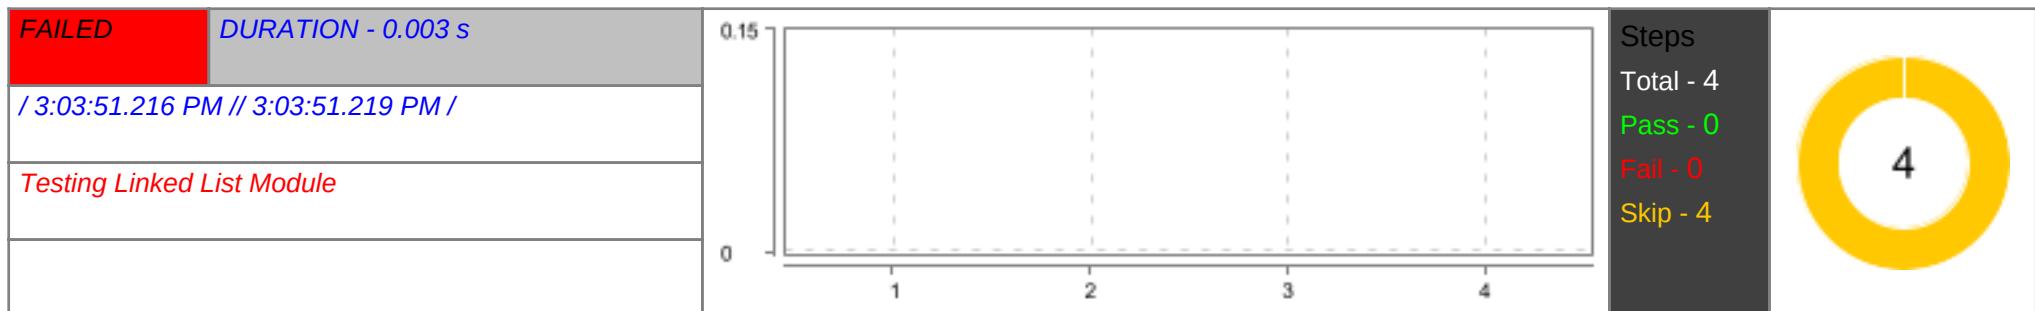


| # | Step / Hook Details | Status | Duration |
|---|---|---------|----------|
| | BEFORE - appHooks.ApplicationHooks.setup() java.lang.NullPointerException: Cannot invoke "org.openqa.selenium.WebDriver.manage()" because the return value of "com.qa.factory.DriverFactory.getDriver()" is null at com.qa.factory.DriverFactory.init_driver(DriverFactory.java:47) at com.qa.factory.DriverFactory.setupdriver(DriverFactory.java:71) at appHooks.ApplicationHooks.setup(ApplicationHooks.java:33) | FAILED | 0.001 s |
| 1 | Given The user is in a try here page having tryEditor with a Run button to test | SKIPPED | 0.000 s |
| 2 | When The user gets invalid input from sheet "pythonCode" and 1 | SKIPPED | 0.000 s |
| 3 | And user click on Run button | SKIPPED | 0.000 s |
| 4 | Then The user should be presented with the Run output with alert | SKIPPED | 0.000 s |
| | AFTER - appHooks.ApplicationHooks.tearDown(io.cucumber.java.Scenario) java.lang.NullPointerException: Cannot invoke "org.openqa.selenium.TakesScreenshot.getScreenshotAs(org.openqa.selenium.OutputType)" because the return value of "com.qa.factory.DriverFactory.getDriver()" is null at appHooks.ApplicationHooks.tearDown(ApplicationHooks.java:59) | FAILED | 0.001 s |

User navigated to "Creating Linked List" page

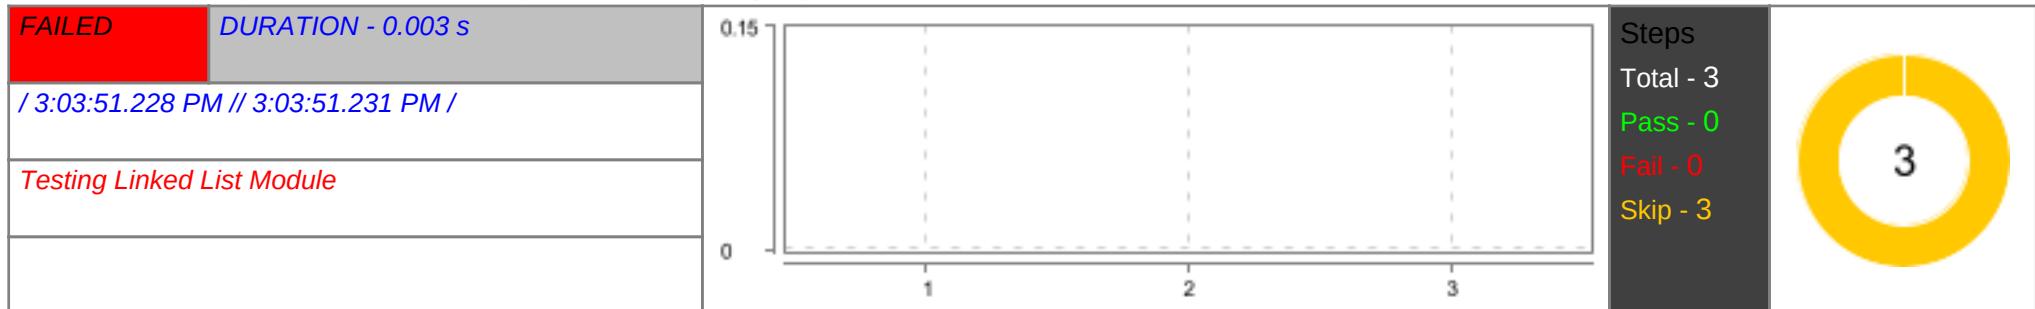

| # | Step / Hook Details | Status | Duration |
|---|---|---------|----------|
| | BEFORE - appHooks.ApplicationHooks.setup() java.lang.NullPointerException: Cannot invoke "org.openqa.selenium.WebDriver.manage()" because the return value of "com.qa.factory.DriverFactory.getDriver()" is null at com.qa.factory.DriverFactory.init_driver(DriverFactory.java:47) at com.qa.factory.DriverFactory.setupdriver(DriverFactory.java:71) at appHooks.ApplicationHooks.setup(ApplicationHooks.java:33) | FAILED | 0.001 s |
| 1 | Given The user is in the "Linked List" page after logged in | SKIPPED | 0.000 s |
| 2 | When The user clicks "Creating Linked List" link of Linked List page | SKIPPED | 0.000 s |
| 3 | Then The user should be directed to "Creating Linked List" Page | SKIPPED | 0.000 s |
| | AFTER - appHooks.ApplicationHooks.tearDown(io.cucumber.java.Scenario) java.lang.NullPointerException: Cannot invoke "org.openqa.selenium.TakesScreenshot.getScreenshotAs(org.openqa.selenium.OutputType)" because the return value of "com.qa.factory.DriverFactory.getDriver()" is null at appHooks.ApplicationHooks.tearDown(ApplicationHooks.java:59) | FAILED | 0.000 s |


User navigated to tryEditor page with Run button from Creating a Linked List page

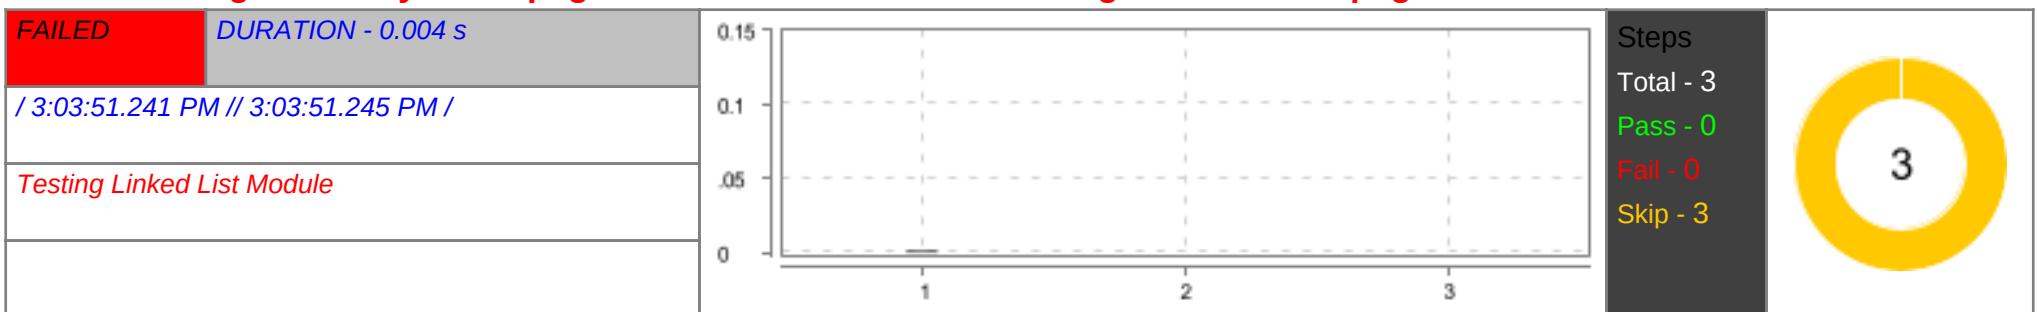

| # | Step / Hook Details | Status | Duration |
|---|---|---------|----------|
| | BEFORE - appHooks.ApplicationHooks.setup() java.lang.NullPointerException: Cannot invoke "org.openqa.selenium.WebDriver.manage()" because the return value of "com.qa.factory.DriverFactory.getDriver()" is null at com.qa.factory.DriverFactory.init_driver(DriverFactory.java:47) at com.qa.factory.DriverFactory.setupdriver(DriverFactory.java:71) at appHooks.ApplicationHooks.setup(ApplicationHooks.java:33) | FAILED | 0.001 s |
| 1 | Given The user is on the "Creating a Linked List" page of Linked List after logged in | SKIPPED | 0.001 s |
| 2 | When The user clicks Try Here button | SKIPPED | 0.000 s |
| 3 | Then The user should be redirected to a page having an tryEditor with a Run button to test | SKIPPED | 0.000 s |
| | AFTER - appHooks.ApplicationHooks.tearDown(io.cucumber.java.Scenario) | FAILED | 0.002 s |


| # | Step / Hook Details | Status | Duration |
|---|---|--------|----------|
| | java.lang.NullPointerException: Cannot invoke "org.openqa.selenium.TakesScreenshot.getScreenshotAs(org.openqa.selenium.OutputType)" because the return value of "com.qa.factory.DriverFactory.getDriver()" is null at appHooks.ApplicationHooks.tearDown(ApplicationHooks.java:59) | | |

The user run the code in tryEditor with valid input for Creating a Linked List page

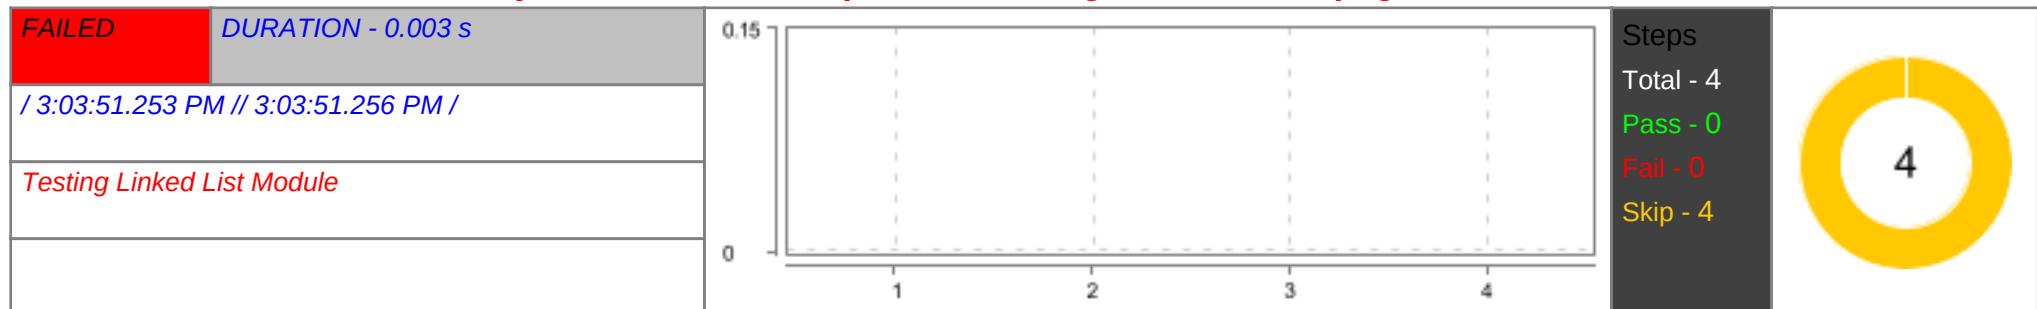


| # | Step / Hook Details | Status | Duration |
|---|---|---------|----------|
| | BEFORE - appHooks.ApplicationHooks.setup() java.lang.NullPointerException: Cannot invoke "org.openqa.selenium.WebDriver.manage()" because the return value of "com.qa.factory.DriverFactory.getDriver()" is null at com.qa.factory.DriverFactory.init_driver(DriverFactory.java:47) at com.qa.factory.DriverFactory.setupdriver(DriverFactory.java:71) at appHooks.ApplicationHooks.setup(ApplicationHooks.java:33) | FAILED | 0.001 s |
| 1 | Given The user is in a try here page having tryEditor with a Run button to test | SKIPPED | 0.000 s |
| 2 | When The user gets input from sheet "pythonCode" and 0 | SKIPPED | 0.000 s |
| 3 | And user click on Run button | SKIPPED | 0.000 s |
| 4 | Then The user should be presented with Run output | SKIPPED | 0.000 s |
| | AFTER - appHooks.ApplicationHooks.tearDown(io.cucumber.java.Scenario) java.lang.NullPointerException: Cannot invoke "org.openqa.selenium.TakesScreenshot.getScreenshotAs(org.openqa.selenium.OutputType)" because the return value of "com.qa.factory.DriverFactory.getDriver()" is null at appHooks.ApplicationHooks.tearDown(ApplicationHooks.java:59) | FAILED | 0.001 s |

The user getting error message with invalid python code for Creating a Linked List page

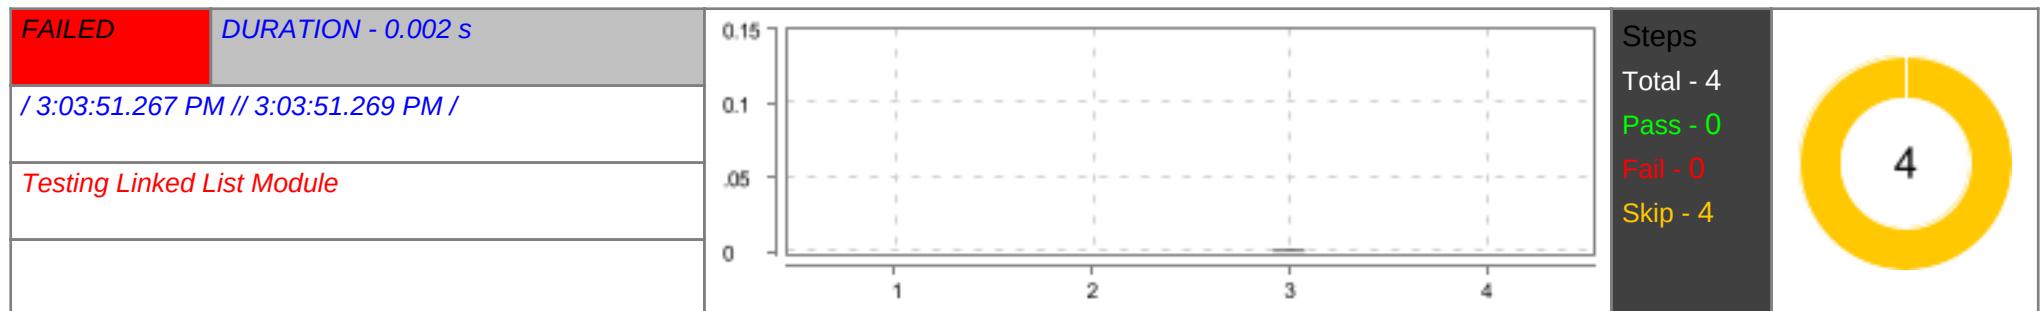


| # | Step / Hook Details | Status | Duration |
|---|---|---------|----------|
| | BEFORE - appHooks.ApplicationHooks.setup() java.lang.NullPointerException: Cannot invoke "org.openqa.selenium.WebDriver.manage()" because the return value of "com.qa.factory.DriverFactory.getDriver()" is null at com.qa.factory.DriverFactory.init_driver(DriverFactory.java:47) at com.qa.factory.DriverFactory.setupdriver(DriverFactory.java:71) at appHooks.ApplicationHooks.setup(ApplicationHooks.java:33) | FAILED | 0.001 s |
| 1 | Given The user is in a try here page having tryEditor with a Run button to test | SKIPPED | 0.000 s |
| 2 | When The user gets invalid input from sheet "pythonCode" and 1 | SKIPPED | 0.000 s |
| 3 | And user click on Run button | SKIPPED | 0.001 s |
| 4 | Then The user should be presented with the Run output with alert | SKIPPED | 0.000 s |
| | AFTER - appHooks.ApplicationHooks.tearDown(io.cucumber.java.Scenario) java.lang.NullPointerException: Cannot invoke "org.openqa.selenium.TakesScreenshot.getScreenshotAs(org.openqa.selenium.OutputType)" because the return value of "com.qa.factory.DriverFactory.getDriver()" is null at appHooks.ApplicationHooks.tearDown(ApplicationHooks.java:59) | FAILED | 0.000 s |

User navigated to "Types of linked list" page

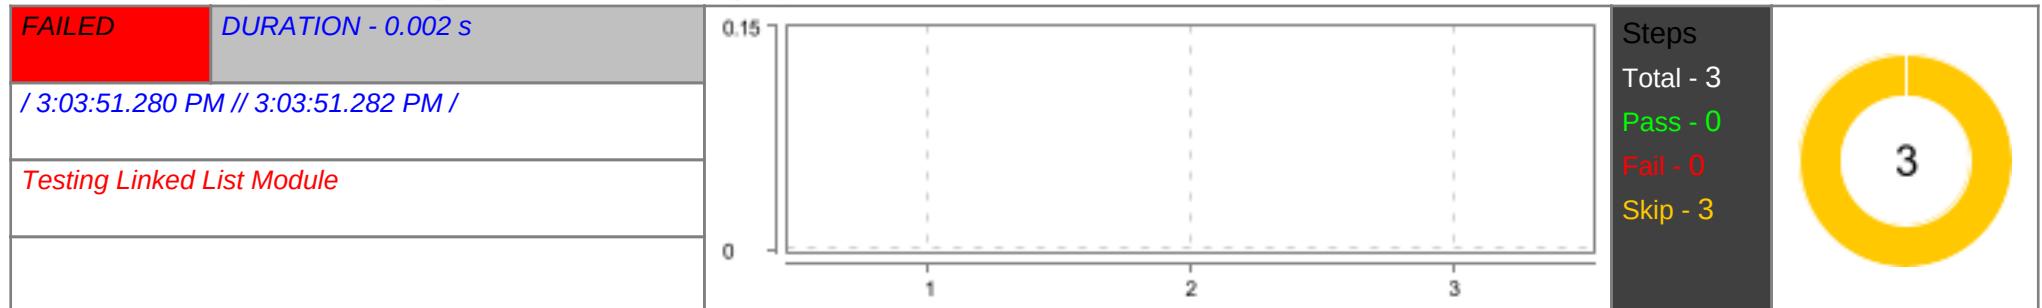

| # | Step / Hook Details | Status | Duration |
|---|---|---------|----------|
| | BEFORE - appHooks.ApplicationHooks.setup() java.lang.NullPointerException: Cannot invoke "org.openqa.selenium.WebDriver.manage()" because the return value of "com.qa.factory.DriverFactory.getDriver()" is null at com.qa.factory.DriverFactory.init_driver(DriverFactory.java:47) at com.qa.factory.DriverFactory.setupdriver(DriverFactory.java:71) at appHooks.ApplicationHooks.setup(ApplicationHooks.java:33) | FAILED | 0.000 s |
| 1 | Given The user is in the "Linked List" page after logged in | SKIPPED | 0.000 s |
| 2 | When The user clicks "Types of Linked List" link of Linked List page | SKIPPED | 0.000 s |
| 3 | Then The user should be directed to "Types of Linked List" Page | SKIPPED | 0.000 s |
| | AFTER - appHooks.ApplicationHooks.tearDown(io.cucumber.java.Scenario) java.lang.NullPointerException: Cannot invoke "org.openqa.selenium.TakesScreenshot.getScreenshotAs(org.openqa.selenium.OutputType)" because the return value of "com.qa.factory.DriverFactory.getDriver()" is null at appHooks.ApplicationHooks.tearDown(ApplicationHooks.java:59) | FAILED | 0.001 s |


User navigated to tryEditor page with Run button from Types of Linked List

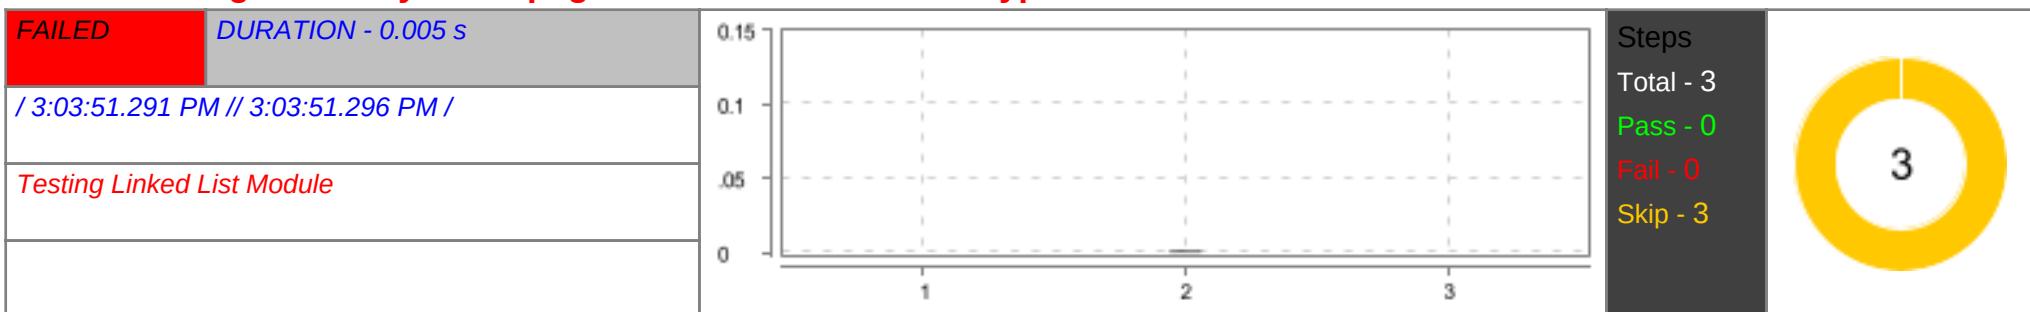

| # | Step / Hook Details | Status | Duration |
|---|---|---------|----------|
| | BEFORE - appHooks.ApplicationHooks.setup() java.lang.NullPointerException: Cannot invoke "org.openqa.selenium.WebDriver.manage()" because the return value of "com.qa.factory.DriverFactory.getDriver()" is null at com.qa.factory.DriverFactory.init_driver(DriverFactory.java:47) at com.qa.factory.DriverFactory.setupdriver(DriverFactory.java:71) at appHooks.ApplicationHooks.setup(ApplicationHooks.java:33) | FAILED | 0.002 s |
| 1 | Given The user is on the "Types of Linked list" page of Linked List after logged in | SKIPPED | 0.000 s |
| 2 | When The user clicks Try Here button | SKIPPED | 0.001 s |
| 3 | Then The user should be redirected to a page having an tryEditor with a Run button to test | SKIPPED | 0.000 s |
| | AFTER - appHooks.ApplicationHooks.tearDown(io.cucumber.java.Scenario) | FAILED | 0.001 s |


| # | Step / Hook Details | Status | Duration |
|---|---|--------|----------|
| | java.lang.NullPointerException: Cannot invoke "org.openqa.selenium.TakesScreenshot.getScreenshotAs(org.openqa.selenium.OutputType)" because the return value of "com.qa.factory.DriverFactory.getDriver()" is null at appHooks.ApplicationHooks.tearDown(ApplicationHooks.java:59) | | |

The user run the code in tryEditor with valid input for Creating a Linked List page

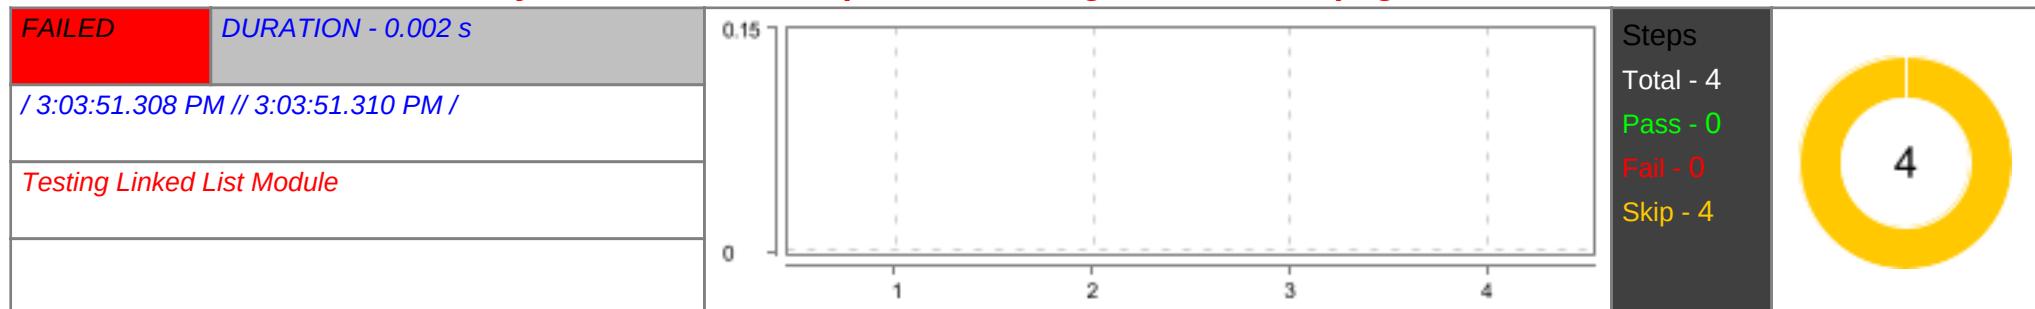


| # | Step / Hook Details | Status | Duration |
|---|---|---------|----------|
| | BEFORE - appHooks.ApplicationHooks.setup() java.lang.NullPointerException: Cannot invoke "org.openqa.selenium.WebDriver.manage()" because the return value of "com.qa.factory.DriverFactory.getDriver()" is null at com.qa.factory.DriverFactory.init_driver(DriverFactory.java:47) at com.qa.factory.DriverFactory.setupdriver(DriverFactory.java:71) at appHooks.ApplicationHooks.setup(ApplicationHooks.java:33) | FAILED | 0.001 s |
| 1 | Given The user is in a try here page having tryEditor with a Run button to test | SKIPPED | 0.000 s |
| 2 | When The user gets input from sheet "pythonCode" and 0 | SKIPPED | 0.000 s |
| 3 | And user click on Run button | SKIPPED | 0.000 s |
| 4 | Then The user should be presented with Run output | SKIPPED | 0.000 s |
| | AFTER - appHooks.ApplicationHooks.tearDown(io.cucumber.java.Scenario) java.lang.NullPointerException: Cannot invoke "org.openqa.selenium.TakesScreenshot.getScreenshotAs(org.openqa.selenium.OutputType)" because the return value of "com.qa.factory.DriverFactory.getDriver()" is null at appHooks.ApplicationHooks.tearDown(ApplicationHooks.java:59) | FAILED | 0.000 s |

The user getting error message with invalid python code for Creating a Linked List page

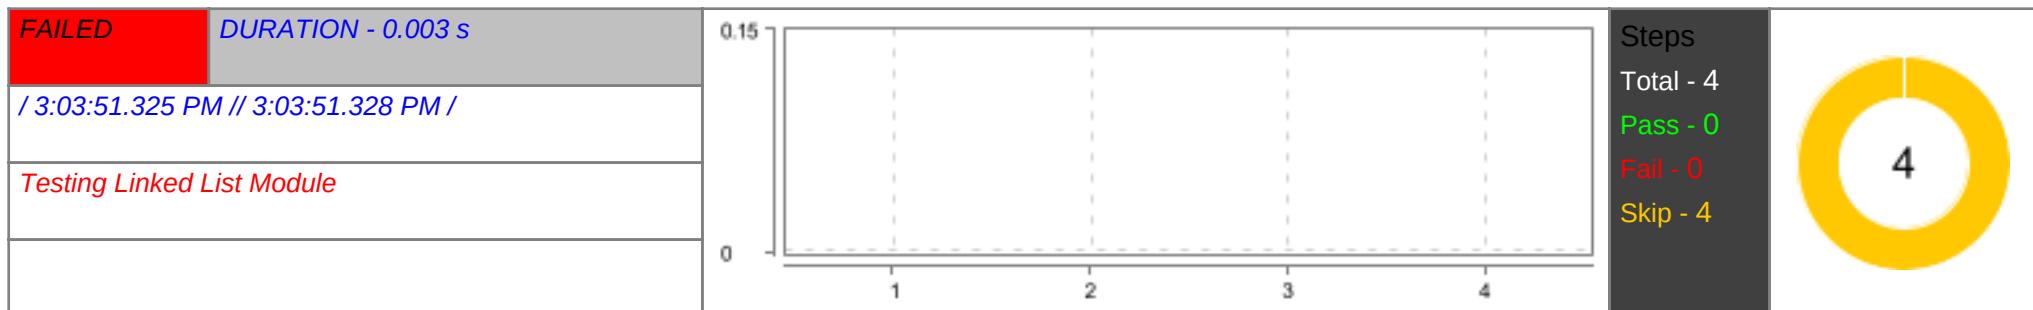


| # | Step / Hook Details | Status | Duration |
|---|---|---------|----------|
| | BEFORE - appHooks.ApplicationHooks.setup() java.lang.NullPointerException: Cannot invoke "org.openqa.selenium.WebDriver.manage()" because the return value of "com.qa.factory.DriverFactory.getDriver()" is null at com.qa.factory.DriverFactory.init_driver(DriverFactory.java:47) at com.qa.factory.DriverFactory.setupdriver(DriverFactory.java:71) at appHooks.ApplicationHooks.setup(ApplicationHooks.java:33) | FAILED | 0.001 s |
| 1 | Given The user is in a try here page having tryEditor with a Run button to test | SKIPPED | 0.000 s |
| 2 | When The user gets invalid input from sheet "pythonCode" and 1 | SKIPPED | 0.000 s |
| 3 | And user click on Run button | SKIPPED | 0.000 s |
| 4 | Then The user should be presented with the Run output with alert | SKIPPED | 0.000 s |
| | AFTER - appHooks.ApplicationHooks.tearDown(io.cucumber.java.Scenario) java.lang.NullPointerException: Cannot invoke "org.openqa.selenium.TakesScreenshot.getScreenshotAs(org.openqa.selenium.OutputType)" because the return value of "com.qa.factory.DriverFactory.getDriver()" is null at appHooks.ApplicationHooks.tearDown(ApplicationHooks.java:59) | FAILED | 0.001 s |

user navigated to "Implementation linked list in python" page

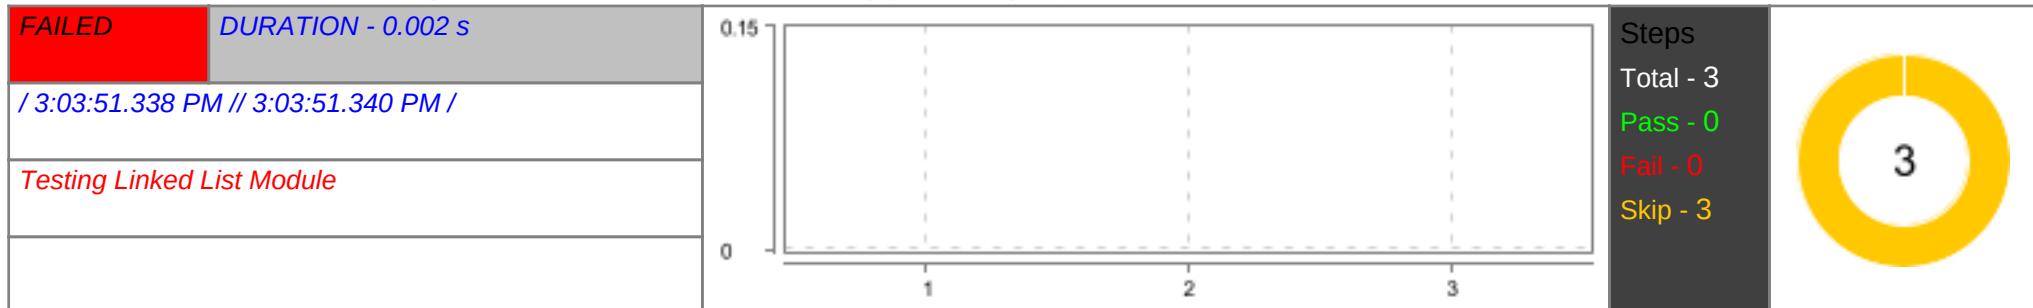

| # | Step / Hook Details | Status | Duration |
|---|---|---------|----------|
| | BEFORE - appHooks.ApplicationHooks.setup() java.lang.NullPointerException: Cannot invoke "org.openqa.selenium.WebDriver.manage()" because the return value of "com.qa.factory.DriverFactory.getDriver()" is null at com.qa.factory.DriverFactory.init_driver(DriverFactory.java:47) at com.qa.factory.DriverFactory.setupdriver(DriverFactory.java:71) at appHooks.ApplicationHooks.setup(ApplicationHooks.java:33) | FAILED | 0.001 s |
| 1 | Given The user is in the "Linked List" page after logged in | SKIPPED | 0.000 s |
| 2 | When The user clicks "Implement Linked List in Python" link of Linked List page | SKIPPED | 0.000 s |
| 3 | Then The user should be directed to "Implement Linked List in Python" Page | SKIPPED | 0.000 s |
| | AFTER - appHooks.ApplicationHooks.tearDown(io.cucumber.java.Scenario) java.lang.NullPointerException: Cannot invoke "org.openqa.selenium.TakesScreenshot.getScreenshotAs(org.openqa.selenium.OutputType)" because the return value of "com.qa.factory.DriverFactory.getDriver()" is null at appHooks.ApplicationHooks.tearDown(ApplicationHooks.java:59) | FAILED | 0.000 s |


User navigated to tryEditor page with Run button from Types of Linked List

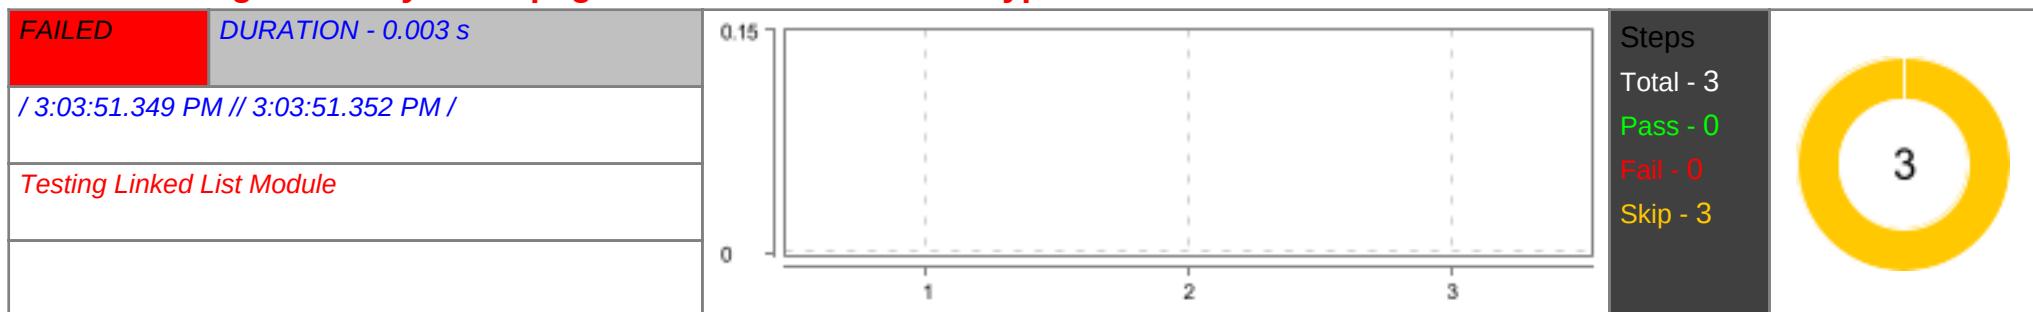

| # | Step / Hook Details | Status | Duration |
|---|---|---------|----------|
| | BEFORE - appHooks.ApplicationHooks.setup() java.lang.NullPointerException: Cannot invoke "org.openqa.selenium.WebDriver.manage()" because the return value of "com.qa.factory.DriverFactory.getDriver()" is null at com.qa.factory.DriverFactory.init_driver(DriverFactory.java:47) at com.qa.factory.DriverFactory.setupdriver(DriverFactory.java:71) at appHooks.ApplicationHooks.setup(ApplicationHooks.java:33) | FAILED | 0.001 s |
| 1 | Given The user is on the "Implement Linked List in Python" page of Linked List after logged in | SKIPPED | 0.000 s |
| 2 | When The user clicks Try Here button | SKIPPED | 0.000 s |
| 3 | Then The user should be redirected to a page having an tryEditor with a Run button to test | SKIPPED | 0.000 s |
| | AFTER - appHooks.ApplicationHooks.tearDown(io.cucumber.java.Scenario) | FAILED | 0.000 s |


| # | Step / Hook Details | Status | Duration |
|---|---|--------|----------|
| | java.lang.NullPointerException: Cannot invoke "org.openqa.selenium.TakesScreenshot.getScreenshotAs(org.openqa.selenium.OutputType)" because the return value of "com.qa.factory.DriverFactory.getDriver()" is null at appHooks.ApplicationHooks.tearDown(ApplicationHooks.java:59) | | |

The user run the code in tryEditor with valid input for Creating a Linked List page

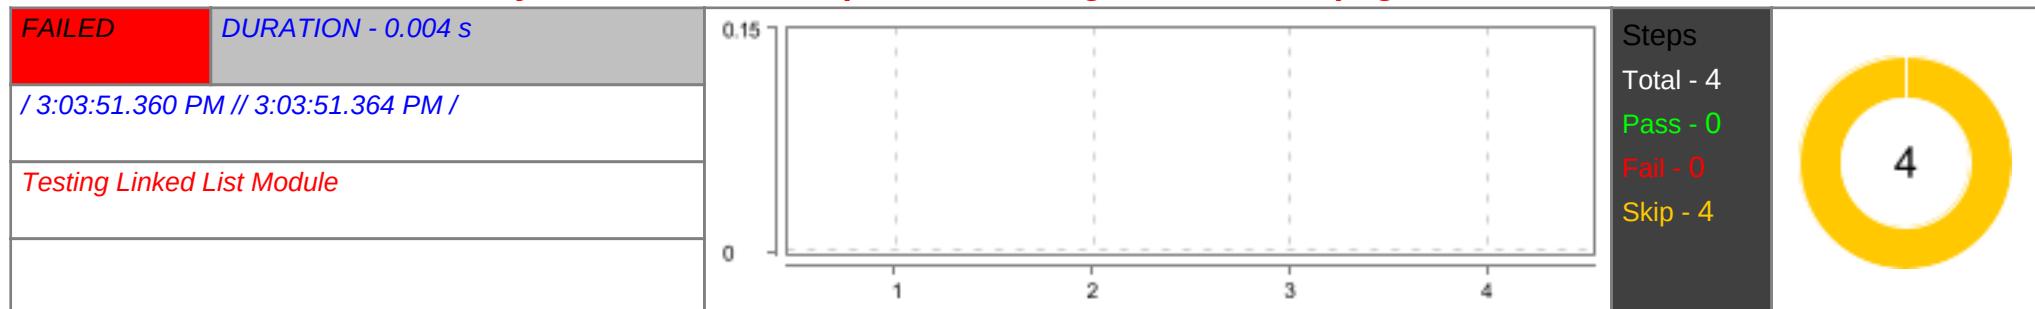


| # | Step / Hook Details | Status | Duration |
|---|---|---------|----------|
| | BEFORE - appHooks.ApplicationHooks.setup() java.lang.NullPointerException: Cannot invoke "org.openqa.selenium.WebDriver.manage()" because the return value of "com.qa.factory.DriverFactory.getDriver()" is null at com.qa.factory.DriverFactory.init_driver(DriverFactory.java:47) at com.qa.factory.DriverFactory.setupdriver(DriverFactory.java:71) at appHooks.ApplicationHooks.setup(ApplicationHooks.java:33) | FAILED | 0.001 s |
| 1 | Given The user is in a try here page having tryEditor with a Run button to test | SKIPPED | 0.000 s |
| 2 | When The user gets input from sheet "pythonCode" and 0 | SKIPPED | 0.000 s |
| 3 | And user click on Run button | SKIPPED | 0.000 s |
| 4 | Then The user should be presented with Run output | SKIPPED | 0.000 s |
| | AFTER - appHooks.ApplicationHooks.tearDown(io.cucumber.java.Scenario) java.lang.NullPointerException: Cannot invoke "org.openqa.selenium.TakesScreenshot.getScreenshotAs(org.openqa.selenium.OutputType)" because the return value of "com.qa.factory.DriverFactory.getDriver()" is null at appHooks.ApplicationHooks.tearDown(ApplicationHooks.java:59) | FAILED | 0.001 s |

The user getting error message with invalid python code for Creating a Linked List page

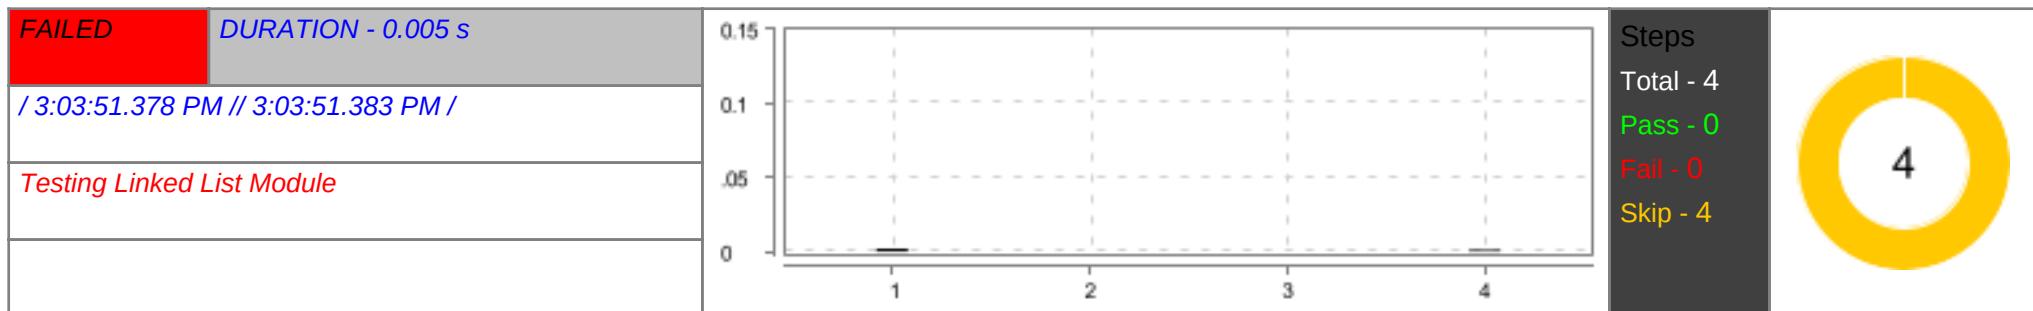


| # | Step / Hook Details | Status | Duration |
|---|---|---------|----------|
| | BEFORE - appHooks.ApplicationHooks.setup() java.lang.NullPointerException: Cannot invoke "org.openqa.selenium.WebDriver.manage()" because the return value of "com.qa.factory.DriverFactory.getDriver()" is null at com.qa.factory.DriverFactory.init_driver(DriverFactory.java:47) at com.qa.factory.DriverFactory.setupdriver(DriverFactory.java:71) at appHooks.ApplicationHooks.setup(ApplicationHooks.java:33) | FAILED | 0.001 s |
| 1 | Given The user is in a try here page having tryEditor with a Run button to test | SKIPPED | 0.002 s |
| 2 | When The user gets invalid input from sheet "pythonCode" and 1 | SKIPPED | 0.000 s |
| 3 | And user click on Run button | SKIPPED | 0.000 s |
| 4 | Then The user should be presented with the Run output with alert | SKIPPED | 0.001 s |
| | AFTER - appHooks.ApplicationHooks.tearDown(io.cucumber.java.Scenario) java.lang.NullPointerException: Cannot invoke "org.openqa.selenium.TakesScreenshot.getScreenshotAs(org.openqa.selenium.OutputType)" because the return value of "com.qa.factory.DriverFactory.getDriver()" is null at appHooks.ApplicationHooks.tearDown(ApplicationHooks.java:59) | FAILED | 0.001 s |

user navigated to "Traversal" page

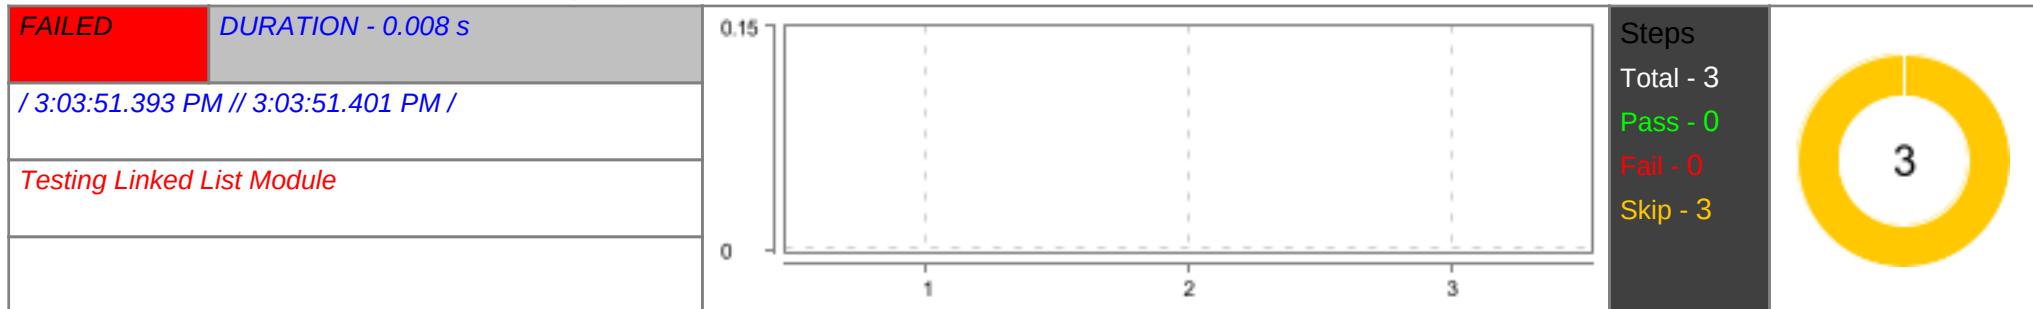

| # | Step / Hook Details | Status | Duration |
|---|---|---------|----------|
| | BEFORE - appHooks.ApplicationHooks.setup() java.lang.NullPointerException: Cannot invoke "org.openqa.selenium.WebDriver.manage()" because the return value of "com.qa.factory.DriverFactory.getDriver()" is null at com.qa.factory.DriverFactory.init_driver(DriverFactory.java:47) at com.qa.factory.DriverFactory.setupdriver(DriverFactory.java:71) at appHooks.ApplicationHooks.setup(ApplicationHooks.java:33) | FAILED | 0.006 s |
| 1 | Given The user is in the "Linked List" page after logged in | SKIPPED | 0.000 s |
| 2 | When The user clicks "Traversal" link of Linked List page | SKIPPED | 0.000 s |
| 3 | Then The user should be directed to "Traversal" Page | SKIPPED | 0.000 s |
| | AFTER - appHooks.ApplicationHooks.tearDown(io.cucumber.java.Scenario) java.lang.NullPointerException: Cannot invoke "org.openqa.selenium.TakesScreenshot.getScreenshotAs(org.openqa.selenium.OutputType)" because the return value of "com.qa.factory.DriverFactory.getDriver()" is null at appHooks.ApplicationHooks.tearDown(ApplicationHooks.java:59) | FAILED | 0.001 s |


User navigated to tryEditor page with Run button from Types of Linked List

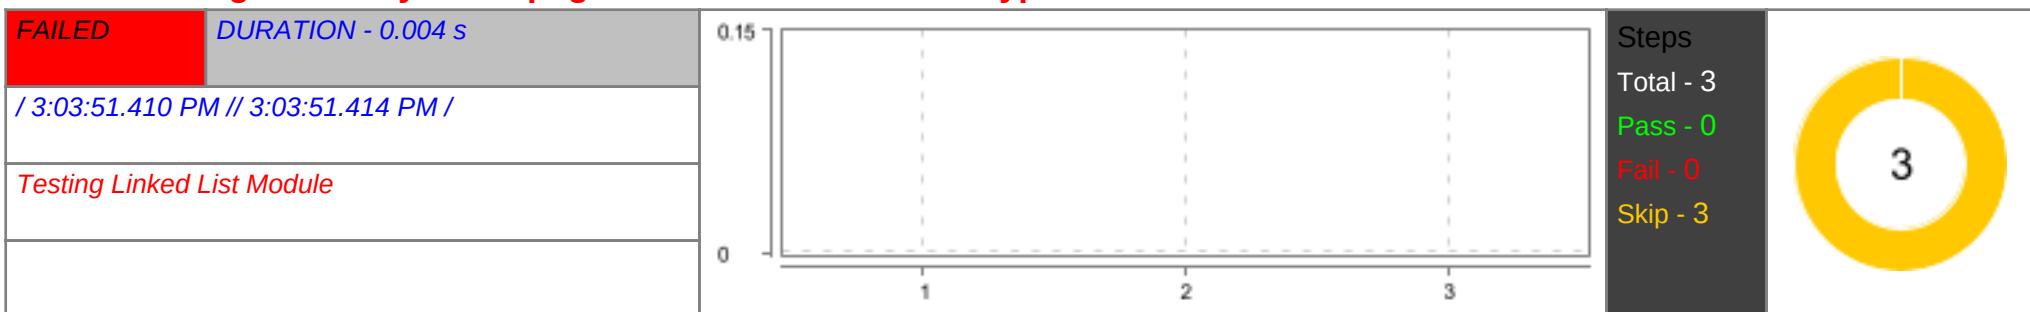

| # | Step / Hook Details | Status | Duration |
|---|---|---------|----------|
| | BEFORE - appHooks.ApplicationHooks.setup() java.lang.NullPointerException: Cannot invoke "org.openqa.selenium.WebDriver.manage()" because the return value of "com.qa.factory.DriverFactory.getDriver()" is null at com.qa.factory.DriverFactory.init_driver(DriverFactory.java:47) at com.qa.factory.DriverFactory.setupdriver(DriverFactory.java:71) at appHooks.ApplicationHooks.setup(ApplicationHooks.java:33) | FAILED | 0.002 s |
| 1 | Given The user is on the "Traversal" page of Linked List after logged in | SKIPPED | 0.000 s |
| 2 | When The user clicks Try Here button | SKIPPED | 0.000 s |
| 3 | Then The user should be redirected to a page having an tryEditor with a Run button to test | SKIPPED | 0.000 s |
| | AFTER - appHooks.ApplicationHooks.tearDown(io.cucumber.java.Scenario) | FAILED | 0.001 s |


| # | Step / Hook Details | Status | Duration |
|---|---|--------|----------|
| | java.lang.NullPointerException: Cannot invoke "org.openqa.selenium.TakesScreenshot.getScreenshotAs(org.openqa.selenium.OutputType)" because the return value of "com.qa.factory.DriverFactory.getDriver()" is null at appHooks.ApplicationHooks.tearDown(ApplicationHooks.java:59) | | |

The user run the code in tryEditor with valid input for Creating a Linked List page

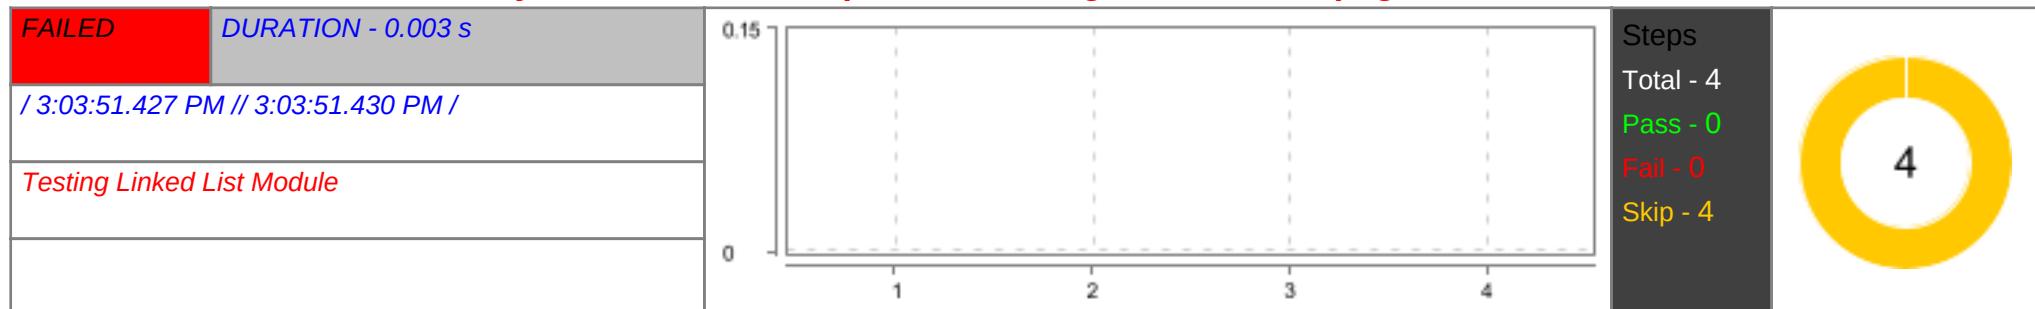


| # | Step / Hook Details | Status | Duration |
|---|---|---------|----------|
| | BEFORE - appHooks.ApplicationHooks.setup() java.lang.NullPointerException: Cannot invoke "org.openqa.selenium.WebDriver.manage()" because the return value of "com.qa.factory.DriverFactory.getDriver()" is null at com.qa.factory.DriverFactory.init_driver(DriverFactory.java:47) at com.qa.factory.DriverFactory.setupdriver(DriverFactory.java:71) at appHooks.ApplicationHooks.setup(ApplicationHooks.java:33) | FAILED | 0.001 s |
| 1 | Given The user is in a try here page having tryEditor with a Run button to test | SKIPPED | 0.000 s |
| 2 | When The user gets input from sheet "pythonCode" and 0 | SKIPPED | 0.000 s |
| 3 | And user click on Run button | SKIPPED | 0.000 s |
| 4 | Then The user should be presented with Run output | SKIPPED | 0.000 s |
| | AFTER - appHooks.ApplicationHooks.tearDown(io.cucumber.java.Scenario) java.lang.NullPointerException: Cannot invoke "org.openqa.selenium.TakesScreenshot.getScreenshotAs(org.openqa.selenium.OutputType)" because the return value of "com.qa.factory.DriverFactory.getDriver()" is null at appHooks.ApplicationHooks.tearDown(ApplicationHooks.java:59) | FAILED | 0.001 s |

The user getting error message with invalid python code for Creating a Linked List page

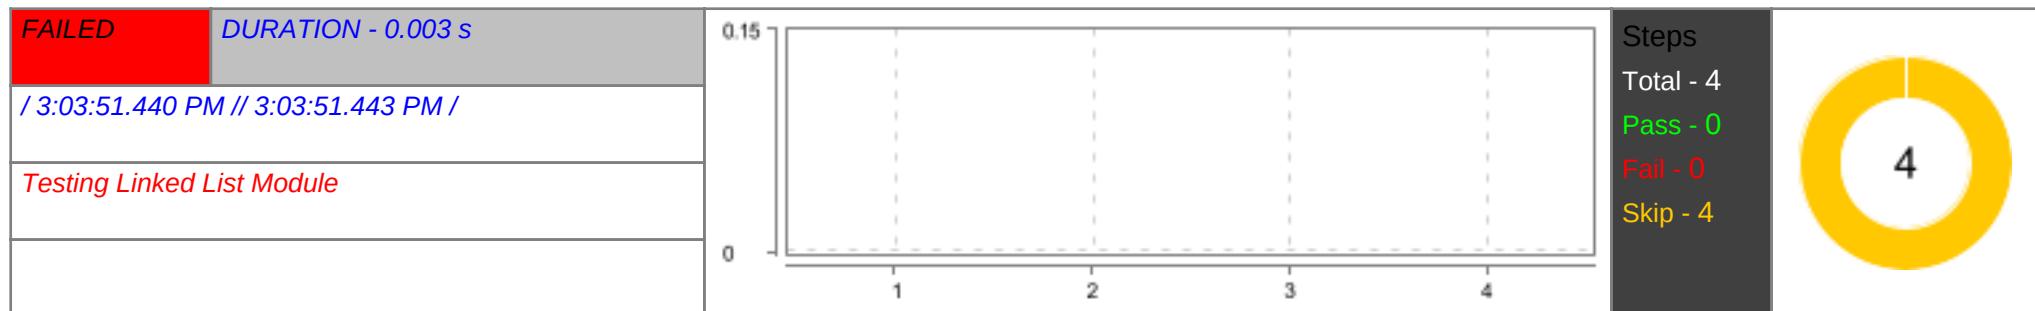


| # | Step / Hook Details | Status | Duration |
|---|---|---------|----------|
| | BEFORE - appHooks.ApplicationHooks.setup() java.lang.NullPointerException: Cannot invoke "org.openqa.selenium.WebDriver.manage()" because the return value of "com.qa.factory.DriverFactory.getDriver()" is null at com.qa.factory.DriverFactory.init_driver(DriverFactory.java:47) at com.qa.factory.DriverFactory.setupdriver(DriverFactory.java:71) at appHooks.ApplicationHooks.setup(ApplicationHooks.java:33) | FAILED | 0.001 s |
| 1 | Given The user is in a try here page having tryEditor with a Run button to test | SKIPPED | 0.000 s |
| 2 | When The user gets invalid input from sheet "pythonCode" and 1 | SKIPPED | 0.000 s |
| 3 | And user click on Run button | SKIPPED | 0.000 s |
| 4 | Then The user should be presented with the Run output with alert | SKIPPED | 0.000 s |
| | AFTER - appHooks.ApplicationHooks.tearDown(io.cucumber.java.Scenario) java.lang.NullPointerException: Cannot invoke "org.openqa.selenium.TakesScreenshot.getScreenshotAs(org.openqa.selenium.OutputType)" because the return value of "com.qa.factory.DriverFactory.getDriver()" is null at appHooks.ApplicationHooks.tearDown(ApplicationHooks.java:59) | FAILED | 0.000 s |

user navigated to "Insertion" page

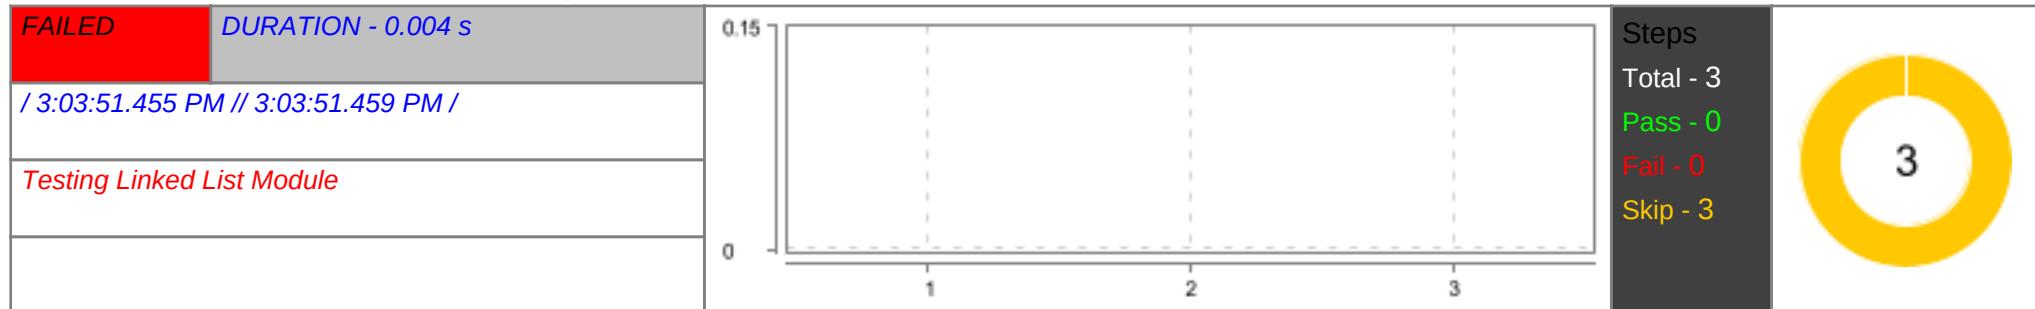

| # | Step / Hook Details | Status | Duration |
|---|---|---------|----------|
| | BEFORE - appHooks.ApplicationHooks.setup() java.lang.NullPointerException: Cannot invoke "org.openqa.selenium.WebDriver.manage()" because the return value of "com.qa.factory.DriverFactory.getDriver()" is null at com.qa.factory.DriverFactory.init_driver(DriverFactory.java:47) at com.qa.factory.DriverFactory.setupdriver(DriverFactory.java:71) at appHooks.ApplicationHooks.setup(ApplicationHooks.java:33) | FAILED | 0.002 s |
| 1 | Given The user is in the "Linked List" page after logged in | SKIPPED | 0.000 s |
| 2 | When The user clicks "Insertion" link of Linked List page | SKIPPED | 0.000 s |
| 3 | Then The user should be directed to "Insertion" Page | SKIPPED | 0.000 s |
| | AFTER - appHooks.ApplicationHooks.tearDown(io.cucumber.java.Scenario) java.lang.NullPointerException: Cannot invoke "org.openqa.selenium.TakesScreenshot.getScreenshotAs(org.openqa.selenium.OutputType)" because the return value of "com.qa.factory.DriverFactory.getDriver()" is null at appHooks.ApplicationHooks.tearDown(ApplicationHooks.java:59) | FAILED | 0.001 s |


User navigated to tryEditor page with Run button from Types of Linked List

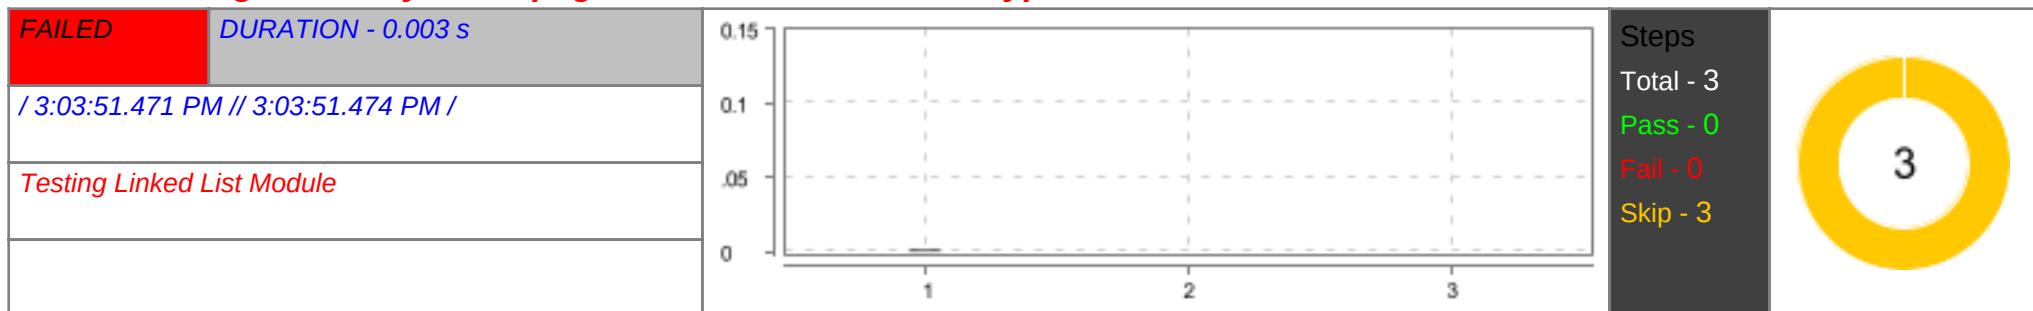

| # | Step / Hook Details | Status | Duration |
|---|---|---------|----------|
| | BEFORE - appHooks.ApplicationHooks.setup() java.lang.NullPointerException: Cannot invoke "org.openqa.selenium.WebDriver.manage()" because the return value of "com.qa.factory.DriverFactory.getDriver()" is null at com.qa.factory.DriverFactory.init_driver(DriverFactory.java:47) at com.qa.factory.DriverFactory.setupdriver(DriverFactory.java:71) at appHooks.ApplicationHooks.setup(ApplicationHooks.java:33) | FAILED | 0.002 s |
| 1 | Given The user is on the "Insertion" page of Linked List after logged in | SKIPPED | 0.001 s |
| 2 | When The user clicks Try Here button | SKIPPED | 0.000 s |
| 3 | Then The user should be redirected to a page having an tryEditor with a Run button to test | SKIPPED | 0.000 s |
| | AFTER - appHooks.ApplicationHooks.tearDown(io.cucumber.java.Scenario) | FAILED | 0.000 s |


| # | Step / Hook Details | Status | Duration |
|---|---|--------|----------|
| | java.lang.NullPointerException: Cannot invoke "org.openqa.selenium.TakesScreenshot.getScreenshotAs(org.openqa.selenium.OutputType)" because the return value of "com.qa.factory.DriverFactory.getDriver()" is null at appHooks.ApplicationHooks.tearDown(ApplicationHooks.java:59) | | |

The user run the code in tryEditor with valid input for Creating a Linked List page

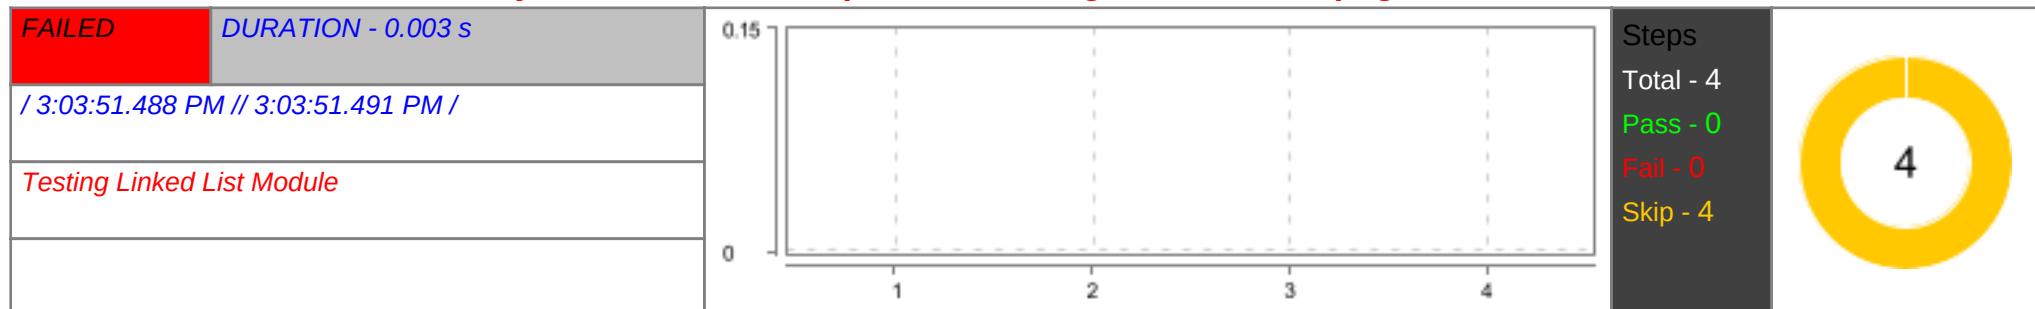


| # | Step / Hook Details | Status | Duration |
|---|---|---------|----------|
| | BEFORE - appHooks.ApplicationHooks.setup() java.lang.NullPointerException: Cannot invoke "org.openqa.selenium.WebDriver.manage()" because the return value of "com.qa.factory.DriverFactory.getDriver()" is null at com.qa.factory.DriverFactory.init_driver(DriverFactory.java:47) at com.qa.factory.DriverFactory.setupdriver(DriverFactory.java:71) at appHooks.ApplicationHooks.setup(ApplicationHooks.java:33) | FAILED | 0.001 s |
| 1 | Given The user is in a try here page having tryEditor with a Run button to test | SKIPPED | 0.000 s |
| 2 | When The user gets input from sheet "pythonCode" and 0 | SKIPPED | 0.000 s |
| 3 | And user click on Run button | SKIPPED | 0.000 s |
| 4 | Then The user should be presented with Run output | SKIPPED | 0.000 s |
| | AFTER - appHooks.ApplicationHooks.tearDown(io.cucumber.java.Scenario) java.lang.NullPointerException: Cannot invoke "org.openqa.selenium.TakesScreenshot.getScreenshotAs(org.openqa.selenium.OutputType)" because the return value of "com.qa.factory.DriverFactory.getDriver()" is null at appHooks.ApplicationHooks.tearDown(ApplicationHooks.java:59) | FAILED | 0.000 s |

The user getting error message with invalid python code for Creating a Linked List page

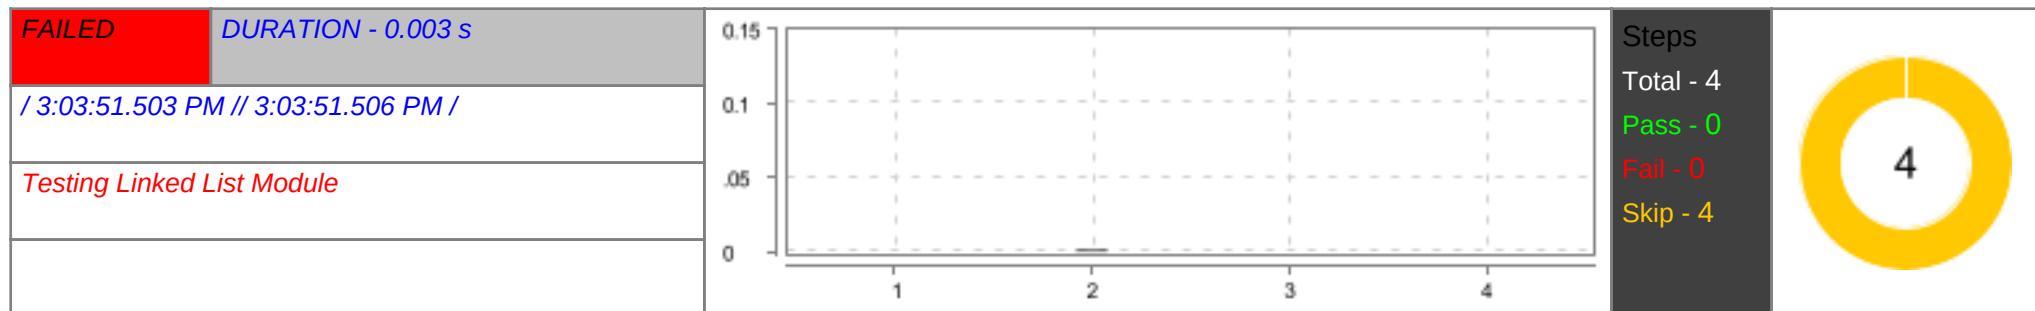


| # | Step / Hook Details | Status | Duration |
|---|---|---------|----------|
| | BEFORE - appHooks.ApplicationHooks.setup() java.lang.NullPointerException: Cannot invoke "org.openqa.selenium.WebDriver.manage()" because the return value of "com.qa.factory.DriverFactory.getDriver()" is null at com.qa.factory.DriverFactory.init_driver(DriverFactory.java:47) at com.qa.factory.DriverFactory.setupdriver(DriverFactory.java:71) at appHooks.ApplicationHooks.setup(ApplicationHooks.java:33) | FAILED | 0.001 s |
| 1 | Given The user is in a try here page having tryEditor with a Run button to test | SKIPPED | 0.000 s |
| 2 | When The user gets invalid input from sheet "pythonCode" and 1 | SKIPPED | 0.001 s |
| 3 | And user click on Run button | SKIPPED | 0.000 s |
| 4 | Then The user should be presented with the Run output with alert | SKIPPED | 0.000 s |
| | AFTER - appHooks.ApplicationHooks.tearDown(io.cucumber.java.Scenario) java.lang.NullPointerException: Cannot invoke "org.openqa.selenium.TakesScreenshot.getScreenshotAs(org.openqa.selenium.OutputType)" because the return value of "com.qa.factory.DriverFactory.getDriver()" is null at appHooks.ApplicationHooks.tearDown(ApplicationHooks.java:59) | FAILED | 0.001 s |

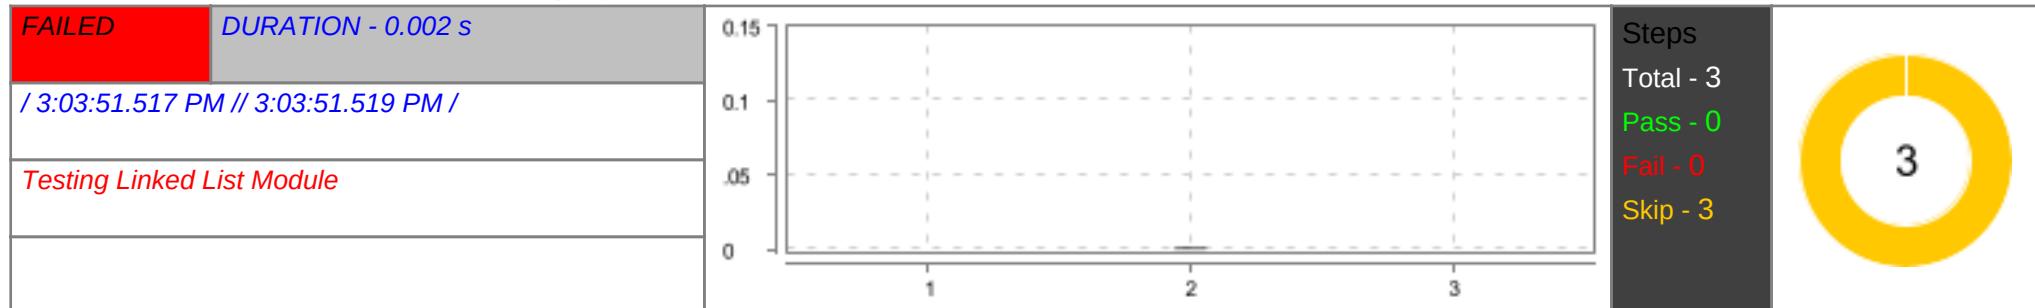user navigated to "Deletion" page

| # | Step / Hook Details | Status | Duration |
|---|---|---------|----------|
| | BEFORE - appHooks.ApplicationHooks.setup() java.lang.NullPointerException: Cannot invoke "org.openqa.selenium.WebDriver.manage()" because the return value of "com.qa.factory.DriverFactory.getDriver()" is null at com.qa.factory.DriverFactory.init_driver(DriverFactory.java:47) at com.qa.factory.DriverFactory.setupdriver(DriverFactory.java:71) at appHooks.ApplicationHooks.setup(ApplicationHooks.java:33) | FAILED | 0.001 s |
| 1 | Given The user is in the "Linked List" page after logged in | SKIPPED | 0.000 s |
| 2 | When The user clicks "Deletion" link of Linked List page | SKIPPED | 0.001 s |
| 3 | Then The user should be directed to "Deletion" Page | SKIPPED | 0.000 s |
| | AFTER - appHooks.ApplicationHooks.tearDown(io.cucumber.java.Scenario) java.lang.NullPointerException: Cannot invoke "org.openqa.selenium.TakesScreenshot.getScreenshotAs(org.openqa.selenium.OutputType)" because the return value of "com.qa.factory.DriverFactory.getDriver()" is null at appHooks.ApplicationHooks.tearDown(ApplicationHooks.java:59) | FAILED | 0.000 s |


User navigated to tryEditor page with Run button from Types of Linked List

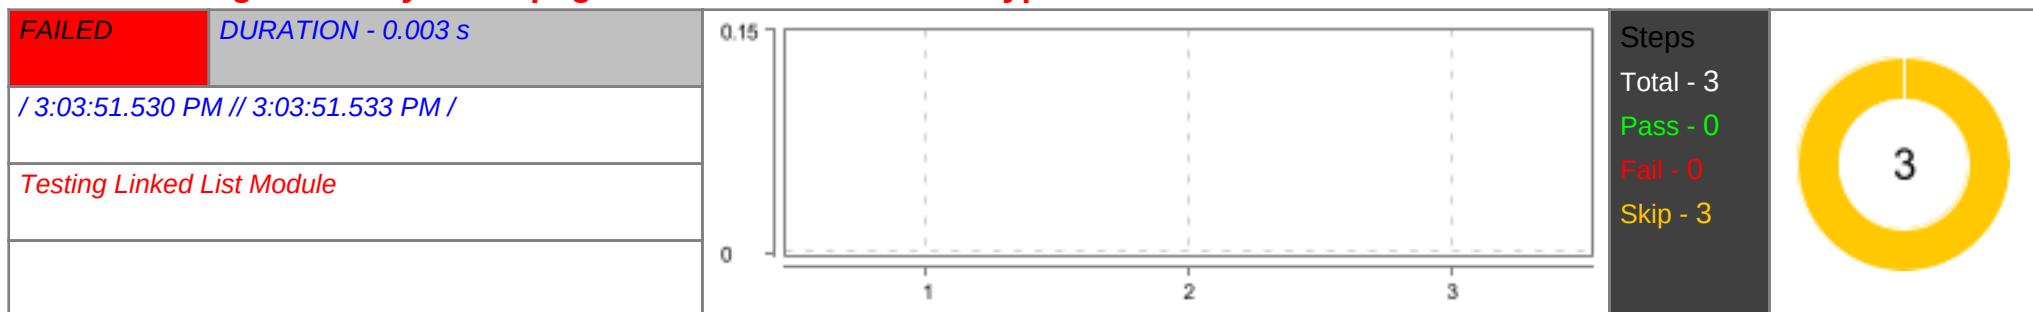

| # | Step / Hook Details | Status | Duration |
|---|---|---------|----------|
| | BEFORE - appHooks.ApplicationHooks.setup() java.lang.NullPointerException: Cannot invoke "org.openqa.selenium.WebDriver.manage()" because the return value of "com.qa.factory.DriverFactory.getDriver()" is null at com.qa.factory.DriverFactory.init_driver(DriverFactory.java:47) at com.qa.factory.DriverFactory.setupdriver(DriverFactory.java:71) at appHooks.ApplicationHooks.setup(ApplicationHooks.java:33) | FAILED | 0.001 s |
| 1 | Given The user is on the "Deletion" page of Linked List after logged in | SKIPPED | 0.000 s |
| 2 | When The user clicks Try Here button | SKIPPED | 0.000 s |
| 3 | Then The user should be redirected to a page having an tryEditor with a Run button to test | SKIPPED | 0.000 s |
| | AFTER - appHooks.ApplicationHooks.tearDown(io.cucumber.java.Scenario) | FAILED | 0.001 s |


| # | Step / Hook Details | Status | Duration |
|---|---|--------|----------|
| | java.lang.NullPointerException: Cannot invoke "org.openqa.selenium.TakesScreenshot.getScreenshotAs(org.openqa.selenium.OutputType)" because the return value of "com.qa.factory.DriverFactory.getDriver()" is null at appHooks.ApplicationHooks.tearDown(ApplicationHooks.java:59) | | |

The user run the code in tryEditor with valid input for Creating a Linked List page

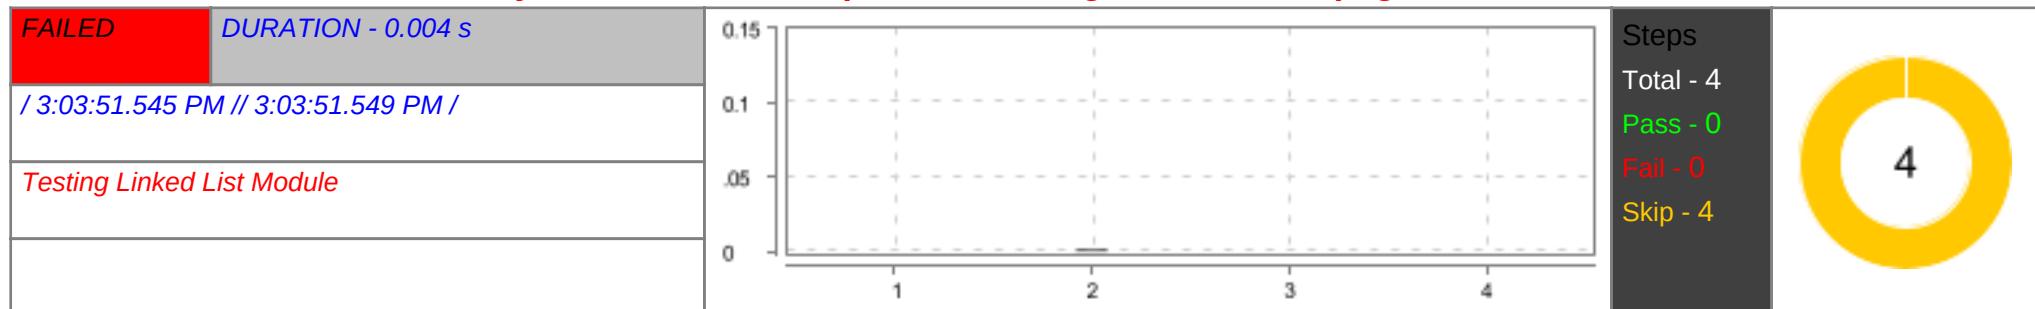


| # | Step / Hook Details | Status | Duration |
|---|---|---------|----------|
| | BEFORE - appHooks.ApplicationHooks.setup() java.lang.NullPointerException: Cannot invoke "org.openqa.selenium.WebDriver.manage()" because the return value of "com.qa.factory.DriverFactory.getDriver()" is null at com.qa.factory.DriverFactory.init_driver(DriverFactory.java:47) at com.qa.factory.DriverFactory.setupdriver(DriverFactory.java:71) at appHooks.ApplicationHooks.setup(ApplicationHooks.java:33) | FAILED | 0.001 s |
| 1 | Given The user is in a try here page having tryEditor with a Run button to test | SKIPPED | 0.000 s |
| 2 | When The user gets input from sheet "pythonCode" and 0 | SKIPPED | 0.001 s |
| 3 | And user click on Run button | SKIPPED | 0.000 s |
| 4 | Then The user should be presented with Run output | SKIPPED | 0.000 s |
| | AFTER - appHooks.ApplicationHooks.tearDown(io.cucumber.java.Scenario) java.lang.NullPointerException: Cannot invoke "org.openqa.selenium.TakesScreenshot.getScreenshotAs(org.openqa.selenium.OutputType)" because the return value of "com.qa.factory.DriverFactory.getDriver()" is null at appHooks.ApplicationHooks.tearDown(ApplicationHooks.java:59) | FAILED | 0.001 s |

The user getting error message with invalid python code for Creating a Linked List page

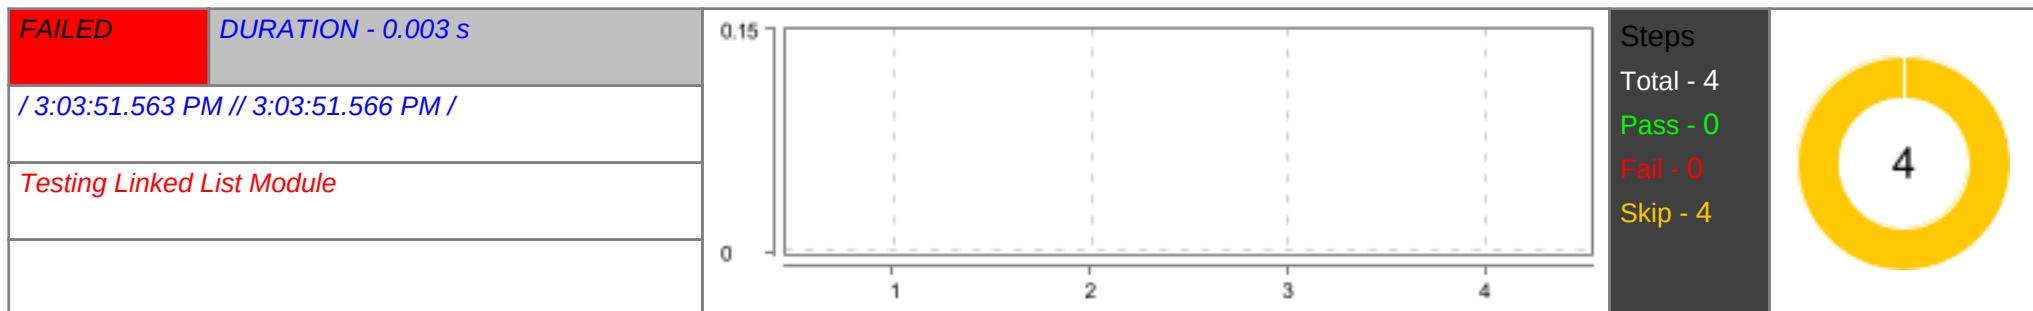

| # | Step / Hook Details | Status | Duration |
|---|---|---------|----------|
| | BEFORE - appHooks.ApplicationHooks.setup() java.lang.NullPointerException: Cannot invoke "org.openqa.selenium.WebDriver.manage()" because the return value of "com.qa.factory.DriverFactory.getDriver()" is null at com.qa.factory.DriverFactory.init_driver(DriverFactory.java:47) at com.qa.factory.DriverFactory.setupdriver(DriverFactory.java:71) at appHooks.ApplicationHooks.setup(ApplicationHooks.java:33) | FAILED | 0.001 s |
| 1 | Given The user is in a try here page having tryEditor with a Run button to test | SKIPPED | 0.000 s |
| 2 | When The user gets invalid input from sheet "pythonCode" and 1 | SKIPPED | 0.000 s |
| 3 | And user click on Run button | SKIPPED | 0.000 s |
| 4 | Then The user should be presented with the Run output with alert | SKIPPED | 0.000 s |
| | AFTER - appHooks.ApplicationHooks.tearDown(io.cucumber.java.Scenario) java.lang.NullPointerException: Cannot invoke "org.openqa.selenium.TakesScreenshot.getScreenshotAs(org.openqa.selenium.OutputType)" because the return value of "com.qa.factory.DriverFactory.getDriver()" is null at appHooks.ApplicationHooks.tearDown(ApplicationHooks.java:59) | FAILED | 0.000 s |

The user validating "Practice Questions" page

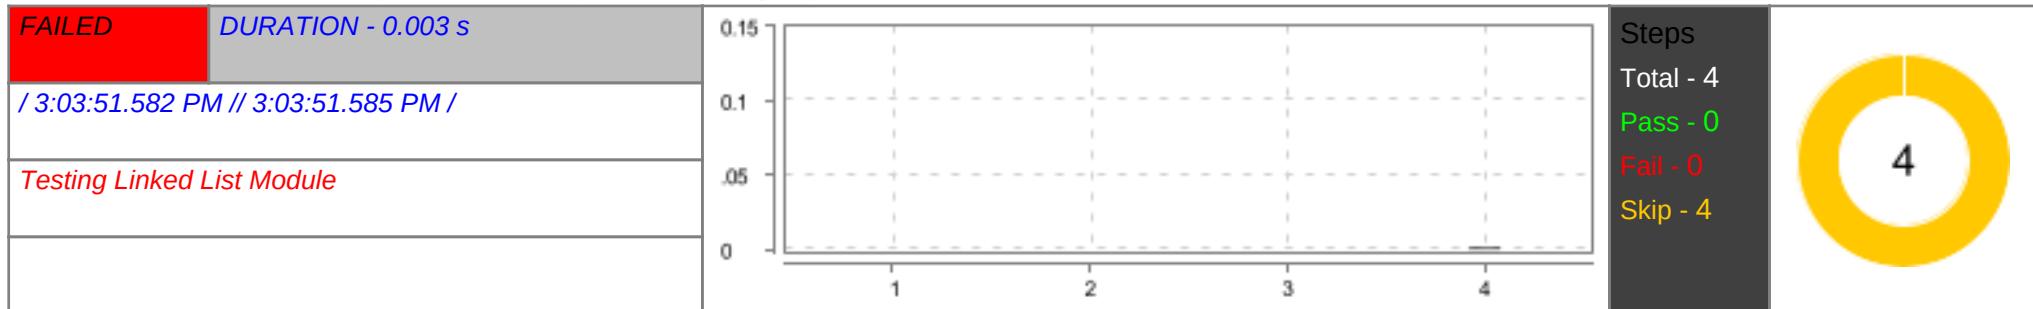


| # | Step / Hook Details | Status | Duration |
|---|---|---------|----------|
| | BEFORE - appHooks.ApplicationHooks.setup() java.lang.NullPointerException: Cannot invoke "org.openqa.selenium.WebDriver.manage()" because the return value of "com.qa.factory.DriverFactory.getDriver()" is null at com.qa.factory.DriverFactory.init_driver(DriverFactory.java:47) at com.qa.factory.DriverFactory.setupdriver(DriverFactory.java:71) at appHooks.ApplicationHooks.setup(ApplicationHooks.java:33) | FAILED | 0.001 s |
| 1 | Given The user is in the "Linked List" page after logged in | SKIPPED | 0.000 s |
| 2 | When The user clicks "Introduction" link of Linked List page | SKIPPED | 0.000 s |
| 3 | And The user clicks on the "Practice Questions" | SKIPPED | 0.000 s |
| 4 | Then The user should be directed to "Practice Questions" Page | SKIPPED | 0.001 s |
| | AFTER - appHooks.ApplicationHooks.tearDown(io.cucumber.java.Scenario) java.lang.NullPointerException: Cannot invoke "org.openqa.selenium.TakesScreenshot.getScreenshotAs(org.openqa.selenium.OutputType)" because the return value of "com.qa.factory.DriverFactory.getDriver()" is null at appHooks.ApplicationHooks.tearDown(ApplicationHooks.java:59) | FAILED | 0.000 s |

user log in with credentials




The user is able to signin with registered credential

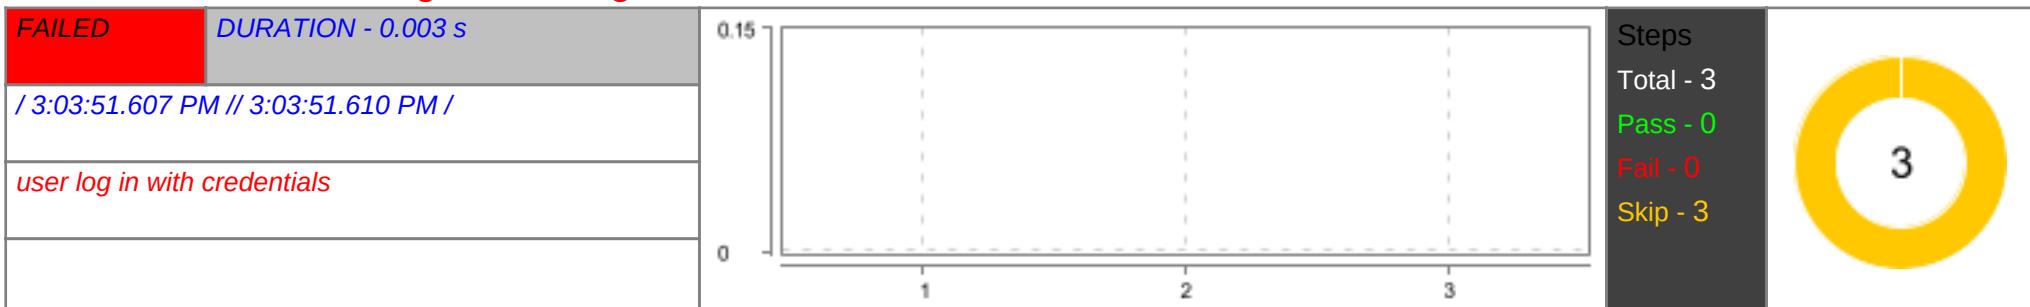

| # | Step / Hook Details | Status | Duration |
|---|---|---------|----------|
| | BEFORE - appHooks.ApplicationHooks.setup() java.lang.NullPointerException: Cannot invoke "org.openqa.selenium.WebDriver.manage()" because the return value of "com.qa.factory.DriverFactory.getDriver()" is null at com.qa.factory.DriverFactory.init_driver(DriverFactory.java:47) at com.qa.factory.DriverFactory.setupdriver(DriverFactory.java:71) at appHooks.ApplicationHooks.setup(ApplicationHooks.java:33) | FAILED | 0.001 s |
| 1 | Given The user is in the Sign in page | SKIPPED | 0.000 s |
| 2 | When The user enters a valid "pluton@gmail.com" and "Nnsdet@115" | SKIPPED | 0.000 s |
| 3 | Then click login button to verify and pagetitle is "NumPyNinja" | SKIPPED | 0.000 s |
| | AFTER - appHooks.ApplicationHooks.tearDown(io.cucumber.java.Scenario) java.lang.NullPointerException: Cannot invoke "org.openqa.selenium.TakesScreenshot.getScreenshotAs(org.openqa.selenium.OutputType)" because the return value of "com.qa.factory.DriverFactory.getDriver()" is null at appHooks.ApplicationHooks.tearDown(ApplicationHooks.java:59) | FAILED | 0.001 s |


The user is directed to "Stack" Page

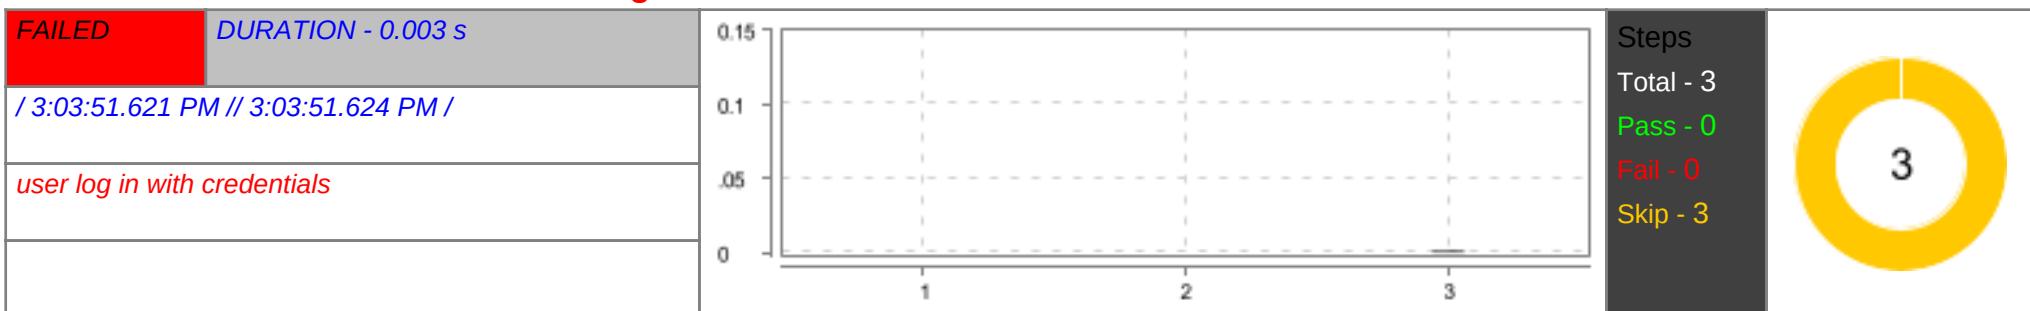

| # | Step / Hook Details | Status | Duration |
|---|---|---------|----------|
| | BEFORE - appHooks.ApplicationHooks.setup() java.lang.NullPointerException: Cannot invoke "org.openqa.selenium.WebDriver.manage()" because the return value of "com.qa.factory.DriverFactory.getDriver()" is null at com.qa.factory.DriverFactory.init_driver(DriverFactory.java:47) at com.qa.factory.DriverFactory.setupdriver(DriverFactory.java:71) at appHooks.ApplicationHooks.setup(ApplicationHooks.java:33) | FAILED | 0.001 s |
| 1 | Given The user is in the Home page after logged in | SKIPPED | 0.000 s |
| 2 | When The user selecting "Stack" item from the drop down menu | SKIPPED | 0.000 s |
| 3 | Then The user should be directed to "Stack" Page | SKIPPED | 0.001 s |
| | AFTER - appHooks.ApplicationHooks.tearDown(io.cucumber.java.Scenario) | FAILED | 0.000 s |


| # | Step / Hook Details | Status | Duration |
|---|---|--------|----------|
| | java.lang.NullPointerException: Cannot invoke "org.openqa.selenium.TakesScreenshot.getScreenshotAs(org.openqa.selenium.OutputType)" because the return value of "com.qa.factory.DriverFactory.getDriver()" is null at appHooks.ApplicationHooks.tearDown(ApplicationHooks.java:59) | | |

The user is able to navigate "to operations in Stack page"

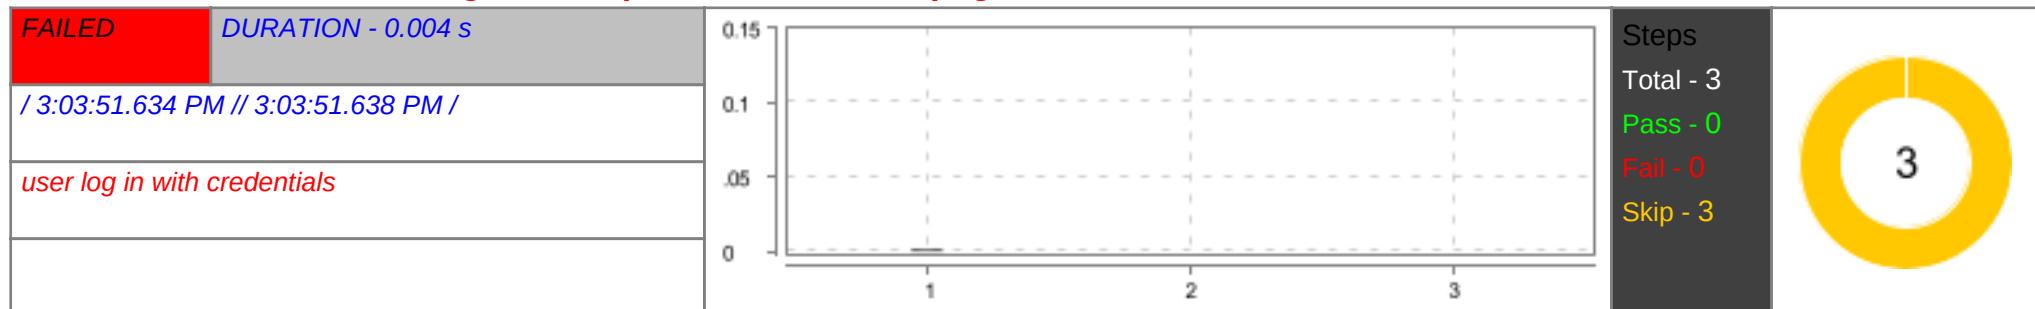


| # | Step / Hook Details | Status | Duration |
|---|---|---------|----------|
| | BEFORE - appHooks.ApplicationHooks.setup() java.lang.NullPointerException: Cannot invoke "org.openqa.selenium.WebDriver.manage()" because the return value of "com.qa.factory.DriverFactory.getDriver()" is null at com.qa.factory.DriverFactory.init_driver(DriverFactory.java:47) at com.qa.factory.DriverFactory.setupdriver(DriverFactory.java:71) at appHooks.ApplicationHooks.setup(ApplicationHooks.java:33) | FAILED | 0.002 s |
| 1 | Given The user is in the "Stack" page after logged in | SKIPPED | 0.001 s |
| 2 | When user clicks on "Operations in Stack" link | SKIPPED | 0.000 s |
| 3 | Then The user should be directed to "Operations in Stack" Page | SKIPPED | 0.000 s |
| | AFTER - appHooks.ApplicationHooks.tearDown(io.cucumber.java.Scenario) java.lang.NullPointerException: Cannot invoke "org.openqa.selenium.TakesScreenshot.getScreenshotAs(org.openqa.selenium.OutputType)" because the return value of "com.qa.factory.DriverFactory.getDriver()" is null at appHooks.ApplicationHooks.tearDown(ApplicationHooks.java:59) | FAILED | 0.001 s |

The user is able to navigate to a page having an tryEditor

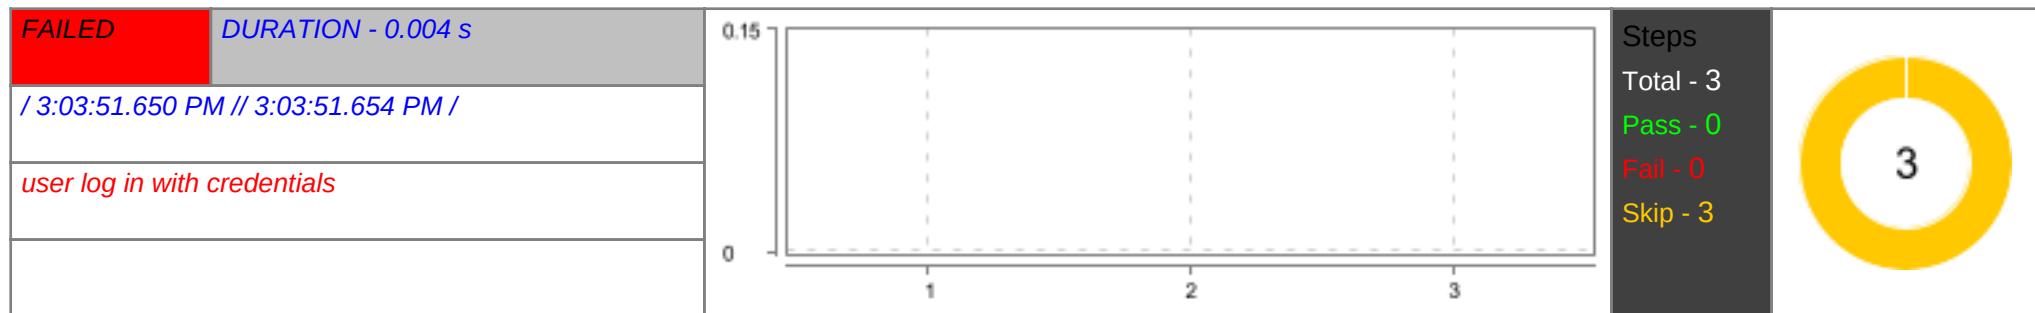

| # | Step / Hook Details | Status | Duration |
|---|---|---------|----------|
| | BEFORE - appHooks.ApplicationHooks.setup() <code>java.lang.NullPointerException: Cannot invoke "org.openqa.selenium.WebDriver.manage()" because the return value of "com.qa.factory.DriverFactory.getDriver()" is null at com.qa.factory.DriverFactory.init_driver(DriverFactory.java:47) at com.qa.factory.DriverFactory.setupdriver(DriverFactory.java:71) at appHooks.ApplicationHooks.setup(ApplicationHooks.java:33)</code> | FAILED | 0.001 s |
| 1 | Given The user is on the "Operations in Stack" after logged in | SKIPPED | 0.000 s |
| 2 | When The user clicks Try Here button | SKIPPED | 0.000 s |
| 3 | Then The user should be redirected to a page having an tryEditor with a Run button to test | SKIPPED | 0.000 s |
| | AFTER - appHooks.ApplicationHooks.tearDown(io.cucumber.java.Scenario) <code>java.lang.NullPointerException: Cannot invoke "org.openqa.selenium.TakesScreenshot.getScreenshotAs(org.openqa.selenium.OutputType)" because the return value of "com.qa.factory.DriverFactory.getDriver()" is null at appHooks.ApplicationHooks.tearDown(ApplicationHooks.java:59)</code> | FAILED | 0.001 s |


The user is able to run code in tryEditor

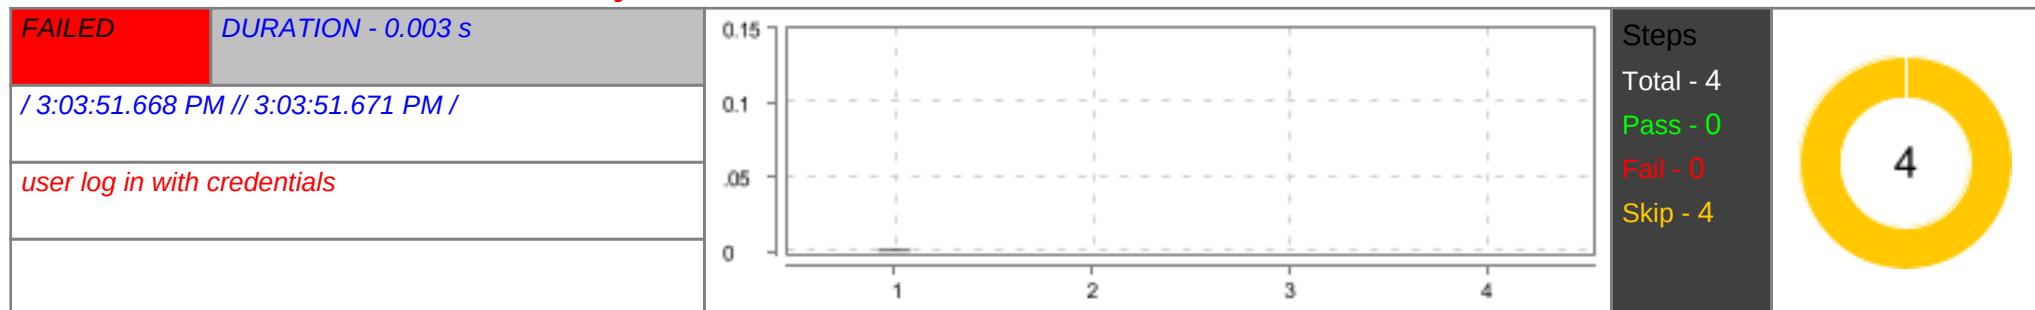

| # | Step / Hook Details | Status | Duration |
|---|--|--------|----------|
| | BEFORE - appHooks.ApplicationHooks.setup() | FAILED | 0.001 s |

| # | Step / Hook Details | Status | Duration |
|---|---|---------|----------|
| | java.lang.NullPointerException: Cannot invoke "org.openqa.selenium.WebDriver.manage()" because the return value of "com.qa.factory.DriverFactory.getDriver()" is null at com.qa.factory.DriverFactory.init_driver(DriverFactory.java:47) at com.qa.factory.DriverFactory.setupdriver(DriverFactory.java:71) at appHooks.ApplicationHooks.setup(ApplicationHooks.java:33) | | |
| 1 | Given The user is in a try here page having tryEditor with a Run button to test | SKIPPED | 0.001 s |
| 2 | When The user gets input from sheet "pythonCode" and 0 | SKIPPED | 0.000 s |
| 3 | And user click on Run button | SKIPPED | 0.000 s |
| 4 | Then The user should be presented with Run output | SKIPPED | 0.000 s |
| | AFTER - appHooks.ApplicationHooks.tearDown(io.cucumber.java.Scenario) java.lang.NullPointerException: Cannot invoke "org.openqa.selenium.TakesScreenshot.getScreenshotAs(org.openqa.selenium.OutputType)" because the return value of "com.qa.factory.DriverFactory.getDriver()" is null at appHooks.ApplicationHooks.tearDown(ApplicationHooks.java:59) | FAILED | 0.001 s |


The user is able to get the error message for invalid syntax

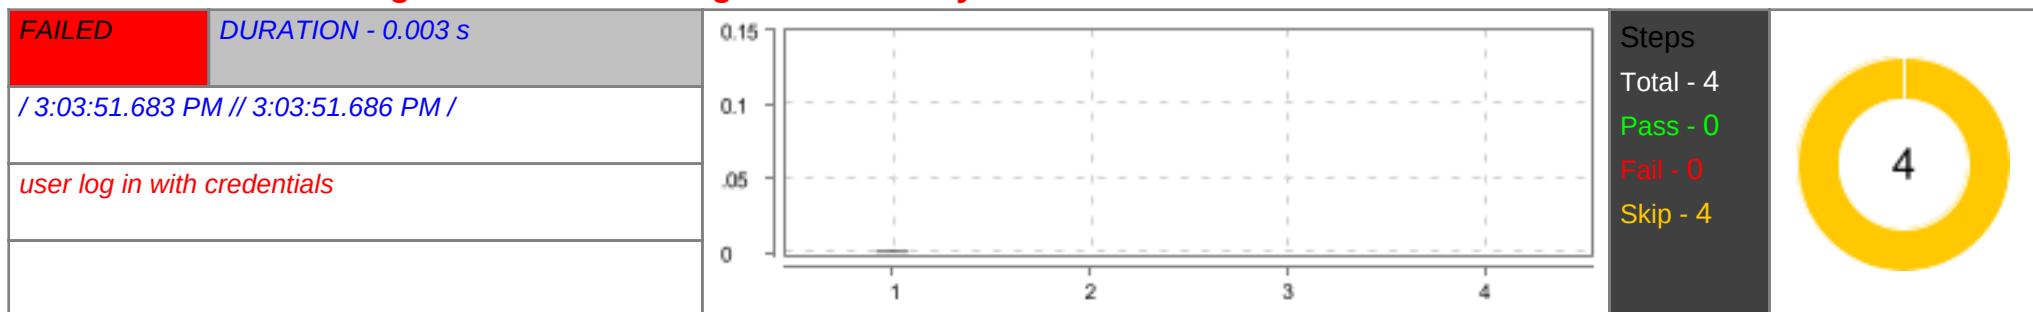

| # | Step / Hook Details | Status | Duration |
|---|---|---------|----------|
| | BEFORE - appHooks.ApplicationHooks.setup() java.lang.NullPointerException: Cannot invoke "org.openqa.selenium.WebDriver.manage()" because the return value of "com.qa.factory.DriverFactory.getDriver()" is null at com.qa.factory.DriverFactory.init_driver(DriverFactory.java:47) at com.qa.factory.DriverFactory.setupdriver(DriverFactory.java:71) at appHooks.ApplicationHooks.setup(ApplicationHooks.java:33) | FAILED | 0.001 s |
| 1 | Given The user is in a try here page having tryEditor with a Run button to test | SKIPPED | 0.001 s |
| 2 | When The user gets invalid input from sheet "pythonCode" and 1 | SKIPPED | 0.000 s |
| 3 | And user click on Run button | SKIPPED | 0.000 s |
| 4 | Then The user should be presented with the Run output with alert | SKIPPED | 0.000 s |


| # | Step / Hook Details | Status | Duration |
|---|--|--------|----------|
| | AFTER - appHooks.ApplicationHooks.tearDown(io.cucumber.java.Scenario) java.lang.NullPointerException: Cannot invoke "org.openqa.selenium.TakesScreenshot.getScreenshotAs(org.openqa.selenium.OutputType)" because the return value of "com.qa.factory.DriverFactory.getDriver()" is null at appHooks.ApplicationHooks.tearDown(ApplicationHooks.java:59) | FAILED | 0.001 s |

The user is able to navigate to "Implementation" Page

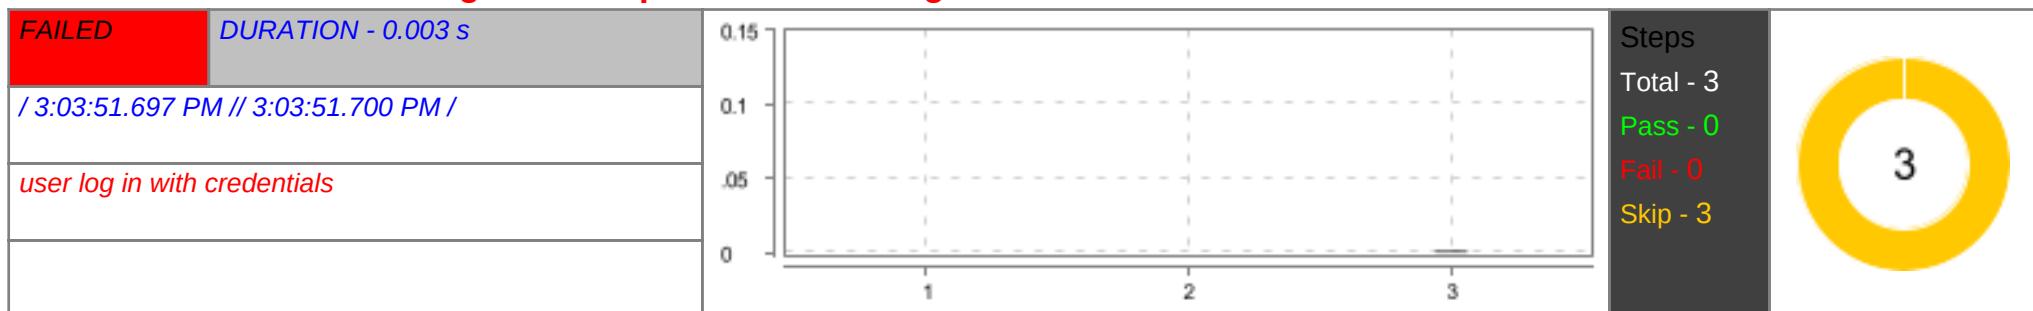


| # | Step / Hook Details | Status | Duration |
|---|---|---------|----------|
| | BEFORE - appHooks.ApplicationHooks.setup() java.lang.NullPointerException: Cannot invoke "org.openqa.selenium.WebDriver.manage()" because the return value of "com.qa.factory.DriverFactory.getDriver()" is null at com.qa.factory.DriverFactory.init_driver(DriverFactory.java:47) at com.qa.factory.DriverFactory.setupdriver(DriverFactory.java:71) at appHooks.ApplicationHooks.setup(ApplicationHooks.java:33) | FAILED | 0.001 s |
| 1 | Given The user is in the "Stack" page after logged in | SKIPPED | 0.000 s |
| 2 | When user clicks on "Implementation" link | SKIPPED | 0.000 s |
| 3 | Then The user should be directed to "Implementation" Page | SKIPPED | 0.001 s |
| | AFTER - appHooks.ApplicationHooks.tearDown(io.cucumber.java.Scenario) java.lang.NullPointerException: Cannot invoke "org.openqa.selenium.TakesScreenshot.getScreenshotAs(org.openqa.selenium.OutputType)" because the return value of "com.qa.factory.DriverFactory.getDriver()" is null at appHooks.ApplicationHooks.tearDown(ApplicationHooks.java:59) | FAILED | 0.000 s |

The user is able to navigate to Implementation page having an tryeditor

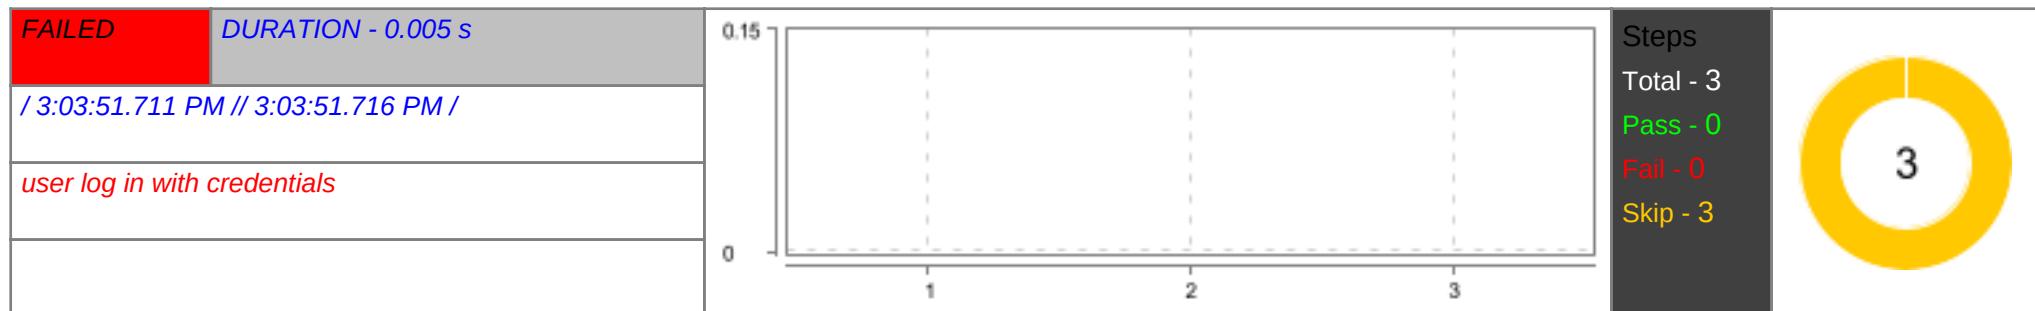

| # | Step / Hook Details | Status | Duration |
|---|---|---------|----------|
| | BEFORE - appHooks.ApplicationHooks.setup() <code>java.lang.NullPointerException: Cannot invoke "org.openqa.selenium.WebDriver.manage()" because the return value of "com.qa.factory.DriverFactory.getDriver()" is null at com.qa.factory.DriverFactory.init_driver(DriverFactory.java:47) at com.qa.factory.DriverFactory.setupdriver(DriverFactory.java:71) at appHooks.ApplicationHooks.setup(ApplicationHooks.java:33)</code> | FAILED | 0.002 s |
| 1 | Given The user is on the "Implementation" after logged in | SKIPPED | 0.000 s |
| 2 | When The user clicks Try Here button | SKIPPED | 0.000 s |
| 3 | Then The user should be redirected to a page having an tryEditor with a Run button to test | SKIPPED | 0.000 s |
| | AFTER - appHooks.ApplicationHooks.tearDown(io.cucumber.java.Scenario) <code>java.lang.NullPointerException: Cannot invoke "org.openqa.selenium.TakesScreenshot.getScreenshotAs(org.openqa.selenium.OutputType)" because the return value of "com.qa.factory.DriverFactory.getDriver()" is null at appHooks.ApplicationHooks.tearDown(ApplicationHooks.java:59)</code> | FAILED | 0.001 s |


The user is able to run code in tryEditor

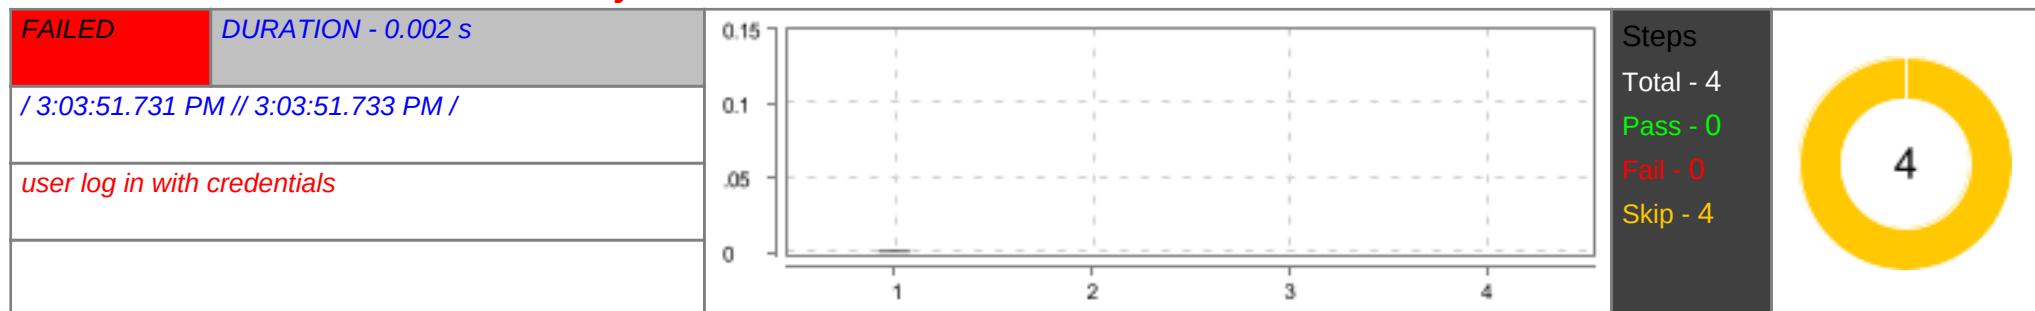

| # | Step / Hook Details | Status | Duration |
|---|--|--------|----------|
| | BEFORE - appHooks.ApplicationHooks.setup() | FAILED | 0.001 s |

| # | Step / Hook Details | Status | Duration |
|---|---|---------|----------|
| | java.lang.NullPointerException: Cannot invoke "org.openqa.selenium.WebDriver.manage()" because the return value of "com.qa.factory.DriverFactory.getDriver()" is null at com.qa.factory.DriverFactory.init_driver(DriverFactory.java:47) at com.qa.factory.DriverFactory.setupdriver(DriverFactory.java:71) at appHooks.ApplicationHooks.setup(ApplicationHooks.java:33) | | |
| 1 | Given The user is in a try here page having tryEditor with a Run button to test | SKIPPED | 0.001 s |
| 2 | When The user gets input from sheet "pythonCode" and 0 | SKIPPED | 0.000 s |
| 3 | And user click on Run button | SKIPPED | 0.000 s |
| 4 | Then The user should be presented with Run output | SKIPPED | 0.000 s |
| | AFTER - appHooks.ApplicationHooks.tearDown(io.cucumber.java.Scenario) java.lang.NullPointerException: Cannot invoke "org.openqa.selenium.TakesScreenshot.getScreenshotAs(org.openqa.selenium.OutputType)" because the return value of "com.qa.factory.DriverFactory.getDriver()" is null at appHooks.ApplicationHooks.tearDown(ApplicationHooks.java:59) | FAILED | 0.000 s |


The user is able to get the error message for invalid syntax

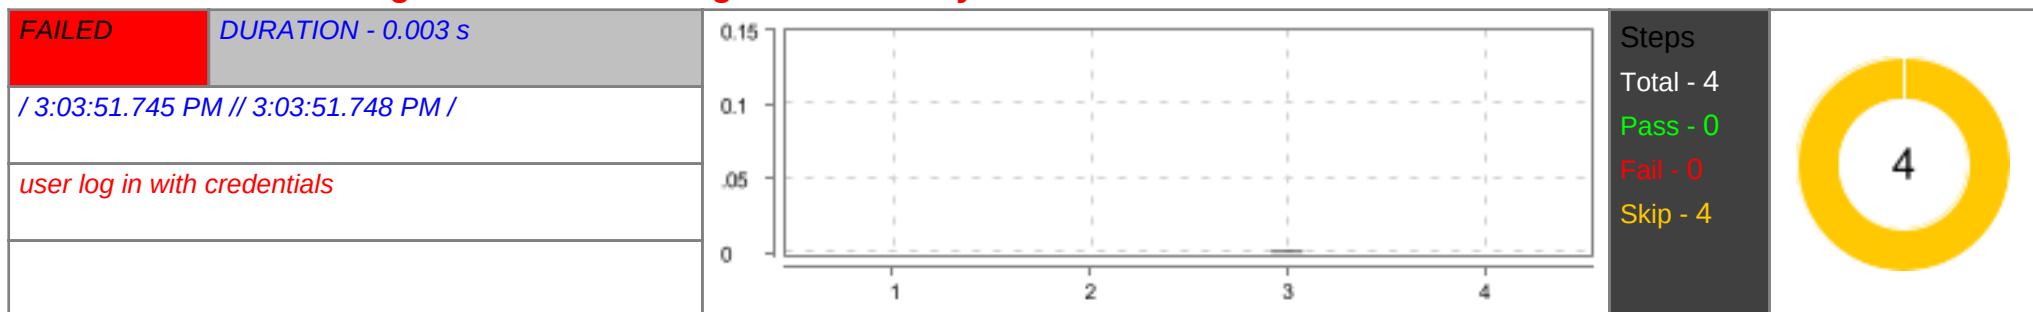

| # | Step / Hook Details | Status | Duration |
|---|---|---------|----------|
| | BEFORE - appHooks.ApplicationHooks.setup() java.lang.NullPointerException: Cannot invoke "org.openqa.selenium.WebDriver.manage()" because the return value of "com.qa.factory.DriverFactory.getDriver()" is null at com.qa.factory.DriverFactory.init_driver(DriverFactory.java:47) at com.qa.factory.DriverFactory.setupdriver(DriverFactory.java:71) at appHooks.ApplicationHooks.setup(ApplicationHooks.java:33) | FAILED | 0.002 s |
| 1 | Given The user is in a try here page having tryEditor with a Run button to test | SKIPPED | 0.000 s |
| 2 | When The user gets invalid input from sheet "pythonCode" and 1 | SKIPPED | 0.000 s |
| 3 | And user click on Run button | SKIPPED | 0.001 s |
| 4 | Then The user should be presented with the Run output with alert | SKIPPED | 0.000 s |


| # | Step / Hook Details | Status | Duration |
|---|--|--------|----------|
| | AFTER - appHooks.ApplicationHooks.tearDown(io.cucumber.java.Scenario) java.lang.NullPointerException: Cannot invoke "org.openqa.selenium.TakesScreenshot.getScreenshotAs(org.openqa.selenium.OutputType)" because the return value of "com.qa.factory.DriverFactory.getDriver()" is null at appHooks.ApplicationHooks.tearDown(ApplicationHooks.java:59) | FAILED | 0.000 s |

The user is able to navigate to "Applications" Page

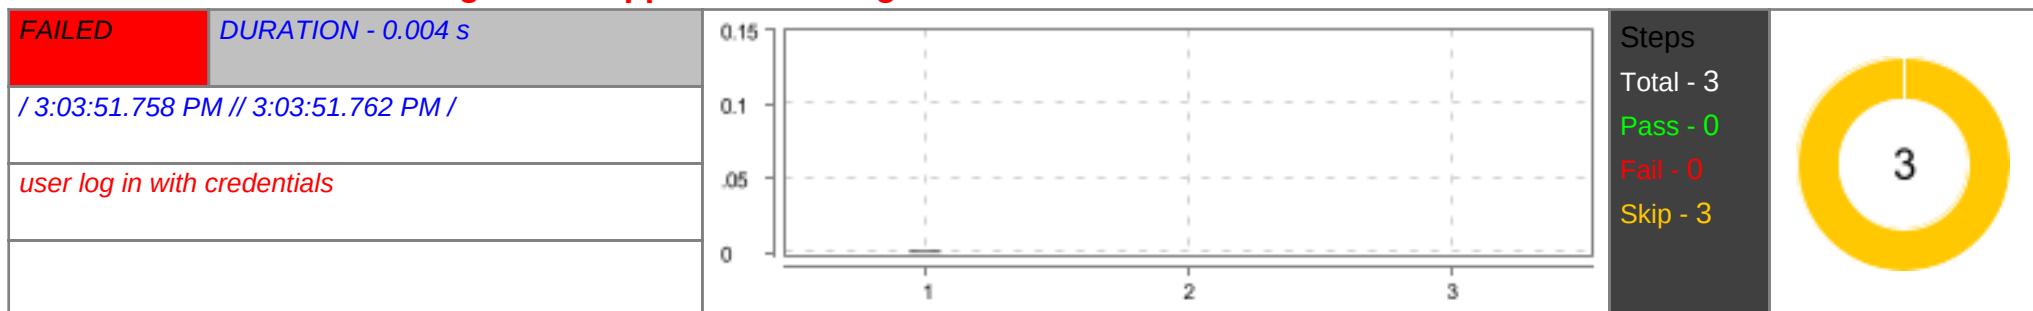


| # | Step / Hook Details | Status | Duration |
|---|---|---------|----------|
| | BEFORE - appHooks.ApplicationHooks.setup() java.lang.NullPointerException: Cannot invoke "org.openqa.selenium.WebDriver.manage()" because the return value of "com.qa.factory.DriverFactory.getDriver()" is null at com.qa.factory.DriverFactory.init_driver(DriverFactory.java:47) at com.qa.factory.DriverFactory.setupdriver(DriverFactory.java:71) at appHooks.ApplicationHooks.setup(ApplicationHooks.java:33) | FAILED | 0.001 s |
| 1 | Given The user is in the "Stack" page after logged in | SKIPPED | 0.001 s |
| 2 | When user clicks on "Applications" link | SKIPPED | 0.000 s |
| 3 | Then The user should be directed to "Applications" Page | SKIPPED | 0.000 s |
| | AFTER - appHooks.ApplicationHooks.tearDown(io.cucumber.java.Scenario) java.lang.NullPointerException: Cannot invoke "org.openqa.selenium.TakesScreenshot.getScreenshotAs(org.openqa.selenium.OutputType)" because the return value of "com.qa.factory.DriverFactory.getDriver()" is null at appHooks.ApplicationHooks.tearDown(ApplicationHooks.java:59) | FAILED | 0.001 s |

The user is able to navigate to Applications page having an tryeditor

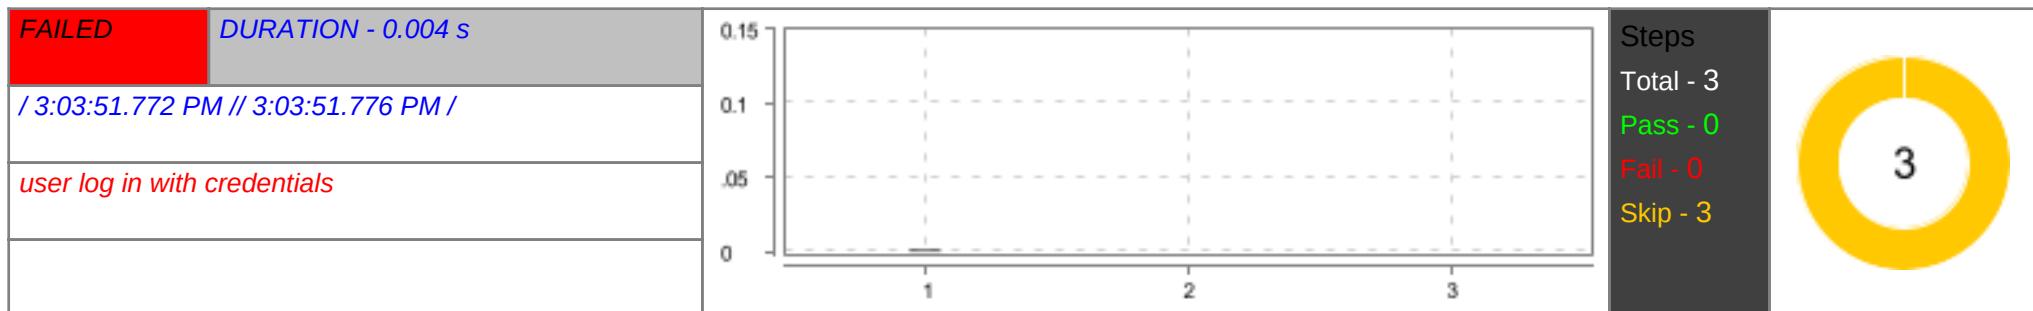

| # | Step / Hook Details | Status | Duration |
|---|---|---------|----------|
| | BEFORE - appHooks.ApplicationHooks.setup() java.lang.NullPointerException: Cannot invoke "org.openqa.selenium.WebDriver.manage()" because the return value of "com.qa.factory.DriverFactory.getDriver()" is null at com.qa.factory.DriverFactory.init_driver(DriverFactory.java:47) at com.qa.factory.DriverFactory.setupdriver(DriverFactory.java:71) at appHooks.ApplicationHooks.setup(ApplicationHooks.java:33) | FAILED | 0.002 s |
| 1 | Given The user is on the "Applications" after logged in | SKIPPED | 0.001 s |
| 2 | When The user clicks Try Here button | SKIPPED | 0.000 s |
| 3 | Then The user should be redirected to a page having an tryEditor with a Run button to test | SKIPPED | 0.000 s |
| | AFTER - appHooks.ApplicationHooks.tearDown(io.cucumber.java.Scenario) java.lang.NullPointerException: Cannot invoke "org.openqa.selenium.TakesScreenshot.getScreenshotAs(org.openqa.selenium.OutputType)" because the return value of "com.qa.factory.DriverFactory.getDriver()" is null at appHooks.ApplicationHooks.tearDown(ApplicationHooks.java:59) | FAILED | 0.001 s |


The user is able to run code in tryEditor

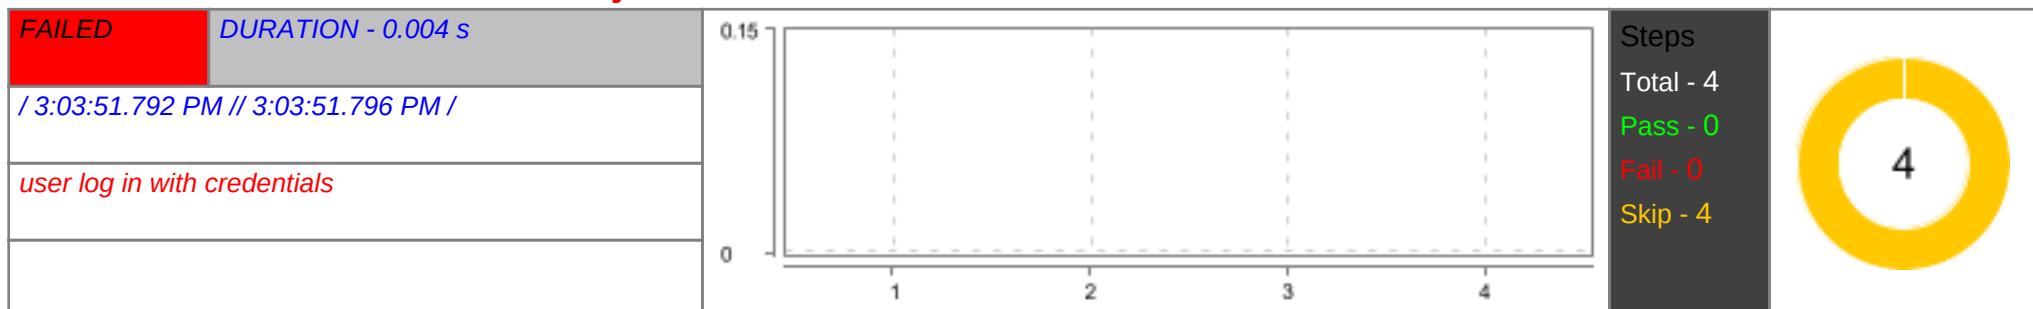

| # | Step / Hook Details | Status | Duration |
|---|--|--------|----------|
| | BEFORE - appHooks.ApplicationHooks.setup() | FAILED | 0.002 s |

| # | Step / Hook Details | Status | Duration |
|---|---|---------|----------|
| | java.lang.NullPointerException: Cannot invoke "org.openqa.selenium.WebDriver.manage()" because the return value of "com.qa.factory.DriverFactory.getDriver()" is null at com.qa.factory.DriverFactory.init_driver(DriverFactory.java:47) at com.qa.factory.DriverFactory.setupdriver(DriverFactory.java:71) at appHooks.ApplicationHooks.setup(ApplicationHooks.java:33) | | |
| 1 | Given The user is in a try here page having tryEditor with a Run button to test | SKIPPED | 0.000 s |
| 2 | When The user gets input from sheet "pythonCode" and 0 | SKIPPED | 0.000 s |
| 3 | And user click on Run button | SKIPPED | 0.000 s |
| 4 | Then The user should be presented with Run output | SKIPPED | 0.000 s |
| | AFTER - appHooks.ApplicationHooks.tearDown(io.cucumber.java.Scenario) java.lang.NullPointerException: Cannot invoke "org.openqa.selenium.TakesScreenshot.getScreenshotAs(org.openqa.selenium.OutputType)" because the return value of "com.qa.factory.DriverFactory.getDriver()" is null at appHooks.ApplicationHooks.tearDown(ApplicationHooks.java:59) | FAILED | 0.001 s |


The user is able to get the error message for invalid syntax

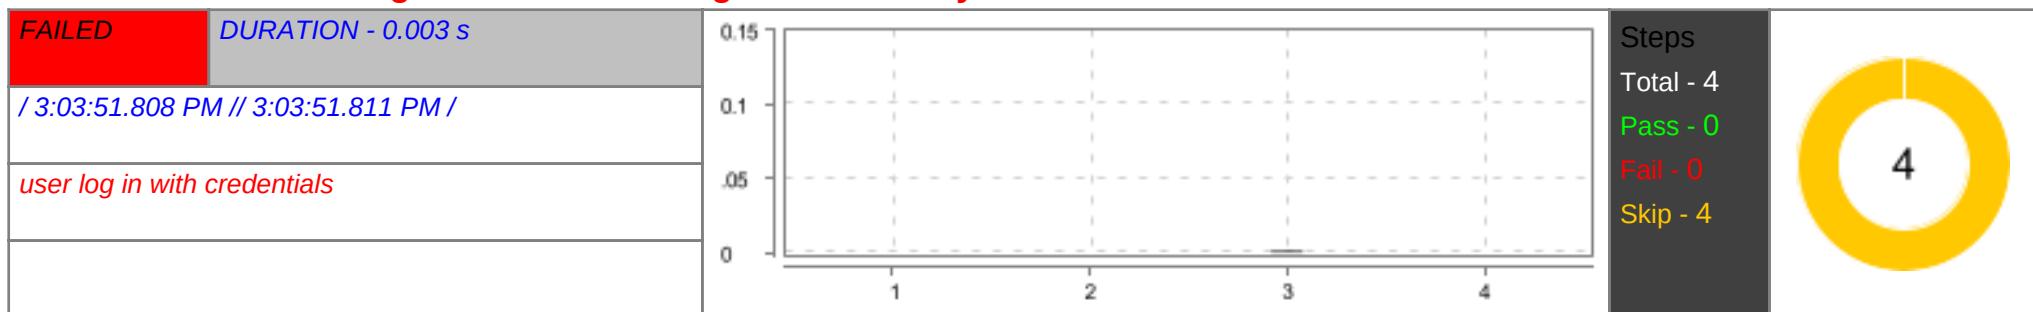

| # | Step / Hook Details | Status | Duration |
|---|---|---------|----------|
| | BEFORE - appHooks.ApplicationHooks.setup() java.lang.NullPointerException: Cannot invoke "org.openqa.selenium.WebDriver.manage()" because the return value of "com.qa.factory.DriverFactory.getDriver()" is null at com.qa.factory.DriverFactory.init_driver(DriverFactory.java:47) at com.qa.factory.DriverFactory.setupdriver(DriverFactory.java:71) at appHooks.ApplicationHooks.setup(ApplicationHooks.java:33) | FAILED | 0.001 s |
| 1 | Given The user is in a try here page having tryEditor with a Run button to test | SKIPPED | 0.000 s |
| 2 | When The user gets invalid input from sheet "pythonCode" and 1 | SKIPPED | 0.000 s |
| 3 | And user click on Run button | SKIPPED | 0.001 s |
| 4 | Then The user should be presented with the Run output with alert | SKIPPED | 0.000 s |

| # | Step / Hook Details | Status | Duration |
|---|--|--------|----------|
| | AFTER - appHooks.ApplicationHooks.tearDown(io.cucumber.java.Scenario) java.lang.NullPointerException: Cannot invoke "org.openqa.selenium.TakesScreenshot.getScreenshotAs(org.openqa.selenium.OutputType)" because the return value of "com.qa.factory.DriverFactory.getDriver()" is null at appHooks.ApplicationHooks.tearDown(ApplicationHooks.java:59) | FAILED | 0.000 s |

The user is able to navigate to "Practice Questions" in stack Page

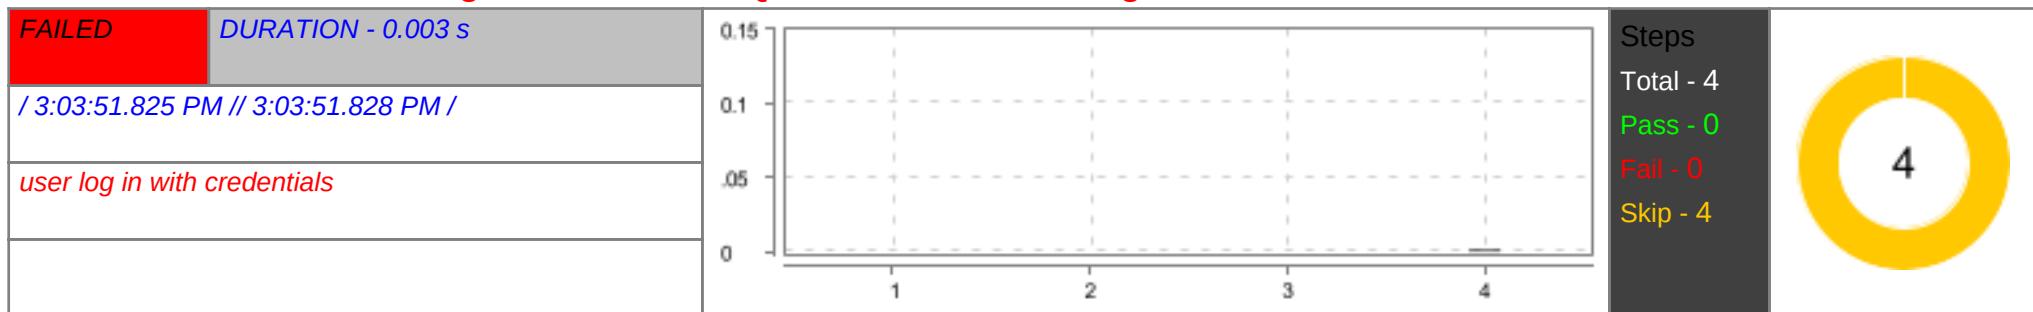


| # | Step / Hook Details | Status | Duration |
|---|---|---------|----------|
| | BEFORE - appHooks.ApplicationHooks.setup() java.lang.NullPointerException: Cannot invoke "org.openqa.selenium.WebDriver.manage()" because the return value of "com.qa.factory.DriverFactory.getDriver()" is null at com.qa.factory.DriverFactory.init_driver(DriverFactory.java:47) at com.qa.factory.DriverFactory.setupdriver(DriverFactory.java:71) at appHooks.ApplicationHooks.setup(ApplicationHooks.java:33) | FAILED | 0.001 s |
| 1 | Given The user is in the "Stack" page after logged in | SKIPPED | 0.000 s |
| 2 | When user clicks on "Operations in Stack" link | SKIPPED | 0.000 s |
| 3 | When The user clicks on the "Practice Questions" link | SKIPPED | 0.000 s |
| 4 | Then The user should be directed to "Practice Questions" Page | SKIPPED | 0.001 s |
| | AFTER - appHooks.ApplicationHooks.tearDown(io.cucumber.java.Scenario) java.lang.NullPointerException: Cannot invoke "org.openqa.selenium.TakesScreenshot.getScreenshotAs(org.openqa.selenium.OutputType)" because the return value of "com.qa.factory.DriverFactory.getDriver()" is null at appHooks.ApplicationHooks.tearDown(ApplicationHooks.java:59) | FAILED | 0.000 s |

user log in with credentials




The user is able to signin with registered credential

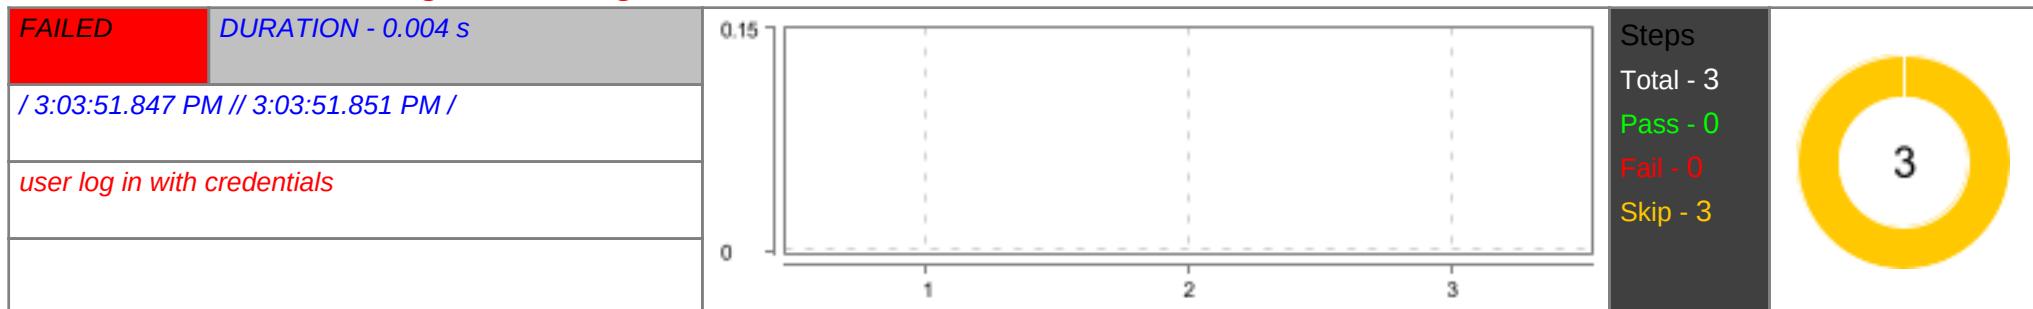


| # | Step / Hook Details | Status | Duration |
|---|---|---------|----------|
| | BEFORE - appHooks.ApplicationHooks.setup() java.lang.NullPointerException: Cannot invoke "org.openqa.selenium.WebDriver.manage()" because the return value of "com.qa.factory.DriverFactory.getDriver()" is null at com.qa.factory.DriverFactory.init_driver(DriverFactory.java:47) at com.qa.factory.DriverFactory.setupdriver(DriverFactory.java:71) at appHooks.ApplicationHooks.setup(ApplicationHooks.java:33) | FAILED | 0.001 s |
| 1 | Given The user is in the Sign in page | SKIPPED | 0.000 s |
| 2 | When The user enters a valid "pluton@gmail.com" and "Nnsdet@115" | SKIPPED | 0.000 s |
| 3 | Then click login button to verify and pagetitle is "NumPyNinja" | SKIPPED | 0.000 s |
| | AFTER - appHooks.ApplicationHooks.tearDown(io.cucumber.java.Scenario) java.lang.NullPointerException: Cannot invoke "org.openqa.selenium.TakesScreenshot.getScreenshotAs(org.openqa.selenium.OutputType)" because the return value of "com.qa.factory.DriverFactory.getDriver()" is null at appHooks.ApplicationHooks.tearDown(ApplicationHooks.java:59) | FAILED | 0.001 s |

The user is directed to "Queue" Page

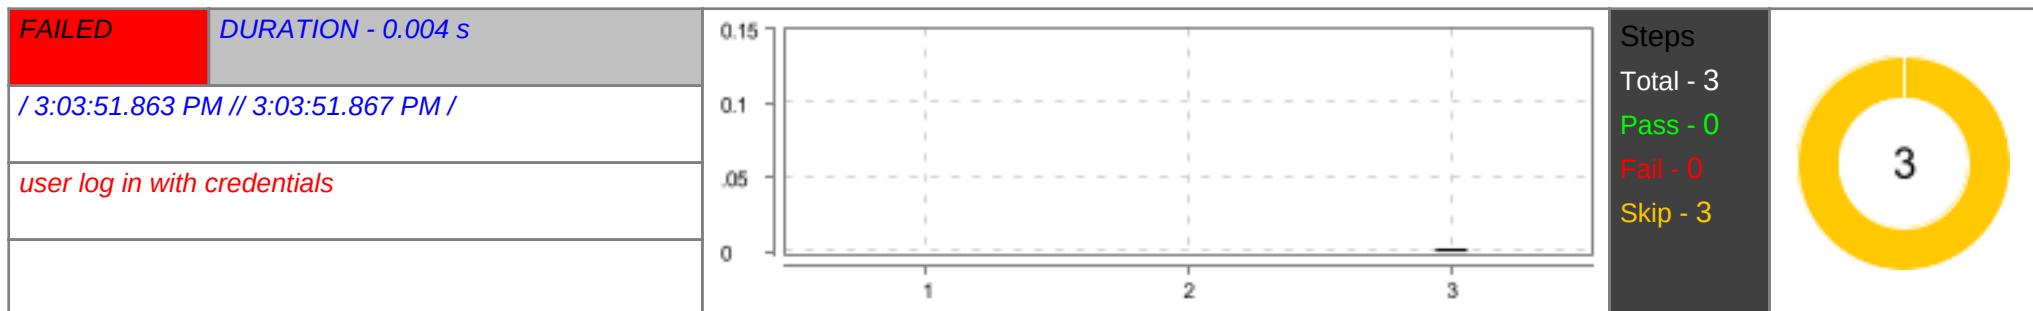

| # | Step / Hook Details | Status | Duration |
|---|---|---------|----------|
| | BEFORE - appHooks.ApplicationHooks.setup() java.lang.NullPointerException: Cannot invoke "org.openqa.selenium.WebDriver.manage()" because the return value of "com.qa.factory.DriverFactory.getDriver()" is null at com.qa.factory.DriverFactory.init_driver(DriverFactory.java:47) at com.qa.factory.DriverFactory.setupdriver(DriverFactory.java:71) at appHooks.ApplicationHooks.setup(ApplicationHooks.java:33) | FAILED | 0.000 s |
| 1 | Given The user is in the Home page after logged in | SKIPPED | 0.000 s |
| 2 | When The user selecting "Queue" item from the drop down menu | SKIPPED | 0.000 s |
| 3 | Then The user should be directed to "Queue" Page | SKIPPED | 0.002 s |
| | AFTER - appHooks.ApplicationHooks.tearDown(io.cucumber.java.Scenario) java.lang.NullPointerException: Cannot invoke "org.openqa.selenium.TakesScreenshot.getScreenshotAs(org.openqa.selenium.OutputType)" because the return value of "com.qa.factory.DriverFactory.getDriver()" is null at appHooks.ApplicationHooks.tearDown(ApplicationHooks.java:59) | FAILED | 0.000 s |


The user is able to navigate to Implementation of Queue in Python link page

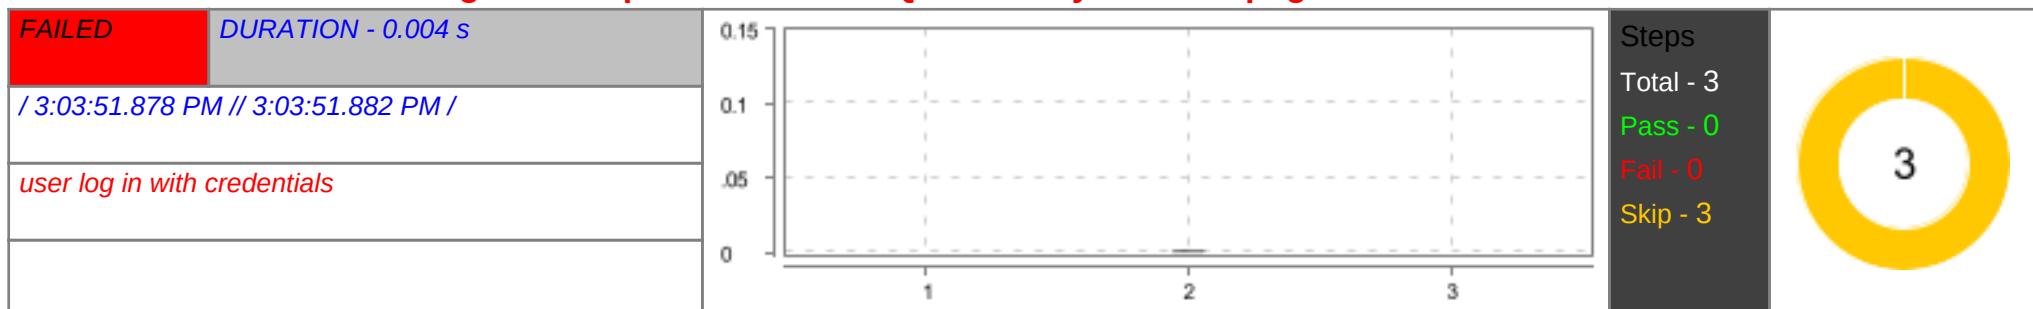

| # | Step / Hook Details | Status | Duration |
|---|--|--------|----------|
| | BEFORE - appHooks.ApplicationHooks.setup() | FAILED | 0.001 s |

| # | Step / Hook Details | Status | Duration |
|---|---|---------|----------|
| | java.lang.NullPointerException: Cannot invoke "org.openqa.selenium.WebDriver.manage()" because the return value of "com.qa.factory.DriverFactory.getDriver()" is null at com.qa.factory.DriverFactory.init_driver(DriverFactory.java:47) at com.qa.factory.DriverFactory.setupdriver(DriverFactory.java:71) at appHooks.ApplicationHooks.setup(ApplicationHooks.java:33) | | |
| 1 | Given The user is in the "Queue" page after logged in | SKIPPED | 0.000 s |
| 2 | When The user clicks on "Implementation of Queue in Python" link | SKIPPED | 0.001 s |
| 3 | Then The user should be directed to "Implementation of Queue in Python" Page | SKIPPED | 0.000 s |
| | AFTER - appHooks.ApplicationHooks.tearDown(io.cucumber.java.Scenario) java.lang.NullPointerException: Cannot invoke "org.openqa.selenium.TakesScreenshot.getScreenshotAs(org.openqa.selenium.OutputType)" because the return value of "com.qa.factory.DriverFactory.getDriver()" is null at appHooks.ApplicationHooks.tearDown(ApplicationHooks.java:59) | FAILED | 0.000 s |


The user should be directed to editor page with run button to test python code

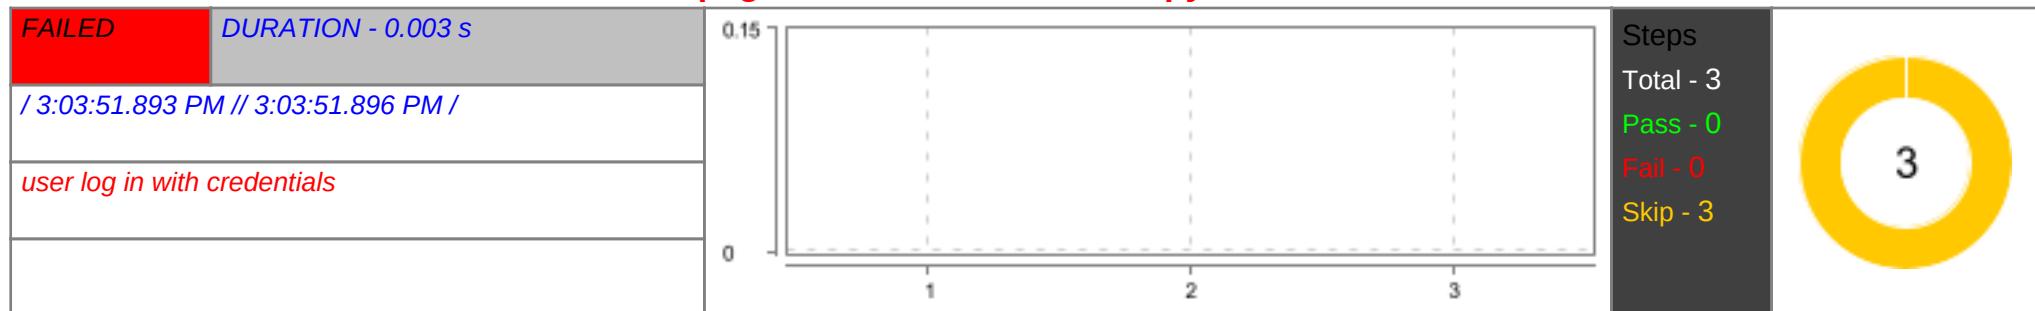

| # | Step / Hook Details | Status | Duration |
|---|---|---------|----------|
| | BEFORE - appHooks.ApplicationHooks.setup() java.lang.NullPointerException: Cannot invoke "org.openqa.selenium.WebDriver.manage()" because the return value of "com.qa.factory.DriverFactory.getDriver()" is null at com.qa.factory.DriverFactory.init_driver(DriverFactory.java:47) at com.qa.factory.DriverFactory.setupdriver(DriverFactory.java:71) at appHooks.ApplicationHooks.setup(ApplicationHooks.java:33) | FAILED | 0.001 s |
| 1 | Given The user is on the "Implementation of Queue in Python" page in queue after logged in | SKIPPED | 0.000 s |
| 2 | When The user clicks Try Here button | SKIPPED | 0.000 s |
| 3 | Then The user should be redirected to a page having an tryEditor with a Run button to test | SKIPPED | 0.000 s |
| | AFTER - appHooks.ApplicationHooks.tearDown(io.cucumber.java.Scenario) java.lang.NullPointerException: Cannot invoke "org.openqa.selenium.TakesScreenshot.getScreenshotAs(org.openqa.selenium.OutputType)" | FAILED | 0.000 s |


| # | Step / Hook Details | Status | Duration |
|---|---|--------|----------|
| | because the return value of "com.qa.factory.DriverFactory.getDriver()" is null at appHooks.ApplicationHooks.tearDown(ApplicationHooks.java:59) | | |

The user is able to run code in Editor for Implementation of queue page

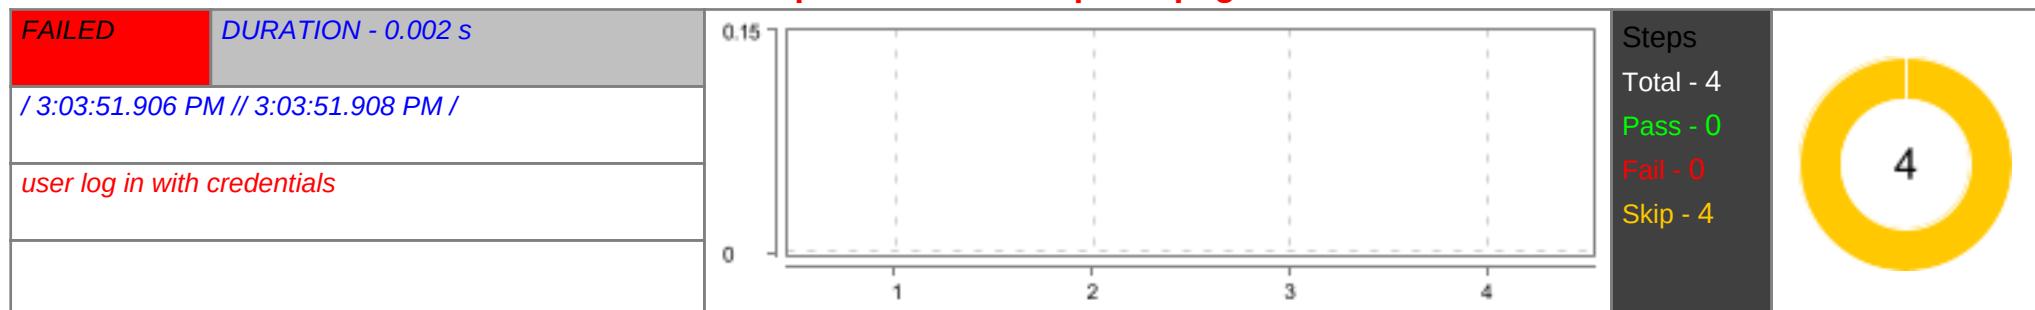


| # | Step / Hook Details | Status | Duration |
|---|---|---------|----------|
| | BEFORE - appHooks.ApplicationHooks.setup() java.lang.NullPointerException: Cannot invoke "org.openqa.selenium.WebDriver.manage()" because the return value of "com.qa.factory.DriverFactory.getDriver()" is null at com.qa.factory.DriverFactory.init_driver(DriverFactory.java:47) at com.qa.factory.DriverFactory.setupdriver(DriverFactory.java:71) at appHooks.ApplicationHooks.setup(ApplicationHooks.java:33) | FAILED | 0.001 s |
| 1 | Given The user is in a try here page having tryEditor with a Run button to test | SKIPPED | 0.000 s |
| 2 | When The user gets input from sheet "pythonCode" and 0 | SKIPPED | 0.000 s |
| 3 | And user click on Run button | SKIPPED | 0.000 s |
| 4 | Then The user should be presented with Run output | SKIPPED | 0.000 s |
| | AFTER - appHooks.ApplicationHooks.tearDown(io.cucumber.java.Scenario) java.lang.NullPointerException: Cannot invoke "org.openqa.selenium.TakesScreenshot.getScreenshotAs(org.openqa.selenium.OutputType)" because the return value of "com.qa.factory.DriverFactory.getDriver()" is null at appHooks.ApplicationHooks.tearDown(ApplicationHooks.java:59) | FAILED | 0.000 s |

The user is presented with error message for invalid code in Editor for Implementation of queue page

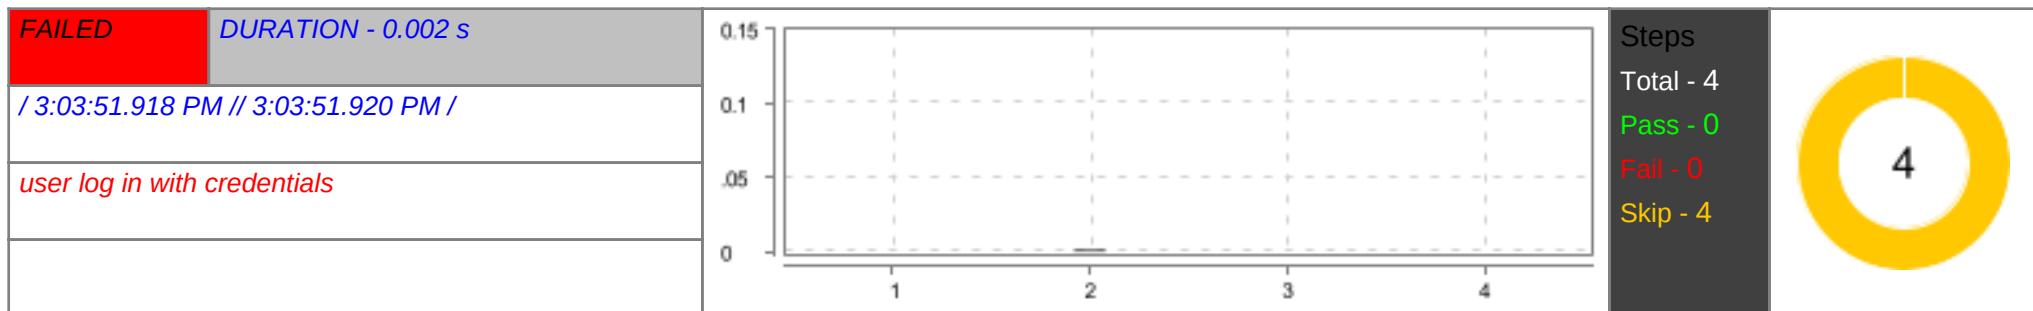


| # | Step / Hook Details | Status | Duration |
|---|---|---------|----------|
| | BEFORE - appHooks.ApplicationHooks.setup() java.lang.NullPointerException: Cannot invoke "org.openqa.selenium.WebDriver.manage()" because the return value of "com.qa.factory.DriverFactory.getDriver()" is null at com.qa.factory.DriverFactory.init_driver(DriverFactory.java:47) at com.qa.factory.DriverFactory.setupdriver(DriverFactory.java:71) at appHooks.ApplicationHooks.setup(ApplicationHooks.java:33) | FAILED | 0.001 s |
| 1 | Given The user is in a try here page having tryEditor with a Run button to test | SKIPPED | 0.000 s |
| 2 | When The user gets invalid input from sheet "pythonCode" and 1 | SKIPPED | 0.001 s |
| 3 | And user click on Run button | SKIPPED | 0.000 s |
| 4 | Then The user should be presented with the Run output with alert | SKIPPED | 0.000 s |
| | AFTER - appHooks.ApplicationHooks.tearDown(io.cucumber.java.Scenario) java.lang.NullPointerException: Cannot invoke "org.openqa.selenium.TakesScreenshot.getScreenshotAs(org.openqa.selenium.OutputType)" because the return value of "com.qa.factory.DriverFactory.getDriver()" is null at appHooks.ApplicationHooks.tearDown(ApplicationHooks.java:59) | FAILED | 0.000 s |

The user is able to navigate to queue page and click on Implementation using collections deque link

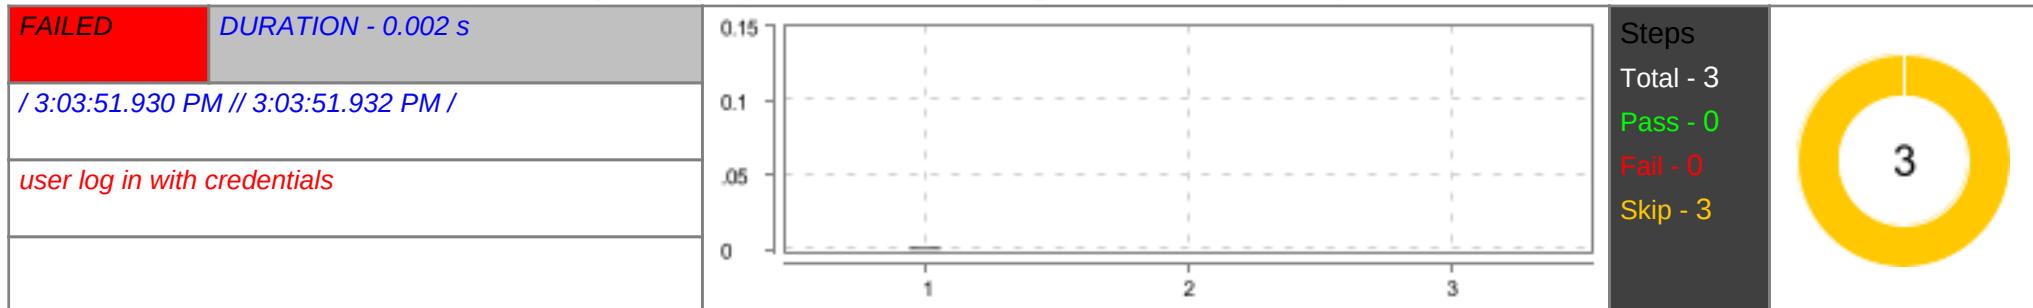

| # | Step / Hook Details | Status | Duration |
|---|---|---------|----------|
| | BEFORE - appHooks.ApplicationHooks.setup() java.lang.NullPointerException: Cannot invoke "org.openqa.selenium.WebDriver.manage()" because the return value of "com.qa.factory.DriverFactory.getDriver()" is null at com.qa.factory.DriverFactory.init_driver(DriverFactory.java:47) at com.qa.factory.DriverFactory.setupdriver(DriverFactory.java:71) at appHooks.ApplicationHooks.setup(ApplicationHooks.java:33) | FAILED | 0.001 s |
| 1 | Given The user is in the "Queue" page after logged in | SKIPPED | 0.001 s |
| 2 | When The user clicks on "Implementation using collections.dequeue" link | SKIPPED | 0.000 s |
| 3 | Then The user should be directed to "Implementation using collections.dequeue" Page | SKIPPED | 0.000 s |
| | AFTER - appHooks.ApplicationHooks.tearDown(io.cucumber.java.Scenario) java.lang.NullPointerException: Cannot invoke "org.openqa.selenium.TakesScreenshot.getScreenshotAs(org.openqa.selenium.OutputType)" because the return value of "com.qa.factory.DriverFactory.getDriver()" is null at appHooks.ApplicationHooks.tearDown(ApplicationHooks.java:59) | FAILED | 0.000 s |


The user should be directed to editor page with run button to test python code

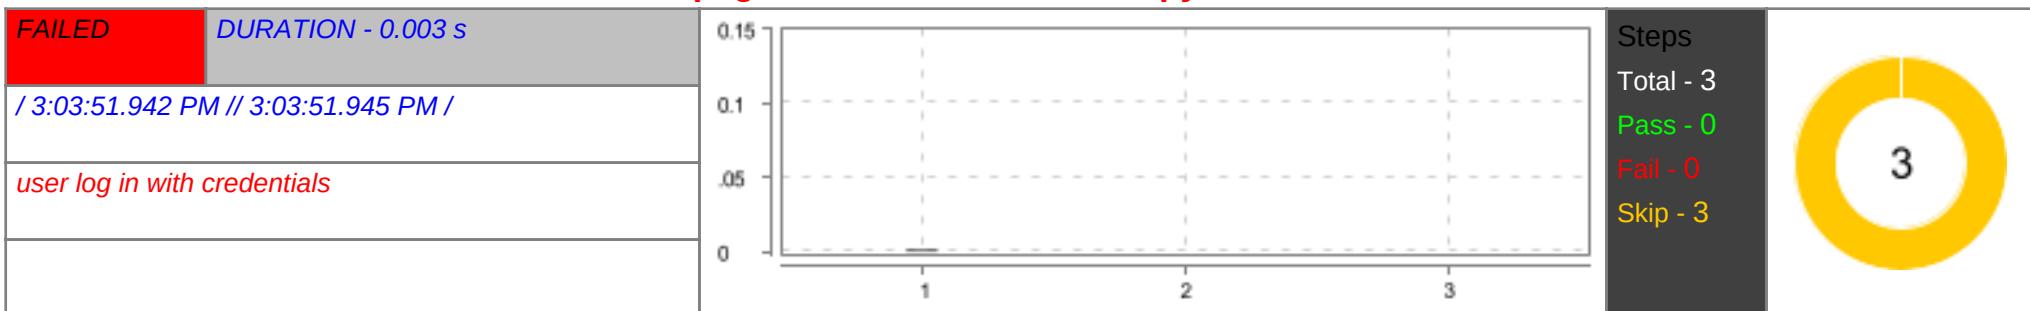

| # | Step / Hook Details | Status | Duration |
|---|---|---------|----------|
| | BEFORE - appHooks.ApplicationHooks.setup() java.lang.NullPointerException: Cannot invoke "org.openqa.selenium.WebDriver.manage()" because the return value of "com.qa.factory.DriverFactory.getDriver()" is null at com.qa.factory.DriverFactory.init_driver(DriverFactory.java:47) at com.qa.factory.DriverFactory.setupdriver(DriverFactory.java:71) at appHooks.ApplicationHooks.setup(ApplicationHooks.java:33) | FAILED | 0.000 s |
| 1 | Given The user is on the "Implementation using collections.dequeue" page in queue after logged in | SKIPPED | 0.001 s |
| 2 | When The user clicks Try Here button | SKIPPED | 0.000 s |
| 3 | Then The user should be redirected to a page having an tryEditor with a Run button to test | SKIPPED | 0.000 s |
| | AFTER - appHooks.ApplicationHooks.tearDown(io.cucumber.java.Scenario) | FAILED | 0.001 s |


| # | Step / Hook Details | Status | Duration |
|---|---|--------|----------|
| | java.lang.NullPointerException: Cannot invoke "org.openqa.selenium.TakesScreenshot.getScreenshotAs(org.openqa.selenium.OutputType)" because the return value of "com.qa.factory.DriverFactory.getDriver()" is null at appHooks.ApplicationHooks.tearDown(ApplicationHooks.java:59) | | |

The user is able to run code in Editor for Implementation of queue page

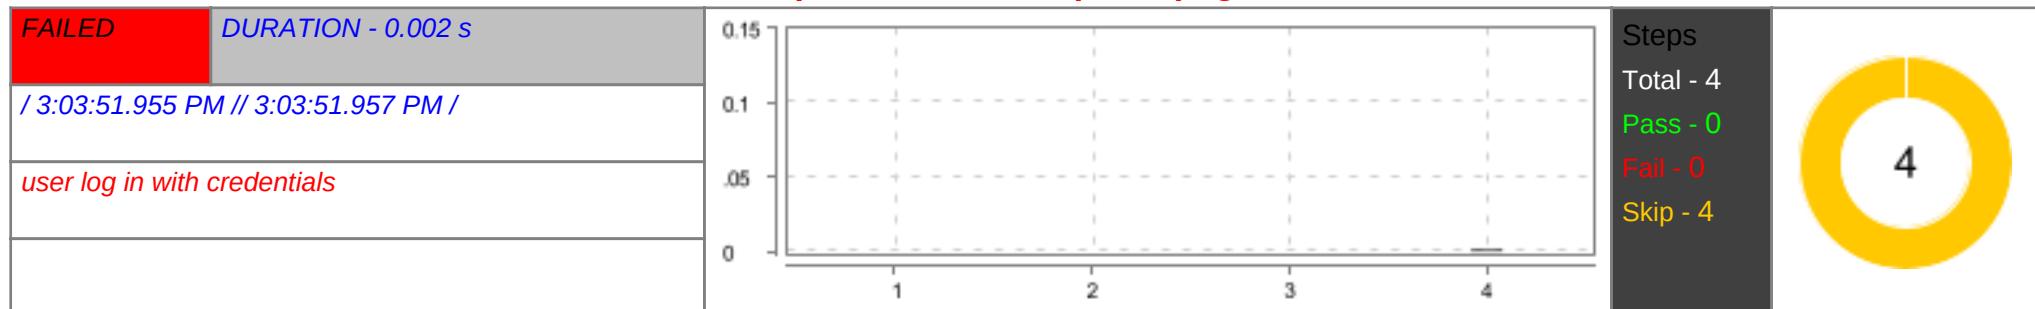


| # | Step / Hook Details | Status | Duration |
|---|---|---------|----------|
| | BEFORE - appHooks.ApplicationHooks.setup() java.lang.NullPointerException: Cannot invoke "org.openqa.selenium.WebDriver.manage()" because the return value of "com.qa.factory.DriverFactory.getDriver()" is null at com.qa.factory.DriverFactory.init_driver(DriverFactory.java:47) at com.qa.factory.DriverFactory.setupdriver(DriverFactory.java:71) at appHooks.ApplicationHooks.setup(ApplicationHooks.java:33) | FAILED | 0.000 s |
| 1 | Given The user is in a try here page having tryEditor with a Run button to test | SKIPPED | 0.000 s |
| 2 | When The user gets input from sheet "pythonCode" and 0 | SKIPPED | 0.000 s |
| 3 | And user click on Run button | SKIPPED | 0.000 s |
| 4 | Then The user should be presented with Run output | SKIPPED | 0.001 s |
| | AFTER - appHooks.ApplicationHooks.tearDown(io.cucumber.java.Scenario) java.lang.NullPointerException: Cannot invoke "org.openqa.selenium.TakesScreenshot.getScreenshotAs(org.openqa.selenium.OutputType)" because the return value of "com.qa.factory.DriverFactory.getDriver()" is null at appHooks.ApplicationHooks.tearDown(ApplicationHooks.java:59) | FAILED | 0.000 s |

The user is presented with error message for invalid code in Editor for Implementation of queue page

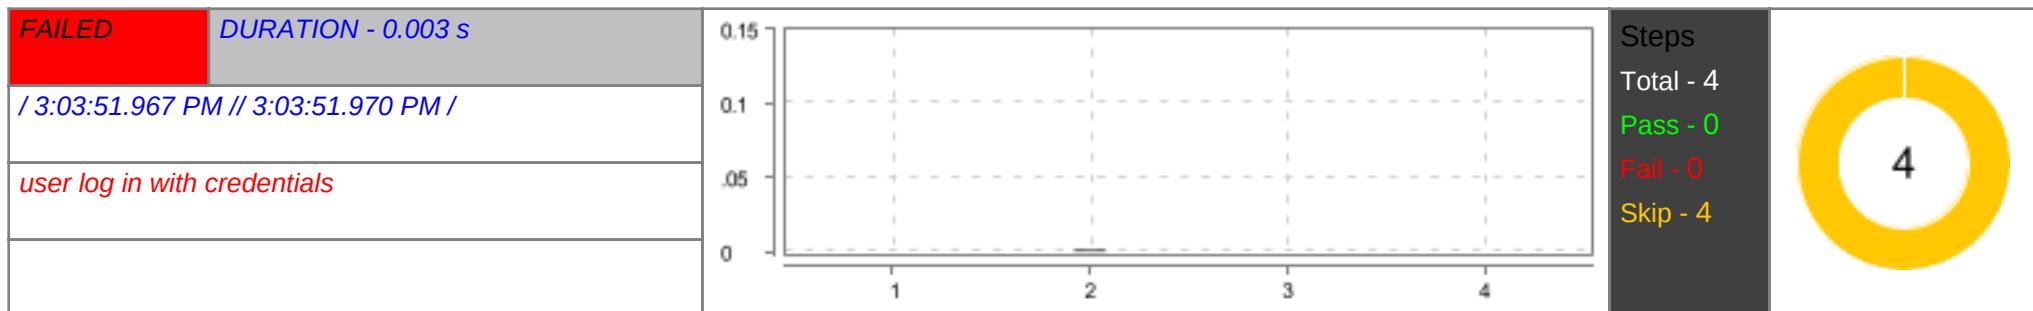


| # | Step / Hook Details | Status | Duration |
|---|---|---------|----------|
| | BEFORE - appHooks.ApplicationHooks.setup() java.lang.NullPointerException: Cannot invoke "org.openqa.selenium.WebDriver.manage()" because the return value of "com.qa.factory.DriverFactory.getDriver()" is null at com.qa.factory.DriverFactory.init_driver(DriverFactory.java:47) at com.qa.factory.DriverFactory.setupdriver(DriverFactory.java:71) at appHooks.ApplicationHooks.setup(ApplicationHooks.java:33) | FAILED | 0.002 s |
| 1 | Given The user is in a try here page having tryEditor with a Run button to test | SKIPPED | 0.000 s |
| 2 | When The user gets invalid input from sheet "pythonCode" and 1 | SKIPPED | 0.001 s |
| 3 | And user click on Run button | SKIPPED | 0.000 s |
| 4 | Then The user should be presented with the Run output with alert | SKIPPED | 0.000 s |
| | AFTER - appHooks.ApplicationHooks.tearDown(io.cucumber.java.Scenario) java.lang.NullPointerException: Cannot invoke "org.openqa.selenium.TakesScreenshot.getScreenshotAs(org.openqa.selenium.OutputType)" because the return value of "com.qa.factory.DriverFactory.getDriver()" is null at appHooks.ApplicationHooks.tearDown(ApplicationHooks.java:59) | FAILED | 0.000 s |

The user is able to navigate to queue page and click on Implementation using arrays link

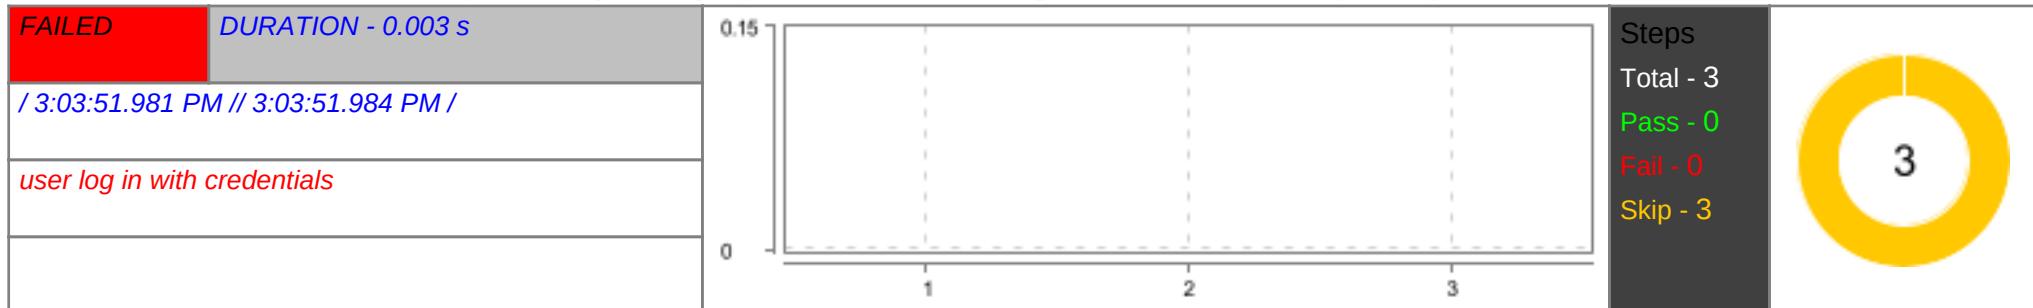

| # | Step / Hook Details | Status | Duration |
|---|---|---------|----------|
| | BEFORE - appHooks.ApplicationHooks.setup() java.lang.NullPointerException: Cannot invoke "org.openqa.selenium.WebDriver.manage()" because the return value of "com.qa.factory.DriverFactory.getDriver()" is null at com.qa.factory.DriverFactory.init_driver(DriverFactory.java:47) at com.qa.factory.DriverFactory.setupdriver(DriverFactory.java:71) at appHooks.ApplicationHooks.setup(ApplicationHooks.java:33) | FAILED | 0.000 s |
| 1 | Given The user is in the "Queue" page after logged in | SKIPPED | 0.000 s |
| 2 | When The user clicks on "Implementation using array" link | SKIPPED | 0.000 s |
| 3 | Then The user should be directed to "Implementation using array" Page | SKIPPED | 0.000 s |
| | AFTER - appHooks.ApplicationHooks.tearDown(io.cucumber.java.Scenario) java.lang.NullPointerException: Cannot invoke "org.openqa.selenium.TakesScreenshot.getScreenshotAs(org.openqa.selenium.OutputType)" because the return value of "com.qa.factory.DriverFactory.getDriver()" is null at appHooks.ApplicationHooks.tearDown(ApplicationHooks.java:59) | FAILED | 0.001 s |


The user should be directed to editor page with run button to test python code

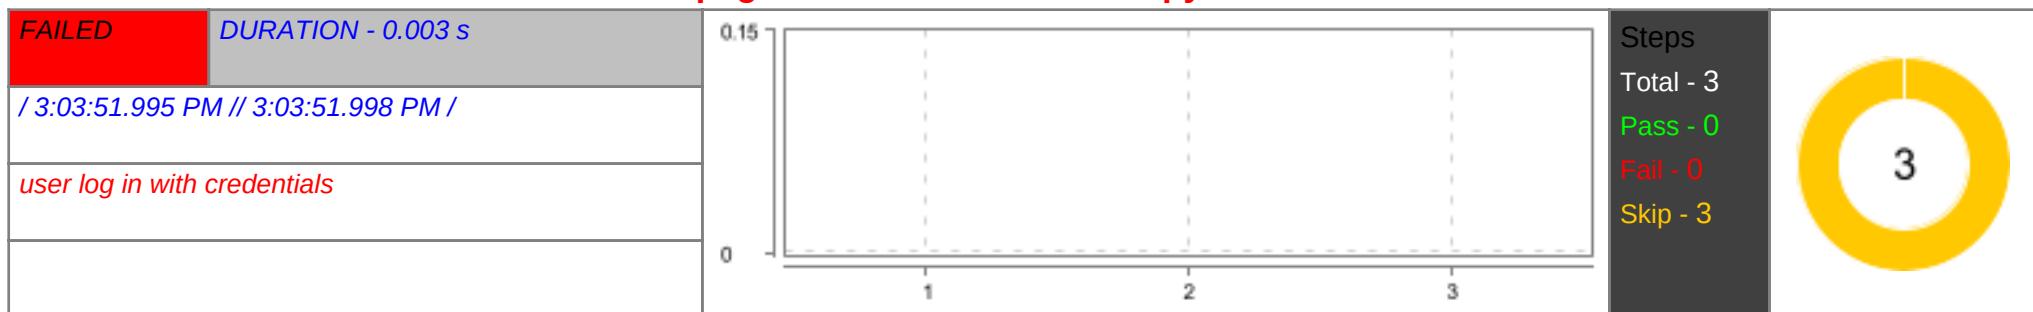

| # | Step / Hook Details | Status | Duration |
|---|---|---------|----------|
| | BEFORE - appHooks.ApplicationHooks.setup() java.lang.NullPointerException: Cannot invoke "org.openqa.selenium.WebDriver.manage()" because the return value of "com.qa.factory.DriverFactory.getDriver()" is null at com.qa.factory.DriverFactory.init_driver(DriverFactory.java:47) at com.qa.factory.DriverFactory.setupdriver(DriverFactory.java:71) at appHooks.ApplicationHooks.setup(ApplicationHooks.java:33) | FAILED | 0.001 s |
| 1 | Given The user is on the "Implementation using array" page in queue after logged in | SKIPPED | 0.000 s |
| 2 | When The user clicks Try Here button | SKIPPED | 0.000 s |
| 3 | Then The user should be redirected to a page having an tryEditor with a Run button to test | SKIPPED | 0.000 s |
| | AFTER - appHooks.ApplicationHooks.tearDown(io.cucumber.java.Scenario) | FAILED | 0.001 s |


| # | Step / Hook Details | Status | Duration |
|---|---|--------|----------|
| | java.lang.NullPointerException: Cannot invoke "org.openqa.selenium.TakesScreenshot.getScreenshotAs(org.openqa.selenium.OutputType)" because the return value of "com.qa.factory.DriverFactory.getDriver()" is null at appHooks.ApplicationHooks.tearDown(ApplicationHooks.java:59) | | |

The user is able to run code in Editor for Implementation of queue page

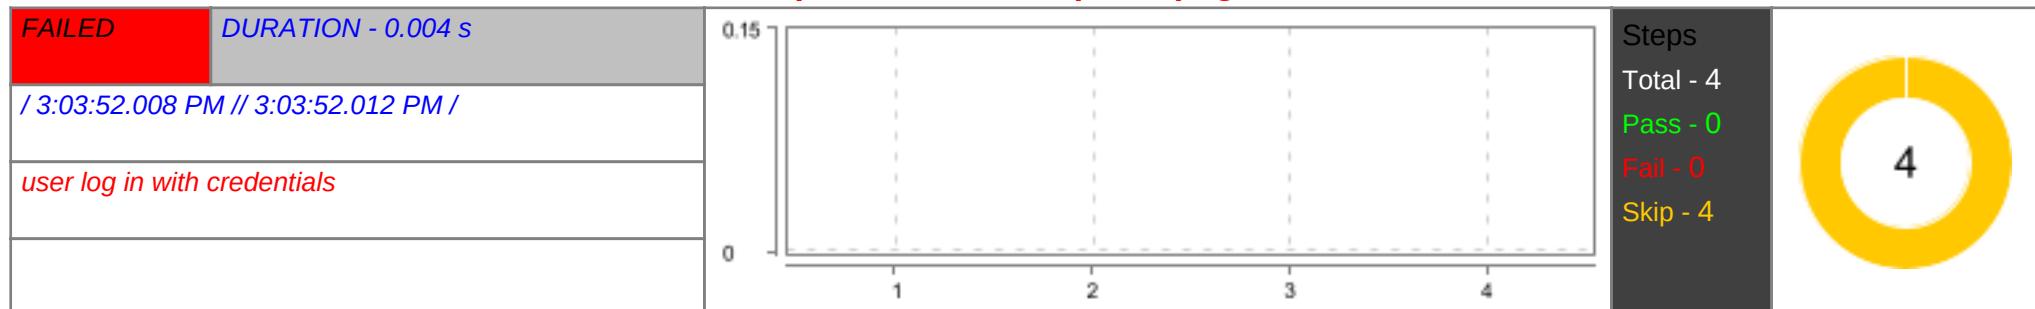


| # | Step / Hook Details | Status | Duration |
|---|---|---------|----------|
| | BEFORE - appHooks.ApplicationHooks.setup() java.lang.NullPointerException: Cannot invoke "org.openqa.selenium.WebDriver.manage()" because the return value of "com.qa.factory.DriverFactory.getDriver()" is null at com.qa.factory.DriverFactory.init_driver(DriverFactory.java:47) at com.qa.factory.DriverFactory.setupdriver(DriverFactory.java:71) at appHooks.ApplicationHooks.setup(ApplicationHooks.java:33) | FAILED | 0.001 s |
| 1 | Given The user is in a try here page having tryEditor with a Run button to test | SKIPPED | 0.000 s |
| 2 | When The user gets input from sheet "pythonCode" and 0 | SKIPPED | 0.000 s |
| 3 | And user click on Run button | SKIPPED | 0.000 s |
| 4 | Then The user should be presented with Run output | SKIPPED | 0.000 s |
| | AFTER - appHooks.ApplicationHooks.tearDown(io.cucumber.java.Scenario) java.lang.NullPointerException: Cannot invoke "org.openqa.selenium.TakesScreenshot.getScreenshotAs(org.openqa.selenium.OutputType)" because the return value of "com.qa.factory.DriverFactory.getDriver()" is null at appHooks.ApplicationHooks.tearDown(ApplicationHooks.java:59) | FAILED | 0.000 s |

The user is presented with error message for invalid code in Editor for Implementation of queue page

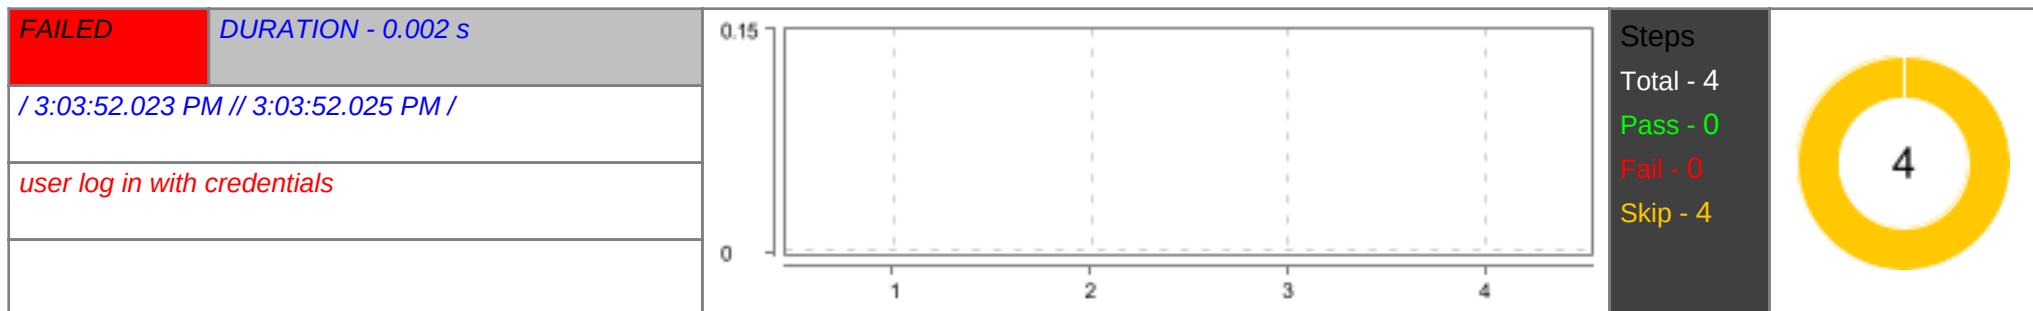


| # | Step / Hook Details | Status | Duration |
|---|---|---------|----------|
| | BEFORE - appHooks.ApplicationHooks.setup() java.lang.NullPointerException: Cannot invoke "org.openqa.selenium.WebDriver.manage()" because the return value of "com.qa.factory.DriverFactory.getDriver()" is null at com.qa.factory.DriverFactory.init_driver(DriverFactory.java:47) at com.qa.factory.DriverFactory.setupdriver(DriverFactory.java:71) at appHooks.ApplicationHooks.setup(ApplicationHooks.java:33) | FAILED | 0.001 s |
| 1 | Given The user is in a try here page having tryEditor with a Run button to test | SKIPPED | 0.000 s |
| 2 | When The user gets invalid input from sheet "pythonCode" and 1 | SKIPPED | 0.000 s |
| 3 | And user click on Run button | SKIPPED | 0.000 s |
| 4 | Then The user should be presented with the Run output with alert | SKIPPED | 0.000 s |
| | AFTER - appHooks.ApplicationHooks.tearDown(io.cucumber.java.Scenario) java.lang.NullPointerException: Cannot invoke "org.openqa.selenium.TakesScreenshot.getScreenshotAs(org.openqa.selenium.OutputType)" because the return value of "com.qa.factory.DriverFactory.getDriver()" is null at appHooks.ApplicationHooks.tearDown(ApplicationHooks.java:59) | FAILED | 0.000 s |

The user is able to navigate to queue page and click on Implementation using arrays link

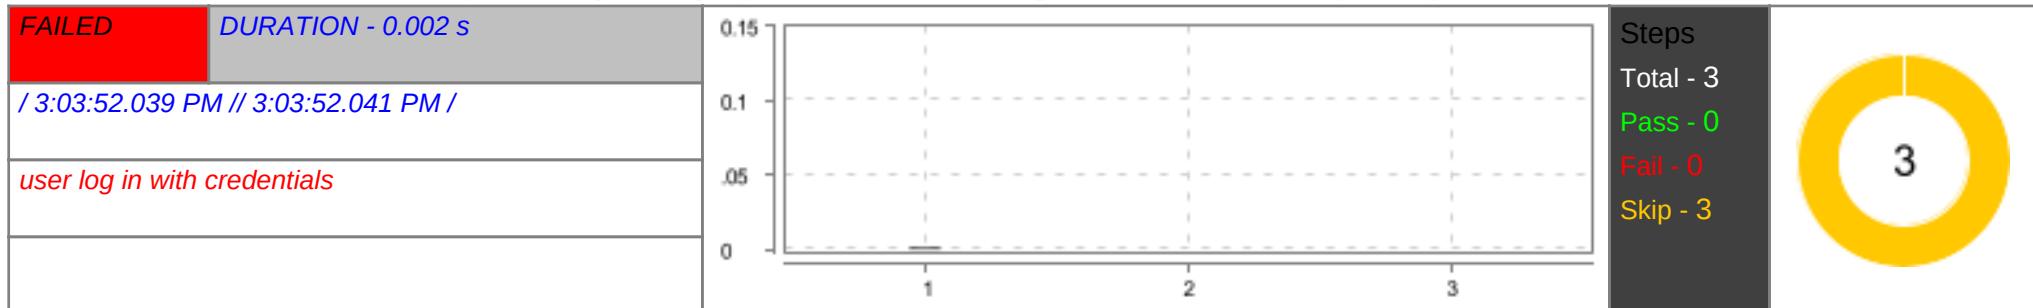

| # | Step / Hook Details | Status | Duration |
|---|---|---------|----------|
| | BEFORE - appHooks.ApplicationHooks.setup() java.lang.NullPointerException: Cannot invoke "org.openqa.selenium.WebDriver.manage()" because the return value of "com.qa.factory.DriverFactory.getDriver()" is null at com.qa.factory.DriverFactory.init_driver(DriverFactory.java:47) at com.qa.factory.DriverFactory.setupdriver(DriverFactory.java:71) at appHooks.ApplicationHooks.setup(ApplicationHooks.java:33) | FAILED | 0.001 s |
| 1 | Given The user is in the "Queue" page after logged in | SKIPPED | 0.001 s |
| 2 | When The user clicks on "Queue Operations" link | SKIPPED | 0.000 s |
| 3 | Then The user should be directed to "Queue Operations" Page | SKIPPED | 0.000 s |
| | AFTER - appHooks.ApplicationHooks.tearDown(io.cucumber.java.Scenario) java.lang.NullPointerException: Cannot invoke "org.openqa.selenium.TakesScreenshot.getScreenshotAs(org.openqa.selenium.OutputType)" because the return value of "com.qa.factory.DriverFactory.getDriver()" is null at appHooks.ApplicationHooks.tearDown(ApplicationHooks.java:59) | FAILED | 0.000 s |


The user should be directed to editor page with run button to test python code

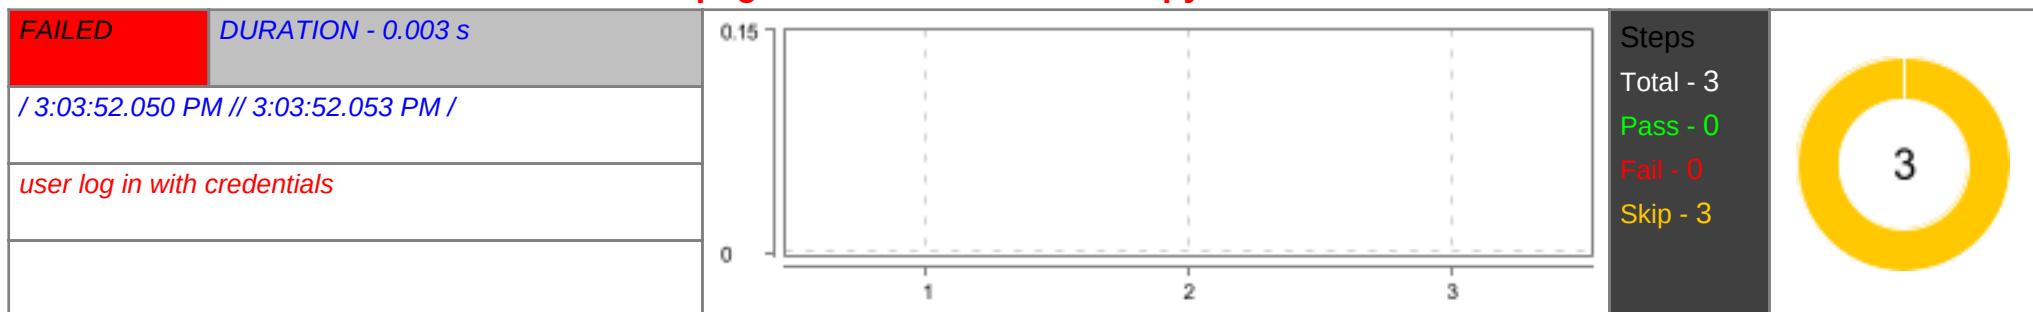

| # | Step / Hook Details | Status | Duration |
|---|---|---------|----------|
| | BEFORE - appHooks.ApplicationHooks.setup() java.lang.NullPointerException: Cannot invoke "org.openqa.selenium.WebDriver.manage()" because the return value of "com.qa.factory.DriverFactory.getDriver()" is null at com.qa.factory.DriverFactory.init_driver(DriverFactory.java:47) at com.qa.factory.DriverFactory.setupdriver(DriverFactory.java:71) at appHooks.ApplicationHooks.setup(ApplicationHooks.java:33) | FAILED | 0.001 s |
| 1 | Given The user is on the "Queue Operations" page in queue after logged in | SKIPPED | 0.000 s |
| 2 | When The user clicks Try Here button | SKIPPED | 0.000 s |
| 3 | Then The user should be redirected to a page having an tryEditor with a Run button to test | SKIPPED | 0.000 s |
| | AFTER - appHooks.ApplicationHooks.tearDown(io.cucumber.java.Scenario) | FAILED | 0.001 s |


| # | Step / Hook Details | Status | Duration |
|---|---|--------|----------|
| | java.lang.NullPointerException: Cannot invoke "org.openqa.selenium.TakesScreenshot.getScreenshotAs(org.openqa.selenium.OutputType)" because the return value of "com.qa.factory.DriverFactory.getDriver()" is null at appHooks.ApplicationHooks.tearDown(ApplicationHooks.java:59) | | |

The user is able to run code in Editor for Implementation of queue page

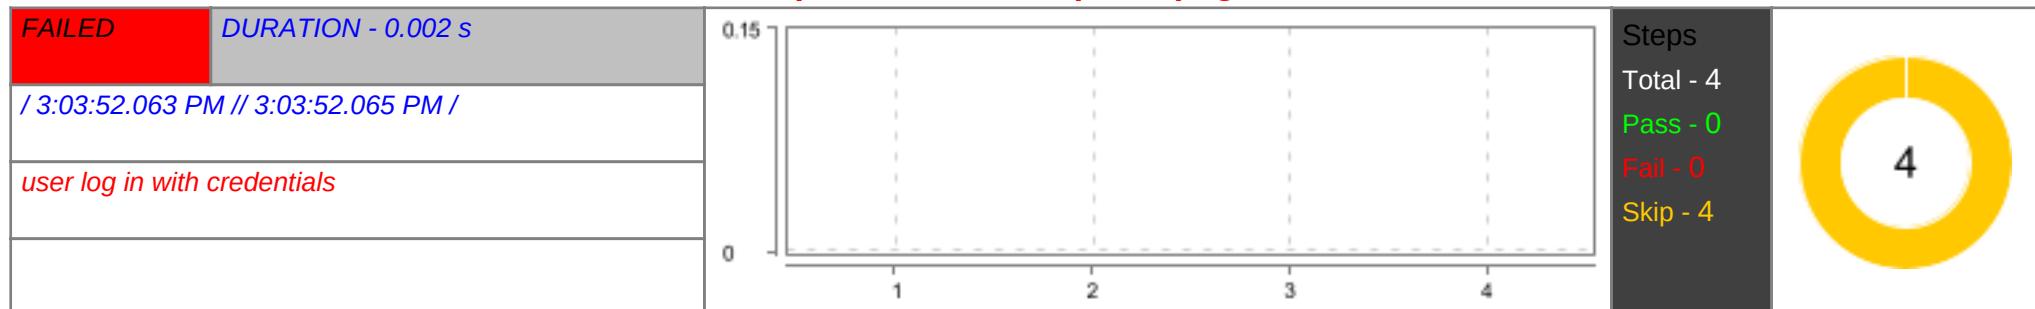


| # | Step / Hook Details | Status | Duration |
|---|---|---------|----------|
| | BEFORE - appHooks.ApplicationHooks.setup() java.lang.NullPointerException: Cannot invoke "org.openqa.selenium.WebDriver.manage()" because the return value of "com.qa.factory.DriverFactory.getDriver()" is null at com.qa.factory.DriverFactory.init_driver(DriverFactory.java:47) at com.qa.factory.DriverFactory.setupdriver(DriverFactory.java:71) at appHooks.ApplicationHooks.setup(ApplicationHooks.java:33) | FAILED | 0.001 s |
| 1 | Given The user is in a try here page having tryEditor with a Run button to test | SKIPPED | 0.000 s |
| 2 | When The user gets input from sheet "pythonCode" and 0 | SKIPPED | 0.000 s |
| 3 | And user click on Run button | SKIPPED | 0.000 s |
| 4 | Then The user should be presented with Run output | SKIPPED | 0.000 s |
| | AFTER - appHooks.ApplicationHooks.tearDown(io.cucumber.java.Scenario) java.lang.NullPointerException: Cannot invoke "org.openqa.selenium.TakesScreenshot.getScreenshotAs(org.openqa.selenium.OutputType)" because the return value of "com.qa.factory.DriverFactory.getDriver()" is null at appHooks.ApplicationHooks.tearDown(ApplicationHooks.java:59) | FAILED | 0.000 s |

The user is presented with error message for invalid code in Editor for Implementation of queue page

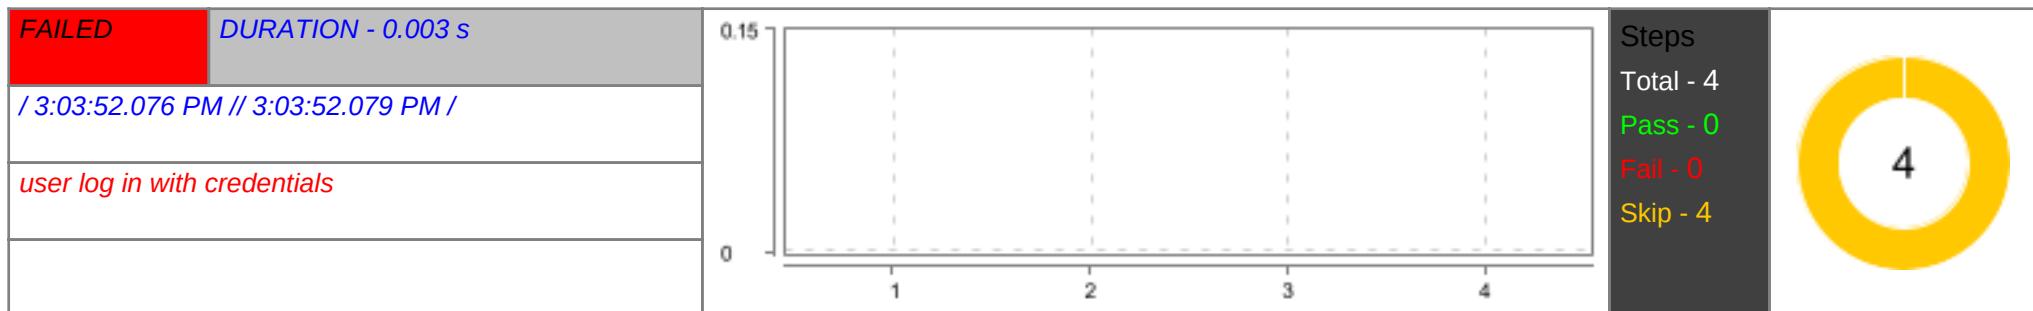

| # | Step / Hook Details | Status | Duration |
|---|---|---------|----------|
| | BEFORE - appHooks.ApplicationHooks.setup() java.lang.NullPointerException: Cannot invoke "org.openqa.selenium.WebDriver.manage()" because the return value of "com.qa.factory.DriverFactory.getDriver()" is null at com.qa.factory.DriverFactory.init_driver(DriverFactory.java:47) at com.qa.factory.DriverFactory.setupdriver(DriverFactory.java:71) at appHooks.ApplicationHooks.setup(ApplicationHooks.java:33) | FAILED | 0.001 s |
| 1 | Given The user is in a try here page having tryEditor with a Run button to test | SKIPPED | 0.000 s |
| 2 | When The user gets invalid input from sheet "pythonCode" and 1 | SKIPPED | 0.000 s |
| 3 | And user click on Run button | SKIPPED | 0.000 s |
| 4 | Then The user should be presented with the Run output with alert | SKIPPED | 0.000 s |
| | AFTER - appHooks.ApplicationHooks.tearDown(io.cucumber.java.Scenario) java.lang.NullPointerException: Cannot invoke "org.openqa.selenium.TakesScreenshot.getScreenshotAs(org.openqa.selenium.OutputType)" because the return value of "com.qa.factory.DriverFactory.getDriver()" is null at appHooks.ApplicationHooks.tearDown(ApplicationHooks.java:59) | FAILED | 0.000 s |

The user is able to navigate to QueueOp page and click on Practice Questions

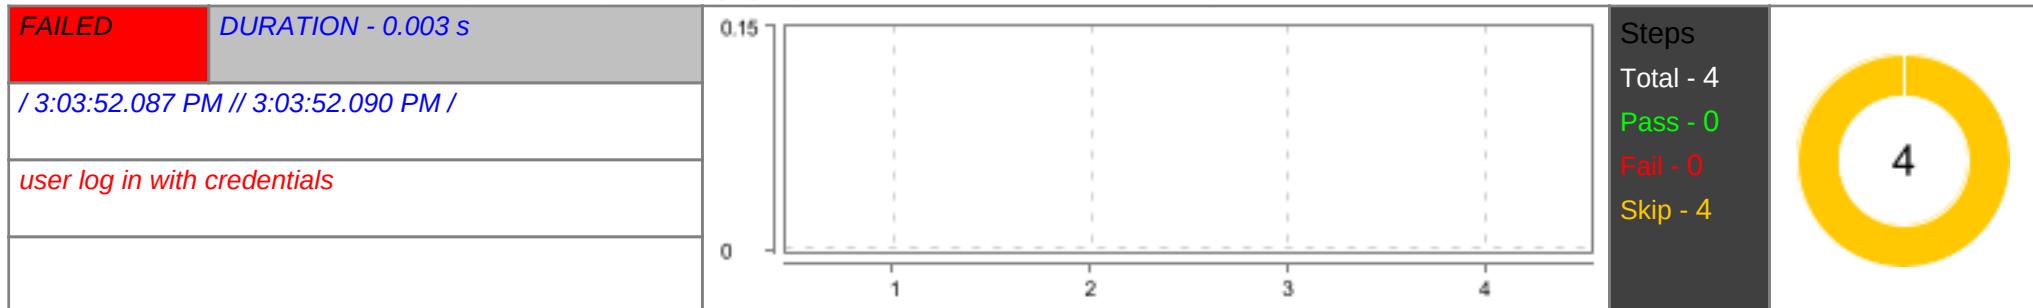


| # | Step / Hook Details | Status | Duration |
|---|---|---------|----------|
| | BEFORE - appHooks.ApplicationHooks.setup() java.lang.NullPointerException: Cannot invoke "org.openqa.selenium.WebDriver.manage()" because the return value of "com.qa.factory.DriverFactory.getDriver()" is null at com.qa.factory.DriverFactory.init_driver(DriverFactory.java:47) at com.qa.factory.DriverFactory.setupdriver(DriverFactory.java:71) at appHooks.ApplicationHooks.setup(ApplicationHooks.java:33) | FAILED | 0.002 s |
| 1 | Given The user is in the "Queue" page after logged in | SKIPPED | 0.000 s |
| 2 | When The user clicks on "Implementation of Queue in Python" link | SKIPPED | 0.000 s |
| 3 | When The user clicks on "Practice Questions" link | SKIPPED | 0.000 s |
| 4 | Then The user should be directed to "Practice Questions" Page | SKIPPED | 0.000 s |
| | AFTER - appHooks.ApplicationHooks.tearDown(io.cucumber.java.Scenario) java.lang.NullPointerException: Cannot invoke "org.openqa.selenium.TakesScreenshot.getScreenshotAs(org.openqa.selenium.OutputType)" because the return value of "com.qa.factory.DriverFactory.getDriver()" is null at appHooks.ApplicationHooks.tearDown(ApplicationHooks.java:59) | FAILED | 0.001 s |


Testing the tree module



The user is able to signin with registered credential

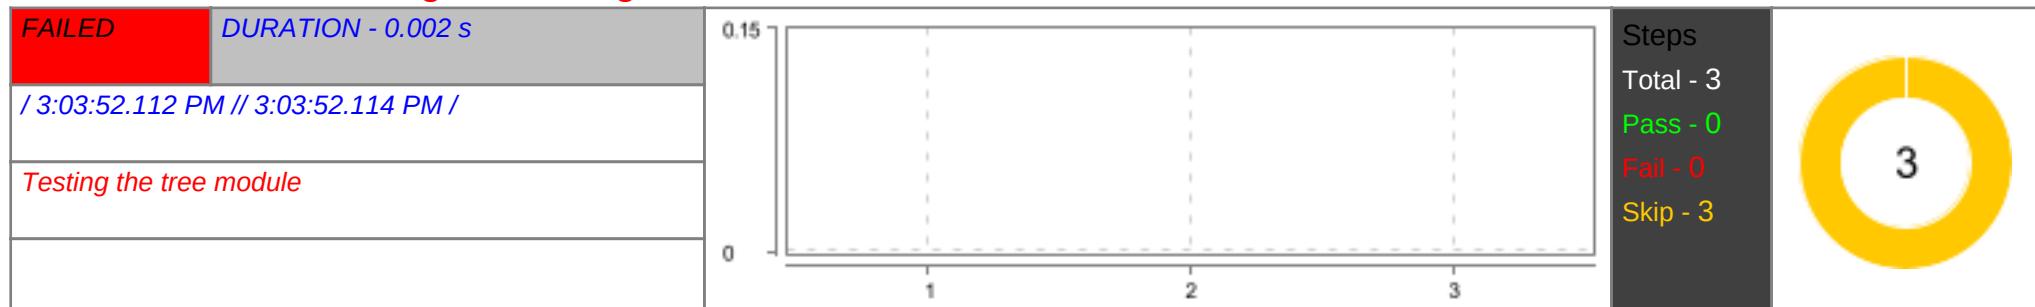


| # | Step / Hook Details | Status | Duration |
|---|---|---------|----------|
| | BEFORE - appHooks.ApplicationHooks.setup() java.lang.NullPointerException: Cannot invoke "org.openqa.selenium.WebDriver.manage()" because the return value of "com.qa.factory.DriverFactory.getDriver()" is null at com.qa.factory.DriverFactory.init_driver(DriverFactory.java:47) at com.qa.factory.DriverFactory.setupdriver(DriverFactory.java:71) at appHooks.ApplicationHooks.setup(ApplicationHooks.java:33) | FAILED | 0.001 s |
| 1 | Given The user is in the Sign in page | SKIPPED | 0.000 s |
| 2 | When The user enters a valid "pluton@gmail.com" and "Nnsdet@115" | SKIPPED | 0.000 s |
| 3 | Then click login button to verify and pagetitle is "NumPyNinja" | SKIPPED | 0.000 s |
| | AFTER - appHooks.ApplicationHooks.tearDown(io.cucumber.java.Scenario) java.lang.NullPointerException: Cannot invoke "org.openqa.selenium.TakesScreenshot.getScreenshotAs(org.openqa.selenium.OutputType)" because the return value of "com.qa.factory.DriverFactory.getDriver()" is null at appHooks.ApplicationHooks.tearDown(ApplicationHooks.java:59) | FAILED | 0.000 s |

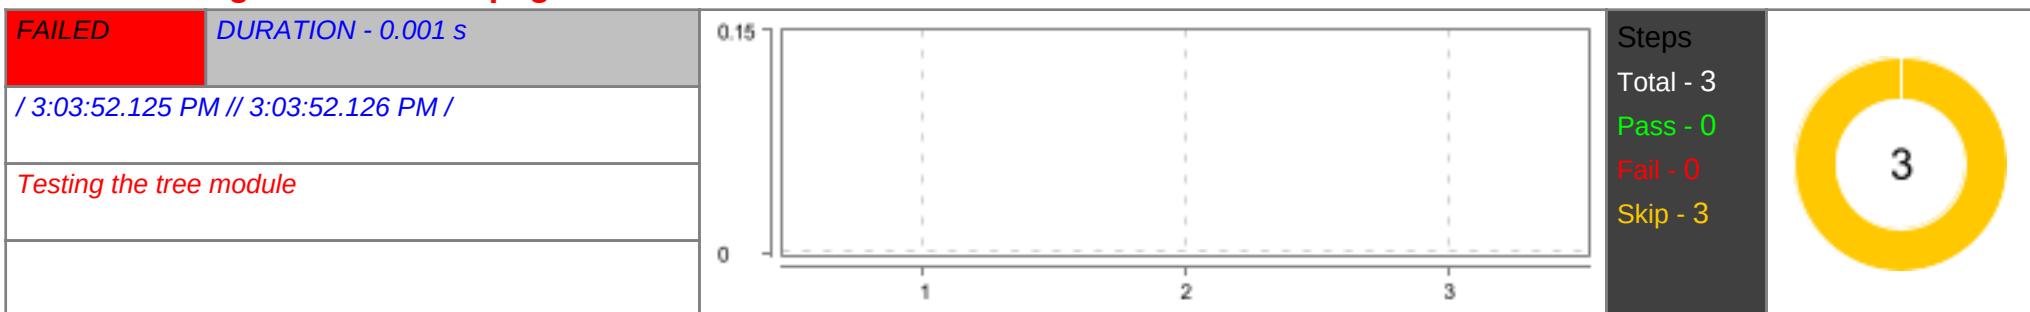User navigated to "Tree" page

| # | Step / Hook Details | Status | Duration |
|---|---|---------|----------|
| | BEFORE - appHooks.ApplicationHooks.setup() java.lang.NullPointerException: Cannot invoke "org.openqa.selenium.WebDriver.manage()" because the return value of "com.qa.factory.DriverFactory.getDriver()" is null at com.qa.factory.DriverFactory.init_driver(DriverFactory.java:47) at com.qa.factory.DriverFactory.setupdriver(DriverFactory.java:71) at appHooks.ApplicationHooks.setup(ApplicationHooks.java:33) | FAILED | 0.000 s |
| 1 | Given The user is in the Home page after logged in | SKIPPED | 0.000 s |
| 2 | When The user selecting "Tree" item from the drop down menu | SKIPPED | 0.000 s |
| 3 | Then The user should be directed to "Tree" Page | SKIPPED | 0.000 s |
| | AFTER - appHooks.ApplicationHooks.tearDown(io.cucumber.java.Scenario) | FAILED | 0.000 s |


| # | Step / Hook Details | Status | Duration |
|---|---|--------|----------|
| | java.lang.NullPointerException: Cannot invoke "org.openqa.selenium.TakesScreenshot.getScreenshotAs(org.openqa.selenium.OutputType)" because the return value of "com.qa.factory.DriverFactory.getDriver()" is null at appHooks.ApplicationHooks.tearDown(ApplicationHooks.java:59) | | |

The user is able to navigate to Overview of Trees page

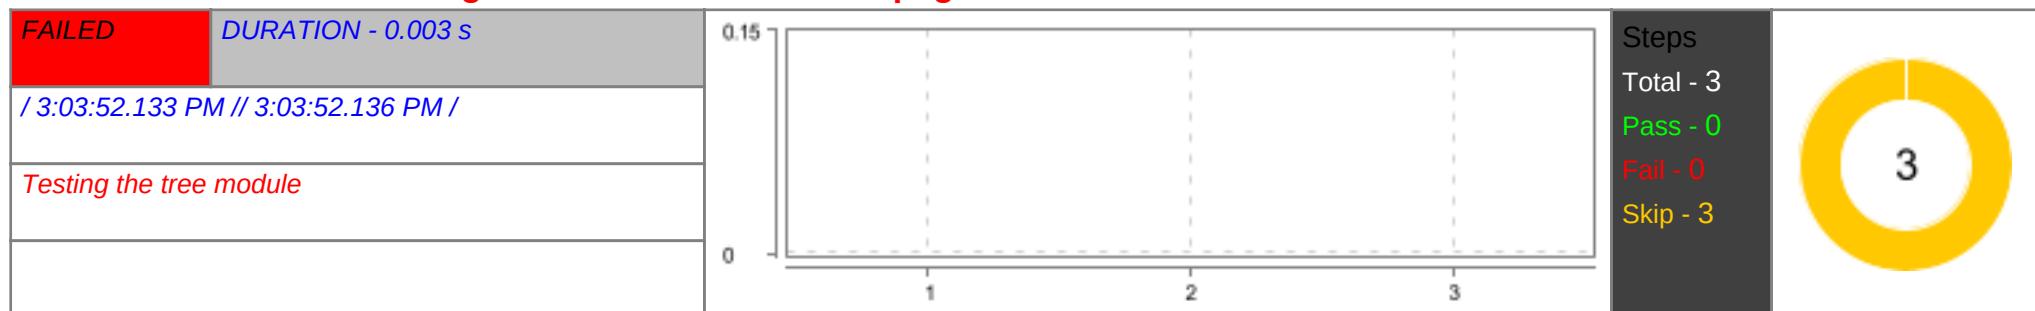


| # | Step / Hook Details | Status | Duration |
|---|---|---------|----------|
| | BEFORE - appHooks.ApplicationHooks.setup() java.lang.NullPointerException: Cannot invoke "org.openqa.selenium.WebDriver.manage()" because the return value of "com.qa.factory.DriverFactory.getDriver()" is null at com.qa.factory.DriverFactory.init_driver(DriverFactory.java:47) at com.qa.factory.DriverFactory.setupdriver(DriverFactory.java:71) at appHooks.ApplicationHooks.setup(ApplicationHooks.java:33) | FAILED | 0.000 s |
| 1 | Given The user is in the "Tree" page after logged in | SKIPPED | 0.000 s |
| 2 | When The user clicks on the "Overview of Trees" link | SKIPPED | 0.000 s |
| 3 | Then The user should be directed to "Overview of Trees" Page | SKIPPED | 0.000 s |
| | AFTER - appHooks.ApplicationHooks.tearDown(io.cucumber.java.Scenario) java.lang.NullPointerException: Cannot invoke "org.openqa.selenium.TakesScreenshot.getScreenshotAs(org.openqa.selenium.OutputType)" because the return value of "com.qa.factory.DriverFactory.getDriver()" is null at appHooks.ApplicationHooks.tearDown(ApplicationHooks.java:59) | FAILED | 0.000 s |

The user is able to navigate to a page having an tryEditor

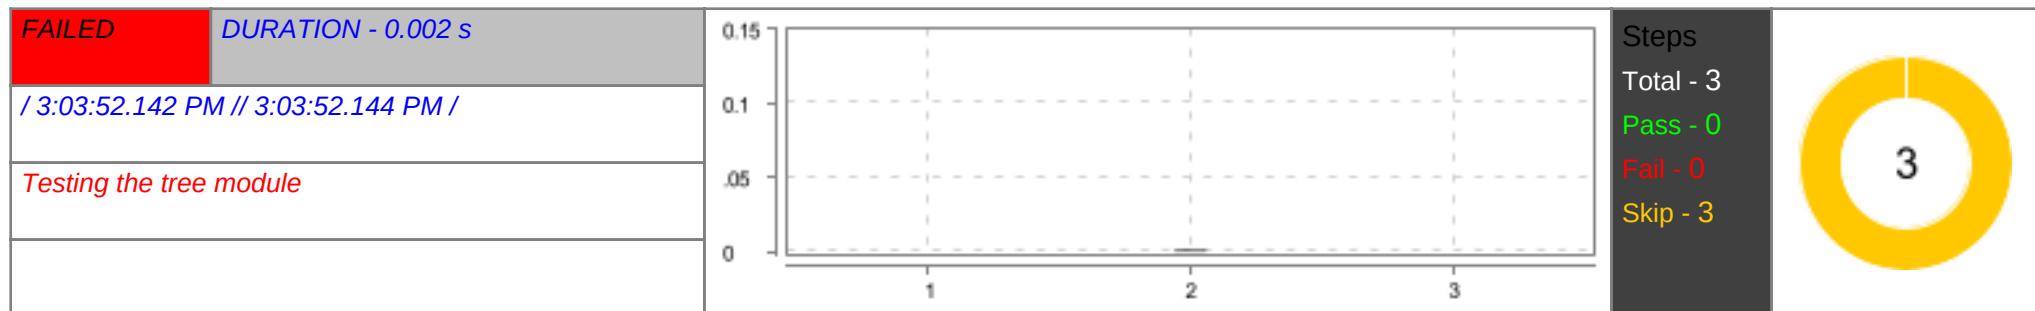

| # | Step / Hook Details | Status | Duration |
|---|---|---------|----------|
| | BEFORE - appHooks.ApplicationHooks.setup() java.lang.NullPointerException: Cannot invoke "org.openqa.selenium.WebDriver.manage()" because the return value of "com.qa.factory.DriverFactory.getDriver()" is null at com.qa.factory.DriverFactory.init_driver(DriverFactory.java:47) at com.qa.factory.DriverFactory.setupdriver(DriverFactory.java:71) at appHooks.ApplicationHooks.setup(ApplicationHooks.java:33) | FAILED | 0.001 s |
| 1 | Given The user is on the "Overview of Trees" page after logged in | SKIPPED | 0.000 s |
| 2 | When The user clicks Try Here button | SKIPPED | 0.001 s |
| 3 | Then The user should be redirected to a page having an tryEditor with a Run button to test | SKIPPED | 0.000 s |
| | AFTER - appHooks.ApplicationHooks.tearDown(io.cucumber.java.Scenario) java.lang.NullPointerException: Cannot invoke "org.openqa.selenium.TakesScreenshot.getScreenshotAs(org.openqa.selenium.OutputType)" because the return value of "com.qa.factory.DriverFactory.getDriver()" is null at appHooks.ApplicationHooks.tearDown(ApplicationHooks.java:59) | FAILED | 0.000 s |


The user is able to run code in tryEditor

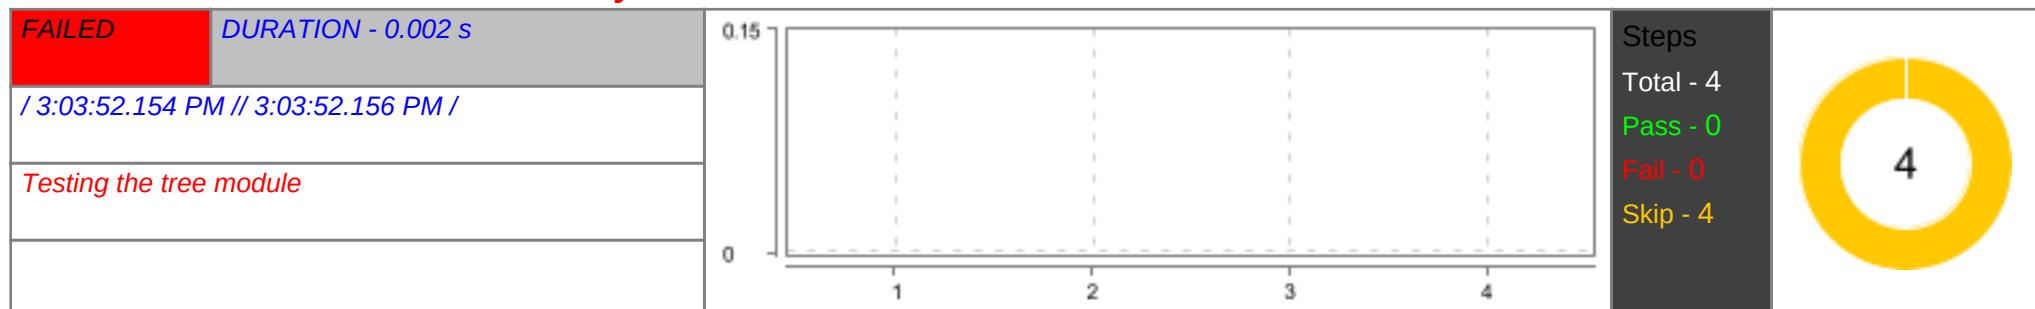

| # | Step / Hook Details | Status | Duration |
|---|--|--------|----------|
| | BEFORE - appHooks.ApplicationHooks.setup() | FAILED | 0.000 s |

| # | Step / Hook Details | Status | Duration |
|---|---|---------|----------|
| | java.lang.NullPointerException: Cannot invoke "org.openqa.selenium.WebDriver.manage()" because the return value of "com.qa.factory.DriverFactory.getDriver()" is null at com.qa.factory.DriverFactory.init_driver(DriverFactory.java:47) at com.qa.factory.DriverFactory.setupdriver(DriverFactory.java:71) at appHooks.ApplicationHooks.setup(ApplicationHooks.java:33) | | |
| 1 | Given The user is in a try here page having tryEditor with a Run button to test | SKIPPED | 0.000 s |
| 2 | When The user gets input from sheet "pythonCode" and 0 | SKIPPED | 0.000 s |
| 3 | And user click on Run button | SKIPPED | 0.000 s |
| 4 | Then The user should be presented with Run output | SKIPPED | 0.000 s |
| | AFTER - appHooks.ApplicationHooks.tearDown(io.cucumber.java.Scenario) java.lang.NullPointerException: Cannot invoke "org.openqa.selenium.TakesScreenshot.getScreenshotAs(org.openqa.selenium.OutputType)" because the return value of "com.qa.factory.DriverFactory.getDriver()" is null at appHooks.ApplicationHooks.tearDown(ApplicationHooks.java:59) | FAILED | 0.001 s |


The user is able to get the error message for invalid syntax

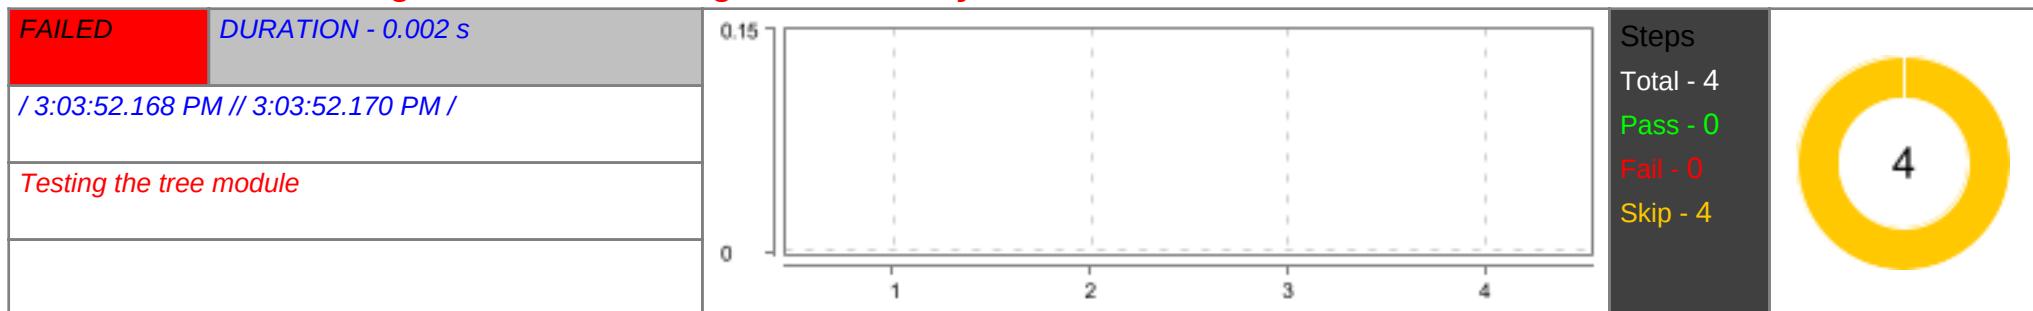

| # | Step / Hook Details | Status | Duration |
|---|---|---------|----------|
| | BEFORE - appHooks.ApplicationHooks.setup() java.lang.NullPointerException: Cannot invoke "org.openqa.selenium.WebDriver.manage()" because the return value of "com.qa.factory.DriverFactory.getDriver()" is null at com.qa.factory.DriverFactory.init_driver(DriverFactory.java:47) at com.qa.factory.DriverFactory.setupdriver(DriverFactory.java:71) at appHooks.ApplicationHooks.setup(ApplicationHooks.java:33) | FAILED | 0.000 s |
| 1 | Given The user is in a try here page having tryEditor with a Run button to test | SKIPPED | 0.000 s |
| 2 | When The user gets invalid input from sheet "pythonCode" and 1 | SKIPPED | 0.000 s |
| 3 | And user click on Run button | SKIPPED | 0.000 s |
| 4 | Then The user should be presented with the Run output with alert | SKIPPED | 0.000 s |


| # | Step / Hook Details | Status | Duration |
|---|--|--------|----------|
| | AFTER - appHooks.ApplicationHooks.tearDown(io.cucumber.java.Scenario) java.lang.NullPointerException: Cannot invoke "org.openqa.selenium.TakesScreenshot.getScreenshotAs(org.openqa.selenium.OutputType)" because the return value of "com.qa.factory.DriverFactory.getDriver()" is null at appHooks.ApplicationHooks.tearDown(ApplicationHooks.java:59) | FAILED | 0.001 s |

The user is able to navigate to Terminologies Page

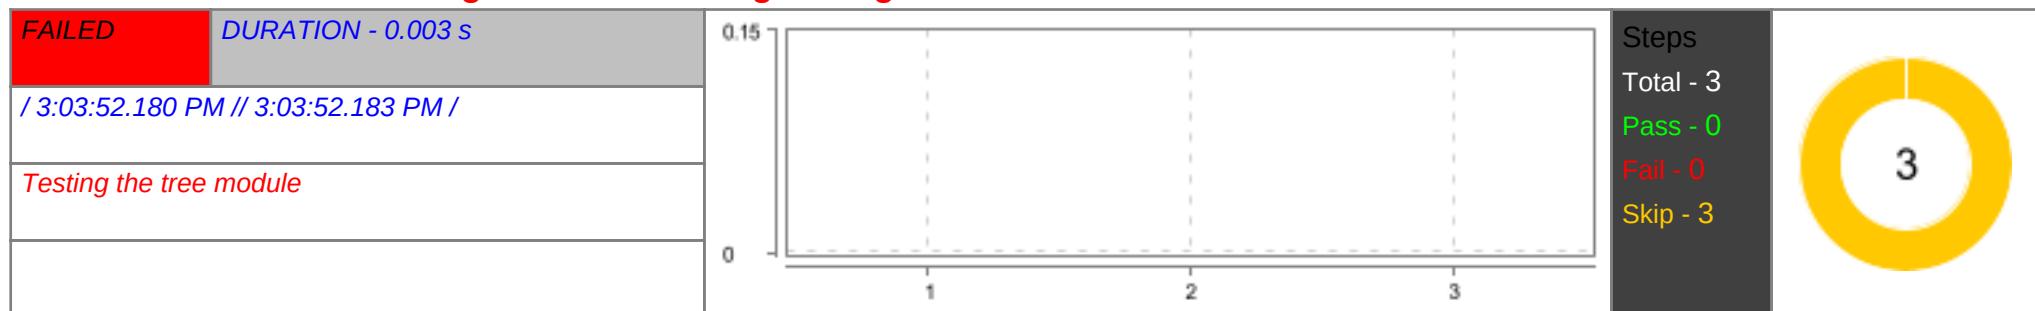


| # | Step / Hook Details | Status | Duration |
|---|---|---------|----------|
| | BEFORE - appHooks.ApplicationHooks.setup() java.lang.NullPointerException: Cannot invoke "org.openqa.selenium.WebDriver.manage()" because the return value of "com.qa.factory.DriverFactory.getDriver()" is null at com.qa.factory.DriverFactory.init_driver(DriverFactory.java:47) at com.qa.factory.DriverFactory.setupdriver(DriverFactory.java:71) at appHooks.ApplicationHooks.setup(ApplicationHooks.java:33) | FAILED | 0.000 s |
| 1 | Given The user is in the "Tree" page after logged in | SKIPPED | 0.000 s |
| 2 | When The user clicks on the "Terminologies" link | SKIPPED | 0.000 s |
| 3 | Then The user should be directed to "Terminologies" Page | SKIPPED | 0.000 s |
| | AFTER - appHooks.ApplicationHooks.tearDown(io.cucumber.java.Scenario) java.lang.NullPointerException: Cannot invoke "org.openqa.selenium.TakesScreenshot.getScreenshotAs(org.openqa.selenium.OutputType)" because the return value of "com.qa.factory.DriverFactory.getDriver()" is null at appHooks.ApplicationHooks.tearDown(ApplicationHooks.java:59) | FAILED | 0.001 s |

The user is able to navigate to Terminologies page having an tryEditor

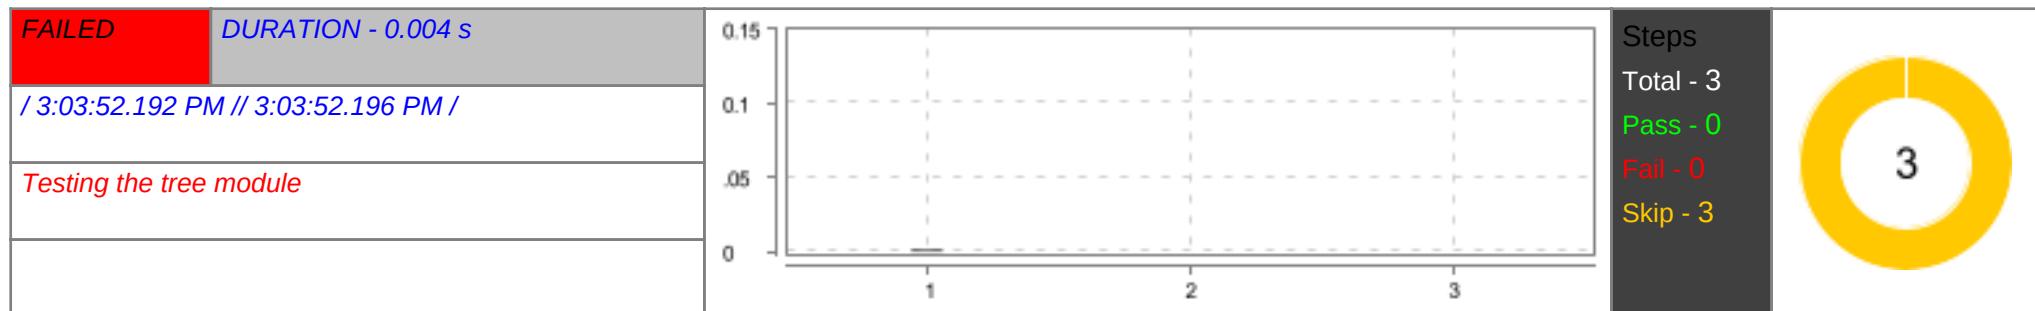

| # | Step / Hook Details | Status | Duration |
|---|---|---------|----------|
| | BEFORE - appHooks.ApplicationHooks.setup() java.lang.NullPointerException: Cannot invoke "org.openqa.selenium.WebDriver.manage()" because the return value of "com.qa.factory.DriverFactory.getDriver()" is null at com.qa.factory.DriverFactory.init_driver(DriverFactory.java:47) at com.qa.factory.DriverFactory.setupdriver(DriverFactory.java:71) at appHooks.ApplicationHooks.setup(ApplicationHooks.java:33) | FAILED | 0.001 s |
| 1 | Given The user is on the "Terminologies" page after logged in | SKIPPED | 0.001 s |
| 2 | When The user clicks Try Here button | SKIPPED | 0.000 s |
| 3 | Then The user should be redirected to a page having an tryEditor with a Run button to test | SKIPPED | 0.000 s |
| | AFTER - appHooks.ApplicationHooks.tearDown(io.cucumber.java.Scenario) java.lang.NullPointerException: Cannot invoke "org.openqa.selenium.TakesScreenshot.getScreenshotAs(org.openqa.selenium.OutputType)" because the return value of "com.qa.factory.DriverFactory.getDriver()" is null at appHooks.ApplicationHooks.tearDown(ApplicationHooks.java:59) | FAILED | 0.001 s |


The user is able to run code in tryEditor

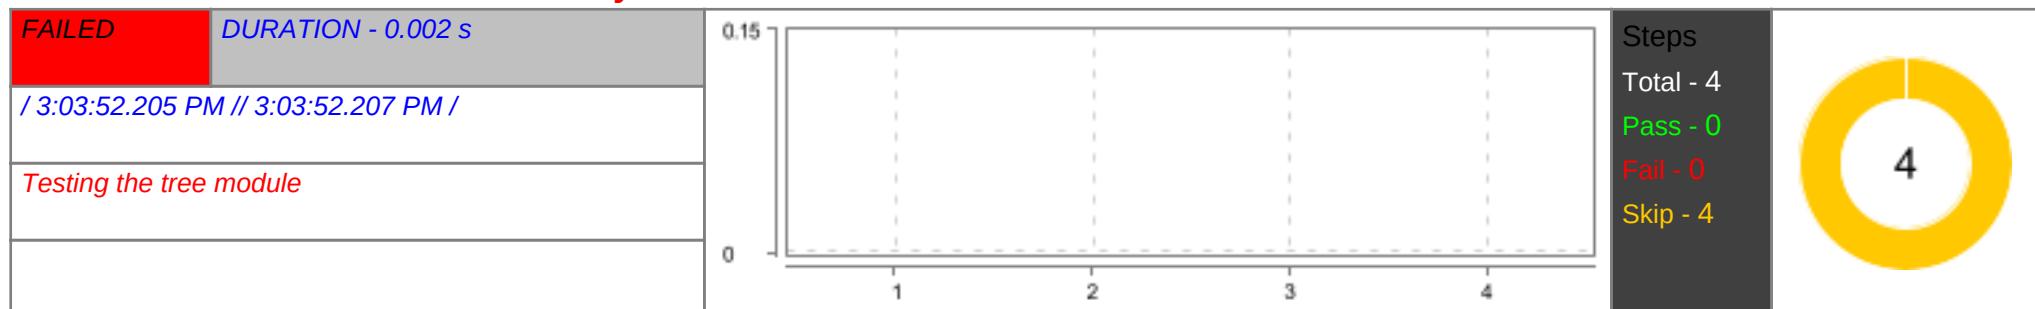

| # | Step / Hook Details | Status | Duration |
|---|--|--------|----------|
| | BEFORE - appHooks.ApplicationHooks.setup() | FAILED | 0.000 s |

| # | Step / Hook Details | Status | Duration |
|---|---|---------|----------|
| | java.lang.NullPointerException: Cannot invoke "org.openqa.selenium.WebDriver.manage()" because the return value of "com.qa.factory.DriverFactory.getDriver()" is null at com.qa.factory.DriverFactory.init_driver(DriverFactory.java:47) at com.qa.factory.DriverFactory.setupdriver(DriverFactory.java:71) at appHooks.ApplicationHooks.setup(ApplicationHooks.java:33) | | |
| 1 | Given The user is in a try here page having tryEditor with a Run button to test | SKIPPED | 0.000 s |
| 2 | When The user gets input from sheet "pythonCode" and 0 | SKIPPED | 0.000 s |
| 3 | And user click on Run button | SKIPPED | 0.000 s |
| 4 | Then The user should be presented with Run output | SKIPPED | 0.000 s |
| | AFTER - appHooks.ApplicationHooks.tearDown(io.cucumber.java.Scenario) java.lang.NullPointerException: Cannot invoke "org.openqa.selenium.TakesScreenshot.getScreenshotAs(org.openqa.selenium.OutputType)" because the return value of "com.qa.factory.DriverFactory.getDriver()" is null at appHooks.ApplicationHooks.tearDown(ApplicationHooks.java:59) | FAILED | 0.001 s |


The user is able to get the error message for invalid syntax

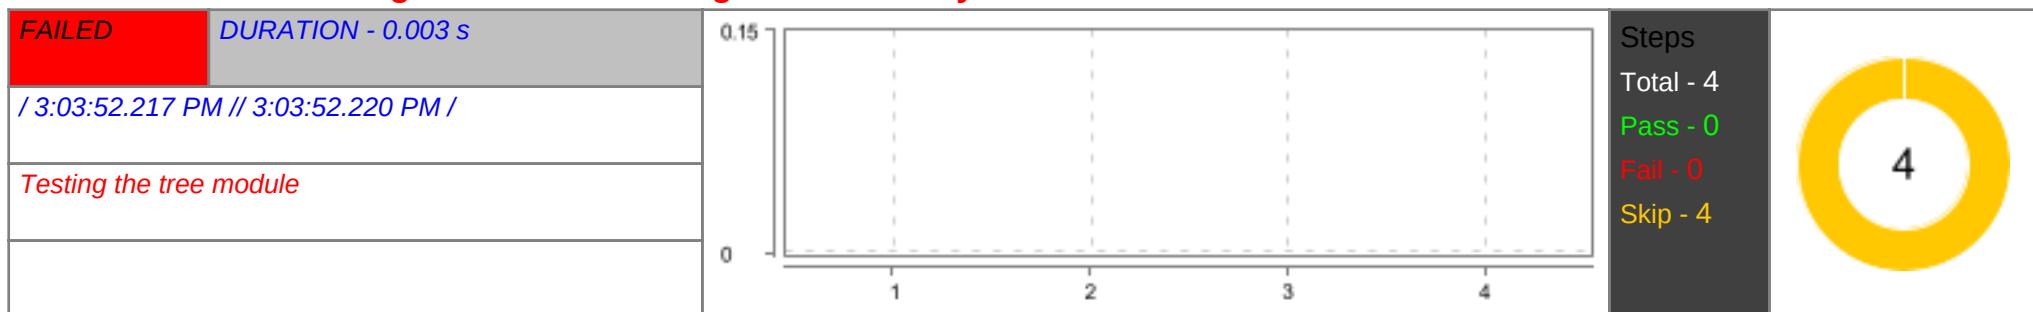

| # | Step / Hook Details | Status | Duration |
|---|---|---------|----------|
| | BEFORE - appHooks.ApplicationHooks.setup() java.lang.NullPointerException: Cannot invoke "org.openqa.selenium.WebDriver.manage()" because the return value of "com.qa.factory.DriverFactory.getDriver()" is null at com.qa.factory.DriverFactory.init_driver(DriverFactory.java:47) at com.qa.factory.DriverFactory.setupdriver(DriverFactory.java:71) at appHooks.ApplicationHooks.setup(ApplicationHooks.java:33) | FAILED | 0.001 s |
| 1 | Given The user is in a try here page having tryEditor with a Run button to test | SKIPPED | 0.000 s |
| 2 | When The user gets invalid input from sheet "pythonCode" and 1 | SKIPPED | 0.000 s |
| 3 | And user click on Run button | SKIPPED | 0.000 s |
| 4 | Then The user should be presented with the Run output with alert | SKIPPED | 0.000 s |


| # | Step / Hook Details | Status | Duration |
|---|--|--------|----------|
| | AFTER - appHooks.ApplicationHooks.tearDown(io.cucumber.java.Scenario) java.lang.NullPointerException: Cannot invoke "org.openqa.selenium.TakesScreenshot.getScreenshotAs(org.openqa.selenium.OutputType)" because the return value of "com.qa.factory.DriverFactory.getDriver()" is null at appHooks.ApplicationHooks.tearDown(ApplicationHooks.java:59) | FAILED | 0.000 s |

The user is able to navigate to Types of Trees Page

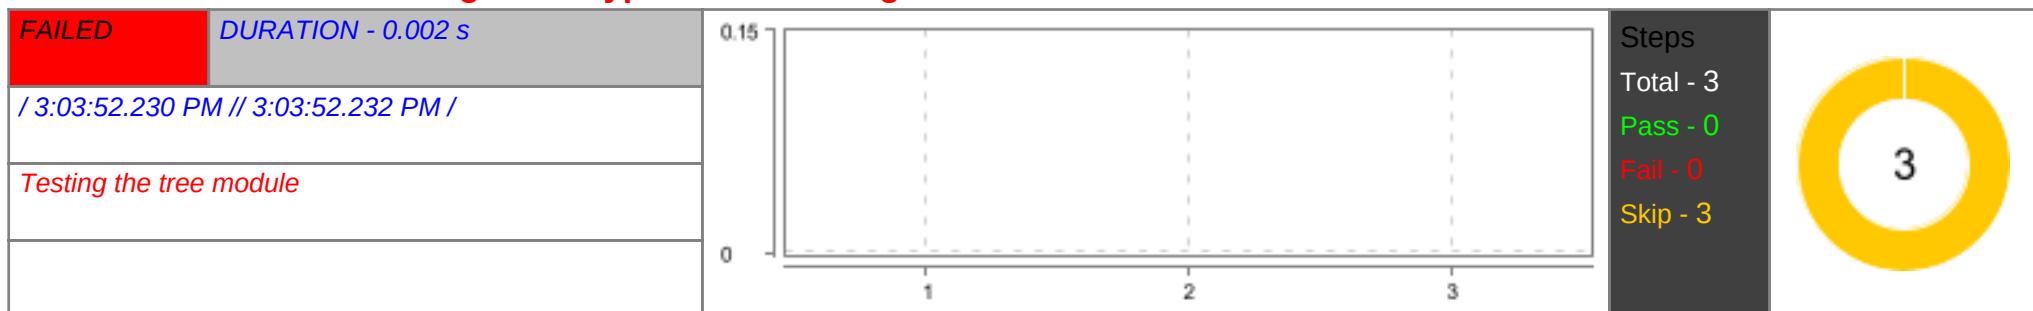


| # | Step / Hook Details | Status | Duration |
|---|---|---------|----------|
| | BEFORE - appHooks.ApplicationHooks.setup() java.lang.NullPointerException: Cannot invoke "org.openqa.selenium.WebDriver.manage()" because the return value of "com.qa.factory.DriverFactory.getDriver()" is null at com.qa.factory.DriverFactory.init_driver(DriverFactory.java:47) at com.qa.factory.DriverFactory.setupdriver(DriverFactory.java:71) at appHooks.ApplicationHooks.setup(ApplicationHooks.java:33) | FAILED | 0.001 s |
| 1 | Given The user is in the "Tree" page after logged in | SKIPPED | 0.000 s |
| 2 | When The user clicks on the "Types of Trees" link | SKIPPED | 0.000 s |
| 3 | Then The user should be directed to "Types of Trees" Page | SKIPPED | 0.000 s |
| | AFTER - appHooks.ApplicationHooks.tearDown(io.cucumber.java.Scenario) java.lang.NullPointerException: Cannot invoke "org.openqa.selenium.TakesScreenshot.getScreenshotAs(org.openqa.selenium.OutputType)" because the return value of "com.qa.factory.DriverFactory.getDriver()" is null at appHooks.ApplicationHooks.tearDown(ApplicationHooks.java:59) | FAILED | 0.000 s |

The user is able to navigate to a page having an tryEditor

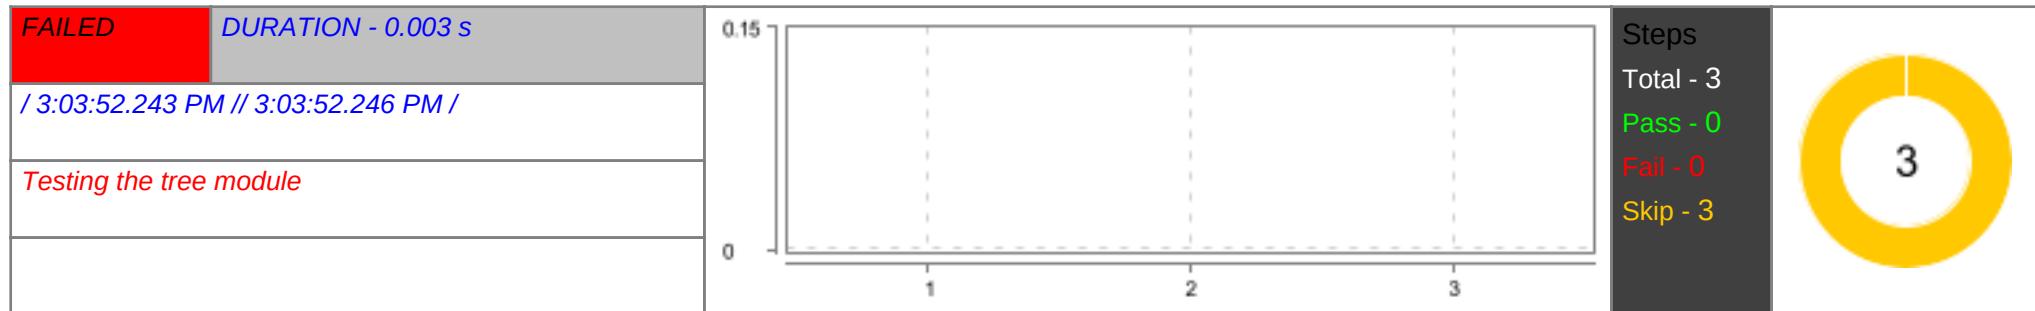

| # | Step / Hook Details | Status | Duration |
|---|---|---------|----------|
| | BEFORE - appHooks.ApplicationHooks.setup() java.lang.NullPointerException: Cannot invoke "org.openqa.selenium.WebDriver.manage()" because the return value of "com.qa.factory.DriverFactory.getDriver()" is null at com.qa.factory.DriverFactory.init_driver(DriverFactory.java:47) at com.qa.factory.DriverFactory.setupdriver(DriverFactory.java:71) at appHooks.ApplicationHooks.setup(ApplicationHooks.java:33) | FAILED | 0.001 s |
| 1 | Given The user is on the "types of trees" page after logged in | SKIPPED | 0.000 s |
| 2 | When The user clicks Try Here button | SKIPPED | 0.000 s |
| 3 | Then The user should be redirected to a page having an tryEditor with a Run button to test | SKIPPED | 0.000 s |
| | AFTER - appHooks.ApplicationHooks.tearDown(io.cucumber.java.Scenario) java.lang.NullPointerException: Cannot invoke "org.openqa.selenium.TakesScreenshot.getScreenshotAs(org.openqa.selenium.OutputType)" because the return value of "com.qa.factory.DriverFactory.getDriver()" is null at appHooks.ApplicationHooks.tearDown(ApplicationHooks.java:59) | FAILED | 0.001 s |


The user is able to run code in tryEditor

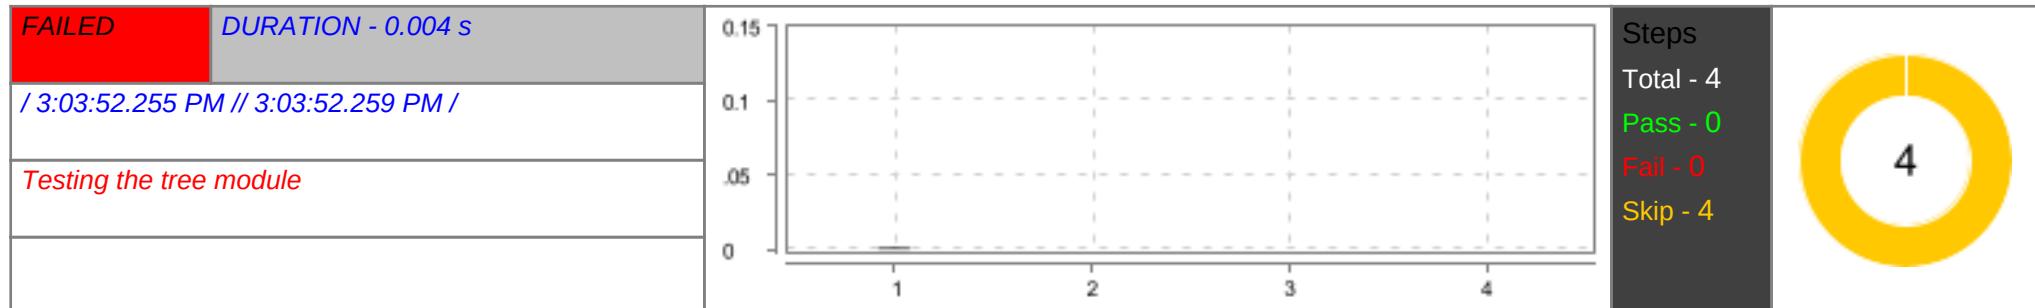

| # | Step / Hook Details | Status | Duration |
|---|--|--------|----------|
| | BEFORE - appHooks.ApplicationHooks.setup() | FAILED | 0.001 s |

| # | Step / Hook Details | Status | Duration |
|---|---|---------|----------|
| | java.lang.NullPointerException: Cannot invoke "org.openqa.selenium.WebDriver.manage()" because the return value of "com.qa.factory.DriverFactory.getDriver()" is null at com.qa.factory.DriverFactory.init_driver(DriverFactory.java:47) at com.qa.factory.DriverFactory.setupdriver(DriverFactory.java:71) at appHooks.ApplicationHooks.setup(ApplicationHooks.java:33) | | |
| 1 | Given The user is in a try here page having tryEditor with a Run button to test | SKIPPED | 0.001 s |
| 2 | When The user gets input from sheet "pythonCode" and 0 | SKIPPED | 0.000 s |
| 3 | And user click on Run button | SKIPPED | 0.000 s |
| 4 | Then The user should be presented with Run output | SKIPPED | 0.000 s |
| | AFTER - appHooks.ApplicationHooks.tearDown(io.cucumber.java.Scenario) java.lang.NullPointerException: Cannot invoke "org.openqa.selenium.TakesScreenshot.getScreenshotAs(org.openqa.selenium.OutputType)" because the return value of "com.qa.factory.DriverFactory.getDriver()" is null at appHooks.ApplicationHooks.tearDown(ApplicationHooks.java:59) | FAILED | 0.000 s |


The user is able to get the error message for invalid syntax

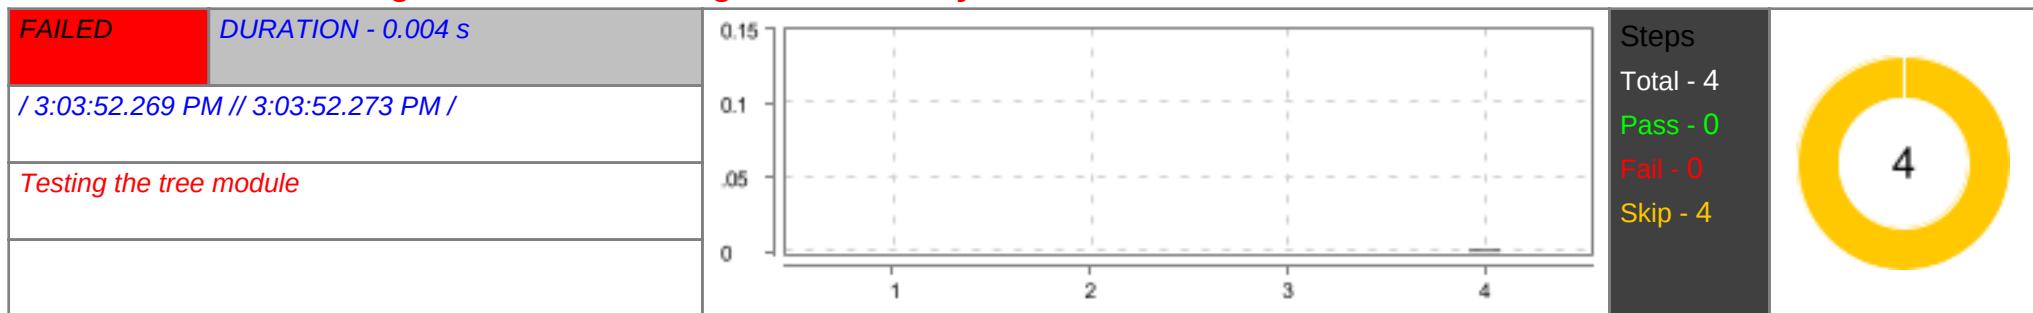

| # | Step / Hook Details | Status | Duration |
|---|---|---------|----------|
| | BEFORE - appHooks.ApplicationHooks.setup() java.lang.NullPointerException: Cannot invoke "org.openqa.selenium.WebDriver.manage()" because the return value of "com.qa.factory.DriverFactory.getDriver()" is null at com.qa.factory.DriverFactory.init_driver(DriverFactory.java:47) at com.qa.factory.DriverFactory.setupdriver(DriverFactory.java:71) at appHooks.ApplicationHooks.setup(ApplicationHooks.java:33) | FAILED | 0.000 s |
| 1 | Given The user is in a try here page having tryEditor with a Run button to test | SKIPPED | 0.000 s |
| 2 | When The user gets invalid input from sheet "pythonCode" and 1 | SKIPPED | 0.000 s |
| 3 | And user click on Run button | SKIPPED | 0.000 s |
| 4 | Then The user should be presented with the Run output with alert | SKIPPED | 0.001 s |


| # | Step / Hook Details | Status | Duration |
|---|--|--------|----------|
| | AFTER - appHooks.ApplicationHooks.tearDown(io.cucumber.java.Scenario) java.lang.NullPointerException: Cannot invoke "org.openqa.selenium.TakesScreenshot.getScreenshotAs(org.openqa.selenium.OutputType)" because the return value of "com.qa.factory.DriverFactory.getDriver()" is null at appHooks.ApplicationHooks.tearDown(ApplicationHooks.java:59) | FAILED | 0.000 s |

The user is able to navigate to Tree Traversals Page

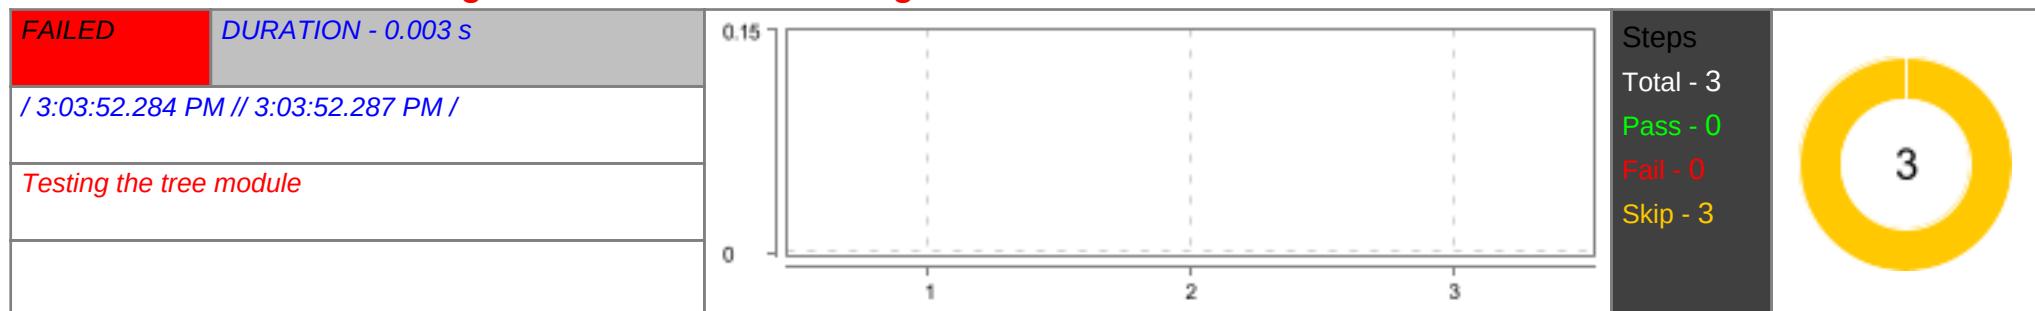


| # | Step / Hook Details | Status | Duration |
|---|---|---------|----------|
| | BEFORE - appHooks.ApplicationHooks.setup() java.lang.NullPointerException: Cannot invoke "org.openqa.selenium.WebDriver.manage()" because the return value of "com.qa.factory.DriverFactory.getDriver()" is null at com.qa.factory.DriverFactory.init_driver(DriverFactory.java:47) at com.qa.factory.DriverFactory.setupdriver(DriverFactory.java:71) at appHooks.ApplicationHooks.setup(ApplicationHooks.java:33) | FAILED | 0.001 s |
| 1 | Given The user is in the "Tree" page after logged in | SKIPPED | 0.000 s |
| 2 | When The user clicks on the "Tree Traversals" link | SKIPPED | 0.000 s |
| 3 | Then The user should be directed to "Tree Traversals" Page | SKIPPED | 0.000 s |
| | AFTER - appHooks.ApplicationHooks.tearDown(io.cucumber.java.Scenario) java.lang.NullPointerException: Cannot invoke "org.openqa.selenium.TakesScreenshot.getScreenshotAs(org.openqa.selenium.OutputType)" because the return value of "com.qa.factory.DriverFactory.getDriver()" is null at appHooks.ApplicationHooks.tearDown(ApplicationHooks.java:59) | FAILED | 0.001 s |

The user is able to navigate to a page having an tryEditor

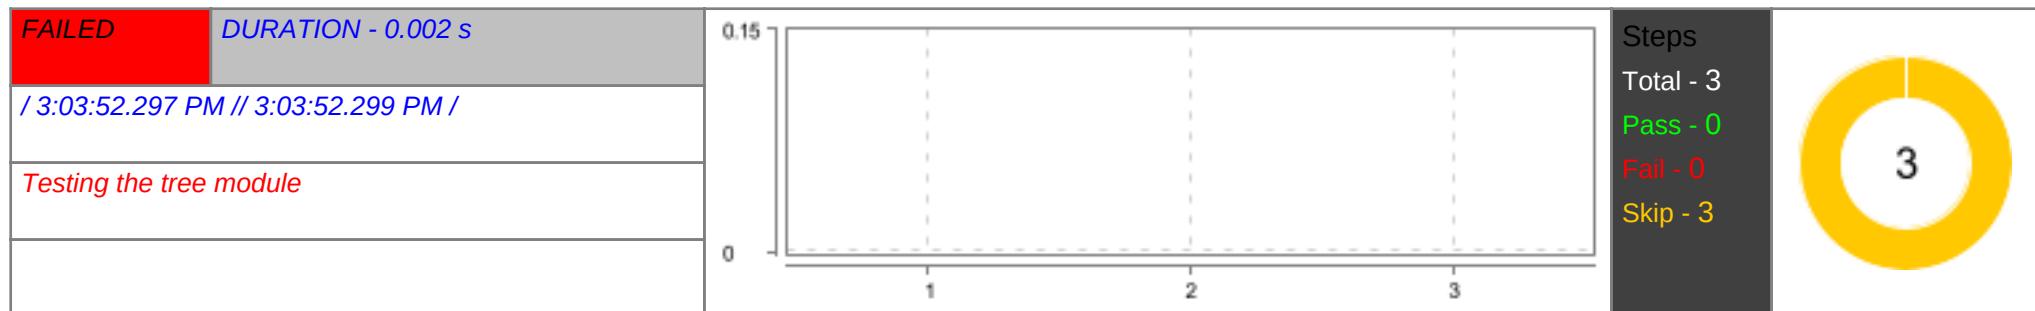

| # | Step / Hook Details | Status | Duration |
|---|---|---------|----------|
| | BEFORE - appHooks.ApplicationHooks.setup() java.lang.NullPointerException: Cannot invoke "org.openqa.selenium.WebDriver.manage()" because the return value of "com.qa.factory.DriverFactory.getDriver()" is null at com.qa.factory.DriverFactory.init_driver(DriverFactory.java:47) at com.qa.factory.DriverFactory.setupdriver(DriverFactory.java:71) at appHooks.ApplicationHooks.setup(ApplicationHooks.java:33) | FAILED | 0.001 s |
| 1 | Given The user is on the "tree traversals" page after logged in | SKIPPED | 0.000 s |
| 2 | When The user clicks Try Here button | SKIPPED | 0.000 s |
| 3 | Then The user should be redirected to a page having an tryEditor with a Run button to test | SKIPPED | 0.000 s |
| | AFTER - appHooks.ApplicationHooks.tearDown(io.cucumber.java.Scenario) java.lang.NullPointerException: Cannot invoke "org.openqa.selenium.TakesScreenshot.getScreenshotAs(org.openqa.selenium.OutputType)" because the return value of "com.qa.factory.DriverFactory.getDriver()" is null at appHooks.ApplicationHooks.tearDown(ApplicationHooks.java:59) | FAILED | 0.001 s |


The user is able to run code in tryEditor

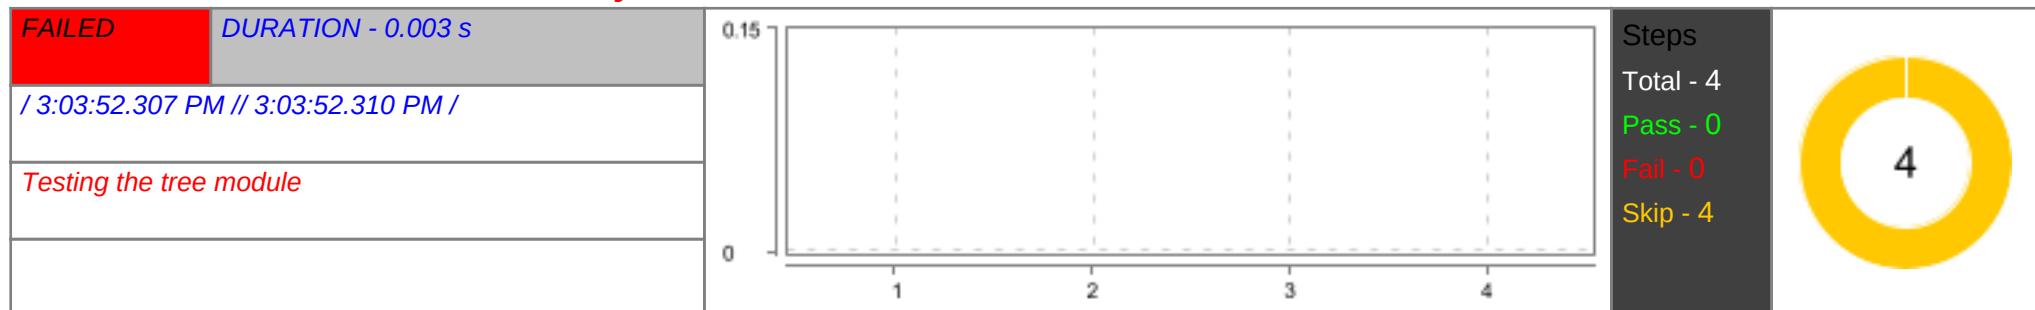

| # | Step / Hook Details | Status | Duration |
|---|--|--------|----------|
| | BEFORE - appHooks.ApplicationHooks.setup() | FAILED | 0.001 s |

| # | Step / Hook Details | Status | Duration |
|---|---|---------|----------|
| | java.lang.NullPointerException: Cannot invoke "org.openqa.selenium.WebDriver.manage()" because the return value of "com.qa.factory.DriverFactory.getDriver()" is null at com.qa.factory.DriverFactory.init_driver(DriverFactory.java:47) at com.qa.factory.DriverFactory.setupdriver(DriverFactory.java:71) at appHooks.ApplicationHooks.setup(ApplicationHooks.java:33) | | |
| 1 | Given The user is in a try here page having tryEditor with a Run button to test | SKIPPED | 0.000 s |
| 2 | When The user gets input from sheet "pythonCode" and 0 | SKIPPED | 0.000 s |
| 3 | And user click on Run button | SKIPPED | 0.000 s |
| 4 | Then The user should be presented with Run output | SKIPPED | 0.000 s |
| | AFTER - appHooks.ApplicationHooks.tearDown(io.cucumber.java.Scenario) java.lang.NullPointerException: Cannot invoke "org.openqa.selenium.TakesScreenshot.getScreenshotAs(org.openqa.selenium.OutputType)" because the return value of "com.qa.factory.DriverFactory.getDriver()" is null at appHooks.ApplicationHooks.tearDown(ApplicationHooks.java:59) | FAILED | 0.002 s |


The user is able to get the error message for invalid syntax

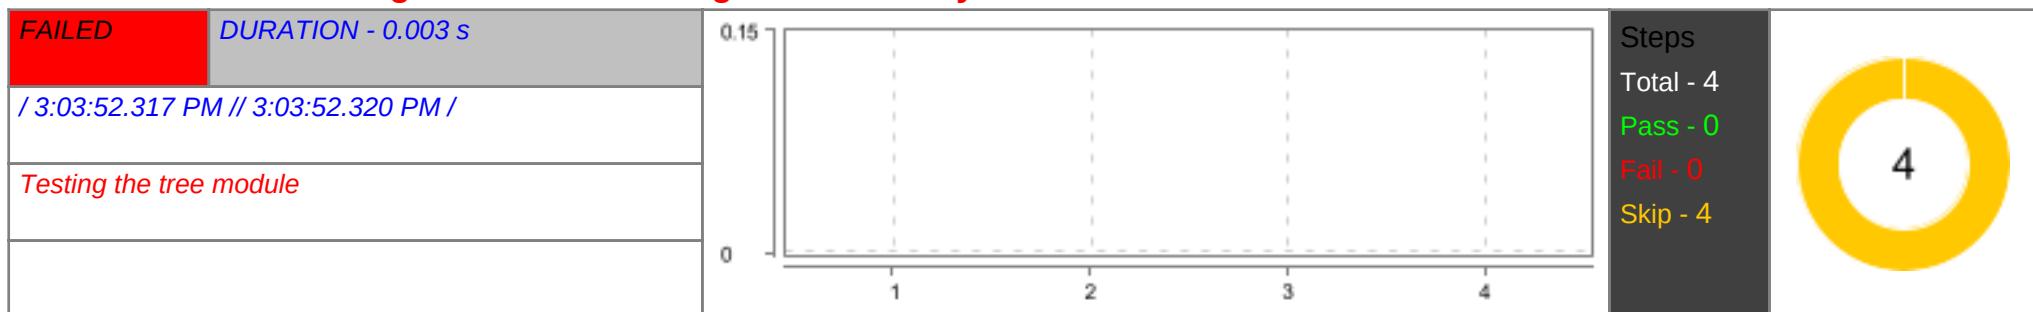

| # | Step / Hook Details | Status | Duration |
|---|---|---------|----------|
| | BEFORE - appHooks.ApplicationHooks.setup() java.lang.NullPointerException: Cannot invoke "org.openqa.selenium.WebDriver.manage()" because the return value of "com.qa.factory.DriverFactory.getDriver()" is null at com.qa.factory.DriverFactory.init_driver(DriverFactory.java:47) at com.qa.factory.DriverFactory.setupdriver(DriverFactory.java:71) at appHooks.ApplicationHooks.setup(ApplicationHooks.java:33) | FAILED | 0.001 s |
| 1 | Given The user is in a try here page having tryEditor with a Run button to test | SKIPPED | 0.000 s |
| 2 | When The user gets invalid input from sheet "pythonCode" and 1 | SKIPPED | 0.000 s |
| 3 | And user click on Run button | SKIPPED | 0.000 s |
| 4 | Then The user should be presented with the Run output with alert | SKIPPED | 0.000 s |


| # | Step / Hook Details | Status | Duration |
|---|--|--------|----------|
| | AFTER - appHooks.ApplicationHooks.tearDown(io.cucumber.java.Scenario) java.lang.NullPointerException: Cannot invoke "org.openqa.selenium.TakesScreenshot.getScreenshotAs(org.openqa.selenium.OutputType)" because the return value of "com.qa.factory.DriverFactory.getDriver()" is null at appHooks.ApplicationHooks.tearDown(ApplicationHooks.java:59) | FAILED | 0.000 s |

The user is able to navigate to "Traversals illustration" Page

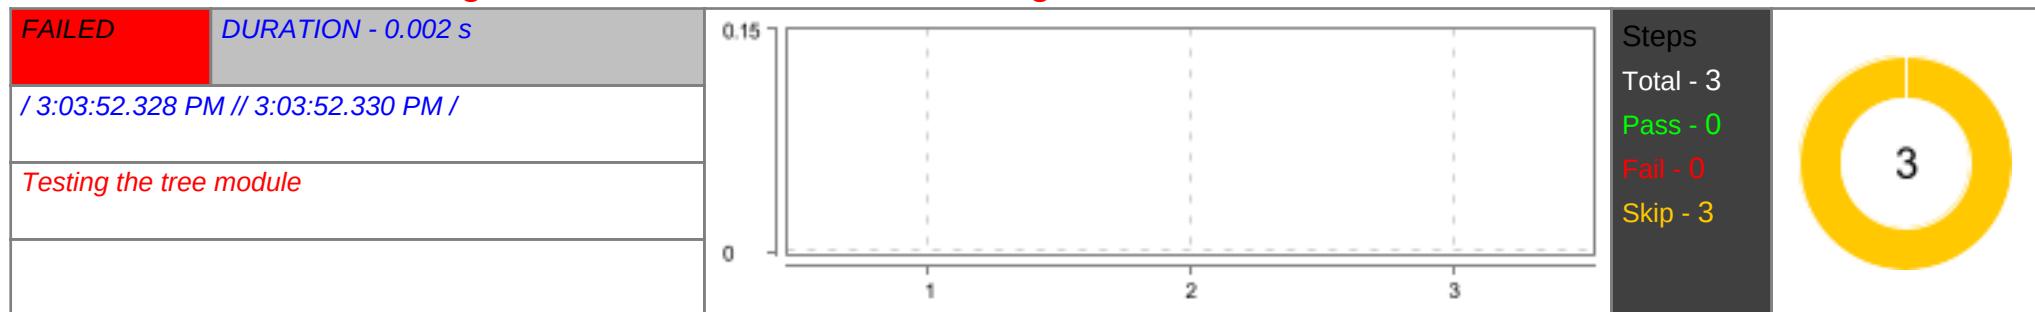


| # | Step / Hook Details | Status | Duration |
|---|---|---------|----------|
| | BEFORE - appHooks.ApplicationHooks.setup() java.lang.NullPointerException: Cannot invoke "org.openqa.selenium.WebDriver.manage()" because the return value of "com.qa.factory.DriverFactory.getDriver()" is null at com.qa.factory.DriverFactory.init_driver(DriverFactory.java:47) at com.qa.factory.DriverFactory.setupdriver(DriverFactory.java:71) at appHooks.ApplicationHooks.setup(ApplicationHooks.java:33) | FAILED | 0.001 s |
| 1 | Given The user is in the "Tree" page after logged in | SKIPPED | 0.000 s |
| 2 | When The user clicks on the "Traversals-Illustration" link | SKIPPED | 0.000 s |
| 3 | Then The user should be directed to "Traversals-Illustration" Page | SKIPPED | 0.000 s |
| | AFTER - appHooks.ApplicationHooks.tearDown(io.cucumber.java.Scenario) java.lang.NullPointerException: Cannot invoke "org.openqa.selenium.TakesScreenshot.getScreenshotAs(org.openqa.selenium.OutputType)" because the return value of "com.qa.factory.DriverFactory.getDriver()" is null at appHooks.ApplicationHooks.tearDown(ApplicationHooks.java:59) | FAILED | 0.000 s |

The user is able to navigate to a Page having an tryEditor

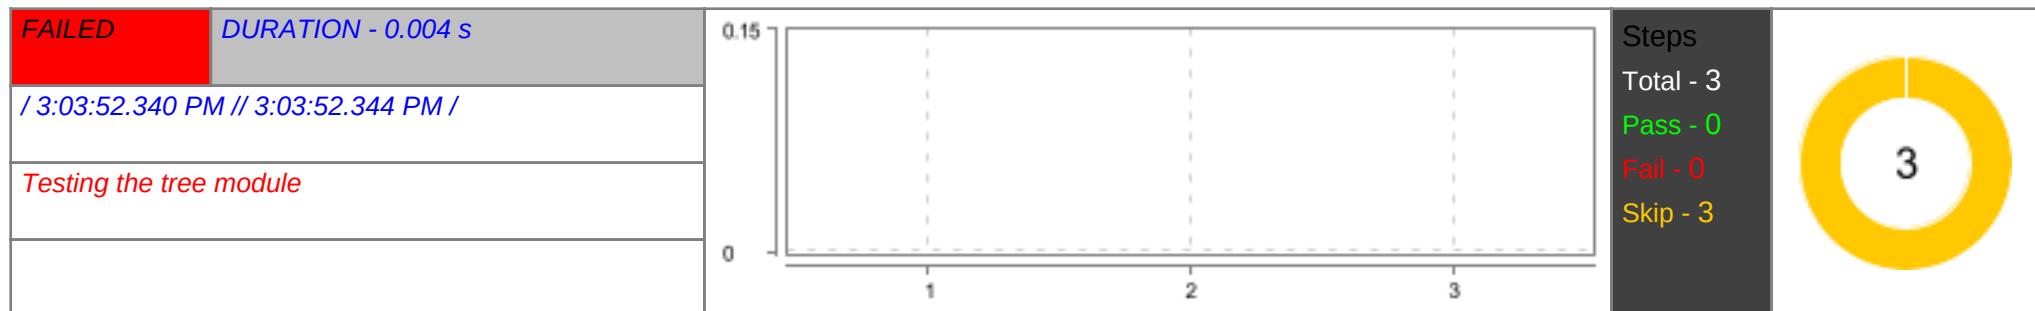

| # | Step / Hook Details | Status | Duration |
|---|---|---------|----------|
| | BEFORE - appHooks.ApplicationHooks.setup() java.lang.NullPointerException: Cannot invoke "org.openqa.selenium.WebDriver.manage()" because the return value of "com.qa.factory.DriverFactory.getDriver()" is null at com.qa.factory.DriverFactory.init_driver(DriverFactory.java:47) at com.qa.factory.DriverFactory.setupdriver(DriverFactory.java:71) at appHooks.ApplicationHooks.setup(ApplicationHooks.java:33) | FAILED | 0.001 s |
| 1 | Given The user is on the "traversals illustration" page after logged in | SKIPPED | 0.000 s |
| 2 | When The user clicks Try Here button | SKIPPED | 0.000 s |
| 3 | Then The user should be redirected to a page having an tryEditor with a Run button to test | SKIPPED | 0.000 s |
| | AFTER - appHooks.ApplicationHooks.tearDown(io.cucumber.java.Scenario) java.lang.NullPointerException: Cannot invoke "org.openqa.selenium.TakesScreenshot.getScreenshotAs(org.openqa.selenium.OutputType)" because the return value of "com.qa.factory.DriverFactory.getDriver()" is null at appHooks.ApplicationHooks.tearDown(ApplicationHooks.java:59) | FAILED | 0.001 s |


The user is able to run code in tryEditor

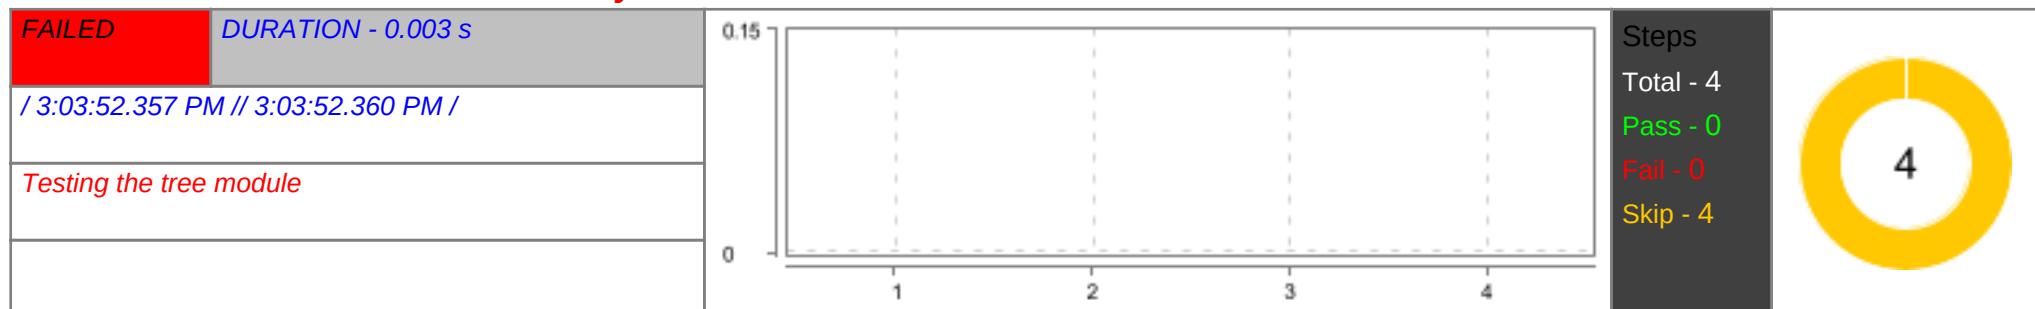

| # | Step / Hook Details | Status | Duration |
|---|--|--------|----------|
| | BEFORE - appHooks.ApplicationHooks.setup() | FAILED | 0.000 s |

| # | Step / Hook Details | Status | Duration |
|---|---|---------|----------|
| | java.lang.NullPointerException: Cannot invoke "org.openqa.selenium.WebDriver.manage()" because the return value of "com.qa.factory.DriverFactory.getDriver()" is null at com.qa.factory.DriverFactory.init_driver(DriverFactory.java:47) at com.qa.factory.DriverFactory.setupdriver(DriverFactory.java:71) at appHooks.ApplicationHooks.setup(ApplicationHooks.java:33) | | |
| 1 | Given The user is in a try here page having tryEditor with a Run button to test | SKIPPED | 0.000 s |
| 2 | When The user gets input from sheet "pythonCode" and 0 | SKIPPED | 0.000 s |
| 3 | And user click on Run button | SKIPPED | 0.000 s |
| 4 | Then The user should be presented with Run output | SKIPPED | 0.000 s |
| | AFTER - appHooks.ApplicationHooks.tearDown(io.cucumber.java.Scenario) java.lang.NullPointerException: Cannot invoke "org.openqa.selenium.TakesScreenshot.getScreenshotAs(org.openqa.selenium.OutputType)" because the return value of "com.qa.factory.DriverFactory.getDriver()" is null at appHooks.ApplicationHooks.tearDown(ApplicationHooks.java:59) | FAILED | 0.001 s |


The user is able to get the error message for invalid syntax

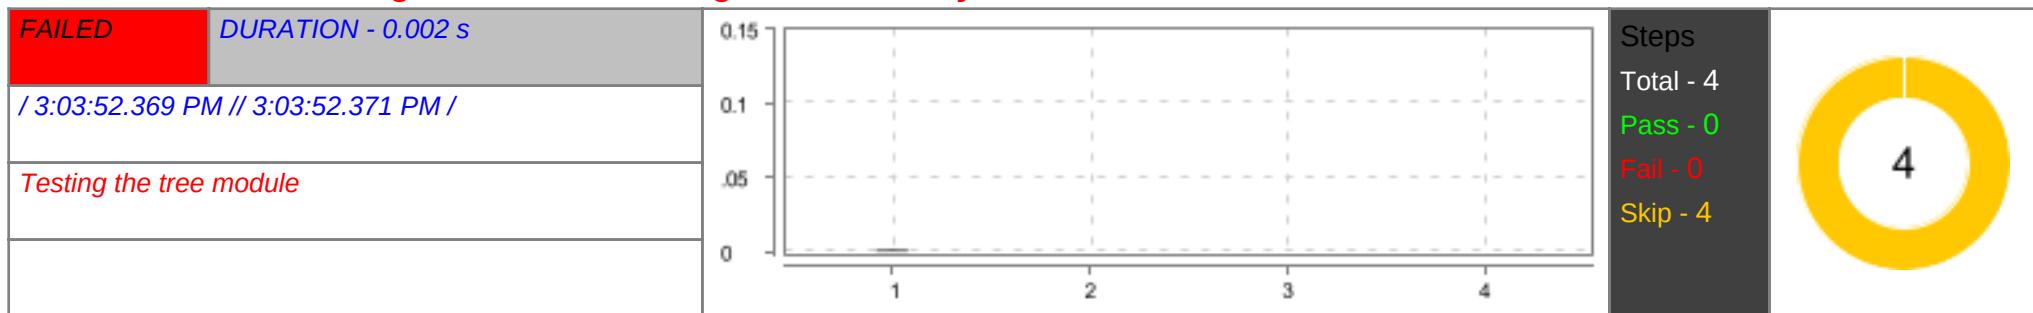

| # | Step / Hook Details | Status | Duration |
|---|---|---------|----------|
| | BEFORE - appHooks.ApplicationHooks.setup() java.lang.NullPointerException: Cannot invoke "org.openqa.selenium.WebDriver.manage()" because the return value of "com.qa.factory.DriverFactory.getDriver()" is null at com.qa.factory.DriverFactory.init_driver(DriverFactory.java:47) at com.qa.factory.DriverFactory.setupdriver(DriverFactory.java:71) at appHooks.ApplicationHooks.setup(ApplicationHooks.java:33) | FAILED | 0.001 s |
| 1 | Given The user is in a try here page having tryEditor with a Run button to test | SKIPPED | 0.001 s |
| 2 | When The user gets invalid input from sheet "pythonCode" and 1 | SKIPPED | 0.000 s |
| 3 | And user click on Run button | SKIPPED | 0.000 s |
| 4 | Then The user should be presented with the Run output with alert | SKIPPED | 0.000 s |


| # | Step / Hook Details | Status | Duration |
|---|--|--------|----------|
| | AFTER - appHooks.ApplicationHooks.tearDown(io.cucumber.java.Scenario) java.lang.NullPointerException: Cannot invoke "org.openqa.selenium.TakesScreenshot.getScreenshotAs(org.openqa.selenium.OutputType)" because the return value of "com.qa.factory.DriverFactory.getDriver()" is null at appHooks.ApplicationHooks.tearDown(ApplicationHooks.java:59) | FAILED | 0.000 s |

The user is able to navigate to "Binary trees" Page

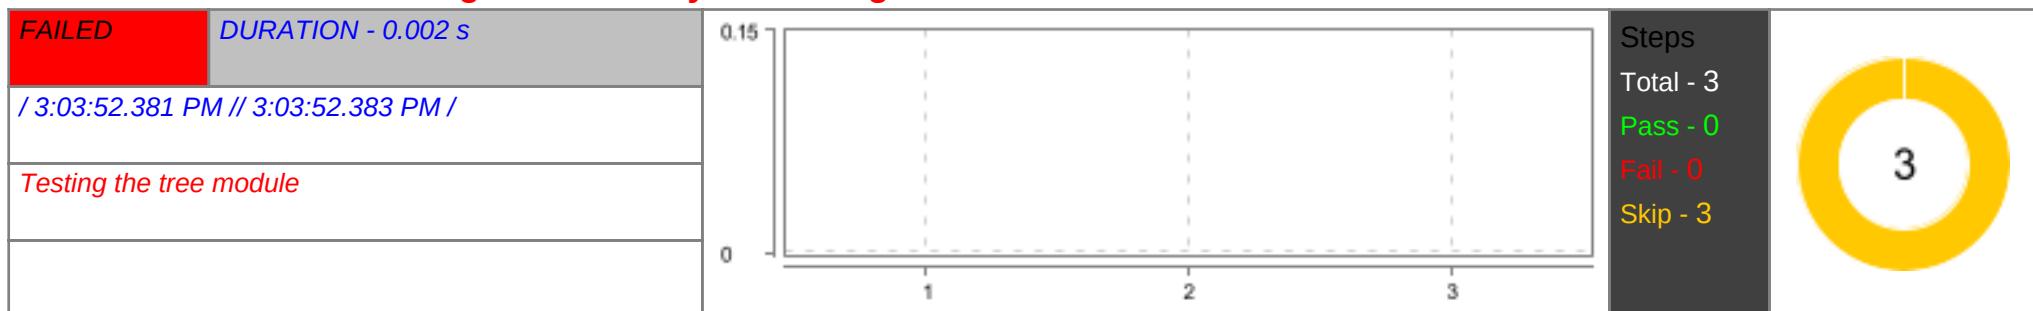


| # | Step / Hook Details | Status | Duration |
|---|---|---------|----------|
| | BEFORE - appHooks.ApplicationHooks.setup() java.lang.NullPointerException: Cannot invoke "org.openqa.selenium.WebDriver.manage()" because the return value of "com.qa.factory.DriverFactory.getDriver()" is null at com.qa.factory.DriverFactory.init_driver(DriverFactory.java:47) at com.qa.factory.DriverFactory.setupdriver(DriverFactory.java:71) at appHooks.ApplicationHooks.setup(ApplicationHooks.java:33) | FAILED | 0.001 s |
| 1 | Given The user is in the "Tree" page after logged in | SKIPPED | 0.000 s |
| 2 | When The user clicks on the "Binary Trees" link | SKIPPED | 0.000 s |
| 3 | Then The user should be directed to "Binary Trees" Page | SKIPPED | 0.000 s |
| | AFTER - appHooks.ApplicationHooks.tearDown(io.cucumber.java.Scenario) java.lang.NullPointerException: Cannot invoke "org.openqa.selenium.TakesScreenshot.getScreenshotAs(org.openqa.selenium.OutputType)" because the return value of "com.qa.factory.DriverFactory.getDriver()" is null at appHooks.ApplicationHooks.tearDown(ApplicationHooks.java:59) | FAILED | 0.001 s |

The user is able to navigate to a page having an tryEditor

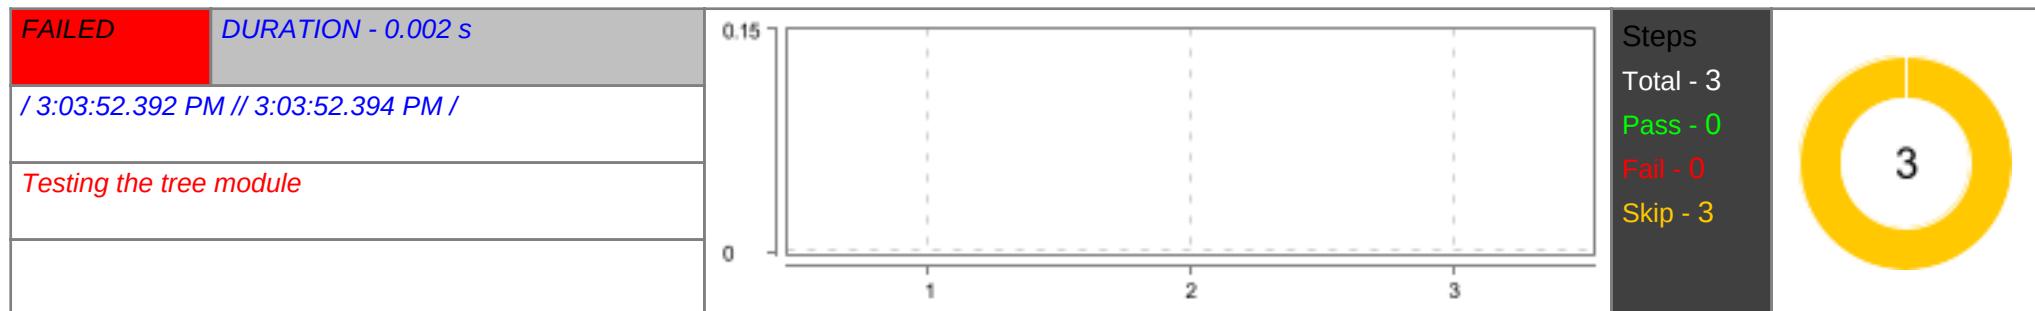

| # | Step / Hook Details | Status | Duration |
|---|---|---------|----------|
| | BEFORE - appHooks.ApplicationHooks.setup() java.lang.NullPointerException: Cannot invoke "org.openqa.selenium.WebDriver.manage()" because the return value of "com.qa.factory.DriverFactory.getDriver()" is null at com.qa.factory.DriverFactory.init_driver(DriverFactory.java:47) at com.qa.factory.DriverFactory.setupdriver(DriverFactory.java:71) at appHooks.ApplicationHooks.setup(ApplicationHooks.java:33) | FAILED | 0.001 s |
| 1 | Given The user is on the "binary trees" page after logged in | SKIPPED | 0.000 s |
| 2 | When The user clicks Try Here button | SKIPPED | 0.000 s |
| 3 | Then The user should be redirected to a page having an tryEditor with a Run button to test | SKIPPED | 0.000 s |
| | AFTER - appHooks.ApplicationHooks.tearDown(io.cucumber.java.Scenario) java.lang.NullPointerException: Cannot invoke "org.openqa.selenium.TakesScreenshot.getScreenshotAs(org.openqa.selenium.OutputType)" because the return value of "com.qa.factory.DriverFactory.getDriver()" is null at appHooks.ApplicationHooks.tearDown(ApplicationHooks.java:59) | FAILED | 0.000 s |


The user is able to run code in tryEditor

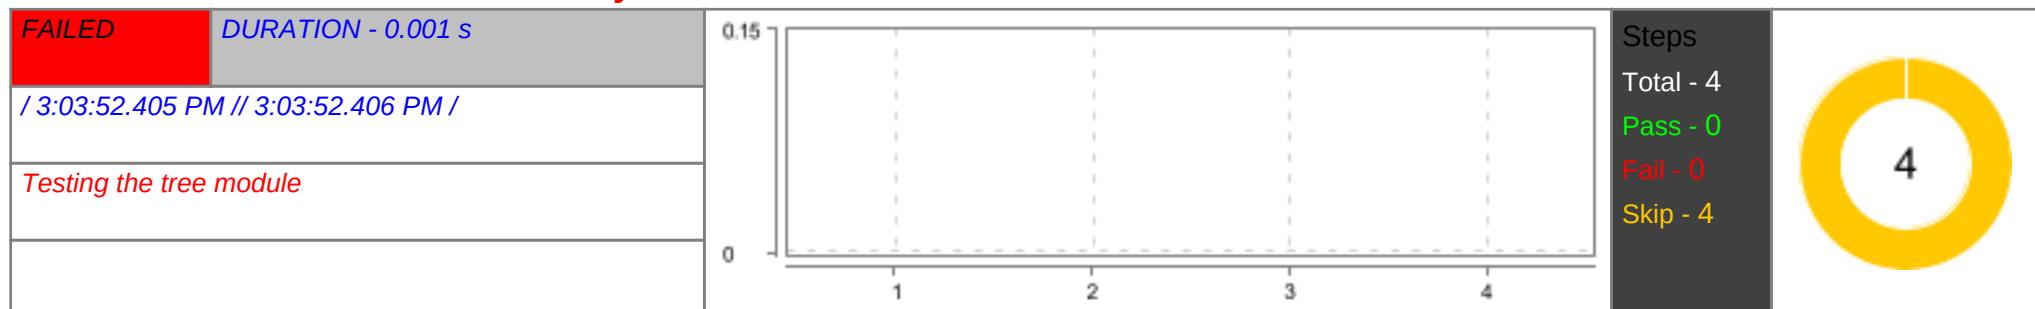

| # | Step / Hook Details | Status | Duration |
|---|--|--------|----------|
| | BEFORE - appHooks.ApplicationHooks.setup() | FAILED | 0.000 s |

| # | Step / Hook Details | Status | Duration |
|---|---|---------|----------|
| | java.lang.NullPointerException: Cannot invoke "org.openqa.selenium.WebDriver.manage()" because the return value of "com.qa.factory.DriverFactory.getDriver()" is null at com.qa.factory.DriverFactory.init_driver(DriverFactory.java:47) at com.qa.factory.DriverFactory.setupdriver(DriverFactory.java:71) at appHooks.ApplicationHooks.setup(ApplicationHooks.java:33) | | |
| 1 | Given The user is in a try here page having tryEditor with a Run button to test | SKIPPED | 0.000 s |
| 2 | When The user gets input from sheet "pythonCode" and 0 | SKIPPED | 0.000 s |
| 3 | And user click on Run button | SKIPPED | 0.000 s |
| 4 | Then The user should be presented with Run output | SKIPPED | 0.000 s |
| | AFTER - appHooks.ApplicationHooks.tearDown(io.cucumber.java.Scenario) java.lang.NullPointerException: Cannot invoke "org.openqa.selenium.TakesScreenshot.getScreenshotAs(org.openqa.selenium.OutputType)" because the return value of "com.qa.factory.DriverFactory.getDriver()" is null at appHooks.ApplicationHooks.tearDown(ApplicationHooks.java:59) | FAILED | 0.000 s |


The user is able to get the error message for invalid syntax

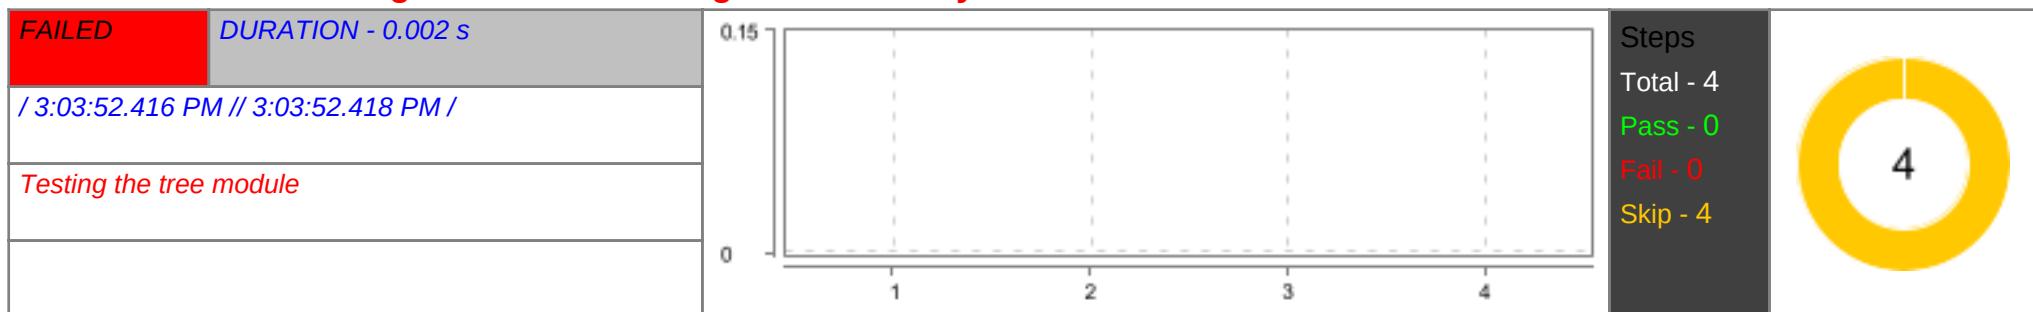

| # | Step / Hook Details | Status | Duration |
|---|---|---------|----------|
| | BEFORE - appHooks.ApplicationHooks.setup() java.lang.NullPointerException: Cannot invoke "org.openqa.selenium.WebDriver.manage()" because the return value of "com.qa.factory.DriverFactory.getDriver()" is null at com.qa.factory.DriverFactory.init_driver(DriverFactory.java:47) at com.qa.factory.DriverFactory.setupdriver(DriverFactory.java:71) at appHooks.ApplicationHooks.setup(ApplicationHooks.java:33) | FAILED | 0.001 s |
| 1 | Given The user is in a try here page having tryEditor with a Run button to test | SKIPPED | 0.000 s |
| 2 | When The user gets invalid input from sheet "pythonCode" and 1 | SKIPPED | 0.000 s |
| 3 | And user click on Run button | SKIPPED | 0.000 s |
| 4 | Then The user should be presented with the Run output with alert | SKIPPED | 0.000 s |


| # | Step / Hook Details | Status | Duration |
|---|--|--------|----------|
| | AFTER - appHooks.ApplicationHooks.tearDown(io.cucumber.java.Scenario) java.lang.NullPointerException: Cannot invoke "org.openqa.selenium.TakesScreenshot.getScreenshotAs(org.openqa.selenium.OutputType)" because the return value of "com.qa.factory.DriverFactory.getDriver()" is null at appHooks.ApplicationHooks.tearDown(ApplicationHooks.java:59) | FAILED | 0.001 s |

The user is able to navigate to "Types of Binary trees" Page

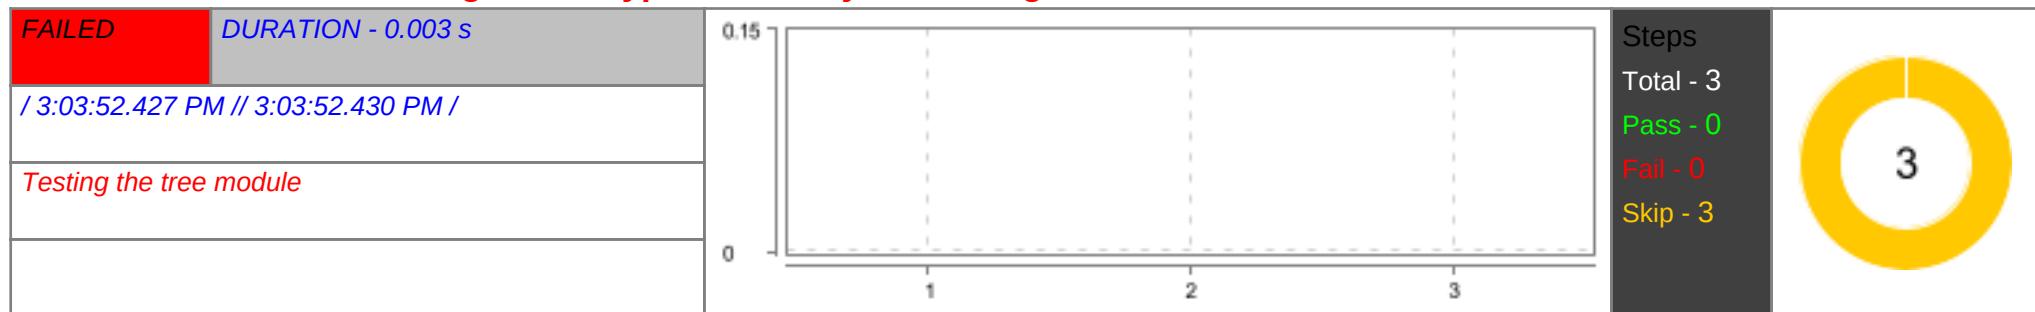


| # | Step / Hook Details | Status | Duration |
|---|---|---------|----------|
| | BEFORE - appHooks.ApplicationHooks.setup() java.lang.NullPointerException: Cannot invoke "org.openqa.selenium.WebDriver.manage()" because the return value of "com.qa.factory.DriverFactory.getDriver()" is null at com.qa.factory.DriverFactory.init_driver(DriverFactory.java:47) at com.qa.factory.DriverFactory.setupdriver(DriverFactory.java:71) at appHooks.ApplicationHooks.setup(ApplicationHooks.java:33) | FAILED | 0.001 s |
| 1 | Given The user is in the "Tree" page after logged in | SKIPPED | 0.000 s |
| 2 | When The user clicks on the "Types of Binary Trees" link | SKIPPED | 0.000 s |
| 3 | Then The user should be directed to "Types of Binary Trees" Page | SKIPPED | 0.000 s |
| | AFTER - appHooks.ApplicationHooks.tearDown(io.cucumber.java.Scenario) java.lang.NullPointerException: Cannot invoke "org.openqa.selenium.TakesScreenshot.getScreenshotAs(org.openqa.selenium.OutputType)" because the return value of "com.qa.factory.DriverFactory.getDriver()" is null at appHooks.ApplicationHooks.tearDown(ApplicationHooks.java:59) | FAILED | 0.002 s |

The user is able to navigate to a page having an tryEditor

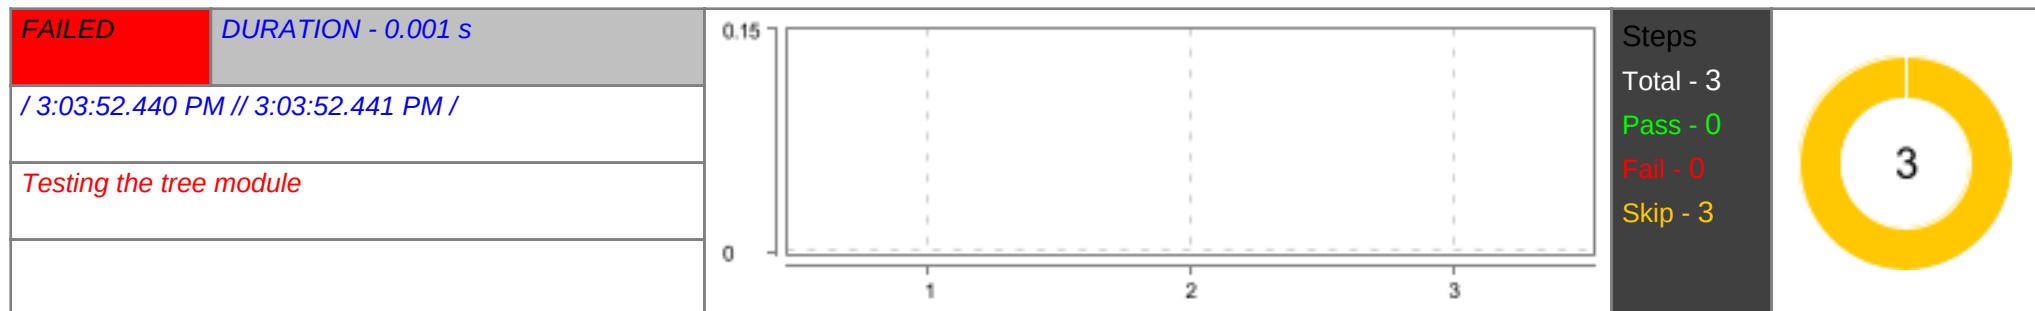

| # | Step / Hook Details | Status | Duration |
|---|---|---------|----------|
| | BEFORE - appHooks.ApplicationHooks.setup() java.lang.NullPointerException: Cannot invoke "org.openqa.selenium.WebDriver.manage()" because the return value of "com.qa.factory.DriverFactory.getDriver()" is null at com.qa.factory.DriverFactory.init_driver(DriverFactory.java:47) at com.qa.factory.DriverFactory.setupdriver(DriverFactory.java:71) at appHooks.ApplicationHooks.setup(ApplicationHooks.java:33) | FAILED | 0.000 s |
| 1 | Given The user is on the "types of binary trees" page after logged in | SKIPPED | 0.000 s |
| 2 | When The user clicks Try Here button | SKIPPED | 0.000 s |
| 3 | Then The user should be redirected to a page having an tryEditor with a Run button to test | SKIPPED | 0.000 s |
| | AFTER - appHooks.ApplicationHooks.tearDown(io.cucumber.java.Scenario) java.lang.NullPointerException: Cannot invoke "org.openqa.selenium.TakesScreenshot.getScreenshotAs(org.openqa.selenium.OutputType)" because the return value of "com.qa.factory.DriverFactory.getDriver()" is null at appHooks.ApplicationHooks.tearDown(ApplicationHooks.java:59) | FAILED | 0.000 s |


The user is able to run code in tryEditor

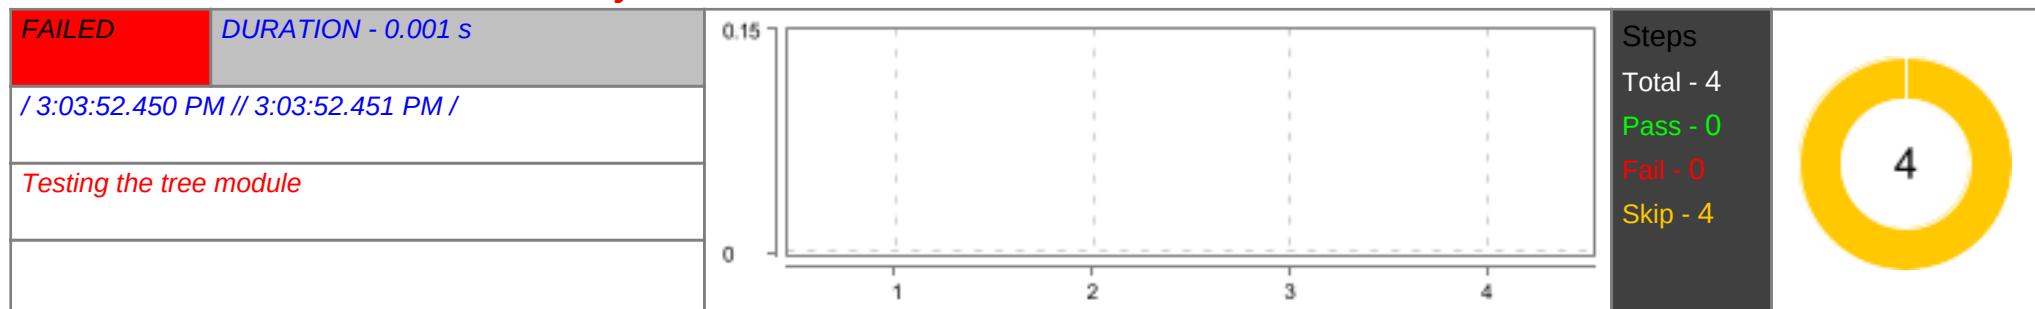

| # | Step / Hook Details | Status | Duration |
|---|--|--------|----------|
| | BEFORE - appHooks.ApplicationHooks.setup() | FAILED | 0.000 s |

| # | Step / Hook Details | Status | Duration |
|---|---|---------|----------|
| | java.lang.NullPointerException: Cannot invoke "org.openqa.selenium.WebDriver.manage()" because the return value of "com.qa.factory.DriverFactory.getDriver()" is null at com.qa.factory.DriverFactory.init_driver(DriverFactory.java:47) at com.qa.factory.DriverFactory.setupdriver(DriverFactory.java:71) at appHooks.ApplicationHooks.setup(ApplicationHooks.java:33) | | |
| 1 | Given The user is in a try here page having tryEditor with a Run button to test | SKIPPED | 0.000 s |
| 2 | When The user gets input from sheet "pythonCode" and 0 | SKIPPED | 0.000 s |
| 3 | And user click on Run button | SKIPPED | 0.000 s |
| 4 | Then The user should be presented with Run output | SKIPPED | 0.000 s |
| | AFTER - appHooks.ApplicationHooks.tearDown(io.cucumber.java.Scenario) java.lang.NullPointerException: Cannot invoke "org.openqa.selenium.TakesScreenshot.getScreenshotAs(org.openqa.selenium.OutputType)" because the return value of "com.qa.factory.DriverFactory.getDriver()" is null at appHooks.ApplicationHooks.tearDown(ApplicationHooks.java:59) | FAILED | 0.000 s |


The user is able to get the error message for invalid syntax

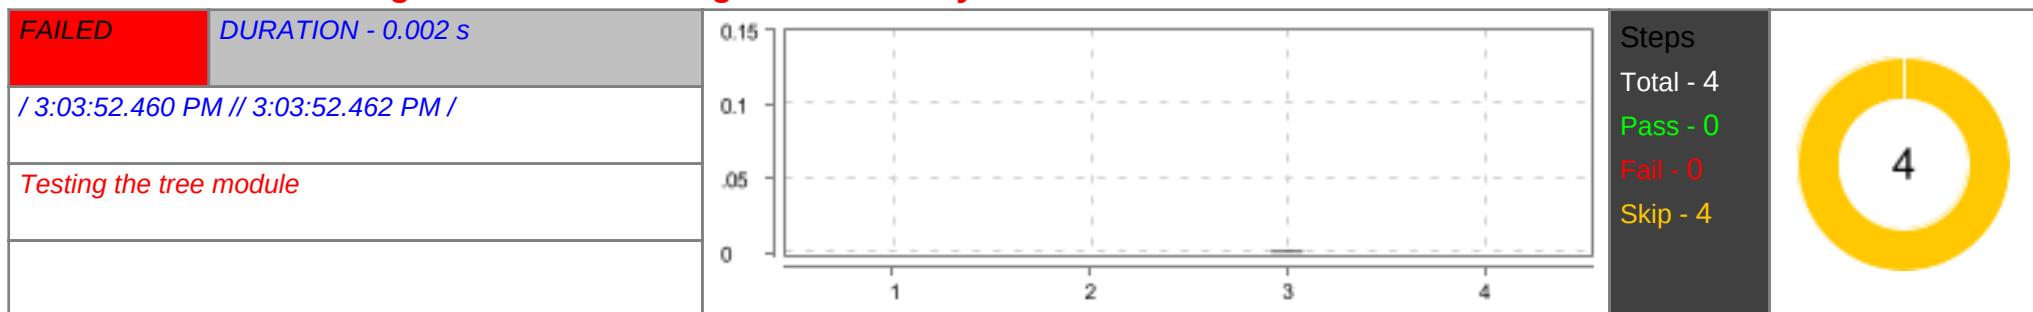

| # | Step / Hook Details | Status | Duration |
|---|---|---------|----------|
| | BEFORE - appHooks.ApplicationHooks.setup() java.lang.NullPointerException: Cannot invoke "org.openqa.selenium.WebDriver.manage()" because the return value of "com.qa.factory.DriverFactory.getDriver()" is null at com.qa.factory.DriverFactory.init_driver(DriverFactory.java:47) at com.qa.factory.DriverFactory.setupdriver(DriverFactory.java:71) at appHooks.ApplicationHooks.setup(ApplicationHooks.java:33) | FAILED | 0.001 s |
| 1 | Given The user is in a try here page having tryEditor with a Run button to test | SKIPPED | 0.000 s |
| 2 | When The user gets invalid input from sheet "pythonCode" and 1 | SKIPPED | 0.000 s |
| 3 | And user click on Run button | SKIPPED | 0.001 s |
| 4 | Then The user should be presented with the Run output with alert | SKIPPED | 0.000 s |


| # | Step / Hook Details | Status | Duration |
|---|--|--------|----------|
| | AFTER - appHooks.ApplicationHooks.tearDown(io.cucumber.java.Scenario) java.lang.NullPointerException: Cannot invoke "org.openqa.selenium.TakesScreenshot.getScreenshotAs(org.openqa.selenium.OutputType)" because the return value of "com.qa.factory.DriverFactory.getDriver()" is null at appHooks.ApplicationHooks.tearDown(ApplicationHooks.java:59) | FAILED | 0.000 s |

The user is able to navigate to Implementation in Python Page

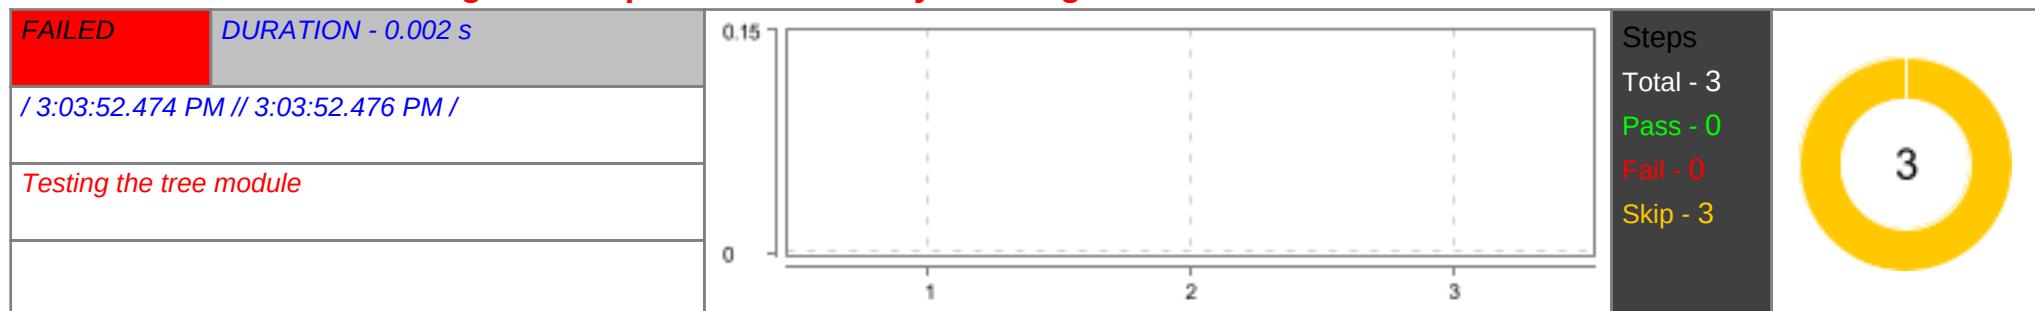


| # | Step / Hook Details | Status | Duration |
|---|---|---------|----------|
| | BEFORE - appHooks.ApplicationHooks.setup() java.lang.NullPointerException: Cannot invoke "org.openqa.selenium.WebDriver.manage()" because the return value of "com.qa.factory.DriverFactory.getDriver()" is null at com.qa.factory.DriverFactory.init_driver(DriverFactory.java:47) at com.qa.factory.DriverFactory.setupdriver(DriverFactory.java:71) at appHooks.ApplicationHooks.setup(ApplicationHooks.java:33) | FAILED | 0.001 s |
| 1 | Given The user is in the "Tree" page after logged in | SKIPPED | 0.000 s |
| 2 | When The user clicks on the "Implementation in Python" link | SKIPPED | 0.000 s |
| 3 | Then The user should be directed to "Implementation in Python" Page | SKIPPED | 0.000 s |
| | AFTER - appHooks.ApplicationHooks.tearDown(io.cucumber.java.Scenario) java.lang.NullPointerException: Cannot invoke "org.openqa.selenium.TakesScreenshot.getScreenshotAs(org.openqa.selenium.OutputType)" because the return value of "com.qa.factory.DriverFactory.getDriver()" is null at appHooks.ApplicationHooks.tearDown(ApplicationHooks.java:59) | FAILED | 0.000 s |

The user is able to navigate to a page having an tryEditor

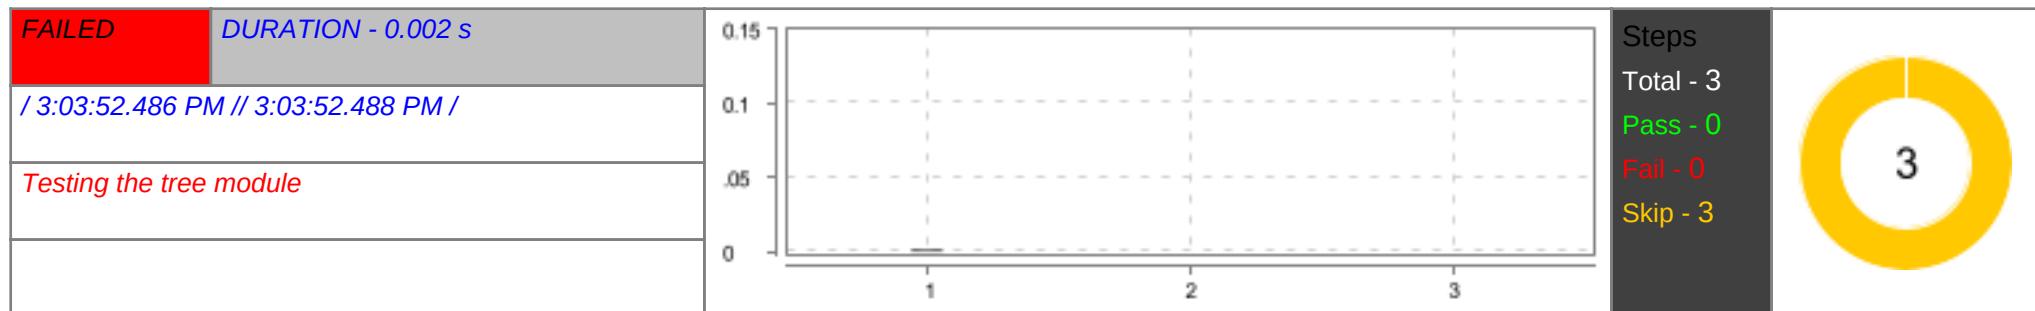

| # | Step / Hook Details | Status | Duration |
|---|---|---------|----------|
| | BEFORE - appHooks.ApplicationHooks.setup() java.lang.NullPointerException: Cannot invoke "org.openqa.selenium.WebDriver.manage()" because the return value of "com.qa.factory.DriverFactory.getDriver()" is null at com.qa.factory.DriverFactory.init_driver(DriverFactory.java:47) at com.qa.factory.DriverFactory.setupdriver(DriverFactory.java:71) at appHooks.ApplicationHooks.setup(ApplicationHooks.java:33) | FAILED | 0.001 s |
| 1 | Given The user is on the "Implementation in Python" page after logged in | SKIPPED | 0.001 s |
| 2 | When The user clicks Try Here button | SKIPPED | 0.000 s |
| 3 | Then The user should be redirected to a page having an tryEditor with a Run button to test | SKIPPED | 0.000 s |
| | AFTER - appHooks.ApplicationHooks.tearDown(io.cucumber.java.Scenario) java.lang.NullPointerException: Cannot invoke "org.openqa.selenium.TakesScreenshot.getScreenshotAs(org.openqa.selenium.OutputType)" because the return value of "com.qa.factory.DriverFactory.getDriver()" is null at appHooks.ApplicationHooks.tearDown(ApplicationHooks.java:59) | FAILED | 0.000 s |


The user is able to run code in tryEditor

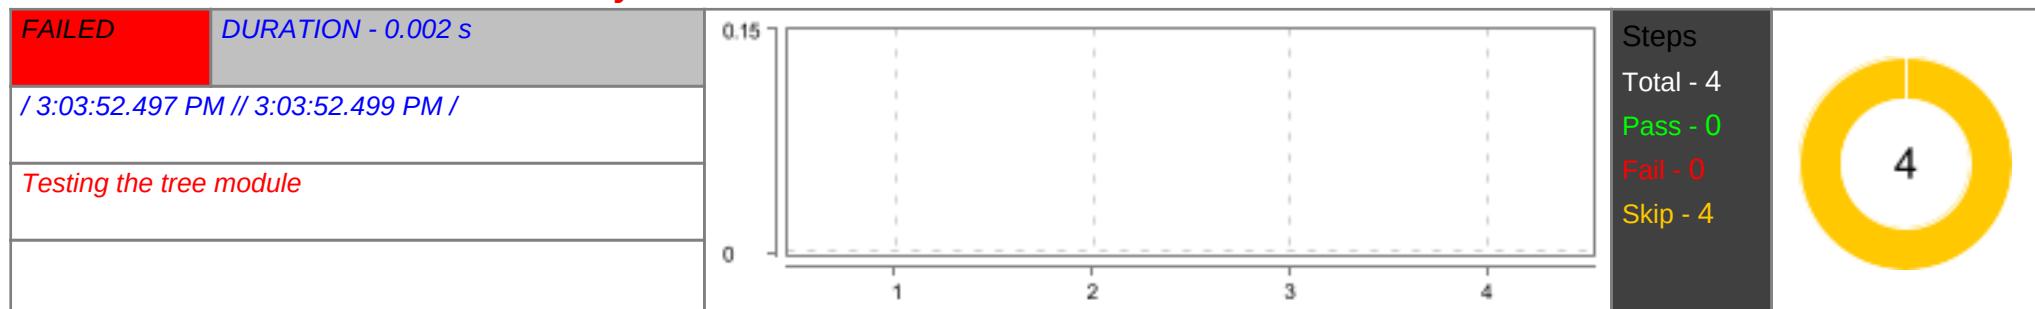

| # | Step / Hook Details | Status | Duration |
|---|--|--------|----------|
| | BEFORE - appHooks.ApplicationHooks.setup() | FAILED | 0.000 s |

| # | Step / Hook Details | Status | Duration |
|---|---|---------|----------|
| | java.lang.NullPointerException: Cannot invoke "org.openqa.selenium.WebDriver.manage()" because the return value of "com.qa.factory.DriverFactory.getDriver()" is null at com.qa.factory.DriverFactory.init_driver(DriverFactory.java:47) at com.qa.factory.DriverFactory.setupdriver(DriverFactory.java:71) at appHooks.ApplicationHooks.setup(ApplicationHooks.java:33) | | |
| 1 | Given The user is in a try here page having tryEditor with a Run button to test | SKIPPED | 0.000 s |
| 2 | When The user gets input from sheet "pythonCode" and 0 | SKIPPED | 0.000 s |
| 3 | And user click on Run button | SKIPPED | 0.000 s |
| 4 | Then The user should be presented with Run output | SKIPPED | 0.000 s |
| | AFTER - appHooks.ApplicationHooks.tearDown(io.cucumber.java.Scenario) java.lang.NullPointerException: Cannot invoke "org.openqa.selenium.TakesScreenshot.getScreenshotAs(org.openqa.selenium.OutputType)" because the return value of "com.qa.factory.DriverFactory.getDriver()" is null at appHooks.ApplicationHooks.tearDown(ApplicationHooks.java:59) | FAILED | 0.000 s |


The user is able to get the error message for invalid syntax

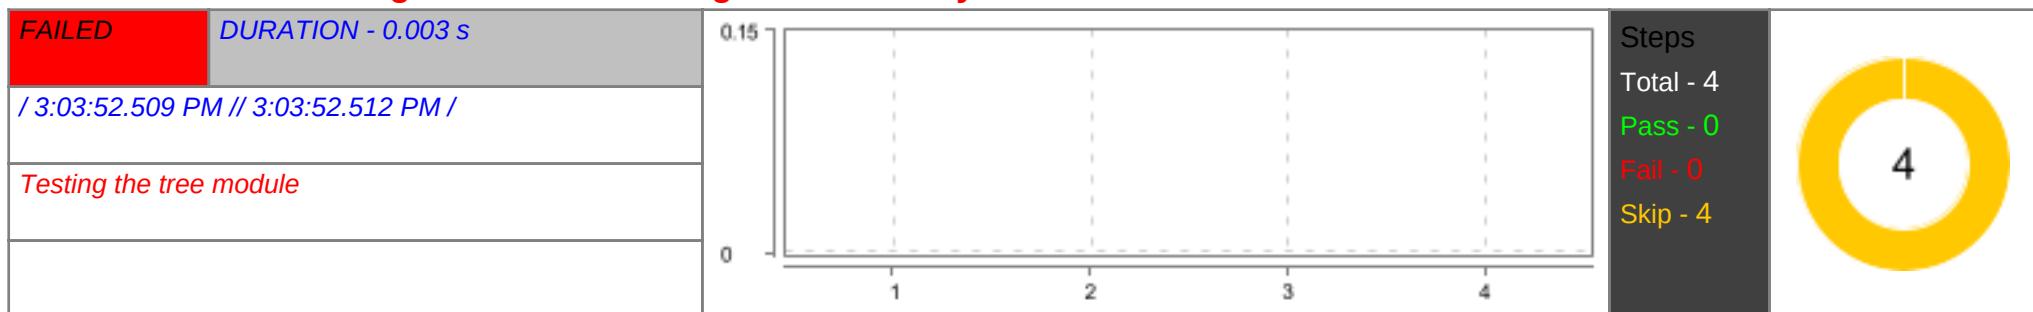

| # | Step / Hook Details | Status | Duration |
|---|---|---------|----------|
| | BEFORE - appHooks.ApplicationHooks.setup() java.lang.NullPointerException: Cannot invoke "org.openqa.selenium.WebDriver.manage()" because the return value of "com.qa.factory.DriverFactory.getDriver()" is null at com.qa.factory.DriverFactory.init_driver(DriverFactory.java:47) at com.qa.factory.DriverFactory.setupdriver(DriverFactory.java:71) at appHooks.ApplicationHooks.setup(ApplicationHooks.java:33) | FAILED | 0.000 s |
| 1 | Given The user is in a try here page having tryEditor with a Run button to test | SKIPPED | 0.000 s |
| 2 | When The user gets invalid input from sheet "pythonCode" and 1 | SKIPPED | 0.000 s |
| 3 | And user click on Run button | SKIPPED | 0.000 s |
| 4 | Then The user should be presented with the Run output with alert | SKIPPED | 0.000 s |


| # | Step / Hook Details | Status | Duration |
|---|--|--------|----------|
| | AFTER - appHooks.ApplicationHooks.tearDown(io.cucumber.java.Scenario) java.lang.NullPointerException: Cannot invoke "org.openqa.selenium.TakesScreenshot.getScreenshotAs(org.openqa.selenium.OutputType)" because the return value of "com.qa.factory.DriverFactory.getDriver()" is null at appHooks.ApplicationHooks.tearDown(ApplicationHooks.java:59) | FAILED | 0.002 s |

The user is able to navigate to binary tree traversals Page

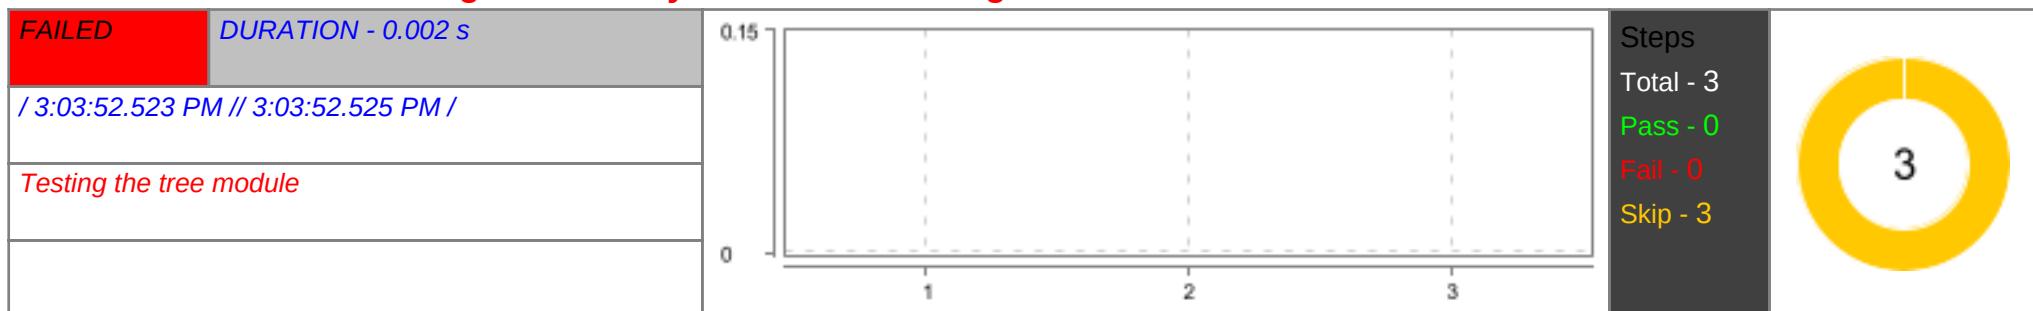


| # | Step / Hook Details | Status | Duration |
|---|---|---------|----------|
| | BEFORE - appHooks.ApplicationHooks.setup() java.lang.NullPointerException: Cannot invoke "org.openqa.selenium.WebDriver.manage()" because the return value of "com.qa.factory.DriverFactory.getDriver()" is null at com.qa.factory.DriverFactory.init_driver(DriverFactory.java:47) at com.qa.factory.DriverFactory.setupdriver(DriverFactory.java:71) at appHooks.ApplicationHooks.setup(ApplicationHooks.java:33) | FAILED | 0.001 s |
| 1 | Given The user is in the "Tree" page after logged in | SKIPPED | 0.000 s |
| 2 | When The user clicks on the "Binary Tree Traversals" link | SKIPPED | 0.000 s |
| 3 | Then The user should be directed to "Binary Tree Traversals" Page | SKIPPED | 0.000 s |
| | AFTER - appHooks.ApplicationHooks.tearDown(io.cucumber.java.Scenario) java.lang.NullPointerException: Cannot invoke "org.openqa.selenium.TakesScreenshot.getScreenshotAs(org.openqa.selenium.OutputType)" because the return value of "com.qa.factory.DriverFactory.getDriver()" is null at appHooks.ApplicationHooks.tearDown(ApplicationHooks.java:59) | FAILED | 0.001 s |

The user is able to navigate to a page having an tryEditor

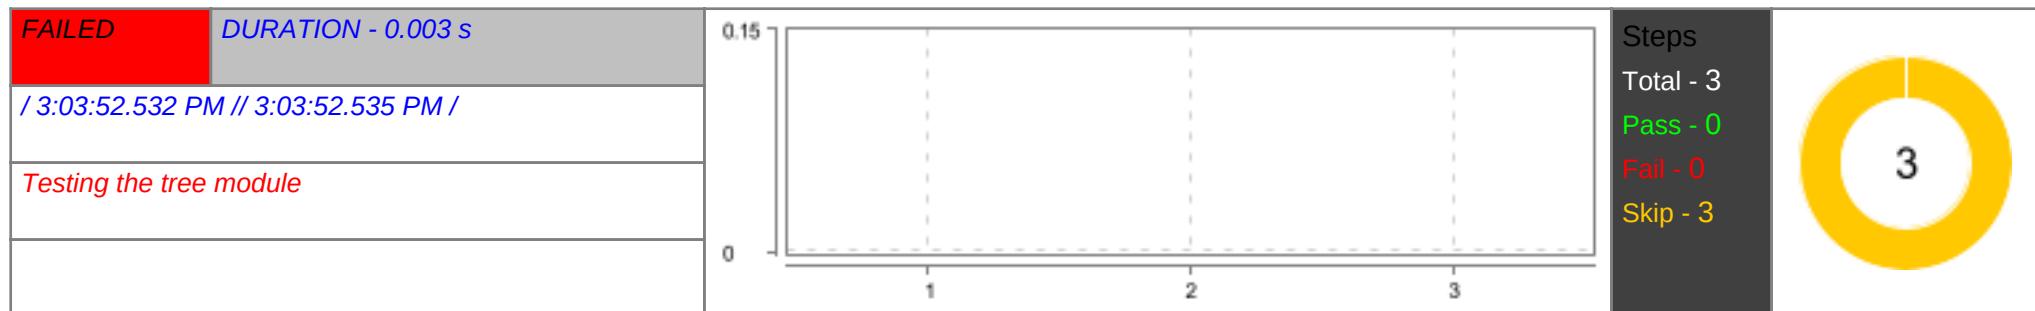

| # | Step / Hook Details | Status | Duration |
|---|---|---------|----------|
| | BEFORE - appHooks.ApplicationHooks.setup() java.lang.NullPointerException: Cannot invoke "org.openqa.selenium.WebDriver.manage()" because the return value of "com.qa.factory.DriverFactory.getDriver()" is null at com.qa.factory.DriverFactory.init_driver(DriverFactory.java:47) at com.qa.factory.DriverFactory.setupdriver(DriverFactory.java:71) at appHooks.ApplicationHooks.setup(ApplicationHooks.java:33) | FAILED | 0.000 s |
| 1 | Given The user is on the "Binary Tree Traversals" page after logged in | SKIPPED | 0.000 s |
| 2 | When The user clicks Try Here button | SKIPPED | 0.000 s |
| 3 | Then The user should be redirected to a page having an tryEditor with a Run button to test | SKIPPED | 0.000 s |
| | AFTER - appHooks.ApplicationHooks.tearDown(io.cucumber.java.Scenario) java.lang.NullPointerException: Cannot invoke "org.openqa.selenium.TakesScreenshot.getScreenshotAs(org.openqa.selenium.OutputType)" because the return value of "com.qa.factory.DriverFactory.getDriver()" is null at appHooks.ApplicationHooks.tearDown(ApplicationHooks.java:59) | FAILED | 0.001 s |


The user is able to run code in tryEditor

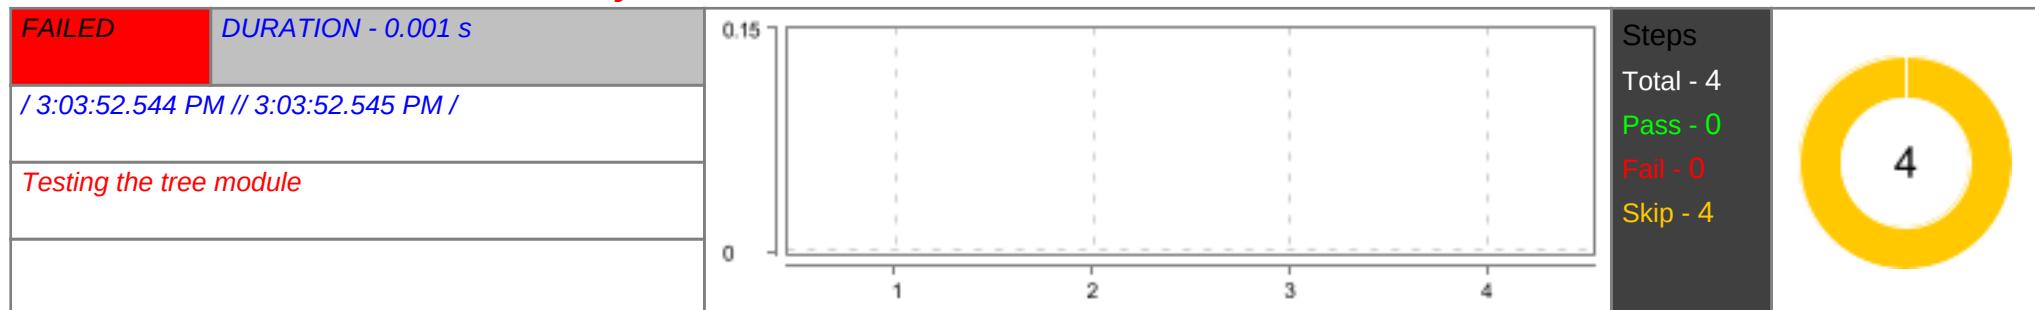

| # | Step / Hook Details | Status | Duration |
|---|--|--------|----------|
| | BEFORE - appHooks.ApplicationHooks.setup() | FAILED | 0.001 s |

| # | Step / Hook Details | Status | Duration |
|---|---|---------|----------|
| | java.lang.NullPointerException: Cannot invoke "org.openqa.selenium.WebDriver.manage()" because the return value of "com.qa.factory.DriverFactory.getDriver()" is null at com.qa.factory.DriverFactory.init_driver(DriverFactory.java:47) at com.qa.factory.DriverFactory.setupdriver(DriverFactory.java:71) at appHooks.ApplicationHooks.setup(ApplicationHooks.java:33) | | |
| 1 | Given The user is in a try here page having tryEditor with a Run button to test | SKIPPED | 0.000 s |
| 2 | When The user gets input from sheet "pythonCode" and 0 | SKIPPED | 0.000 s |
| 3 | And user click on Run button | SKIPPED | 0.000 s |
| 4 | Then The user should be presented with Run output | SKIPPED | 0.000 s |
| | AFTER - appHooks.ApplicationHooks.tearDown(io.cucumber.java.Scenario) java.lang.NullPointerException: Cannot invoke "org.openqa.selenium.TakesScreenshot.getScreenshotAs(org.openqa.selenium.OutputType)" because the return value of "com.qa.factory.DriverFactory.getDriver()" is null at appHooks.ApplicationHooks.tearDown(ApplicationHooks.java:59) | FAILED | 0.000 s |


The user is able to get the error message for invalid syntax

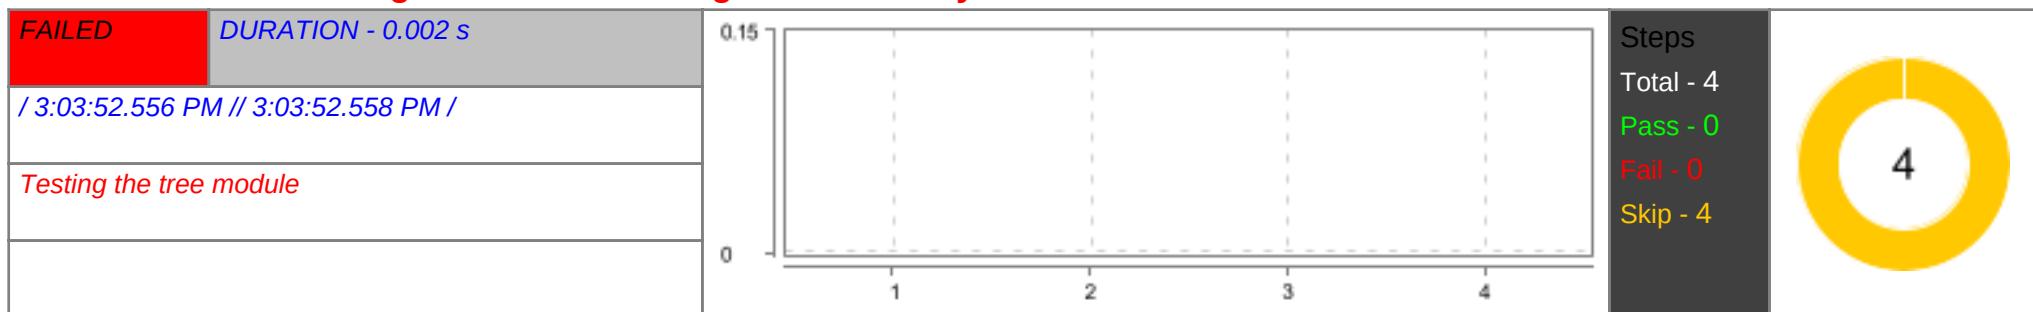

| # | Step / Hook Details | Status | Duration |
|---|---|---------|----------|
| | BEFORE - appHooks.ApplicationHooks.setup() java.lang.NullPointerException: Cannot invoke "org.openqa.selenium.WebDriver.manage()" because the return value of "com.qa.factory.DriverFactory.getDriver()" is null at com.qa.factory.DriverFactory.init_driver(DriverFactory.java:47) at com.qa.factory.DriverFactory.setupdriver(DriverFactory.java:71) at appHooks.ApplicationHooks.setup(ApplicationHooks.java:33) | FAILED | 0.001 s |
| 1 | Given The user is in a try here page having tryEditor with a Run button to test | SKIPPED | 0.000 s |
| 2 | When The user gets invalid input from sheet "pythonCode" and 1 | SKIPPED | 0.000 s |
| 3 | And user click on Run button | SKIPPED | 0.000 s |
| 4 | Then The user should be presented with the Run output with alert | SKIPPED | 0.000 s |


| # | Step / Hook Details | Status | Duration |
|---|--|--------|----------|
| | AFTER - appHooks.ApplicationHooks.tearDown(io.cucumber.java.Scenario) java.lang.NullPointerException: Cannot invoke "org.openqa.selenium.TakesScreenshot.getScreenshotAs(org.openqa.selenium.OutputType)" because the return value of "com.qa.factory.DriverFactory.getDriver()" is null at appHooks.ApplicationHooks.tearDown(ApplicationHooks.java:59) | FAILED | 0.001 s |

The user is able to navigate to Implementation of Binary Trees Page

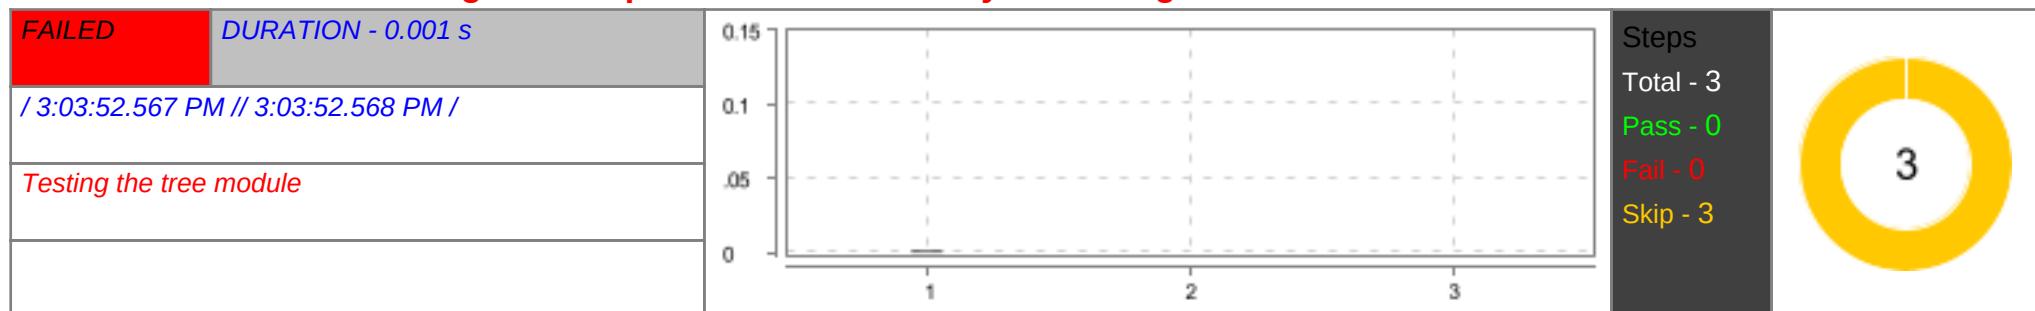


| # | Step / Hook Details | Status | Duration |
|---|---|---------|----------|
| | BEFORE - appHooks.ApplicationHooks.setup() java.lang.NullPointerException: Cannot invoke "org.openqa.selenium.WebDriver.manage()" because the return value of "com.qa.factory.DriverFactory.getDriver()" is null at com.qa.factory.DriverFactory.init_driver(DriverFactory.java:47) at com.qa.factory.DriverFactory.setupdriver(DriverFactory.java:71) at appHooks.ApplicationHooks.setup(ApplicationHooks.java:33) | FAILED | 0.000 s |
| 1 | Given The user is on the "Tree" page after logged in | SKIPPED | 0.001 s |
| 2 | When The user clicks on the "Implementation of Binary Trees" link | SKIPPED | 0.000 s |
| 3 | Then The user should be directed to "Implementation of Binary Trees" Page | SKIPPED | 0.000 s |
| | AFTER - appHooks.ApplicationHooks.tearDown(io.cucumber.java.Scenario) java.lang.NullPointerException: Cannot invoke "org.openqa.selenium.TakesScreenshot.getScreenshotAs(org.openqa.selenium.OutputType)" because the return value of "com.qa.factory.DriverFactory.getDriver()" is null at appHooks.ApplicationHooks.tearDown(ApplicationHooks.java:59) | FAILED | 0.000 s |

The user is able to navigate to a page having an tryEditor

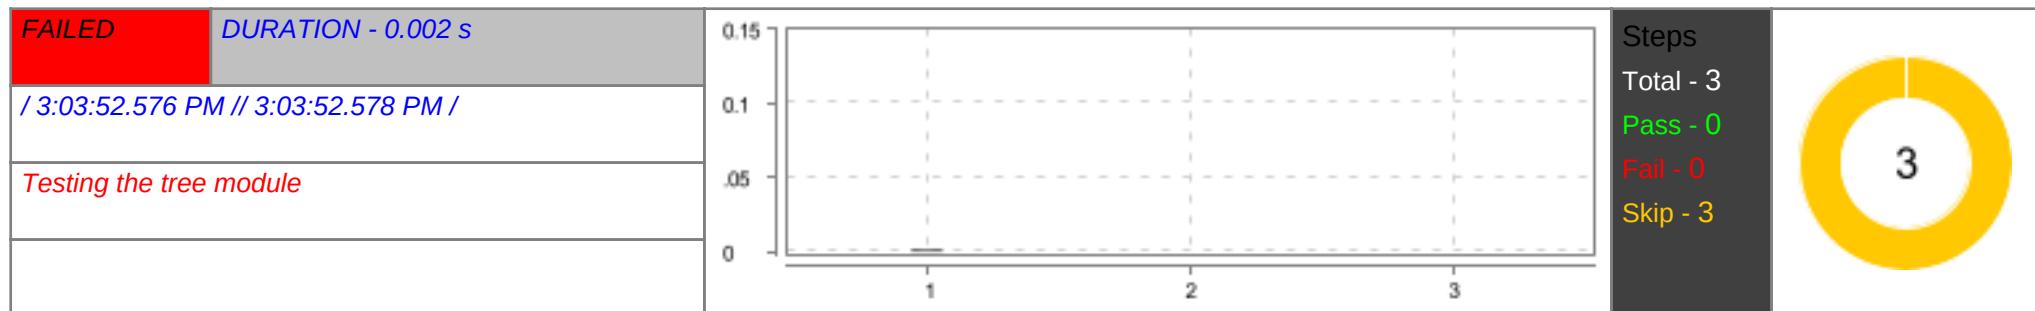

| # | Step / Hook Details | Status | Duration |
|---|---|---------|----------|
| | BEFORE - appHooks.ApplicationHooks.setup() java.lang.NullPointerException: Cannot invoke "org.openqa.selenium.WebDriver.manage()" because the return value of "com.qa.factory.DriverFactory.getDriver()" is null at com.qa.factory.DriverFactory.init_driver(DriverFactory.java:47) at com.qa.factory.DriverFactory.setupdriver(DriverFactory.java:71) at appHooks.ApplicationHooks.setup(ApplicationHooks.java:33) | FAILED | 0.001 s |
| 1 | Given The user is on the "Implementation of Binary Trees" page after logged in | SKIPPED | 0.001 s |
| 2 | When The user clicks Try Here button | SKIPPED | 0.000 s |
| 3 | Then The user should be redirected to a page having an tryEditor with a Run button to test | SKIPPED | 0.000 s |
| | AFTER - appHooks.ApplicationHooks.tearDown(io.cucumber.java.Scenario) java.lang.NullPointerException: Cannot invoke "org.openqa.selenium.TakesScreenshot.getScreenshotAs(org.openqa.selenium.OutputType)" because the return value of "com.qa.factory.DriverFactory.getDriver()" is null at appHooks.ApplicationHooks.tearDown(ApplicationHooks.java:59) | FAILED | 0.000 s |


The user is able to run code in tryEditor

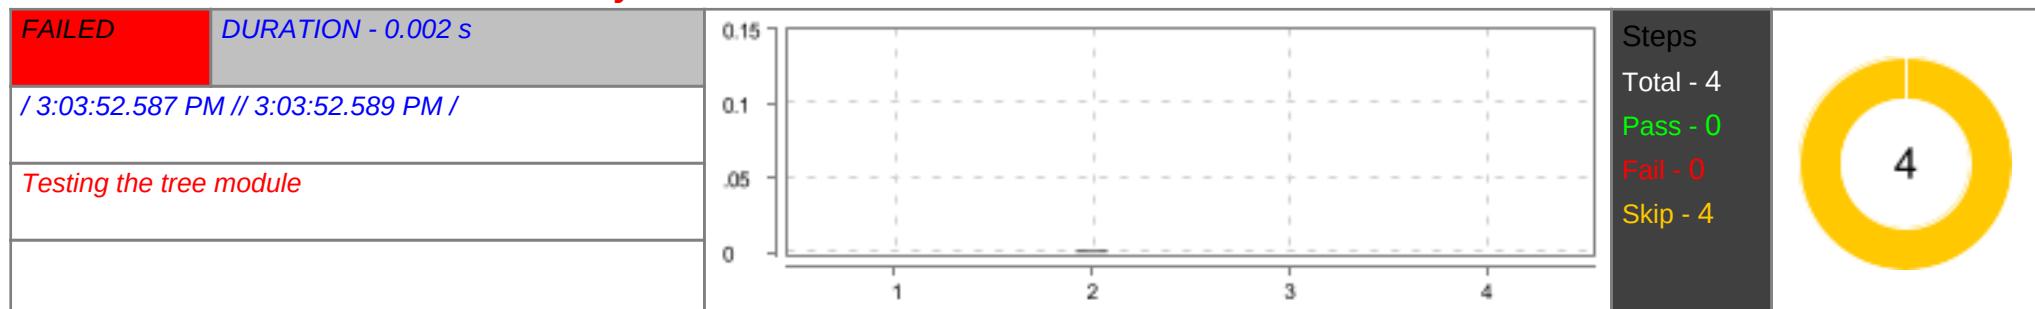

| # | Step / Hook Details | Status | Duration |
|---|--|--------|----------|
| | BEFORE - appHooks.ApplicationHooks.setup() | FAILED | 0.001 s |

| # | Step / Hook Details | Status | Duration |
|---|---|---------|----------|
| | java.lang.NullPointerException: Cannot invoke "org.openqa.selenium.WebDriver.manage()" because the return value of "com.qa.factory.DriverFactory.getDriver()" is null at com.qa.factory.DriverFactory.init_driver(DriverFactory.java:47) at com.qa.factory.DriverFactory.setupdriver(DriverFactory.java:71) at appHooks.ApplicationHooks.setup(ApplicationHooks.java:33) | | |
| 1 | Given The user is in a try here page having tryEditor with a Run button to test | SKIPPED | 0.000 s |
| 2 | When The user gets input from sheet "pythonCode" and 0 | SKIPPED | 0.001 s |
| 3 | And user click on Run button | SKIPPED | 0.000 s |
| 4 | Then The user should be presented with Run output | SKIPPED | 0.000 s |
| | AFTER - appHooks.ApplicationHooks.tearDown(io.cucumber.java.Scenario) java.lang.NullPointerException: Cannot invoke "org.openqa.selenium.TakesScreenshot.getScreenshotAs(org.openqa.selenium.OutputType)" because the return value of "com.qa.factory.DriverFactory.getDriver()" is null at appHooks.ApplicationHooks.tearDown(ApplicationHooks.java:59) | FAILED | 0.000 s |


The user is able to get the error message for invalid syntax

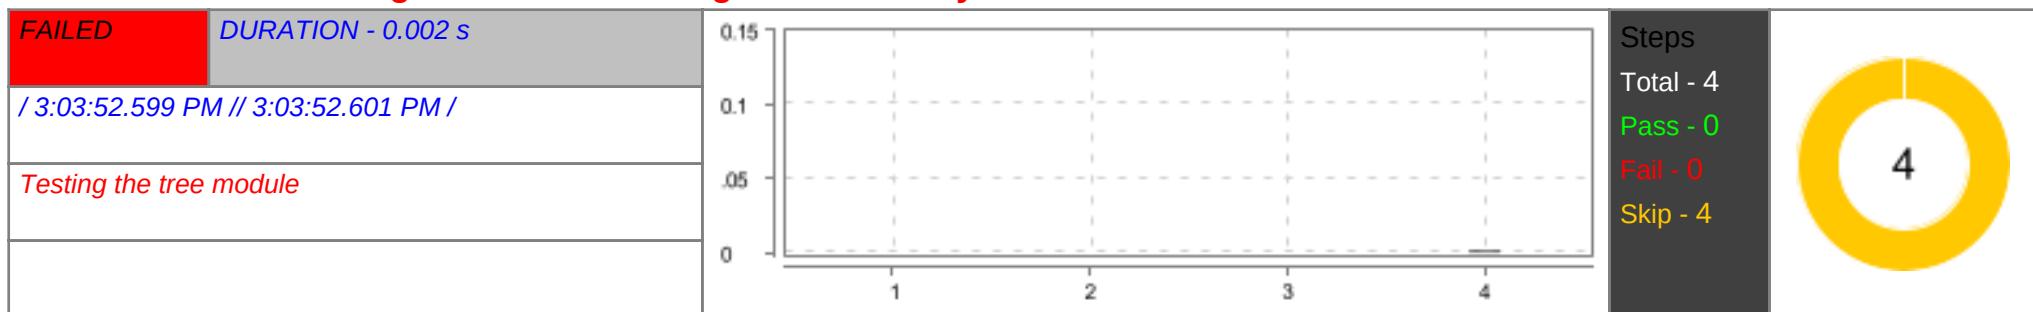

| # | Step / Hook Details | Status | Duration |
|---|---|---------|----------|
| | BEFORE - appHooks.ApplicationHooks.setup() java.lang.NullPointerException: Cannot invoke "org.openqa.selenium.WebDriver.manage()" because the return value of "com.qa.factory.DriverFactory.getDriver()" is null at com.qa.factory.DriverFactory.init_driver(DriverFactory.java:47) at com.qa.factory.DriverFactory.setupdriver(DriverFactory.java:71) at appHooks.ApplicationHooks.setup(ApplicationHooks.java:33) | FAILED | 0.001 s |
| 1 | Given The user is in a try here page having tryEditor with a Run button to test | SKIPPED | 0.000 s |
| 2 | When The user gets invalid input from sheet "pythonCode" and 1 | SKIPPED | 0.000 s |
| 3 | And user click on Run button | SKIPPED | 0.000 s |
| 4 | Then The user should be presented with the Run output with alert | SKIPPED | 0.001 s |


| # | Step / Hook Details | Status | Duration |
|---|--|--------|----------|
| | AFTER - appHooks.ApplicationHooks.tearDown(io.cucumber.java.Scenario) java.lang.NullPointerException: Cannot invoke "org.openqa.selenium.TakesScreenshot.getScreenshotAs(org.openqa.selenium.OutputType)" because the return value of "com.qa.factory.DriverFactory.getDriver()" is null at appHooks.ApplicationHooks.tearDown(ApplicationHooks.java:59) | FAILED | 0.000 s |

The user is able to navigate to Applications of Binary Trees Page

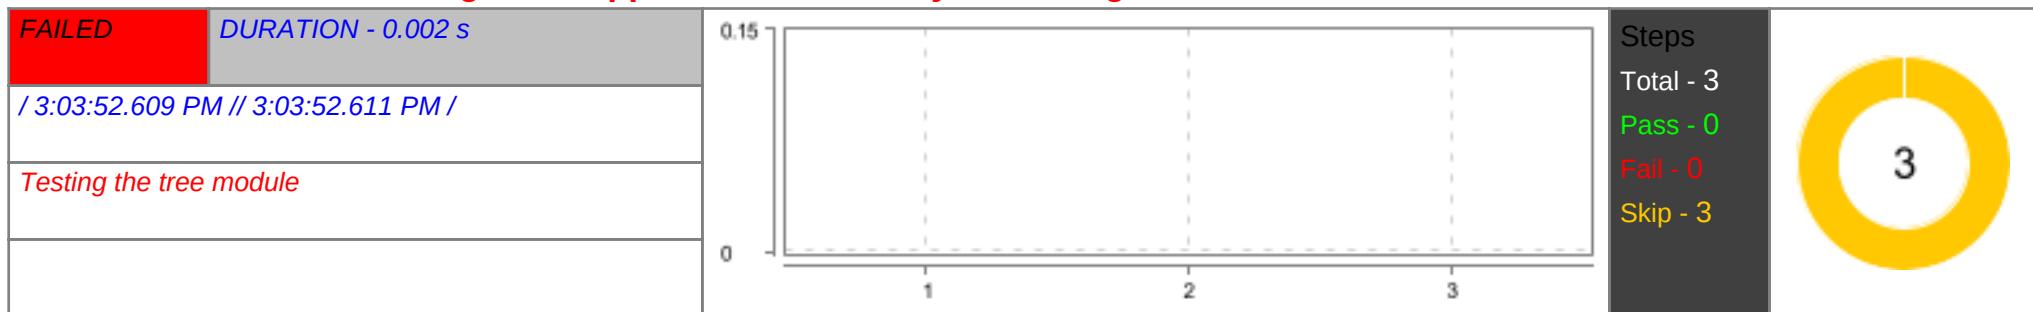


| # | Step / Hook Details | Status | Duration |
|---|---|---------|----------|
| | BEFORE - appHooks.ApplicationHooks.setup() java.lang.NullPointerException: Cannot invoke "org.openqa.selenium.WebDriver.manage()" because the return value of "com.qa.factory.DriverFactory.getDriver()" is null at com.qa.factory.DriverFactory.init_driver(DriverFactory.java:47) at com.qa.factory.DriverFactory.setupdriver(DriverFactory.java:71) at appHooks.ApplicationHooks.setup(ApplicationHooks.java:33) | FAILED | 0.000 s |
| 1 | Given The user is in the "Tree" page after logged in | SKIPPED | 0.000 s |
| 2 | When The user clicks on the "Applications of Binary trees" link | SKIPPED | 0.000 s |
| 3 | Then The user should be directed to "Applications of Binary trees" Page | SKIPPED | 0.000 s |
| | AFTER - appHooks.ApplicationHooks.tearDown(io.cucumber.java.Scenario) java.lang.NullPointerException: Cannot invoke "org.openqa.selenium.TakesScreenshot.getScreenshotAs(org.openqa.selenium.OutputType)" because the return value of "com.qa.factory.DriverFactory.getDriver()" is null at appHooks.ApplicationHooks.tearDown(ApplicationHooks.java:59) | FAILED | 0.001 s |

The user is able to navigate to a page having an tryEditor

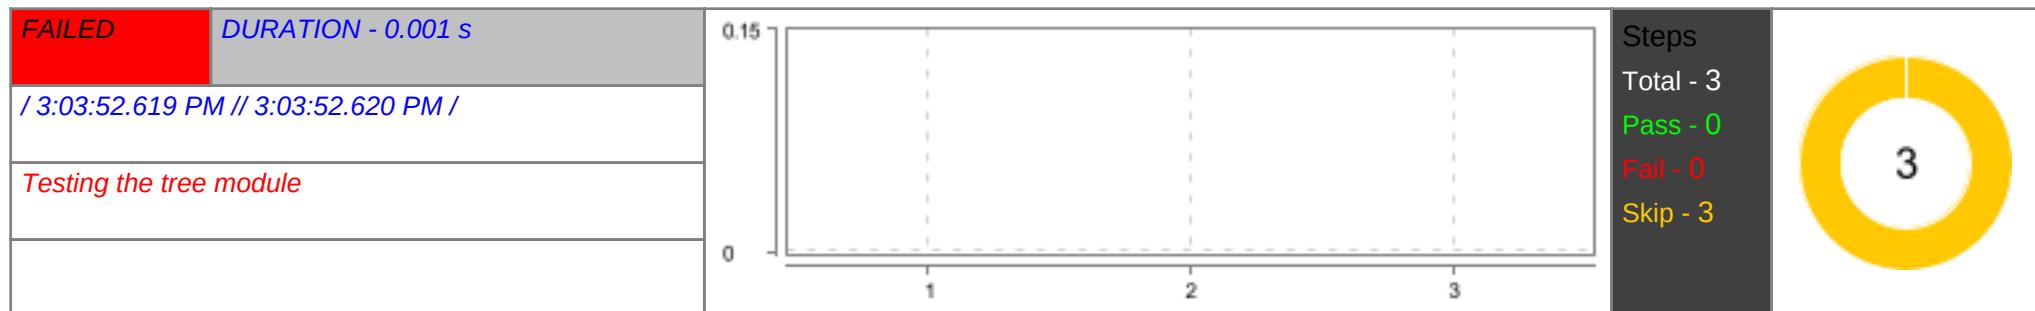

| # | Step / Hook Details | Status | Duration |
|---|---|---------|----------|
| | BEFORE - appHooks.ApplicationHooks.setup() java.lang.NullPointerException: Cannot invoke "org.openqa.selenium.WebDriver.manage()" because the return value of "com.qa.factory.DriverFactory.getDriver()" is null at com.qa.factory.DriverFactory.init_driver(DriverFactory.java:47) at com.qa.factory.DriverFactory.setupdriver(DriverFactory.java:71) at appHooks.ApplicationHooks.setup(ApplicationHooks.java:33) | FAILED | 0.000 s |
| 1 | Given The user is on the "Applications of Binary Trees" page after logged in | SKIPPED | 0.000 s |
| 2 | When The user clicks Try Here button | SKIPPED | 0.000 s |
| 3 | Then The user should be redirected to a page having an tryEditor with a Run button to test | SKIPPED | 0.000 s |
| | AFTER - appHooks.ApplicationHooks.tearDown(io.cucumber.java.Scenario) java.lang.NullPointerException: Cannot invoke "org.openqa.selenium.TakesScreenshot.getScreenshotAs(org.openqa.selenium.OutputType)" because the return value of "com.qa.factory.DriverFactory.getDriver()" is null at appHooks.ApplicationHooks.tearDown(ApplicationHooks.java:59) | FAILED | 0.000 s |


The user is able to run code in tryEditor

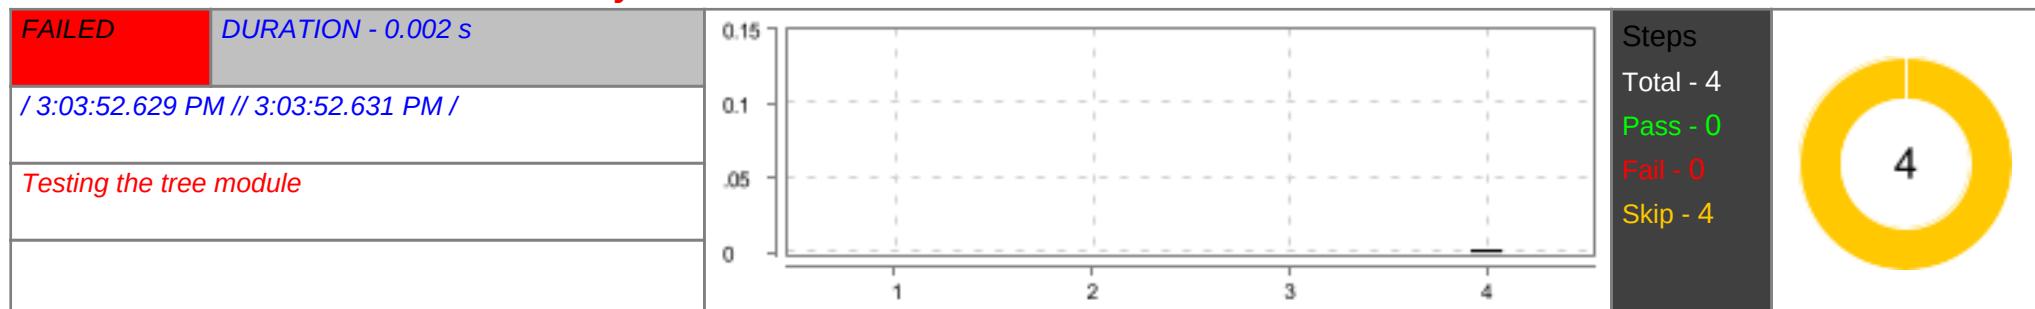

| # | Step / Hook Details | Status | Duration |
|---|--|--------|----------|
| | BEFORE - appHooks.ApplicationHooks.setup() | FAILED | 0.000 s |

| # | Step / Hook Details | Status | Duration |
|---|---|---------|----------|
| | java.lang.NullPointerException: Cannot invoke "org.openqa.selenium.WebDriver.manage()" because the return value of "com.qa.factory.DriverFactory.getDriver()" is null at com.qa.factory.DriverFactory.init_driver(DriverFactory.java:47) at com.qa.factory.DriverFactory.setupdriver(DriverFactory.java:71) at appHooks.ApplicationHooks.setup(ApplicationHooks.java:33) | | |
| 1 | Given The user is in a try here page having tryEditor with a Run button to test | SKIPPED | 0.000 s |
| 2 | When The user gets input from sheet "pythonCode" and 0 | SKIPPED | 0.000 s |
| 3 | And user click on Run button | SKIPPED | 0.000 s |
| 4 | Then The user should be presented with Run output | SKIPPED | 0.002 s |
| | AFTER - appHooks.ApplicationHooks.tearDown(io.cucumber.java.Scenario) java.lang.NullPointerException: Cannot invoke "org.openqa.selenium.TakesScreenshot.getScreenshotAs(org.openqa.selenium.OutputType)" because the return value of "com.qa.factory.DriverFactory.getDriver()" is null at appHooks.ApplicationHooks.tearDown(ApplicationHooks.java:59) | FAILED | 0.000 s |


The user is able to get the error message for invalid syntax

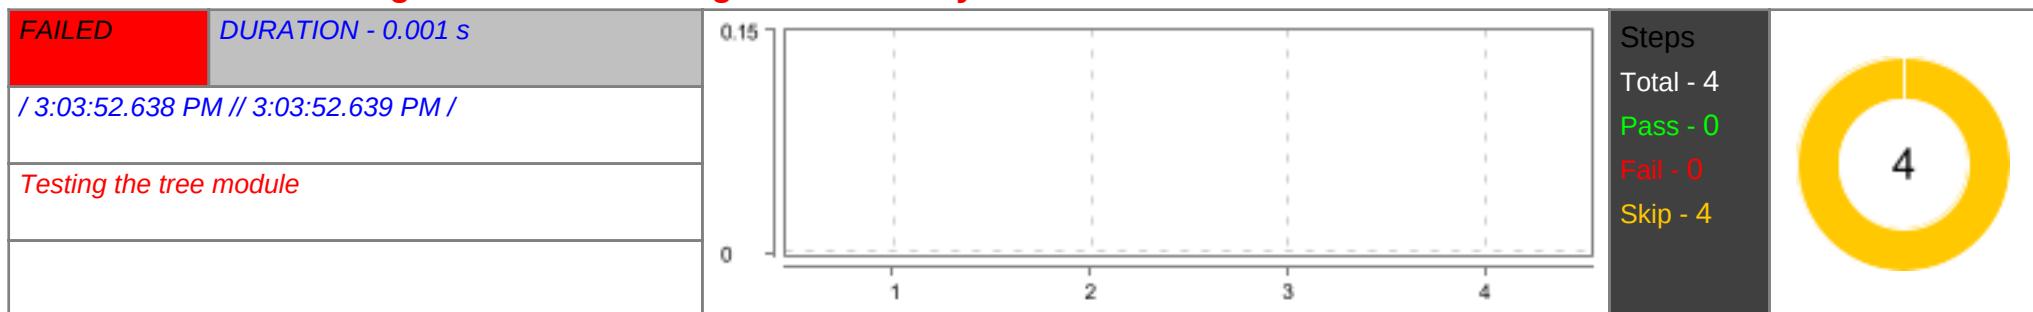

| # | Step / Hook Details | Status | Duration |
|---|---|---------|----------|
| | BEFORE - appHooks.ApplicationHooks.setup() java.lang.NullPointerException: Cannot invoke "org.openqa.selenium.WebDriver.manage()" because the return value of "com.qa.factory.DriverFactory.getDriver()" is null at com.qa.factory.DriverFactory.init_driver(DriverFactory.java:47) at com.qa.factory.DriverFactory.setupdriver(DriverFactory.java:71) at appHooks.ApplicationHooks.setup(ApplicationHooks.java:33) | FAILED | 0.001 s |
| 1 | Given The user is in a try here page having tryEditor with a Run button to test | SKIPPED | 0.000 s |
| 2 | When The user gets invalid input from sheet "pythonCode" and 1 | SKIPPED | 0.000 s |
| 3 | And user click on Run button | SKIPPED | 0.000 s |
| 4 | Then The user should be presented with the Run output with alert | SKIPPED | 0.000 s |


| # | Step / Hook Details | Status | Duration |
|---|--|--------|----------|
| | AFTER - appHooks.ApplicationHooks.tearDown(io.cucumber.java.Scenario) java.lang.NullPointerException: Cannot invoke "org.openqa.selenium.TakesScreenshot.getScreenshotAs(org.openqa.selenium.OutputType)" because the return value of "com.qa.factory.DriverFactory.getDriver()" is null at appHooks.ApplicationHooks.tearDown(ApplicationHooks.java:59) | FAILED | 0.000 s |

The user is able to navigate to "Binary Search Trees" Page

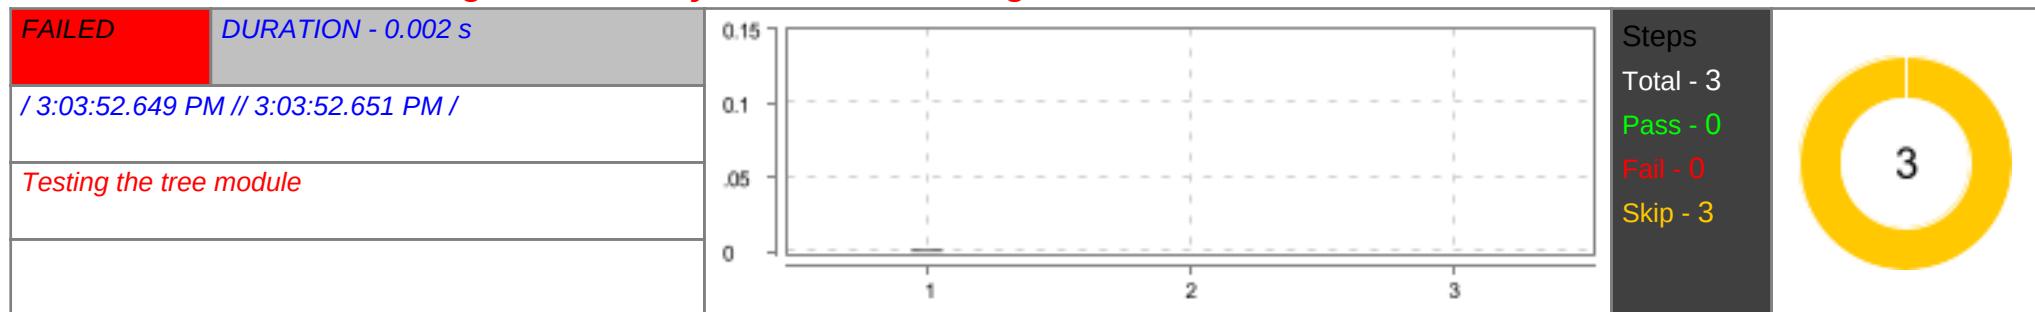


| # | Step / Hook Details | Status | Duration |
|---|---|---------|----------|
| | BEFORE - appHooks.ApplicationHooks.setup() java.lang.NullPointerException: Cannot invoke "org.openqa.selenium.WebDriver.manage()" because the return value of "com.qa.factory.DriverFactory.getDriver()" is null at com.qa.factory.DriverFactory.init_driver(DriverFactory.java:47) at com.qa.factory.DriverFactory.setupdriver(DriverFactory.java:71) at appHooks.ApplicationHooks.setup(ApplicationHooks.java:33) | FAILED | 0.001 s |
| 1 | Given The user is in the "Tree" page after logged in | SKIPPED | 0.001 s |
| 2 | When The user clicks on the "Binary Search Trees" link | SKIPPED | 0.000 s |
| 3 | Then The user should be directed to "Binary Search Trees" Page | SKIPPED | 0.000 s |
| | AFTER - appHooks.ApplicationHooks.tearDown(io.cucumber.java.Scenario) java.lang.NullPointerException: Cannot invoke "org.openqa.selenium.TakesScreenshot.getScreenshotAs(org.openqa.selenium.OutputType)" because the return value of "com.qa.factory.DriverFactory.getDriver()" is null at appHooks.ApplicationHooks.tearDown(ApplicationHooks.java:59) | FAILED | 0.000 s |

The user is able to navigate to a page having an tryEditor

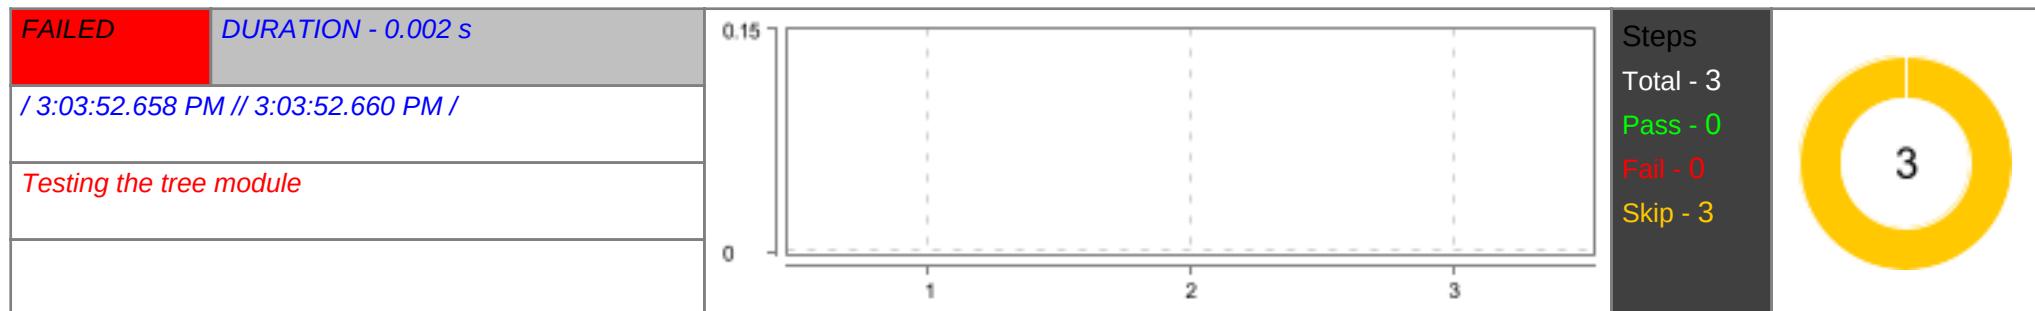

| # | Step / Hook Details | Status | Duration |
|---|---|---------|----------|
| | BEFORE - appHooks.ApplicationHooks.setup() java.lang.NullPointerException: Cannot invoke "org.openqa.selenium.WebDriver.manage()" because the return value of "com.qa.factory.DriverFactory.getDriver()" is null at com.qa.factory.DriverFactory.init_driver(DriverFactory.java:47) at com.qa.factory.DriverFactory.setupdriver(DriverFactory.java:71) at appHooks.ApplicationHooks.setup(ApplicationHooks.java:33) | FAILED | 0.000 s |
| 1 | Given The user is on the "Binary Search Trees" page after logged in | SKIPPED | 0.000 s |
| 2 | When The user clicks Try Here button | SKIPPED | 0.000 s |
| 3 | Then The user should be redirected to a page having an tryEditor with a Run button to test | SKIPPED | 0.000 s |
| | AFTER - appHooks.ApplicationHooks.tearDown(io.cucumber.java.Scenario) java.lang.NullPointerException: Cannot invoke "org.openqa.selenium.TakesScreenshot.getScreenshotAs(org.openqa.selenium.OutputType)" because the return value of "com.qa.factory.DriverFactory.getDriver()" is null at appHooks.ApplicationHooks.tearDown(ApplicationHooks.java:59) | FAILED | 0.000 s |


The user is able to run code in tryEditor

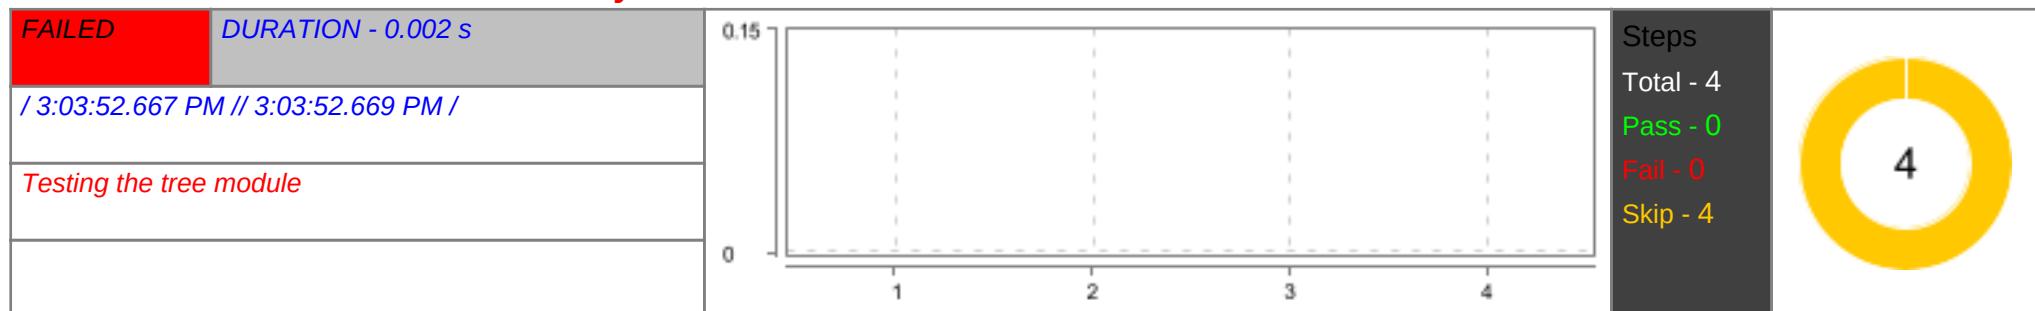

| # | Step / Hook Details | Status | Duration |
|---|--|--------|----------|
| | BEFORE - appHooks.ApplicationHooks.setup() | FAILED | 0.001 s |

| # | Step / Hook Details | Status | Duration |
|---|---|---------|----------|
| | java.lang.NullPointerException: Cannot invoke "org.openqa.selenium.WebDriver.manage()" because the return value of "com.qa.factory.DriverFactory.getDriver()" is null at com.qa.factory.DriverFactory.init_driver(DriverFactory.java:47) at com.qa.factory.DriverFactory.setupdriver(DriverFactory.java:71) at appHooks.ApplicationHooks.setup(ApplicationHooks.java:33) | | |
| 1 | Given The user is in a try here page having tryEditor with a Run button to test | SKIPPED | 0.000 s |
| 2 | When The user gets input from sheet "pythonCode" and 0 | SKIPPED | 0.000 s |
| 3 | And user click on Run button | SKIPPED | 0.000 s |
| 4 | Then The user should be presented with Run output | SKIPPED | 0.000 s |
| | AFTER - appHooks.ApplicationHooks.tearDown(io.cucumber.java.Scenario) java.lang.NullPointerException: Cannot invoke "org.openqa.selenium.TakesScreenshot.getScreenshotAs(org.openqa.selenium.OutputType)" because the return value of "com.qa.factory.DriverFactory.getDriver()" is null at appHooks.ApplicationHooks.tearDown(ApplicationHooks.java:59) | FAILED | 0.000 s |


The user is able to get the error message for invalid syntax

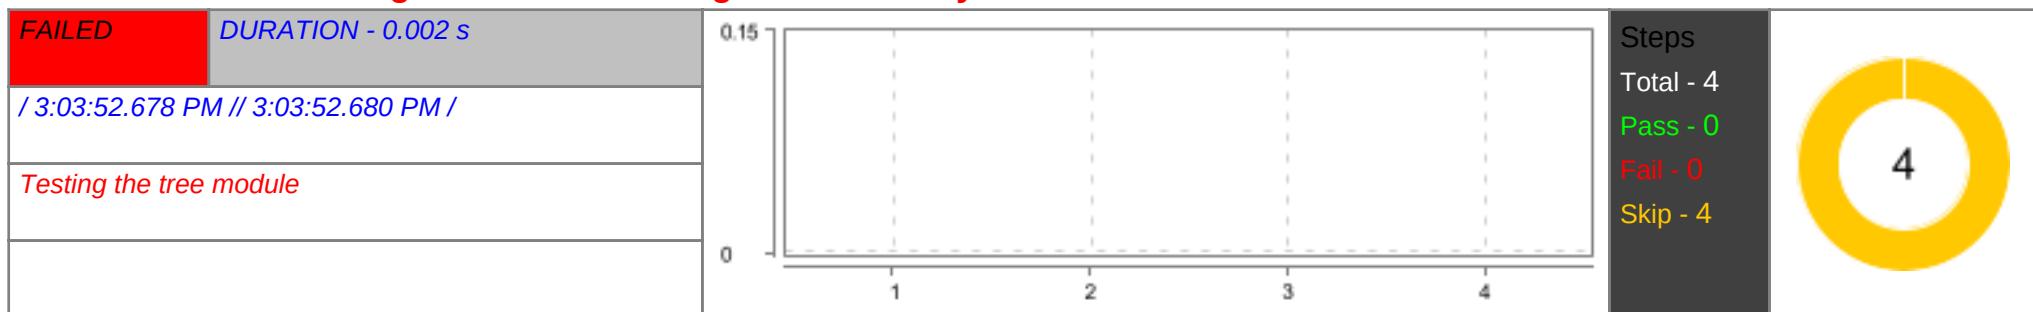

| # | Step / Hook Details | Status | Duration |
|---|---|---------|----------|
| | BEFORE - appHooks.ApplicationHooks.setup() java.lang.NullPointerException: Cannot invoke "org.openqa.selenium.WebDriver.manage()" because the return value of "com.qa.factory.DriverFactory.getDriver()" is null at com.qa.factory.DriverFactory.init_driver(DriverFactory.java:47) at com.qa.factory.DriverFactory.setupdriver(DriverFactory.java:71) at appHooks.ApplicationHooks.setup(ApplicationHooks.java:33) | FAILED | 0.000 s |
| 1 | Given The user is in a try here page having tryEditor with a Run button to test | SKIPPED | 0.000 s |
| 2 | When The user gets invalid input from sheet "pythonCode" and 1 | SKIPPED | 0.000 s |
| 3 | And user click on Run button | SKIPPED | 0.000 s |
| 4 | Then The user should be presented with the Run output with alert | SKIPPED | 0.000 s |


| # | Step / Hook Details | Status | Duration |
|---|--|--------|----------|
| | AFTER - appHooks.ApplicationHooks.tearDown(io.cucumber.java.Scenario) java.lang.NullPointerException: Cannot invoke "org.openqa.selenium.TakesScreenshot.getScreenshotAs(org.openqa.selenium.OutputType)" because the return value of "com.qa.factory.DriverFactory.getDriver()" is null at appHooks.ApplicationHooks.tearDown(ApplicationHooks.java:59) | FAILED | 0.001 s |

The user is able to navigate to "Implementation of BST" Page

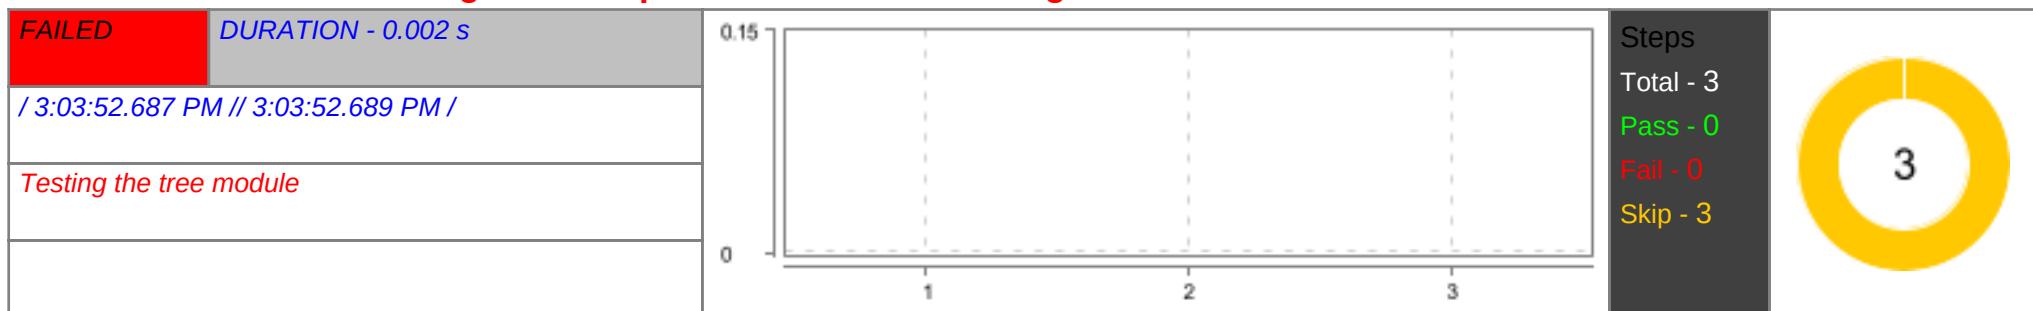


| # | Step / Hook Details | Status | Duration |
|---|---|---------|----------|
| | BEFORE - appHooks.ApplicationHooks.setup() java.lang.NullPointerException: Cannot invoke "org.openqa.selenium.WebDriver.manage()" because the return value of "com.qa.factory.DriverFactory.getDriver()" is null at com.qa.factory.DriverFactory.init_driver(DriverFactory.java:47) at com.qa.factory.DriverFactory.setupdriver(DriverFactory.java:71) at appHooks.ApplicationHooks.setup(ApplicationHooks.java:33) | FAILED | 0.000 s |
| 1 | Given The user is in the "Tree" page after logged in | SKIPPED | 0.000 s |
| 2 | When The user clicks on the "Implementation Of BST" link | SKIPPED | 0.000 s |
| 3 | Then The user should be directed to "Implementation Of BST" Page | SKIPPED | 0.000 s |
| | AFTER - appHooks.ApplicationHooks.tearDown(io.cucumber.java.Scenario) java.lang.NullPointerException: Cannot invoke "org.openqa.selenium.TakesScreenshot.getScreenshotAs(org.openqa.selenium.OutputType)" because the return value of "com.qa.factory.DriverFactory.getDriver()" is null at appHooks.ApplicationHooks.tearDown(ApplicationHooks.java:59) | FAILED | 0.001 s |

The user is able to navigate to a page having an tryEditor

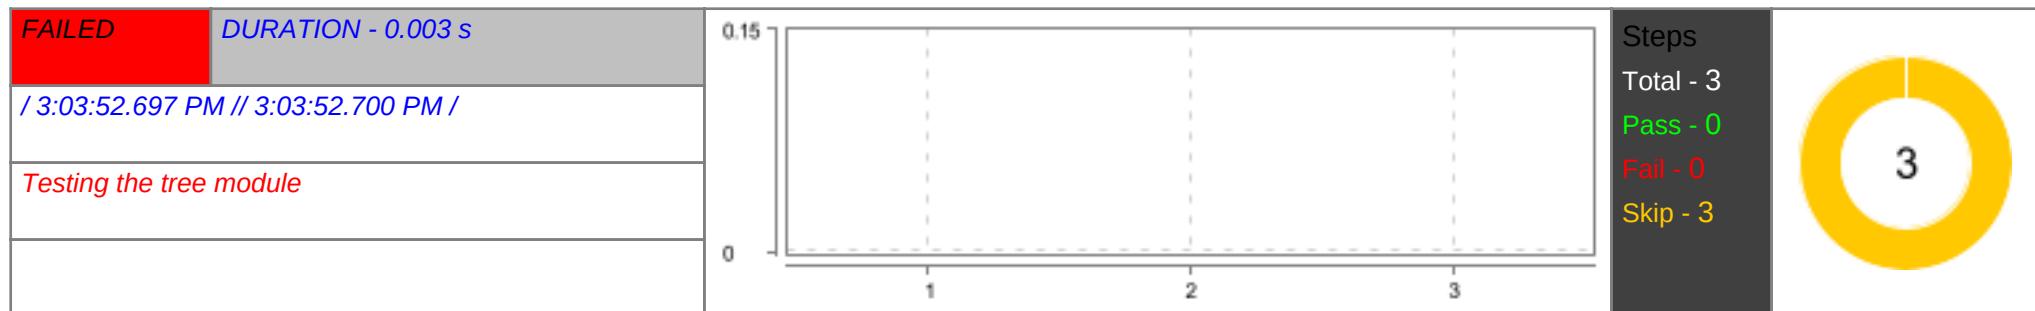

| # | Step / Hook Details | Status | Duration |
|---|---|---------|----------|
| | BEFORE - appHooks.ApplicationHooks.setup() java.lang.NullPointerException: Cannot invoke "org.openqa.selenium.WebDriver.manage()" because the return value of "com.qa.factory.DriverFactory.getDriver()" is null at com.qa.factory.DriverFactory.init_driver(DriverFactory.java:47) at com.qa.factory.DriverFactory.setupdriver(DriverFactory.java:71) at appHooks.ApplicationHooks.setup(ApplicationHooks.java:33) | FAILED | 0.001 s |
| 1 | Given The user is on the "Implementation Of BST" page after logged in | SKIPPED | 0.000 s |
| 2 | When The user clicks Try Here button | SKIPPED | 0.000 s |
| 3 | Then The user should be redirected to a page having an tryEditor with a Run button to test | SKIPPED | 0.000 s |
| | AFTER - appHooks.ApplicationHooks.tearDown(io.cucumber.java.Scenario) java.lang.NullPointerException: Cannot invoke "org.openqa.selenium.TakesScreenshot.getScreenshotAs(org.openqa.selenium.OutputType)" because the return value of "com.qa.factory.DriverFactory.getDriver()" is null at appHooks.ApplicationHooks.tearDown(ApplicationHooks.java:59) | FAILED | 0.000 s |


The user is able to run code in tryEditor

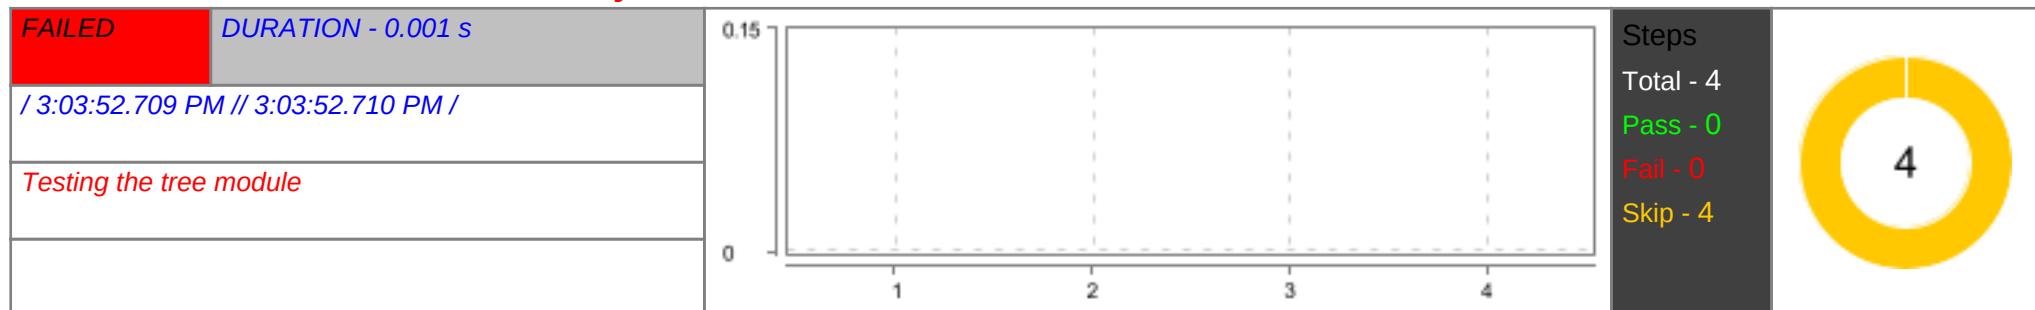

| # | Step / Hook Details | Status | Duration |
|---|--|--------|----------|
| | BEFORE - appHooks.ApplicationHooks.setup() | FAILED | 0.000 s |

| # | Step / Hook Details | Status | Duration |
|---|---|---------|----------|
| | java.lang.NullPointerException: Cannot invoke "org.openqa.selenium.WebDriver.manage()" because the return value of "com.qa.factory.DriverFactory.getDriver()" is null at com.qa.factory.DriverFactory.init_driver(DriverFactory.java:47) at com.qa.factory.DriverFactory.setupdriver(DriverFactory.java:71) at appHooks.ApplicationHooks.setup(ApplicationHooks.java:33) | | |
| 1 | Given The user is in a try here page having tryEditor with a Run button to test | SKIPPED | 0.000 s |
| 2 | When The user gets input from sheet "pythonCode" and 0 | SKIPPED | 0.000 s |
| 3 | And user click on Run button | SKIPPED | 0.000 s |
| 4 | Then The user should be presented with Run output | SKIPPED | 0.000 s |
| | AFTER - appHooks.ApplicationHooks.tearDown(io.cucumber.java.Scenario) java.lang.NullPointerException: Cannot invoke "org.openqa.selenium.TakesScreenshot.getScreenshotAs(org.openqa.selenium.OutputType)" because the return value of "com.qa.factory.DriverFactory.getDriver()" is null at appHooks.ApplicationHooks.tearDown(ApplicationHooks.java:59) | FAILED | 0.000 s |


The user is able to get the error message for invalid syntax

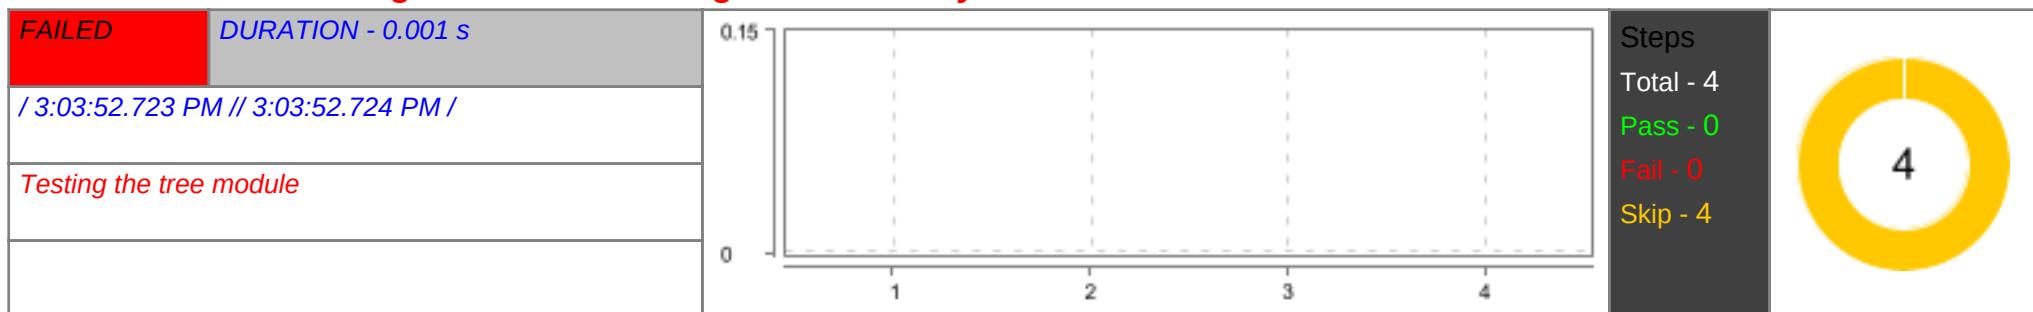

| # | Step / Hook Details | Status | Duration |
|---|---|---------|----------|
| | BEFORE - appHooks.ApplicationHooks.setup() java.lang.NullPointerException: Cannot invoke "org.openqa.selenium.WebDriver.manage()" because the return value of "com.qa.factory.DriverFactory.getDriver()" is null at com.qa.factory.DriverFactory.init_driver(DriverFactory.java:47) at com.qa.factory.DriverFactory.setupdriver(DriverFactory.java:71) at appHooks.ApplicationHooks.setup(ApplicationHooks.java:33) | FAILED | 0.000 s |
| 1 | Given The user is in a try here page having tryEditor with a Run button to test | SKIPPED | 0.000 s |
| 2 | When The user gets invalid input from sheet "pythonCode" and 1 | SKIPPED | 0.000 s |
| 3 | And user click on Run button | SKIPPED | 0.000 s |
| 4 | Then The user should be presented with the Run output with alert | SKIPPED | 0.000 s |

| # | Step / Hook Details | Status | Duration |
|---|--|--------|----------|
| | AFTER - appHooks.ApplicationHooks.tearDown(io.cucumber.java.Scenario) java.lang.NullPointerException: Cannot invoke "org.openqa.selenium.TakesScreenshot.getScreenshotAs(org.openqa.selenium.OutputType)" because the return value of "com.qa.factory.DriverFactory.getDriver()" is null at appHooks.ApplicationHooks.tearDown(ApplicationHooks.java:59) | FAILED | 0.000 s |

The user validating Practice Questions page

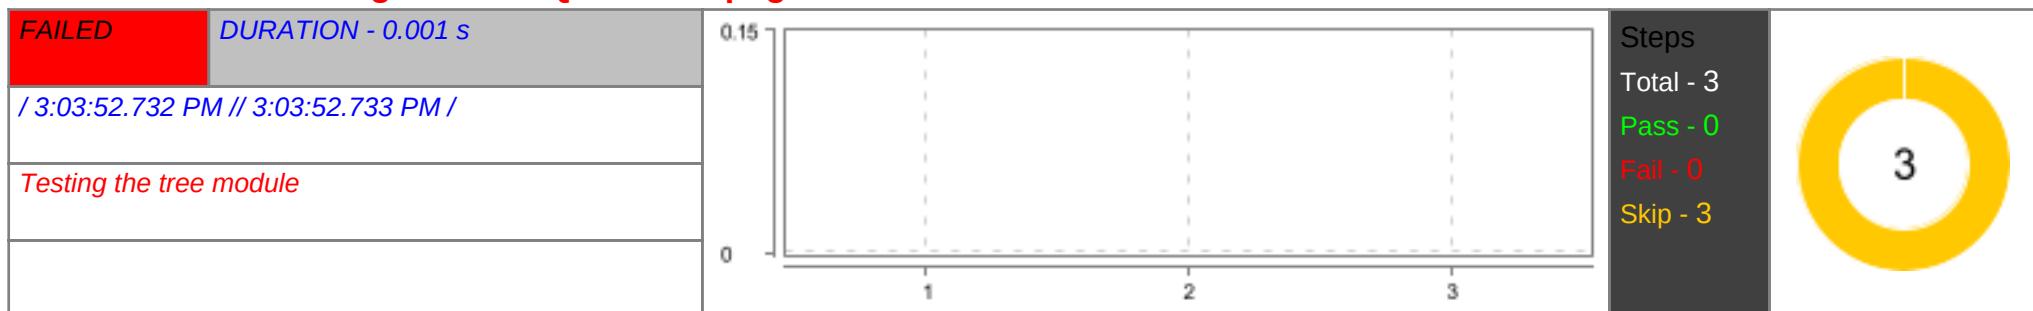


| # | Step / Hook Details | Status | Duration |
|---|---|---------|----------|
| | BEFORE - appHooks.ApplicationHooks.setup() java.lang.NullPointerException: Cannot invoke "org.openqa.selenium.WebDriver.manage()" because the return value of "com.qa.factory.DriverFactory.getDriver()" is null at com.qa.factory.DriverFactory.init_driver(DriverFactory.java:47) at com.qa.factory.DriverFactory.setupdriver(DriverFactory.java:71) at appHooks.ApplicationHooks.setup(ApplicationHooks.java:33) | FAILED | 0.001 s |
| 1 | Given The user is in the "Tree" page after logged in | SKIPPED | 0.000 s |
| 2 | When The user clicks on the "Overview of Trees" link | SKIPPED | 0.000 s |
| 3 | Then The user should be directed to "Practice Questions" of tree Page | SKIPPED | 0.000 s |
| | AFTER - appHooks.ApplicationHooks.tearDown(io.cucumber.java.Scenario) java.lang.NullPointerException: Cannot invoke "org.openqa.selenium.TakesScreenshot.getScreenshotAs(org.openqa.selenium.OutputType)" because the return value of "com.qa.factory.DriverFactory.getDriver()" is null at appHooks.ApplicationHooks.tearDown(ApplicationHooks.java:59) | FAILED | 0.000 s |

Exploring Graph module




User navigated to "Graph" page

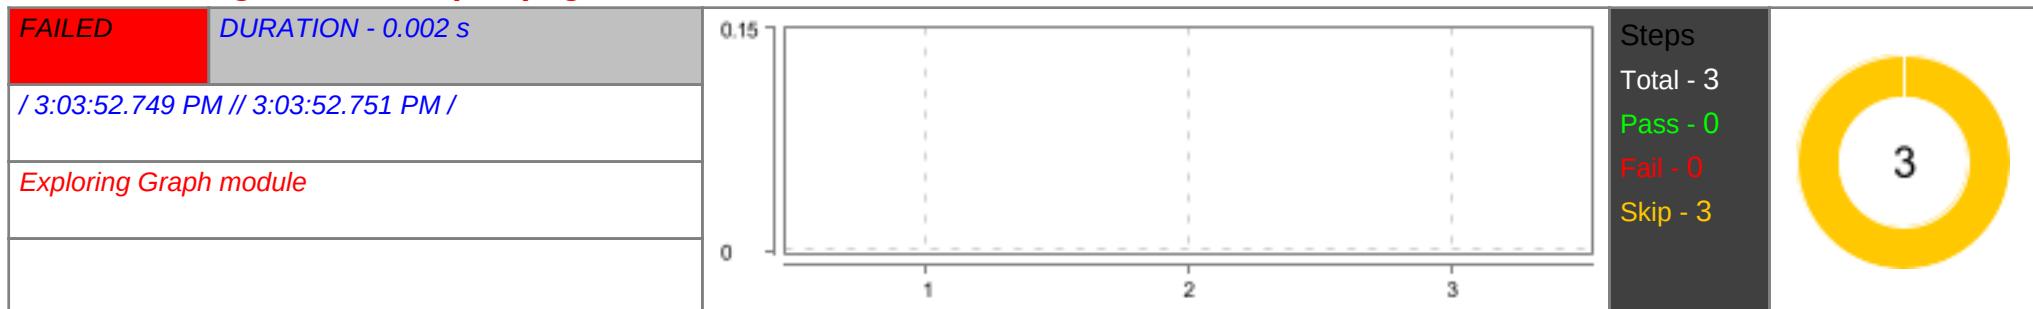


| # | Step / Hook Details | Status | Duration |
|---|---|---------|----------|
| | BEFORE - appHooks.ApplicationHooks.setup() java.lang.NullPointerException: Cannot invoke "org.openqa.selenium.WebDriver.manage()" because the return value of "com.qa.factory.DriverFactory.getDriver()" is null at com.qa.factory.DriverFactory.init_driver(DriverFactory.java:47) at com.qa.factory.DriverFactory.setupdriver(DriverFactory.java:71) at appHooks.ApplicationHooks.setup(ApplicationHooks.java:33) | FAILED | 0.001 s |
| 1 | Given The user is in the Home page after logged in | SKIPPED | 0.000 s |
| 2 | When The user selecting "Graph" item from the drop down menu | SKIPPED | 0.000 s |
| 3 | Then The user should be directed to "Graph" Page | SKIPPED | 0.000 s |
| | AFTER - appHooks.ApplicationHooks.tearDown(io.cucumber.java.Scenario) java.lang.NullPointerException: Cannot invoke "org.openqa.selenium.TakesScreenshot.getScreenshotAs(org.openqa.selenium.OutputType)" because the return value of "com.qa.factory.DriverFactory.getDriver()" is null at appHooks.ApplicationHooks.tearDown(ApplicationHooks.java:59) | FAILED | 0.000 s |

The user is able to navigate to Graph page

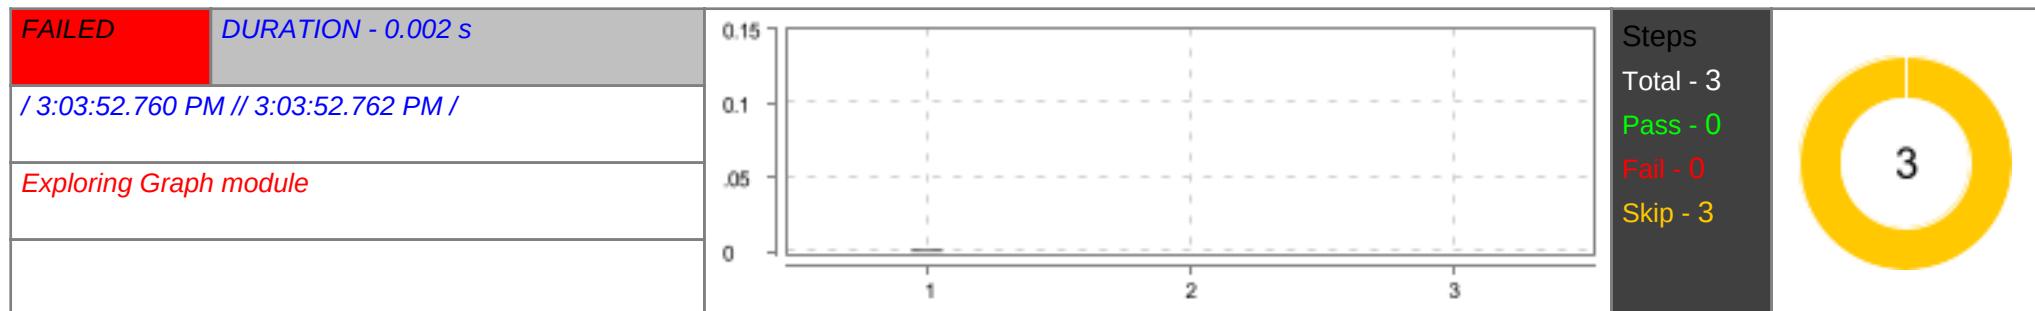

| # | Step / Hook Details | Status | Duration |
|---|---|---------|----------|
| | BEFORE - appHooks.ApplicationHooks.setup() java.lang.NullPointerException: Cannot invoke "org.openqa.selenium.WebDriver.manage()" because the return value of "com.qa.factory.DriverFactory.getDriver()" is null at com.qa.factory.DriverFactory.init_driver(DriverFactory.java:47) at com.qa.factory.DriverFactory.setupdriver(DriverFactory.java:71) at appHooks.ApplicationHooks.setup(ApplicationHooks.java:33) | FAILED | 0.000 s |
| 1 | Given The user is in the "Graph" page after logged in | SKIPPED | 0.001 s |
| 2 | When The user selecting "Graph" item from the drop down menu | SKIPPED | 0.000 s |
| 3 | Then The user should be directed to "Graph" Page | SKIPPED | 0.000 s |
| | AFTER - appHooks.ApplicationHooks.tearDown(io.cucumber.java.Scenario) java.lang.NullPointerException: Cannot invoke "org.openqa.selenium.TakesScreenshot.getScreenshotAs(org.openqa.selenium.OutputType)" because the return value of "com.qa.factory.DriverFactory.getDriver()" is null at appHooks.ApplicationHooks.tearDown(ApplicationHooks.java:59) | FAILED | 0.001 s |


The user should be directed to editor page with run button to test python code

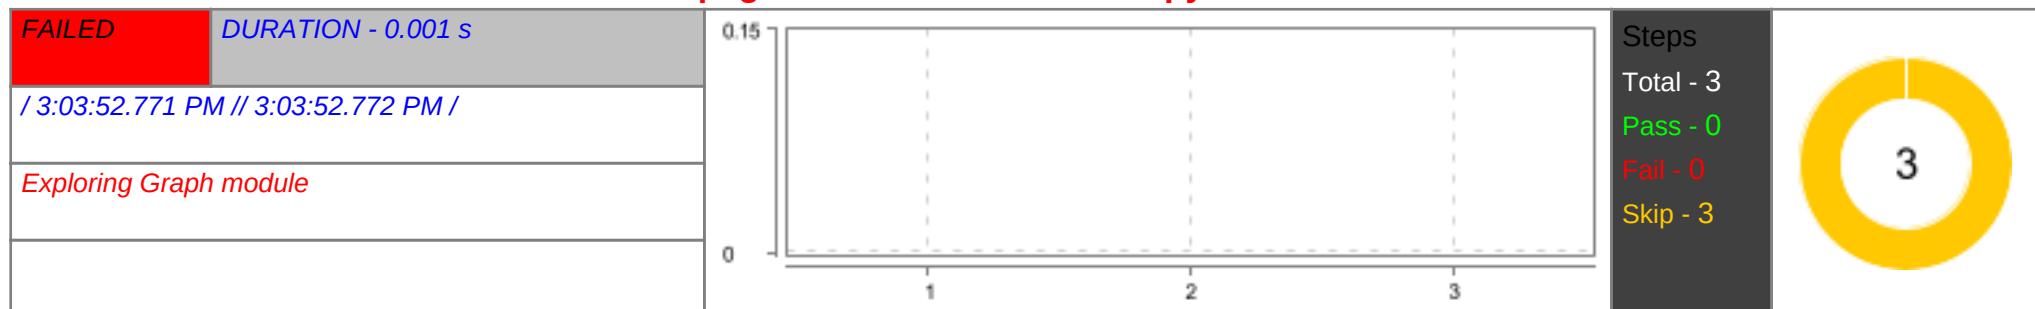

| # | Step / Hook Details | Status | Duration |
|---|--|--------|----------|
| | BEFORE - appHooks.ApplicationHooks.setup() | FAILED | 0.000 s |

| # | Step / Hook Details | Status | Duration |
|---|---|---------|----------|
| | java.lang.NullPointerException: Cannot invoke "org.openqa.selenium.WebDriver.manage()" because the return value of "com.qa.factory.DriverFactory.getDriver()" is null at com.qa.factory.DriverFactory.init_driver(DriverFactory.java:47) at com.qa.factory.DriverFactory.setupdriver(DriverFactory.java:71) at appHooks.ApplicationHooks.setup(ApplicationHooks.java:33) | | |
| 1 | Given The user is on the "Graph" sub link of Graph page | SKIPPED | 0.000 s |
| 2 | When The user clicks Try Here button | SKIPPED | 0.000 s |
| 3 | Then The user should be redirected to a page having an tryEditor with a Run button to test | SKIPPED | 0.000 s |
| | AFTER - appHooks.ApplicationHooks.tearDown(io.cucumber.java.Scenario) java.lang.NullPointerException: Cannot invoke "org.openqa.selenium.TakesScreenshot.getScreenshotAs(org.openqa.selenium.OutputType)" because the return value of "com.qa.factory.DriverFactory.getDriver()" is null at appHooks.ApplicationHooks.tearDown(ApplicationHooks.java:59) | FAILED | 0.000 s |


The user run the code in tryEditor with valid input for Graph page

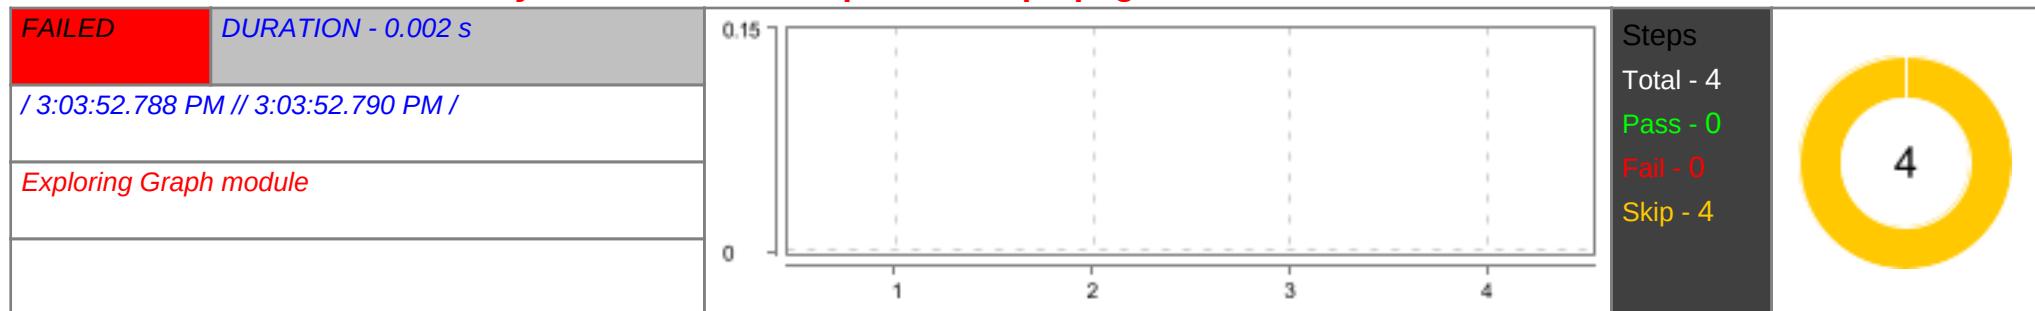

| # | Step / Hook Details | Status | Duration |
|---|---|---------|----------|
| | BEFORE - appHooks.ApplicationHooks.setup() java.lang.NullPointerException: Cannot invoke "org.openqa.selenium.WebDriver.manage()" because the return value of "com.qa.factory.DriverFactory.getDriver()" is null at com.qa.factory.DriverFactory.init_driver(DriverFactory.java:47) at com.qa.factory.DriverFactory.setupdriver(DriverFactory.java:71) at appHooks.ApplicationHooks.setup(ApplicationHooks.java:33) | FAILED | 0.000 s |
| 1 | Given The user is in a try here page having tryEditor with a Run button to test | SKIPPED | 0.000 s |
| 2 | When The user gets input from sheet "pythonCode" and 0 | SKIPPED | 0.000 s |
| 3 | And user click on Run button | SKIPPED | 0.000 s |
| 4 | Then The user should be presented with Run output | SKIPPED | 0.000 s |
| | AFTER - appHooks.ApplicationHooks.tearDown(io.cucumber.java.Scenario) | FAILED | 0.002 s |


| # | Step / Hook Details | Status | Duration |
|---|---|--------|----------|
| | java.lang.NullPointerException: Cannot invoke "org.openqa.selenium.TakesScreenshot.getScreenshotAs(org.openqa.selenium.OutputType)" because the return value of "com.qa.factory.DriverFactory.getDriver()" is null at appHooks.ApplicationHooks.tearDown(ApplicationHooks.java:59) | | |

The user getting error message with invalid python code for Graph page

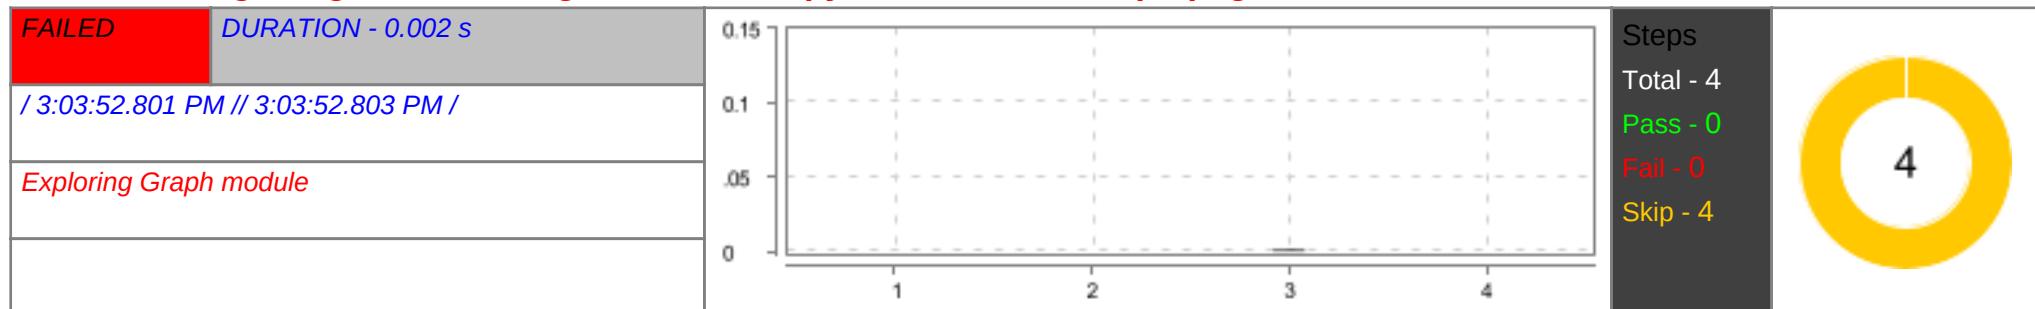


| # | Step / Hook Details | Status | Duration |
|---|---|---------|----------|
| | BEFORE - appHooks.ApplicationHooks.setup() java.lang.NullPointerException: Cannot invoke "org.openqa.selenium.WebDriver.manage()" because the return value of "com.qa.factory.DriverFactory.getDriver()" is null at com.qa.factory.DriverFactory.init_driver(DriverFactory.java:47) at com.qa.factory.DriverFactory.setupdriver(DriverFactory.java:71) at appHooks.ApplicationHooks.setup(ApplicationHooks.java:33) | FAILED | 0.001 s |
| 1 | Given The user is in a try here page having tryEditor with a Run button to test | SKIPPED | 0.000 s |
| 2 | When The user gets invalid input from sheet "pythonCode" and 1 | SKIPPED | 0.000 s |
| 3 | And user click on Run button | SKIPPED | 0.001 s |
| 4 | Then The user should be presented with the Run output with alert | SKIPPED | 0.000 s |
| | AFTER - appHooks.ApplicationHooks.tearDown(io.cucumber.java.Scenario) java.lang.NullPointerException: Cannot invoke "org.openqa.selenium.TakesScreenshot.getScreenshotAs(org.openqa.selenium.OutputType)" because the return value of "com.qa.factory.DriverFactory.getDriver()" is null at appHooks.ApplicationHooks.tearDown(ApplicationHooks.java:59) | FAILED | 0.000 s |

The user is able to navigate to Graph page

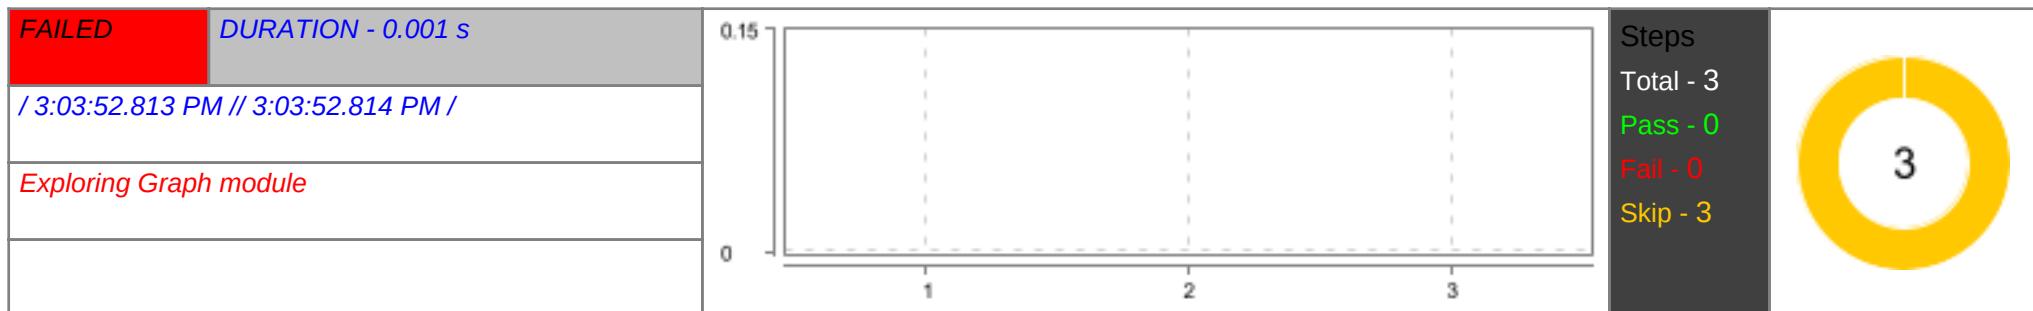

| # | Step / Hook Details | Status | Duration |
|---|---|---------|----------|
| | BEFORE - appHooks.ApplicationHooks.setup() java.lang.NullPointerException: Cannot invoke "org.openqa.selenium.WebDriver.manage()" because the return value of "com.qa.factory.DriverFactory.getDriver()" is null at com.qa.factory.DriverFactory.init_driver(DriverFactory.java:47) at com.qa.factory.DriverFactory.setupdriver(DriverFactory.java:71) at appHooks.ApplicationHooks.setup(ApplicationHooks.java:33) | FAILED | 0.001 s |
| 1 | Given The user is in the "Graph" page after logged in | SKIPPED | 0.000 s |
| 2 | When The user clicks "Graph Representations" sub link of Graph Page | SKIPPED | 0.000 s |
| 3 | Then The user should be directed to "Graph Representations" Page | SKIPPED | 0.000 s |
| | AFTER - appHooks.ApplicationHooks.tearDown(io.cucumber.java.Scenario) java.lang.NullPointerException: Cannot invoke "org.openqa.selenium.TakesScreenshot.getScreenshotAs(org.openqa.selenium.OutputType)" because the return value of "com.qa.factory.DriverFactory.getDriver()" is null at appHooks.ApplicationHooks.tearDown(ApplicationHooks.java:59) | FAILED | 0.000 s |


User navigated to tryEditor page with Run button from Graph page

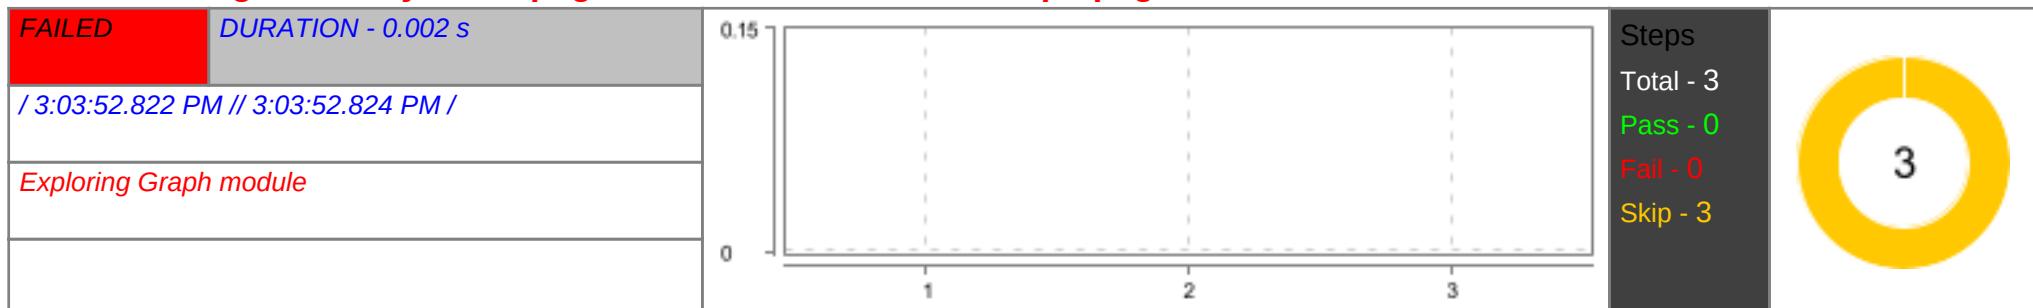

| # | Step / Hook Details | Status | Duration |
|---|--|--------|----------|
| | BEFORE - appHooks.ApplicationHooks.setup() | FAILED | 0.001 s |

| # | Step / Hook Details | Status | Duration |
|---|---|---------|----------|
| | java.lang.NullPointerException: Cannot invoke "org.openqa.selenium.WebDriver.manage()" because the return value of "com.qa.factory.DriverFactory.getDriver()" is null at com.qa.factory.DriverFactory.init_driver(DriverFactory.java:47) at com.qa.factory.DriverFactory.setupdriver(DriverFactory.java:71) at appHooks.ApplicationHooks.setup(ApplicationHooks.java:33) | | |
| 1 | Given The user is on the "Graph Representations" page after logged in | SKIPPED | 0.000 s |
| 2 | When The user clicks Try Here button | SKIPPED | 0.000 s |
| 3 | Then The user should be redirected to a page having an tryEditor with a Run button to test | SKIPPED | 0.000 s |
| | AFTER - appHooks.ApplicationHooks.tearDown(io.cucumber.java.Scenario) java.lang.NullPointerException: Cannot invoke "org.openqa.selenium.TakesScreenshot.getScreenshotAs(org.openqa.selenium.OutputType)" because the return value of "com.qa.factory.DriverFactory.getDriver()" is null at appHooks.ApplicationHooks.tearDown(ApplicationHooks.java:59) | FAILED | 0.000 s |


The user run the code in tryEditor with valid input for Graph page

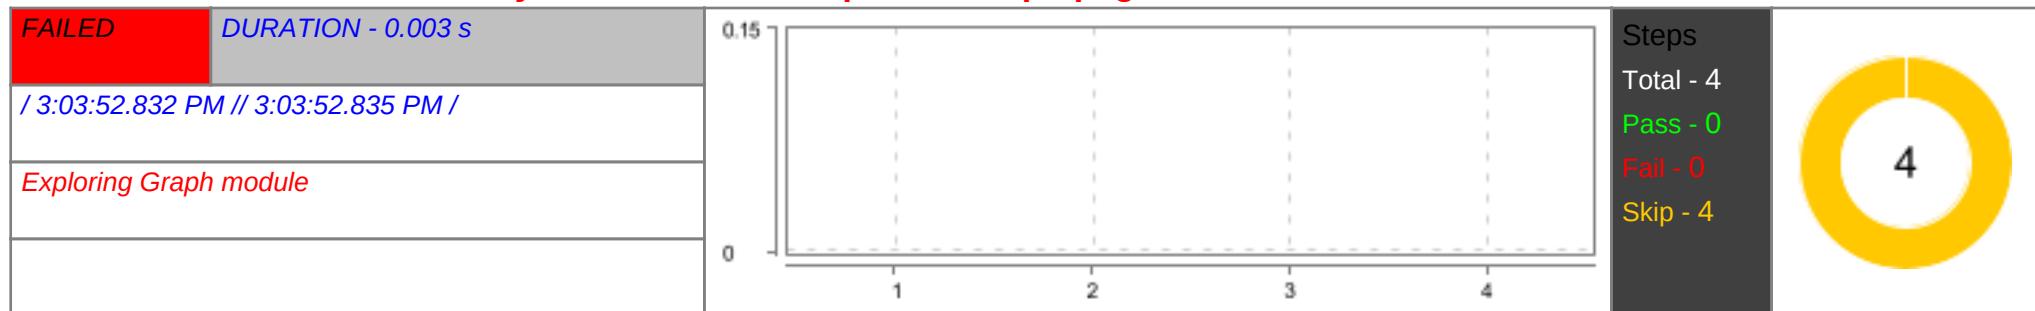

| # | Step / Hook Details | Status | Duration |
|---|---|---------|----------|
| | BEFORE - appHooks.ApplicationHooks.setup() java.lang.NullPointerException: Cannot invoke "org.openqa.selenium.WebDriver.manage()" because the return value of "com.qa.factory.DriverFactory.getDriver()" is null at com.qa.factory.DriverFactory.init_driver(DriverFactory.java:47) at com.qa.factory.DriverFactory.setupdriver(DriverFactory.java:71) at appHooks.ApplicationHooks.setup(ApplicationHooks.java:33) | FAILED | 0.001 s |
| 1 | Given The user is in a try here page having tryEditor with a Run button to test | SKIPPED | 0.000 s |
| 2 | When The user gets input from sheet "pythonCode" and 0 | SKIPPED | 0.000 s |
| 3 | And user click on Run button | SKIPPED | 0.000 s |
| 4 | Then The user should be presented with Run output | SKIPPED | 0.000 s |
| | AFTER - appHooks.ApplicationHooks.tearDown(io.cucumber.java.Scenario) | FAILED | 0.002 s |


| # | Step / Hook Details | Status | Duration |
|---|---|--------|----------|
| | java.lang.NullPointerException: Cannot invoke "org.openqa.selenium.TakesScreenshot.getScreenshotAs(org.openqa.selenium.OutputType)" because the return value of "com.qa.factory.DriverFactory.getDriver()" is null at appHooks.ApplicationHooks.tearDown(ApplicationHooks.java:59) | | |

The user getting error message with invalid python code for Graph page

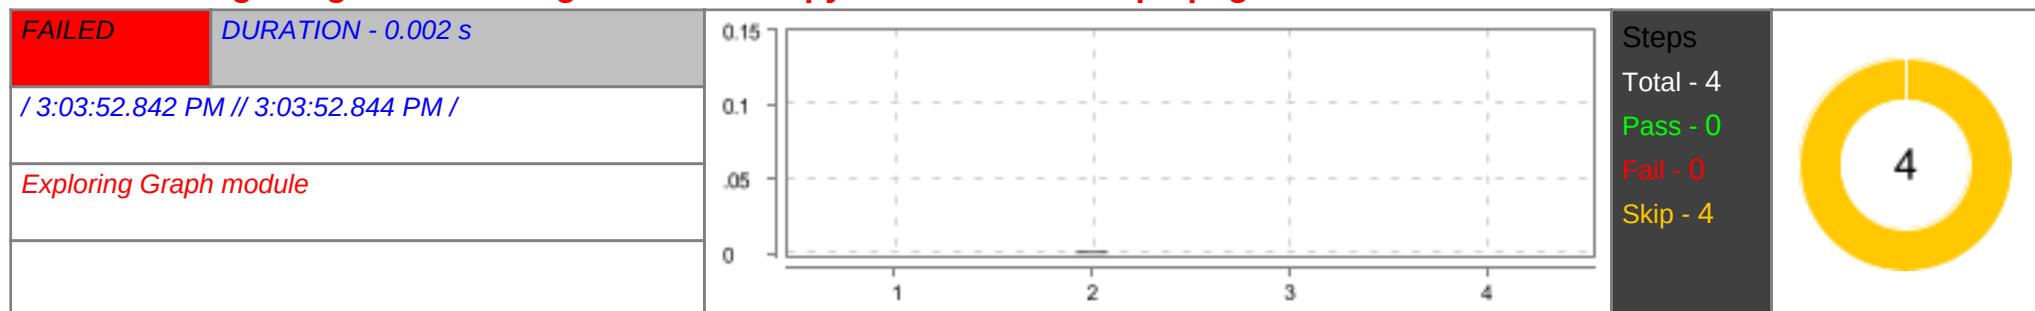

| # | Step / Hook Details | Status | Duration |
|---|---|---------|----------|
| | BEFORE - appHooks.ApplicationHooks.setup() java.lang.NullPointerException: Cannot invoke "org.openqa.selenium.WebDriver.manage()" because the return value of "com.qa.factory.DriverFactory.getDriver()" is null at com.qa.factory.DriverFactory.init_driver(DriverFactory.java:47) at com.qa.factory.DriverFactory.setupdriver(DriverFactory.java:71) at appHooks.ApplicationHooks.setup(ApplicationHooks.java:33) | FAILED | 0.001 s |
| 1 | Given The user is in a try here page having tryEditor with a Run button to test | SKIPPED | 0.000 s |
| 2 | When The user gets invalid input from sheet "pythonCode" and 1 | SKIPPED | 0.001 s |
| 3 | And user click on Run button | SKIPPED | 0.000 s |
| 4 | Then The user should be presented with the Run output with alert | SKIPPED | 0.000 s |
| | AFTER - appHooks.ApplicationHooks.tearDown(io.cucumber.java.Scenario) java.lang.NullPointerException: Cannot invoke "org.openqa.selenium.TakesScreenshot.getScreenshotAs(org.openqa.selenium.OutputType)" because the return value of "com.qa.factory.DriverFactory.getDriver()" is null at appHooks.ApplicationHooks.tearDown(ApplicationHooks.java:59) | FAILED | 0.000 s |

The user validating "Practice Questions" page

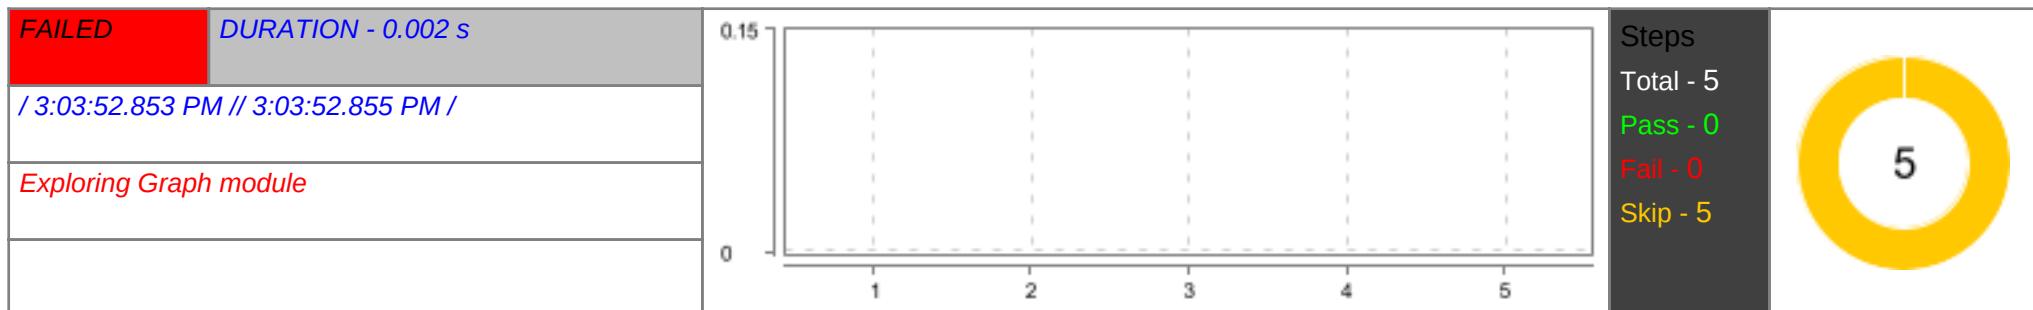

| # | Step / Hook Details | Status | Duration |
|---|---|---------|----------|
| | BEFORE - appHooks.ApplicationHooks.setup() java.lang.NullPointerException: Cannot invoke "org.openqa.selenium.WebDriver.manage()" because the return value of "com.qa.factory.DriverFactory.getDriver()" is null at com.qa.factory.DriverFactory.init_driver(DriverFactory.java:47) at com.qa.factory.DriverFactory.setupdriver(DriverFactory.java:71) at appHooks.ApplicationHooks.setup(ApplicationHooks.java:33) | FAILED | 0.001 s |
| 1 | Given The user is in the "Graph" page after logged in | SKIPPED | 0.000 s |
| 2 | When The user clicks "Graph Representations" sub link of Graph Page | SKIPPED | 0.000 s |
| 3 | And The user clicks on the "Practice Questions" | SKIPPED | 0.000 s |
| 4 | Then The user should be directed to "Practice Questions" Page | SKIPPED | 0.000 s |
| 5 | And The user clicks Sign Out button | SKIPPED | 0.000 s |
| | AFTER - appHooks.ApplicationHooks.tearDown(io.cucumber.java.Scenario) java.lang.NullPointerException: Cannot invoke "org.openqa.selenium.TakesScreenshot.getScreenshotAs(org.openqa.selenium.OutputType)" because the return value of "com.qa.factory.DriverFactory.getDriver()" is null at appHooks.ApplicationHooks.tearDown(ApplicationHooks.java:59) | FAILED | 0.001 s |