

Tests

Table of Contents

Search tests	1
List tests	2
Editor.....	4
Execute tests	14
Test designer	20
Test reporting	24

Managing all your tests is a basic thing to do with the administration UI. You are able to search for tests, open tests and execute tests with the UI.

You can do the following things regarding test management

- [Search tests](#)
- [List tests](#)
- [Open tests](#)
- [Execute tests](#)
- [Test designer](#)
- [Reporting](#)


Search tests

Searching for test cases is very simple. Open the tests page and you will see a search form input field at the top right.



Citrus administration UI will search for tests in your project. These includes XML and Java DSL test cases. The search is a full text search on all test names available. So the result is always a matching list of tests.

You can open the test by selecting the test from the result list.

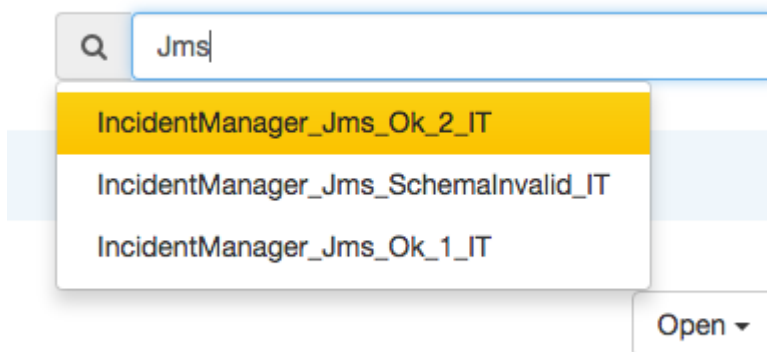

The test is opened and displayed in [test detail](#) panel.

List tests

Your project usually contains a lot of tests. All found tests are listed by their class and method. Also you can filter the displayed tests by the Java package. Each test can be opened in a editor for exploring further test details.

Test cases

	Class	Method
	IncidentManager_Http_IT	testIncidentManager_Http_Ok_3
	IncidentManager_Http_IT	testIncidentManager_Http_Ok_4
lid_IT	IncidentManager_Http_IT	testIncidentManager_Http_Schema
ror_1_IT	IncidentManager_Http_IT	testIncidentManager_Http_FieldFor
ror_2_IT	IncidentManager_Http_IT	testIncidentManager_Http_FieldFor
	IncidentManager_Http_Ok_1_IT	testIncidentManager_Http_Ok_1
	IncidentManager_Http_Ok_2_IT	testIncidentManager_Http_Ok_1
	IncidentManager_Jms_IT	testIncidentManager_Jms_Ok_2
id_IT	IncidentManager_Jms_IT	testIncidentManager_Jms_Schema
	IncidentManager_Jms_IT	testIncidentManager_Jms_Ok_1

	Class	Method
	IncidentManager_Http_IT	testIncidentManager_Http_Ok_3
	IncidentManager_Http_IT	testIncidentManager_Http_Ok_4
id_IT	IncidentManager_Http_IT	testIncidentManager_Http_Schema
ror_1_IT	IncidentManager_Http_IT	testIncidentManager_Http_FieldFor
ror_2_IT	IncidentManager_Http_IT	testIncidentManager_Http_FieldFor
	IncidentManager_Http_Ok_1_IT	testIncidentManager_Http_Ok_1
	IncidentManager_Http_Ok_2_IT	testIncidentManager_Http_Ok_1
	IncidentManager_Jms_IT	testIncidentManager_Jms_Ok_2
id_IT	IncidentManager_Jms_IT	testIncidentManager_Jms_Schema
	IncidentManager_Jms_IT	testIncidentManager_Jms_Ok_1

	Class	Method
	IncidentManager_Http_IT	testIncidentManager_Http_Ok_3
	IncidentManager_Http_IT	testIncidentManager_Http_Ok_4
	IncidentManager_Http_IT	testIncidentManager_Http_SchemaInvalid
	IncidentManager_Http_IT	testIncidentManager_Http_FieldForceError_1
	IncidentManager_Http_IT	testIncidentManager_Http_FieldForceError_2
	IncidentManager_Http_Ok_1_IT	testIncidentManager_Http_Ok_1
	IncidentManager_Http_Ok_2_IT	testIncidentManager_Http_Ok_1
	IncidentManager_Jms_IT	testIncidentManager_Jms_Ok_2
	IncidentManager_Jms_IT	testIncidentManager_Jms_SchemaInvalid
	IncidentManager_Jms_IT	testIncidentManager_Jms_Ok_1

Editor

The administration UI is able to open your test cases. Both XML and Java DSL test cases are supported.

NOTE: Java DSL test cases might cause some problems when loading the test design view. this is because we do have to make the Java DSL code interpretation more stable.

You can open the tests using the *Open* context menu. All available test cases are grouped by their package.



t cases in this project. Select a test and execute it with a run configuration.

IncidentManager_Http_Ok_3_IT

IncidentManager_Http_Ok_4_IT

IncidentManager_Http_SchemaInvalid_IT

IncidentManager_Http_FieldForceError_1_IT

IncidentManager_Http_FieldForceError_2_IT

IncidentManager_Http_Ok_1_IT

IncidentManager_Http_Ok_2_IT

IncidentManager_Jms_Ok_2_IT

IncidentManager_Jms_SchemaInvalid_IT

IncidentManager_Jms_Ok_1_IT

com.consol.o



Test cases in this project. Select a test and execute it with a run configuration.

- IncidentManager_Http_Ok_3_IT
- IncidentManager_Http_Ok_4_IT
- IncidentManager_Http_SchemaInvalid_IT
- IncidentManager_Http_FieldForceError_1_IT
- IncidentManager_Http_FieldForceError_2_IT
- IncidentManager_Http_Ok_1_IT
- IncidentManager_Http_Ok_2_IT
- IncidentManager_Jms_Ok_2_IT
- IncidentManager_Jms_SchemaInvalid_IT
- IncidentManager_Jms_Ok_1_IT**

com.consol.c

Choose a test and open it in order to see the basic test case information such as name, author, status and description.

IT

FINAL Package: **com.consol.citrus.samples.incident** Last Result: **SUCCESS**

IT

FINAL Package: **com.consol.citrus.samples.incident** Last Result: **SUCCESS**

Open



 Run

incident Last Result: **SUCCESS**

Next to to the test case info you can view the test source code.

or authors.

version 2.0 (the "License");
compliance with the License.
t

ENSE-2.0

agreed to in writing, software
distributed on an "AS IS" BASIS,
OF KIND, either express or implied.
page governing permissions and

;

usXmlTest;
estNGCitrusTest;

extends AbstractTestNGCitrusTest {

HttpOk_1_IT")
Ok_1() {

or authors.

version 2.0 (the "License");
compliance with the License.
t

ENSE-2.0

agreed to in writing, software
distributed on an "AS IS" BASIS,
OF KIND, either express or implied.
the governing permissions and

;

usXmlTest;
estNGCitrusTest;

extends AbstractTestNGCitrusTest {

HttpOk_1_IT")
Ok_1() {

or authors.

version 2.0 (the "License");
compliance with the License.
t

ENSE-2.0

agreed to in writing, software
distributed on an "AS IS" BASIS,
of KIND, either express or implied.
page governing permissions and

;

usXmlTest;
estNGCitrusTest;

extends AbstractTestNGCitrusTest {

HttpOk_1_IT")

Ok_1() {

If your test uses the XML DSL to describe the test actions you can also view the XML sources.

```

network.org/schema/testcase"
framework.org/schema/jms/testcase"
framework.org/schema/ws/testcase"
framework.org/schema/samples/IncidentManager/v1"
framework.org/schema/samples/NetworkService/v1"
springframework.org/schema/beans" xmlns:xsi="http://www.w3.org/2001/XMLSchema-instance"
www.springframework.org/schema/beans http://www.springframework.org/schema/beans/spring-beans.xsd
ark.org/schema/jms/testcase http://www.citrusframework.org/schema/jms/testcase/citrus-jms-testcase.xsd
ark.org/schema/ws/testcase http://www.citrusframework.org/schema/ws/testcase/citrus-ws-testcase.xsd
ark.org/schema/testcase http://www.citrusframework.org/schema/testcase/citrus-testcase.xsd">

1_IT">

te>

</last-updated-by>
</last-updated-on>

lication via Http message transport using SOAP request message. Opens a new incident and verifies
ce as well as final incident response.</description>

citrus:randomUUID()"/>
citrus:randomNumber(6)"/>

c request message to IncidentManager via Http SOAP interface</message>

fork="true">

p://www.citrusframework.org/schema/samples/IncidentManager/v1">

'im:ticketId>
tDate('yyyy-MM-dd'T'00:00:00')</im:captured>

i:component>
went wrong with the software!</im:description>

d>
m:firstname>
lastname>
r. 38, 80995 München</im:address>

```

```

network.org/schema/testcase"
framework.org/schema/jms/testcase"
framework.org/schema/ws/testcase"
framework.org/schema/samples/IncidentManager/v1"
framework.org/schema/samples/NetworkService/v1"
springframework.org/schema/beans" xmlns:xsi="http://www.w3.org/2001/XMLSchema-instance"
www.springframework.org/schema/beans http://www.springframework.org/schema/beans/spring-beans.xsd
ark.org/schema/jms/testcase http://www.citrusframework.org/schema/jms/testcase/citrus-jms-testcase.xsd
ark.org/schema/ws/testcase http://www.citrusframework.org/schema/ws/testcase/citrus-ws-testcase.xsd
ark.org/schema/testcase http://www.citrusframework.org/schema/testcase/citrus-testcase.xsd">

1_IT">

te>

</last-updated-by>
</last-updated-on>

lication via Http message transport using SOAP request message. Opens a new incident and verifies
ce as well as final incident response.</description>

citrus:randomUUID()"/>
citrus:randomNumber(6)"/>

c request message to IncidentManager via Http SOAP interface</message>

fork="true">

p://www.citrusframework.org/schema/samples/IncidentManager/v1">

im:ticketId>
tDate('yyyy-MM-dd'T'00:00:00')</im:captured>

i:component>
went wrong with the software!</im:description>

d>
m:firstname>
lastname>
r. 38, 80995 München</im:address>

```

```

network.org/schema/testcase"
framework.org/schema/jms/testcase"
framework.org/schema/ws/testcase"
framework.org/schema/samples/IncidentManager/v1"
framework.org/schema/samples/NetworkService/v1"
springframework.org/schema/beans" xmlns:xsi="http://www.w3.org/2001/XMLSchema-instance"
www.springframework.org/schema/beans http://www.springframework.org/schema/beans/spring-beans.xsd
ark.org/schema/jms/testcase http://www.citrusframework.org/schema/jms/testcase/citrus-jms-testcase.xsd
ark.org/schema/ws/testcase http://www.citrusframework.org/schema/ws/testcase/citrus-ws-testcase.xsd
ark.org/schema/testcase http://www.citrusframework.org/schema/testcase/citrus-testcase.xsd">

1_IT">

te>

/last-updated-by>
</last-updated-on>

lication via Http message transport using SOAP request message. Opens a new incident and verifies
ce as well as final incident response.</description>

citrus:randomUUID()"/>
citrus:randomNumber(6)"/>

request message to IncidentManager via Http SOAP interface</message>

fork="true">

p://www.citrusframework.org/schema/samples/IncidentManager/v1">

'im:ticketId>
tDate('yyyy-MM-dd'T'00:00:00')</im:captured>

i:component>
went wrong with the software!</im:description>

d>
m:firstname>
lastname>
r. 38, 80995 München</im:address>

```

At the moment these information is read only. Stay tuned for some code editing features that might come in the future. Another representation of the test sources is the [test designer](#) view. The design view brings the test actions to a graphical representation.

Now a very powerful feature is to execute the test using the administration UI. Let's go and read about [test execution](#).

Execute tests

Test execution is a very powerful feature as it enables you to execute your tests within a browser environment almost everywhere. Just hit the *Run* button and Citrus will start a new background process that executes the test case immediately. At the moment we do only support Maven test execution. This means that a new Maven process is launched in background executing the test.

AL Package: com.consol.citrus.samples.incident Last Result: SUCCESS

100%

Http_Ok_1_IT: SUCCESS

2.7.1

(default-clean) @ citrus-sample-incident ---
te/Citrus/citrus-samples/sample-incident/target

(default) @ citrus-sample-incident ---

2java (apache-cxf-generate) @ citrus-sample-incident ---

resources (default-resources) @ citrus-sample-incident ---
iltered resources.

compile (default-compile) @ citrus-sample-incident ---
ne module!
ers/christoph/Projekte/Citrus/citrus-samples/sample-incident/target/classes

AL Package: **com.consol.citrus.samples.incident** Last Result: **SUCCESS**

100%

Http_Ok_1_IT: SUCCESS

2.7.1

(default-clean) @ citrus-sample-incident ---
te/Citrus/citrus-samples/sample-incident/target

(default) @ citrus-sample-incident ---

2java (apache-cxf-generate) @ citrus-sample-incident ---

resources (default-resources) @ citrus-sample-incident ---
iltered resources.

compile (default-compile) @ citrus-sample-incident ---
ne module!
ers/christoph/Projekte/Citrus/citrus-samples/sample-incident/target/classes

ples.incident

Last Result:

SUCCESS

100%

SUCCESS

-incident ---

incident/target

t ---

itrus-sample-incident ---

itrus-sample-incident ---

us-sample-incident ---

trus-samples/sample-incident/target/classes

As you can see the test log output is forwarded to your browser. Also the test progress and result (success or failure) is tracked by the administration UI. In the messages table you are able to review all messages (inbound/outbound) that were part of the test run.

ng="UTF-8"?><SOAP-ENV:Envelope xmlns:SOAP-ENV="http://schemas.xmlsoap.org/soap/envelope/">

"http://www.citrusframework.org/schema/samples/IncidentManager/v1">

>

Id>a9f13b9b-81ad-4308-975a-9b6a57fadb10</im:ticketId>

ed>2017-06-26T00:00:00</im:captured>

NEW</im:state>

ent>SOFTWARE</im:component>

ption>Something went wrong with the software!</im:description>

t>

>

128</im:id>

ame>Christoph</im:firstname>

me>Deppisch</im:lastname>

s>Franziskanerstr. 38, 80995 München</im:address>

r>

ent>

ng="UTF-8"?><SOAP-ENV:Envelope xmlns:SOAP-ENV="http://schemas.xmlsoap.org/soap/envelope/">

"http://www.citrusframework.org/schema/samples/IncidentManager/v1">

>

Id>a9f13b9b-81ad-4308-975a-9b6a57fadb10</im:ticketId>

ed>2017-06-26T00:00:00</im:captured>

NEW</im:state>

ent>SOFTWARE</im:component>

ption>Something went wrong with the software!</im:description>

t>

>

128</im:id>

ame>Christoph</im:firstname>

me>Deppisch</im:lastname>

s>Franziskanerstr. 38, 80995 München</im:address>

r>

ent>

```
en</im:address>
```







NOTE: The test design view is not complete for all test actions. Some actions may not be displayed or may have limited display.

Test reporting

The administration UI is able to read and parse basic TestNG and JUnit reports. Usually these reports are written after each test run to the build output directory of your project. The admin UI will automatically find those reports and display the results to you.

st test results

r the active



PASSED
40 %



FAILED
60 %



SKIPPED
0 %

st test results

r the active




PASSED
40 %



FAILED
60 %



SKIPPED
0 %

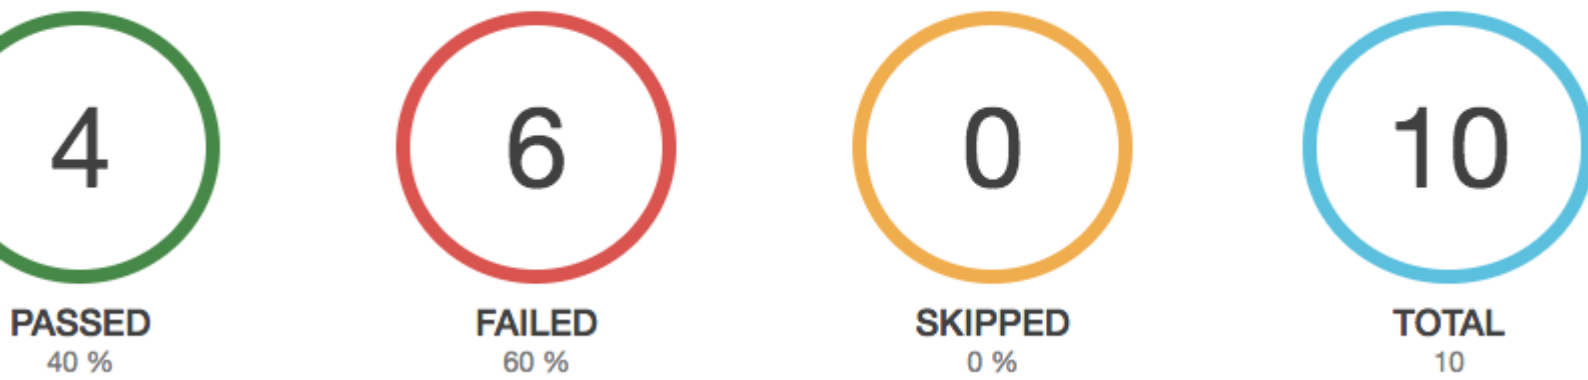

When a test case is failing for some reason exception and failure information will be provided.