

INDUSTRIAL PRODUCT DATASHEET

reComputer J4011 - Edge AI Computer with NVIDIA® Jetson™ Orin™ NX 8GB (Super Mode NOT Supported)

reComputer J4011 Edge AI Computer with NVIDIA® Jetson™ Orin™ NX 8GB (Super Mode NOT Supported) for AI video analytics, machine vision, AMR, and generative AI.

SKU

110110144

UPDATED

2026-09-18 08:42:46

PRICE

\$999.00(Excl. VAT)



Overview



reComputer J4011 is an Edge AI Computer with NVIDIA® Jetson™ Orin™ NX 8GB (Super Mode NOT Supported) offering AI video analytics, machine vision, autonomous mobile robot (AMR), and generative AI capabilities. It supports 18x1080p30 streams for video analytics and provides one-line deployment of projects like YOLOv8, Ollama, Llama3, and LLaVA via Seeed's jetson-example, with Seeed recommending 128GB/256GB/512GB/1TB SSDs for optimal performance.

Key Features

Price Increase Announcement

Date: February 28, 2026

Due to surging demand for modules and SSDs, prices for reComputer and reServer Jetson devices will increase by approximately \$50 to \$400 in the coming weeks. Please confirm your requirements and place your orders promptly to secure your stock.

Note

- For optimal performance with reComputer, we recommend using **128GB / 256GB / 512GB / 1TB** SSDs from Seeed. Since some SSDs on the market may only be compatible with specific JetPack versions which may cause the device to fail to function properly, and this issue is also present with official NVIDIA dev kits.
- If you are looking for the version without power adapter, please check out [reComputer J4011\(w/o power adapter\)](#).

Product Gallery






Specification

Jetson Orin NX System on Module		
AI Performance	reComputer J4012 - Orin NX 16GB, 100 TOPS	reComputer J4011- Orin NX 8GB – 70 TOPS
GPU	1024-core NVIDIA Ampere architecture GPU with 32 Tensor Cores	
CPU	8-core Arm® Cortex®-A78AE v8.2 64-bit CPU (Orin NX 16GB)	6-core Arm® Cortex®-A78AE (Orin NX 8GB)
Memory	16GB 128-bit LPDDR5 (Orin NX 16GB)	8GB 128-bit LPDDR5 (Orin NX 8GB)
Video Decode	1x 8K30 (H.265) 2x 4K60 (H.265) 4x 4K30 (H.265) 9x 1080p60 (H.265) 18x 1080p30 (H.265)	
Video Encode	1x 4K60 (H.265) 3x 4K30 (H.265) 6x 1080p60 (H.265) 12x 1080p30 (H.265)	
DL Accelerator	2x NVDLA v2	1x NVDLA v2
Carrier Board		
Storage	M.2 Key M PCIe (M.2 NVMe 2280 SSD 128G included)	
Networking	Ethernet	1x RJ-45 Gigabit Ethernet (10/100/1000M)
	M.2 KEY E	1x M.2 Key E for WiFi/Bluetooth module

I/O	USB	4x USB 3.2 Type-A (10Gbps) 1x USB2.0 Type-C (Device Mode)
	Camera	2x CSI (2-lane 15pin)
	Display	1x HDMI 2.1
	Fan	1x 4 pin Fan Connector (5V PWM)
	CAN	1x CAN
	Multifunctional Port	1x 40-Pin Expansion header 1x 12-Pin Control and UART header
	RTC	RTC 2-pin, supports CR1220 (not included)
Power Supply		9-19V DC
Mechanical	Dimensions (W x D x H)	130mm x 120mm x 58.5mm (with case)
	Installation	Desk, wall-mounting
Operating Temperature		-10°C~60°C
Warranty		1 Year

Hardware Overview

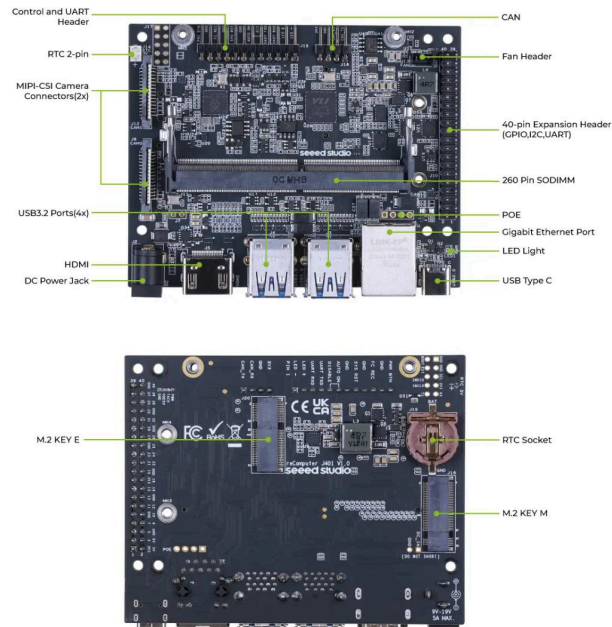



Applications

- **AI Video Analytics:** For building video analytics, Jetson Orin NX incorporates the NVIDIA Multi-Standard Video Decoder. This video decoder accelerates video decode, supporting low resolution mobile content, Standard Definition (SD), High Definition (HD) and UltraHD (8K, 4K, etc.) reComputer J4011 can take 18x1080p30 streams. See our tested YOLOv8 performance using NVIDIA Deepstream of single model and multi model on multi streams: <https://wiki.seeedstudio.com/YOLOv8-DeepStream-TRT-Jetson/#multistream-model-benchmarks>.
- **Machine Vision:** We have jetson-example (<https://github.com/Seeed-Projects/jetson-examples>) prepared for you! It offers one-line deploy projects edge AI applications of generative AI including Ollama, Llama3; computer vision including YOLOv8; and others. We have configured all environment for you to provides single command deployment of projects.
- **Autonomous Mobile Robot (AMR)**
- **Generative AI:** Now you can build AI agents capable of processing large amounts of live or archived videos and images with Vision-Language Models (VLM) such as LLaVA, this new AI agents help nearly every industry summarize, search, and extract actionable insights from video using natural language.

Compliance & Logistics



HSCODE	8471419000
USHSCODE	8517180050
UPC	
EUHSCODE	8471707000
COO	CHINA

FCC Requirement

Any changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions:

(1) this device may not cause harmful interference, and

(2) this device must accept any interference received, including interference that may cause undesired operation.

15.21

This transmitter must not be co-located or operating in conjunction with any other antenna or transmitter.

Note: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses, and can radiate radio frequency energy. If not installed and used in accordance with the instructions, it may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

Resource Links

- <https://www.seeedstudio.com/reComputer-J4011-p-5585.html>
- [Datasheet](#)
- [Schematic](#)
- [3D File](#)
- [Seeed Nvidia Jetson Product Catalog](#)
- [Nvidia Jetson Comparison](#)
- [Seeed Nvidia Jetson Success Cases](#)
- [Seeed Jetson One Pager](#)

Seeed Technology Co.,Ltd.
9F, Building G3, International E City,
Zhongshanyuan Road, Nanshan, Shenzhen, China

Tel: +86 0755-80695676
Web: www.seeed.cc
Shop: www.seeedstudio.com