
TYPE	PART No.	REV.
21	72992217	00

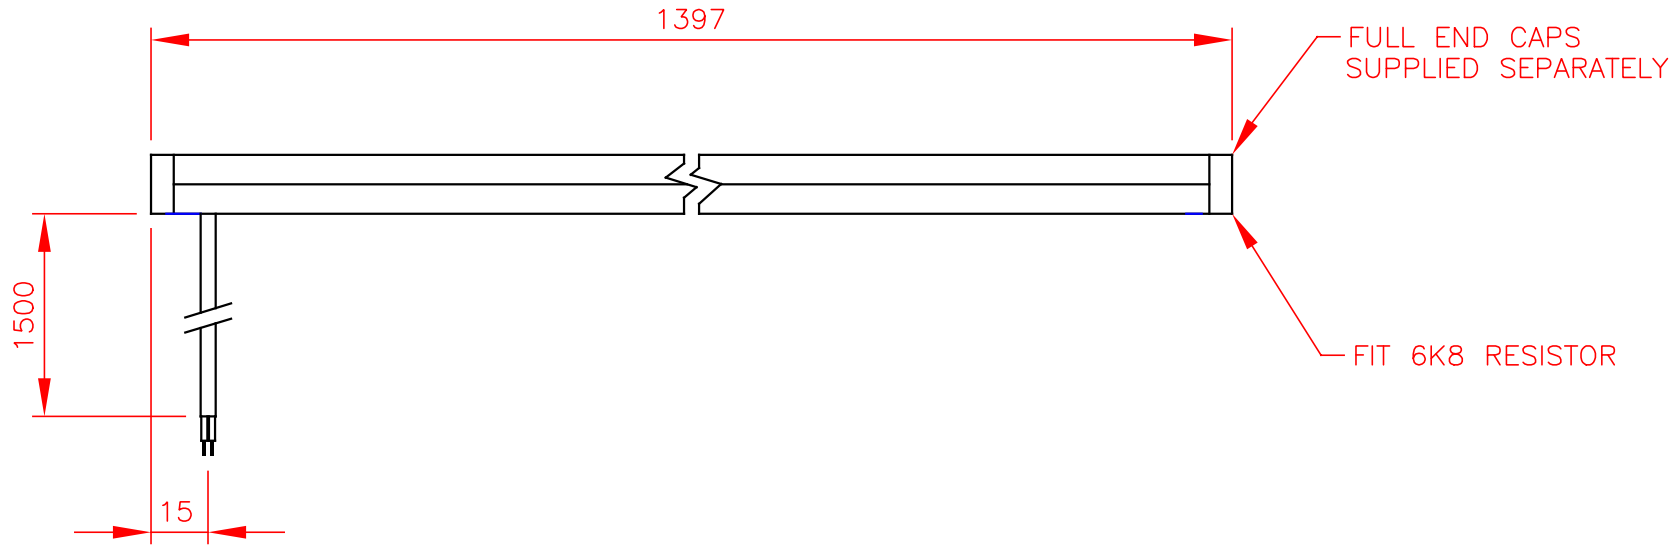

NOTES:

TS–6 SPECIAL PART No. 72992217.
TS–6 / 1397 / F / A / B / SLR / BO / 1500 / 6K8 / Y
X = CABLE EXIT IN BOTTOM OF CHANNEL AT ONE END AS SHOWN.

121–BP–SWITCH = 121–BP / 1389 / SLR / 1500 / 6K8 / BK
X = SWITCH MADE WITH ACTIVE ENDS & 2 CORE BLACK PVC CABLE PART No. 499540.
TERMINATE TWIN CORE CABLE AT LIVE END OF SWITCH AS FOLLOWS:
SOLDER BLUE WIRE TO THE BOTTOM SWITCH ELEMENT.
SOLDER RED WIRE TO THE TOP SWITCH ELEMENT.

APPLY A COAT OF THF/PVC CEMENT MIXTURE AROUND THE CABLE EXIT.
TEST & INSPECT THE SWITCH AS FOLLOWS:
a) MEASURE THE LENGTH OF THE SWITCH, TOLERANCE: +0mm, −2mm.
b) CHECK THE SWITCH USING A CONTINUITY CHECKER (BUZZER).
c) IMMERSE THE SWITCH IN THE WATER BATH FOR A MINIMUM OF 48 HOURS & REPEAT TEST b).

DRILL A HOLE 6mmø AT ONE END OF CHANNEL FOR CABLE EXIT
THE END CAPS TO COVER THE FULL PROFILE OF THE HOUSING & THE CHANNEL.
END CAPS TO BE SUPPLIED SEPARATELY.

UNCONTROLLED COPY
Only to be used with Order:.....
Signed:.....

ENG REV	MOD. No.	DESCRIPTION OF CHANGE	DATE	DRN	CHK
00	----	ORIGINATION	24 09 26	N.K.	

DIMENSIONS IN MILLIMETRES UNLESS OTHERWISE STATED
Tolerances unless stated:
Dimensions: without decimal: ±1
with decimal: ±0,3
Angles: ±1 degree
IF IN DOUBT ASK D.O.
THIRD ANGLE PROJECTION

Tapeswitch

This print is the property of Tapeswitch Ltd and is loaned in confidence subject to return on request on the understanding that no copies shall be taken without the written consent of Tapeswitch Ltd. All rights to design and invention reserved.

TITLE
SENSING EDGE ASSEMBLY
TS-6 SPECIAL

DRAWING NUMBER	TYPE	PART No.	REV.
	21	72992217	00