

ISSUED FOR APPROVAL

CCA-SS1-MDB-1A/B

ELECTRICAL DATA:		
Rated Operating voltage	V AC	400
Rated frequency	Hz	60
Rated current	A	5000
System Configuration		TNS, 3 PHASE, 4 WIRES
Rated control voltage	V AC	230
Rated control voltage	V DC	110
Rated insulation voltage	V	1000
Rated Impulse Withstand Voltage	KV	12

BUSBAR DETAILS:		
Main busbar cross section	mm	2x6x50x10
Neutral Busbar	mm	2x6x50x10
Ground Busbar	mm	2x2x40x10
Short Time Current (kA) for 1sec	Icw	85
Busbar treatment		Tin-plated Copper
Busbar Insulation		Yes
Color code		Red, Yellow, Blue, Black, Green/Yellow
Version of external connection		L1,L2,L3,N,PE

ENCLOSURE DETAILS:		
Type of Switchgear		Sivacon S8
Installation		Free Stand
Internal separation		Form 4b
Degree of protection	IP	54
Canopy		N/A
Ventilation		N/A
Gland plate		Yes
Color of enclosure		RAL 7035
Color of canopy		N/A




CONNECTION DETAILS:		
Cable connection for supply cubicle(s)		Top/Busduct
Cable connection for outgoing cubicle(s)		Top
Connection in plant		Front

SERVICE LOCATION:		
Installation Area		Indoor
Ambient temperature	°C	50
Altitude	m	<2000

WIRING:		
Wires type		PVC 450-750 V, Cu, LS0H
Control circuit cross section	mm²	1.5
CT circuit cross section	mm²	2.5
Auxiliary power circuit cross section	mm²	1.5
AC circuit color		Red, Black
DC circuit color		Grey
CT circuit color		Red, Yellow, Blue
Auxiliary power circuit color		Red, Black
Labeling		Cable Numbers

IDENTIFICATION LABEL:		
Material		Gravoply
Color		White Text in Black Background
Language		English
Fixation		Adhesive Glue

REVISION					
REV	DESCRIPTION	PREP	CHKD	APPD	DATE
PROJECT					
KING KHALID INTERNATIONAL AIRPORT (KKIA) PROJECT CONCOURSE-A					
CLIENT					
ENGINEER					
CONTRACTOR					
DRAWING TITLE					
CCA-SS1-MDB-1A/B					
DATA SHEET					
MANUFACTURER		DRAWING NO. CCA-SS1-MDB-1A/B			
		PROJECT REFERENCE:			REC. 00
		SCALE : NTS		LOCATION: +	SIZE: A4
		SHEET NO: 1 of 18			
QUOTATION REF.					
FILE NAME: 01-02_CCA-SS1-MDB-1A/B					

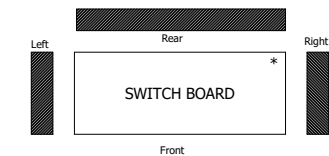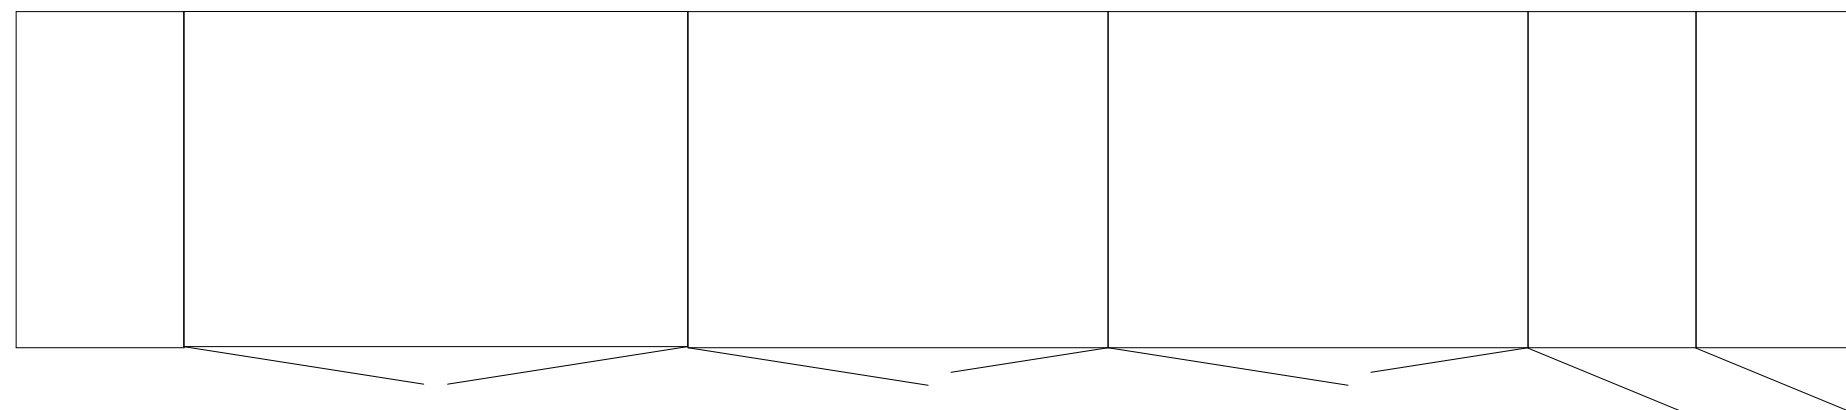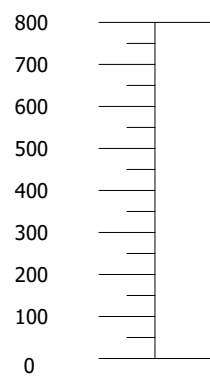


CLEARANCE
Left : 500mm
Right : 500mm
Front : 2000mm
Rear : Wall --> 200mm
Switch board --> 150mm
Top > 400mm

Total Length of Switch Board (mm) :-
 $4400 + 4200 + 2600 = 11200$

REVISION					
REV	DESCRIPTION	PREP	CHKD	APPD	DATE


PROJECT	KING KHALID INTERNATIONAL AIRPORT (KKIA) PROJECT CONCOURSE-A				
CLIENT					
ENGINEER					
CONTRACTOR					
DRAWING TITLE	CCA-SS1-MDB-1A/B				
	GENERAL ARRANGEMENT				
MANUFACTURER	DRAWING NO. CCA-SS1-MDB-1A/B				
	PROJECT REFERENCE:				REC. 00
	SCALE : NTS		LOCATION: +		SIZE: A4
	SHEET NO: 2 of 18				
QUOTATION REF.					
FILE NAME: 01-02 CCA-SS1-MDB-1A/B					



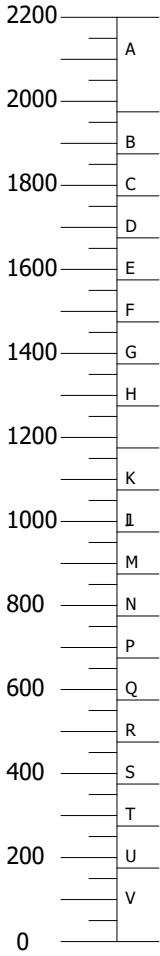


INTERNAL VIEW

REVISION					
REV	DESCRIPTION	PREP	CHKD	APPD	DATE
PROJECT					
KING KHALID INTERNATIONAL AIRPORT (KKIA) PROJECT CONCOURSE-A					
CLIENT					
ENGINEER					
CONTRACTOR					
DRAWING TITLE					
CCA-SS1-MDB-1A/B					
GENERAL ARRANGEMENT					
MANUFACTURER	DRAWING NO. CCA-SS1-MDB-1A/B				
	PROJECT REFERENCE:				REC. 00
	SCALE : NTS		LOCATION: +		SIZE: A4
	SHEET NO:		5 of 18		
QUOTATION REF.					
FILE NAME: 01-02_CCA-SS1-MDB-1A/B					

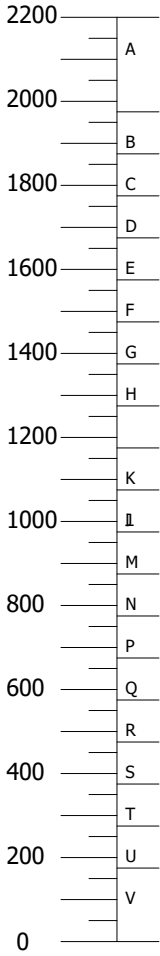


INTERNAL VIEW

REVISION					
REV	DESCRIPTION	PREP	CHKD	APPD	DATE
PROJECT					
KING KHALID INTERNATIONAL AIRPORT (KKIA) PROJECT CONCOURSE-A					
CLIENT					
ENGINEER					
CONTRACTOR					
DRAWING TITLE					
CCA-SS1-MDB-1A/B					
GENERAL ARRANGEMENT					
MANUFACTURER		DRAWING NO. CCA-SS1-MDB-1A/B			
		PROJECT REFERENCE:			REC. 00
		SCALE : NTS		LOCATION: +	SIZE: A4
		SHEET NO: 6 of 18			
QUOTATION REF.					
FILE NAME: 01-02_CCA-SS1-MDB-1A/B					

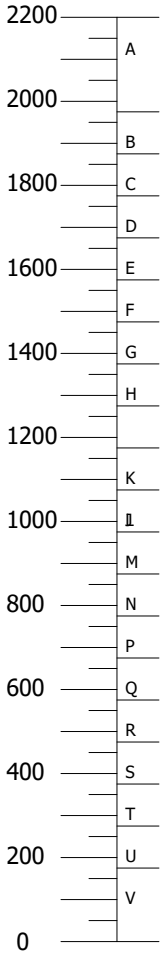

INTERNAL VIEW

REVISION					
REV	DESCRIPTION	PREP	CHKD	APPD	DATE
PROJECT					
KING KHALID INTERNATIONAL AIRPORT (KKIA) PROJECT CONCOURSE-A					
CLIENT					
ENGINEER					
CONTRACTOR					
DRAWING TITLE					
CCA-SS1-MDB-1A/B					
GENERAL ARRANGEMENT					
MANUFACTURER		DRAWING NO. CCA-SS1-MDB-1A/B			
		PROJECT REFERENCE:			REC. 00
		SCALE : NTS	LOCATION: +	SIZE: A4	
		SHEET NO: 7 of 18			
QUOTATION REF.					
FILE NAME: 01-02_CCA-SS1-MDB-1A/B					

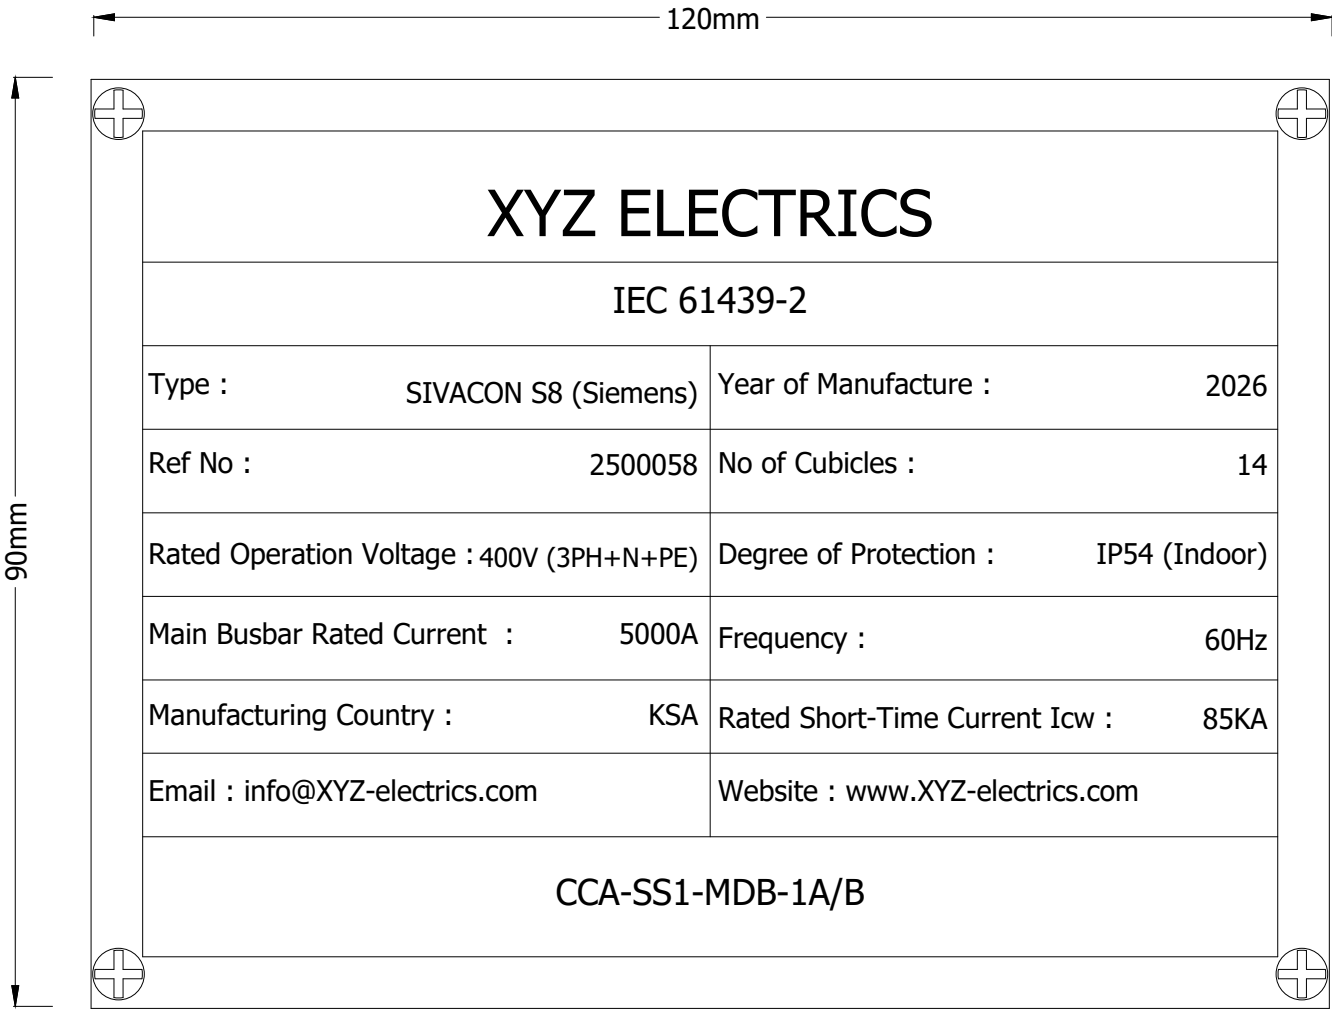

REVISION					
REV	DESCRIPTION	PREP	CHKD	APPD	DATE

PROJECT
KING KHALID INTERNATIONAL
AIRPORT (KKIA) PROJECT
CONCOURSE-A

CLIENT

ENGINEER

CONTRACTOR


DRAWING TITLE
CCA-SS1-MDB-1A/B

NAME PLATE

MANUFACTURER	DRAWING NO. CCA-SS1-MDB-1A/B		
	PROJECT REFERENCE:		REC. 00
	SCALE : NTS	LOCATION: +	SIZE: A4
	SHEET NO:	8 of 18	

QUOTATION REF.

FILE NAME: 01-02_CCA-SS1-MDB-1A/B

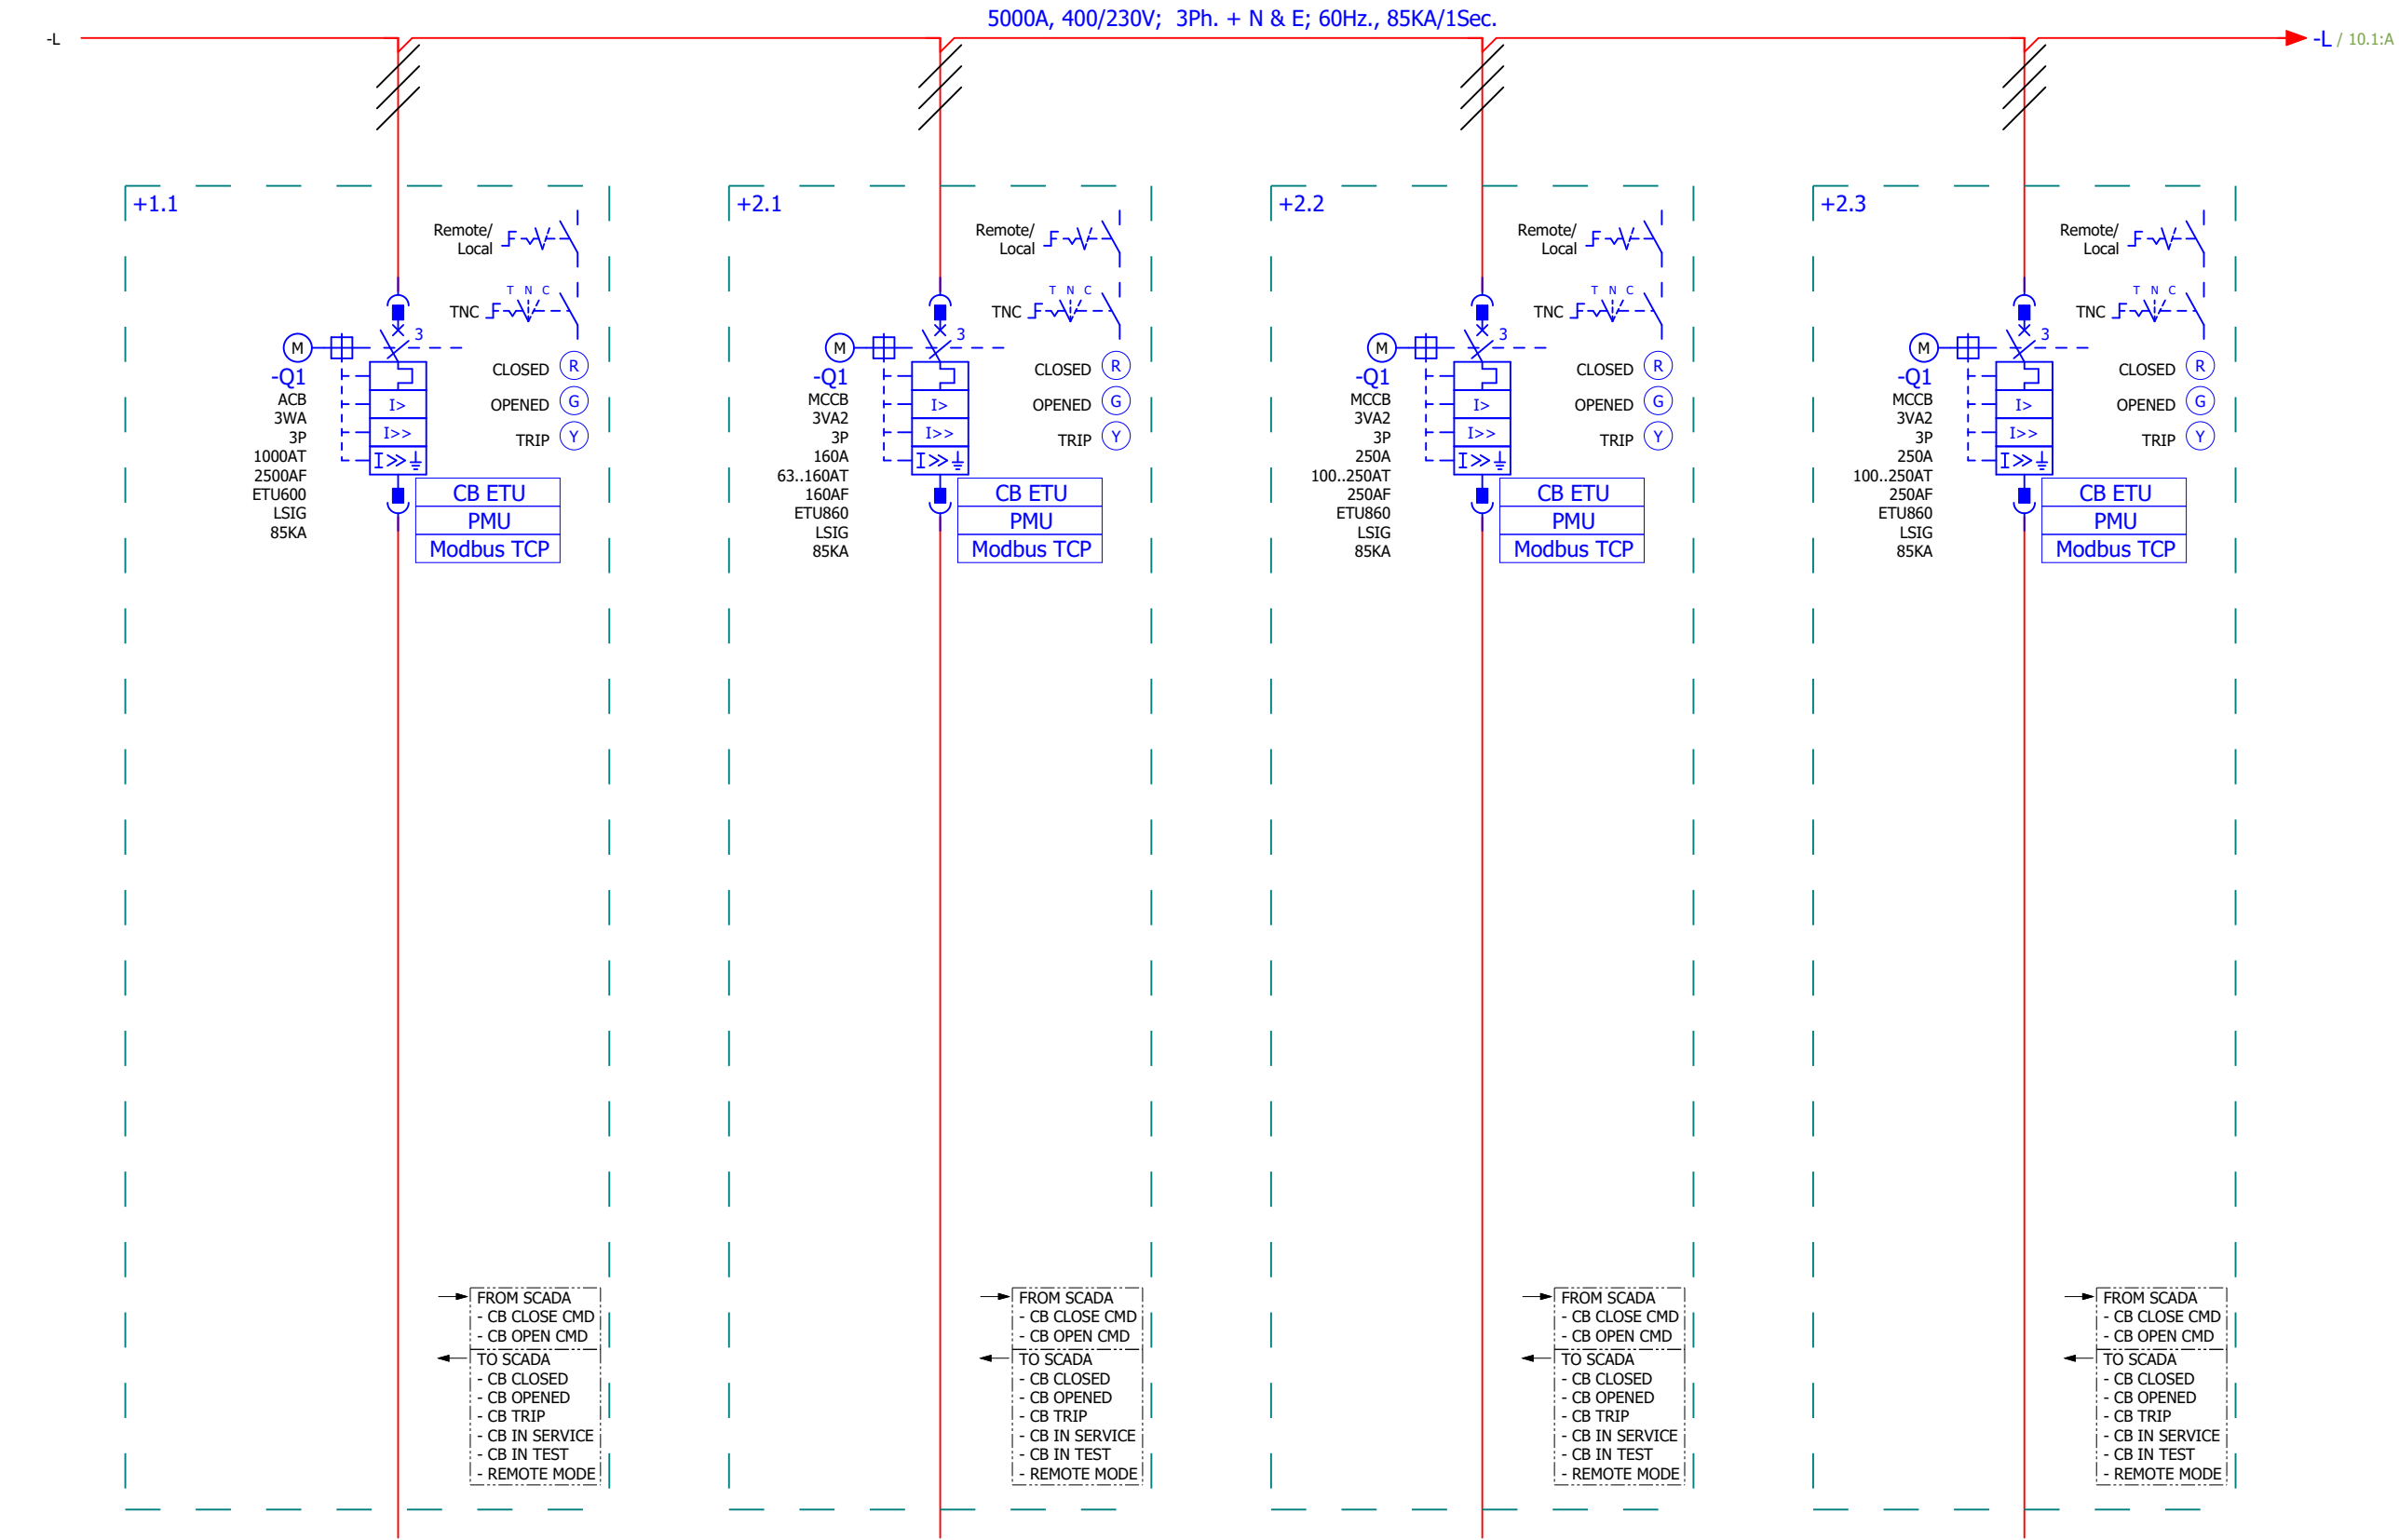

AMP. RATING	1000A	160A	250A	250A
LOAD	---	84.38KVA	126.90KVA	---
SERVICE	F-CCA-SS1-PFC-1A	F-CCA-L1-SMDB-1A-01	F-CCA-L2M-MCC-1A-03	F-CCA-SS1-AHF-1A
CABLE SIZE	---	1x(4C x 95)+(1C x 50 CPC)	2x(4C x 240)+(1C x 120 CPC)	---

REVISION					
REV	DESCRIPTION	PREP	CHKD	APPD	DATE

PROJECT

KING KHALID INTERNATIONAL
AIRPORT (KKIA) PROJECT
CONCOURSE-A

CLIENT

ENGINEER

CONTRACTOR

DRAWING TITLE


CCA-SS1-MDB-1A/B

SINGLE LINE DIAGRAM

MANUFACTURER	DRAWING NO. CCA-SS1-MDB-1A/B		
	PROJECT REFERENCE:		REC. 00
	SCALE : NTS	LOCATION: +	SIZE: A4
	SHEET NO:	9 of 18	

QUOTATION REF.

FILE NAME: 01-02_CCA-SS1-MDB-1A/B

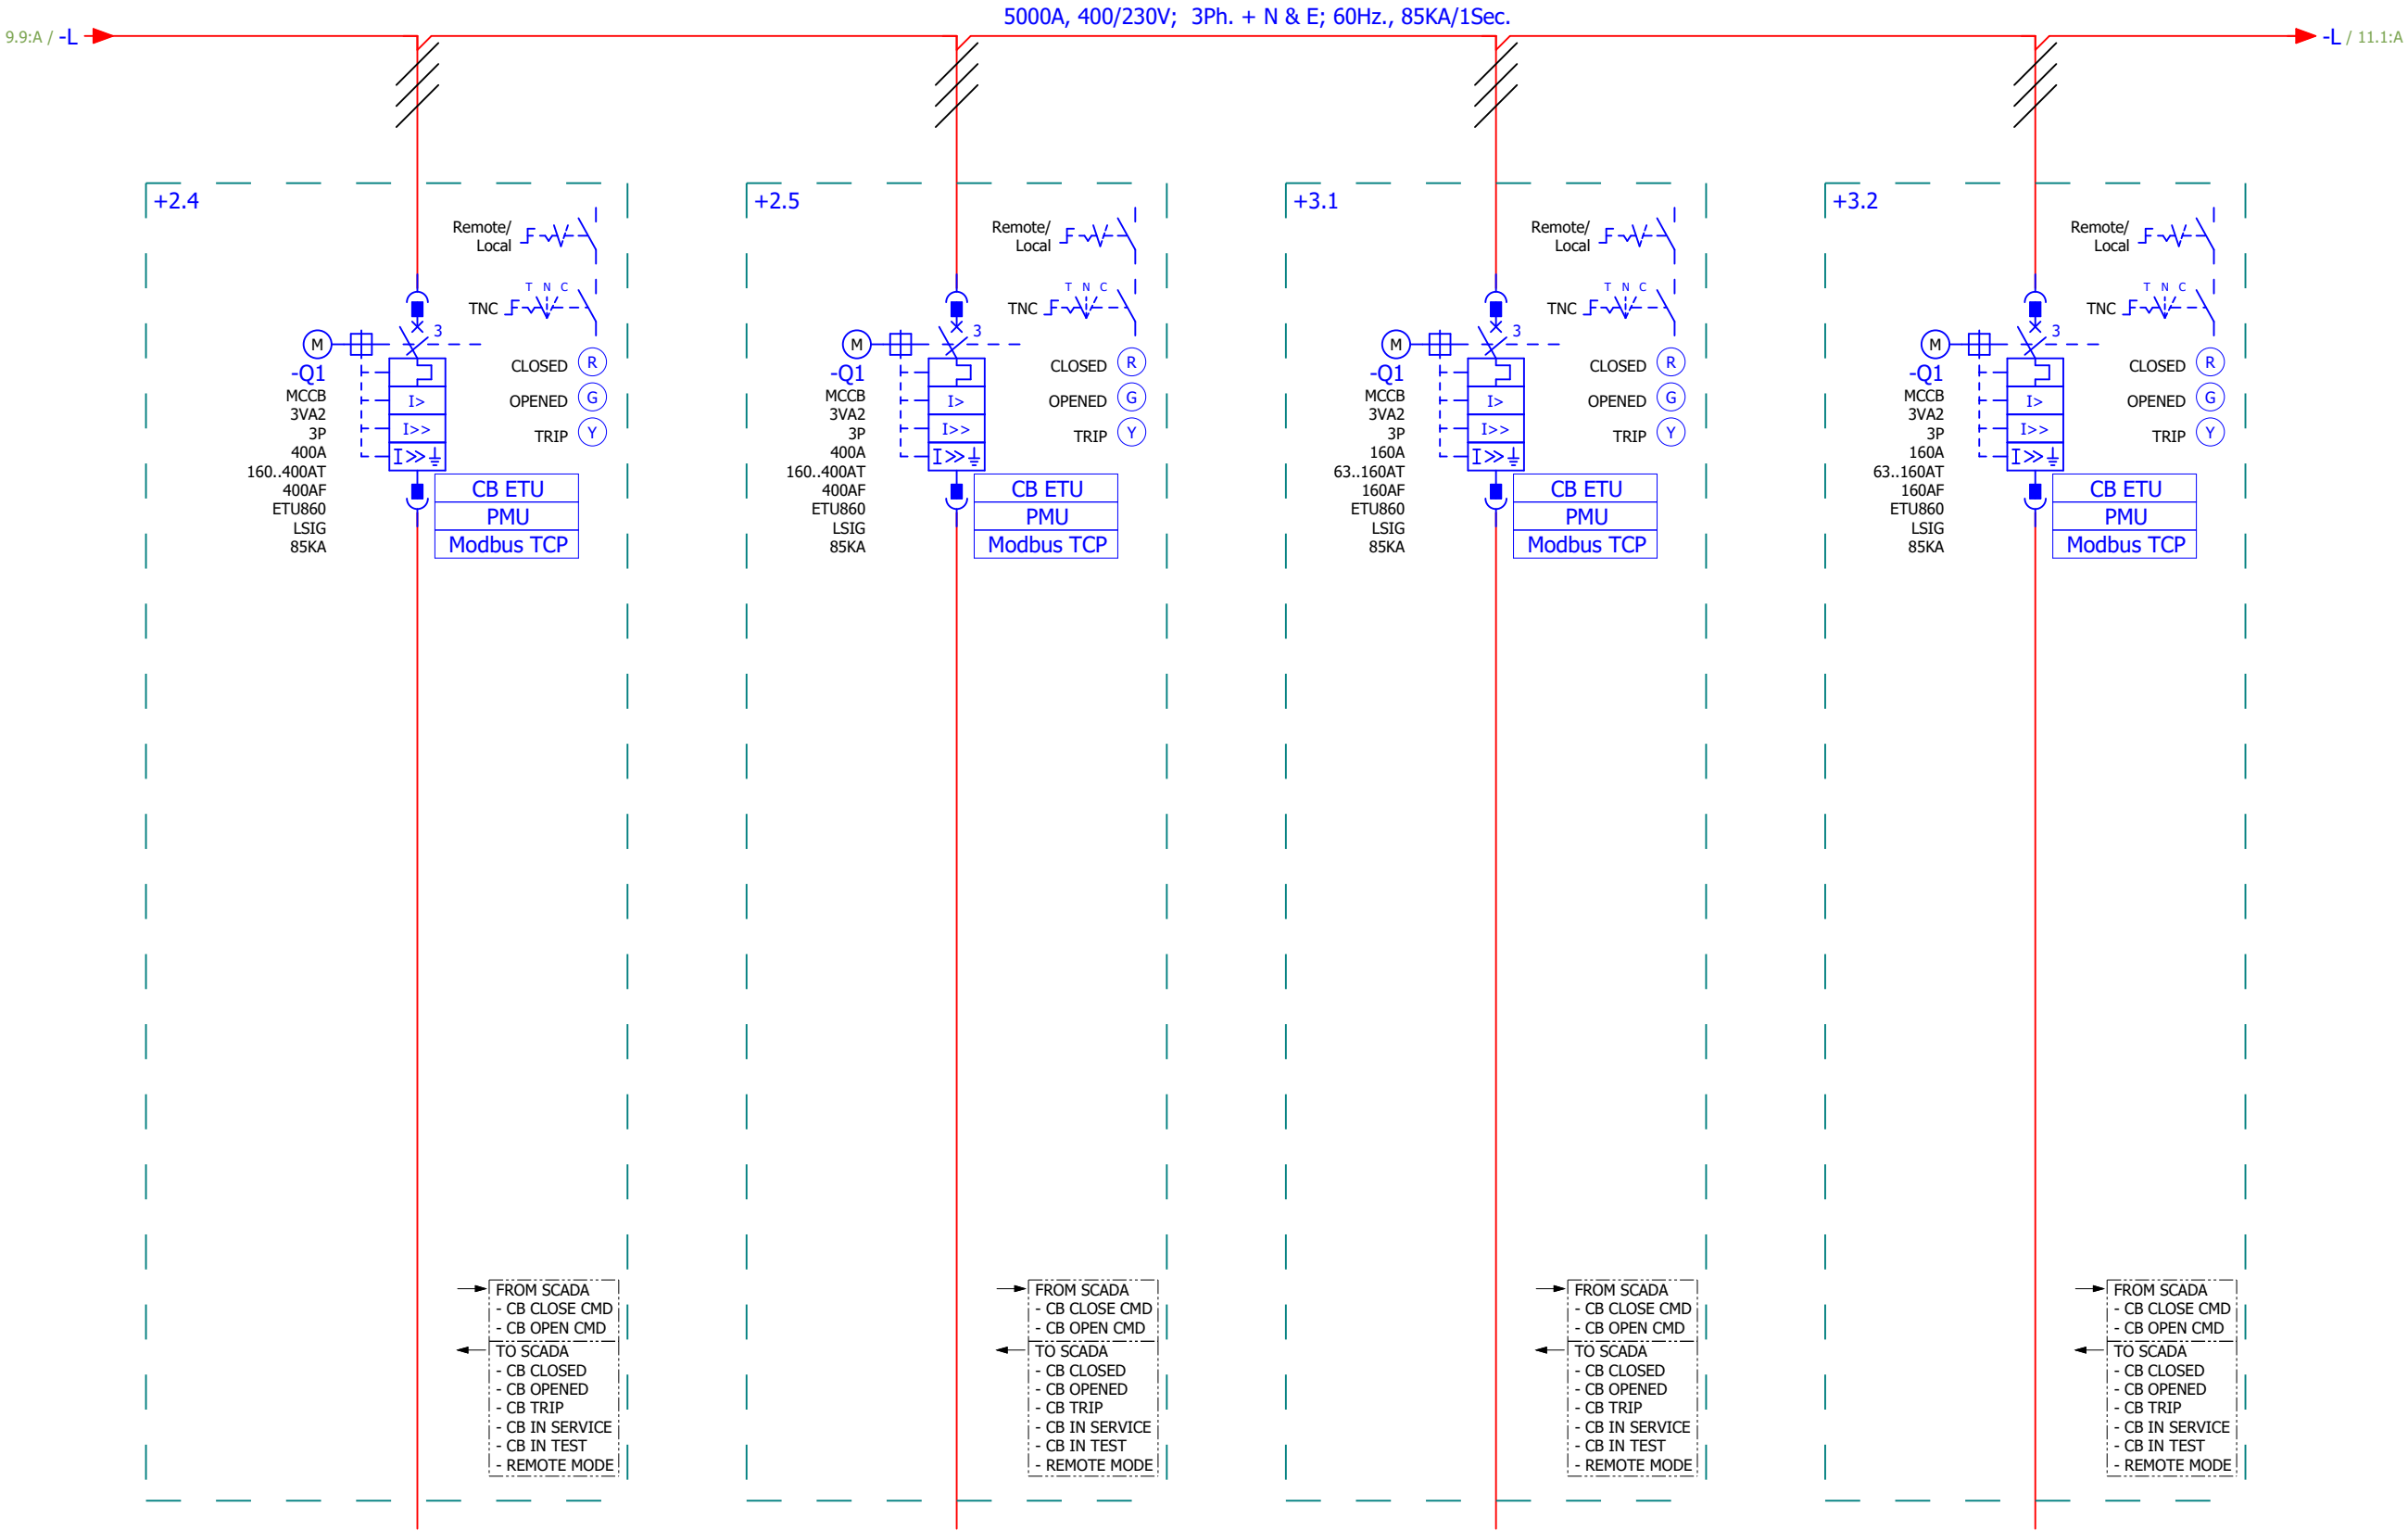

AMP. RATING	400A	400A	160A	160A
LOAD	---	197.10KVA	72.90KVA	75.00KVA
SERVICE	spare	F-CCA-L2M-MCC-1A-04	F-CCA-L2M-MCC-1A-05	F-CCA-L2M-SMDB-1A-01
CABLE SIZE	---	2x(4C x 240)+(1C x 120 CPC)	1x(4C x 150)+(1C x 95 CPC)	1x(4C x 120)+(1C x 70 CPC)

REVISION					
REV	DESCRIPTION	PREP	CHKD	APPD	DATE

PROJECT
KING KHALID INTERNATIONAL
AIRPORT (KKIA) PROJECT
CONCOURSE-A

CLIENT

ENGINEER

CONTRACTOR


DRAWING TITLE
CCA-SS1-MDB-1A/B

SINGLE LINE DIAGRAM

MANUFACTURER	DRAWING NO. CCA-SS1-MDB-1A/B		
	PROJECT REFERENCE:		REC. 00
	SCALE : NTS	LOCATION: +	SIZE: A4
	SHEET NO:	10 of 18	

QUOTATION REF.

FILE NAME: 01-02_CCA-SS1-MDB-1A/B

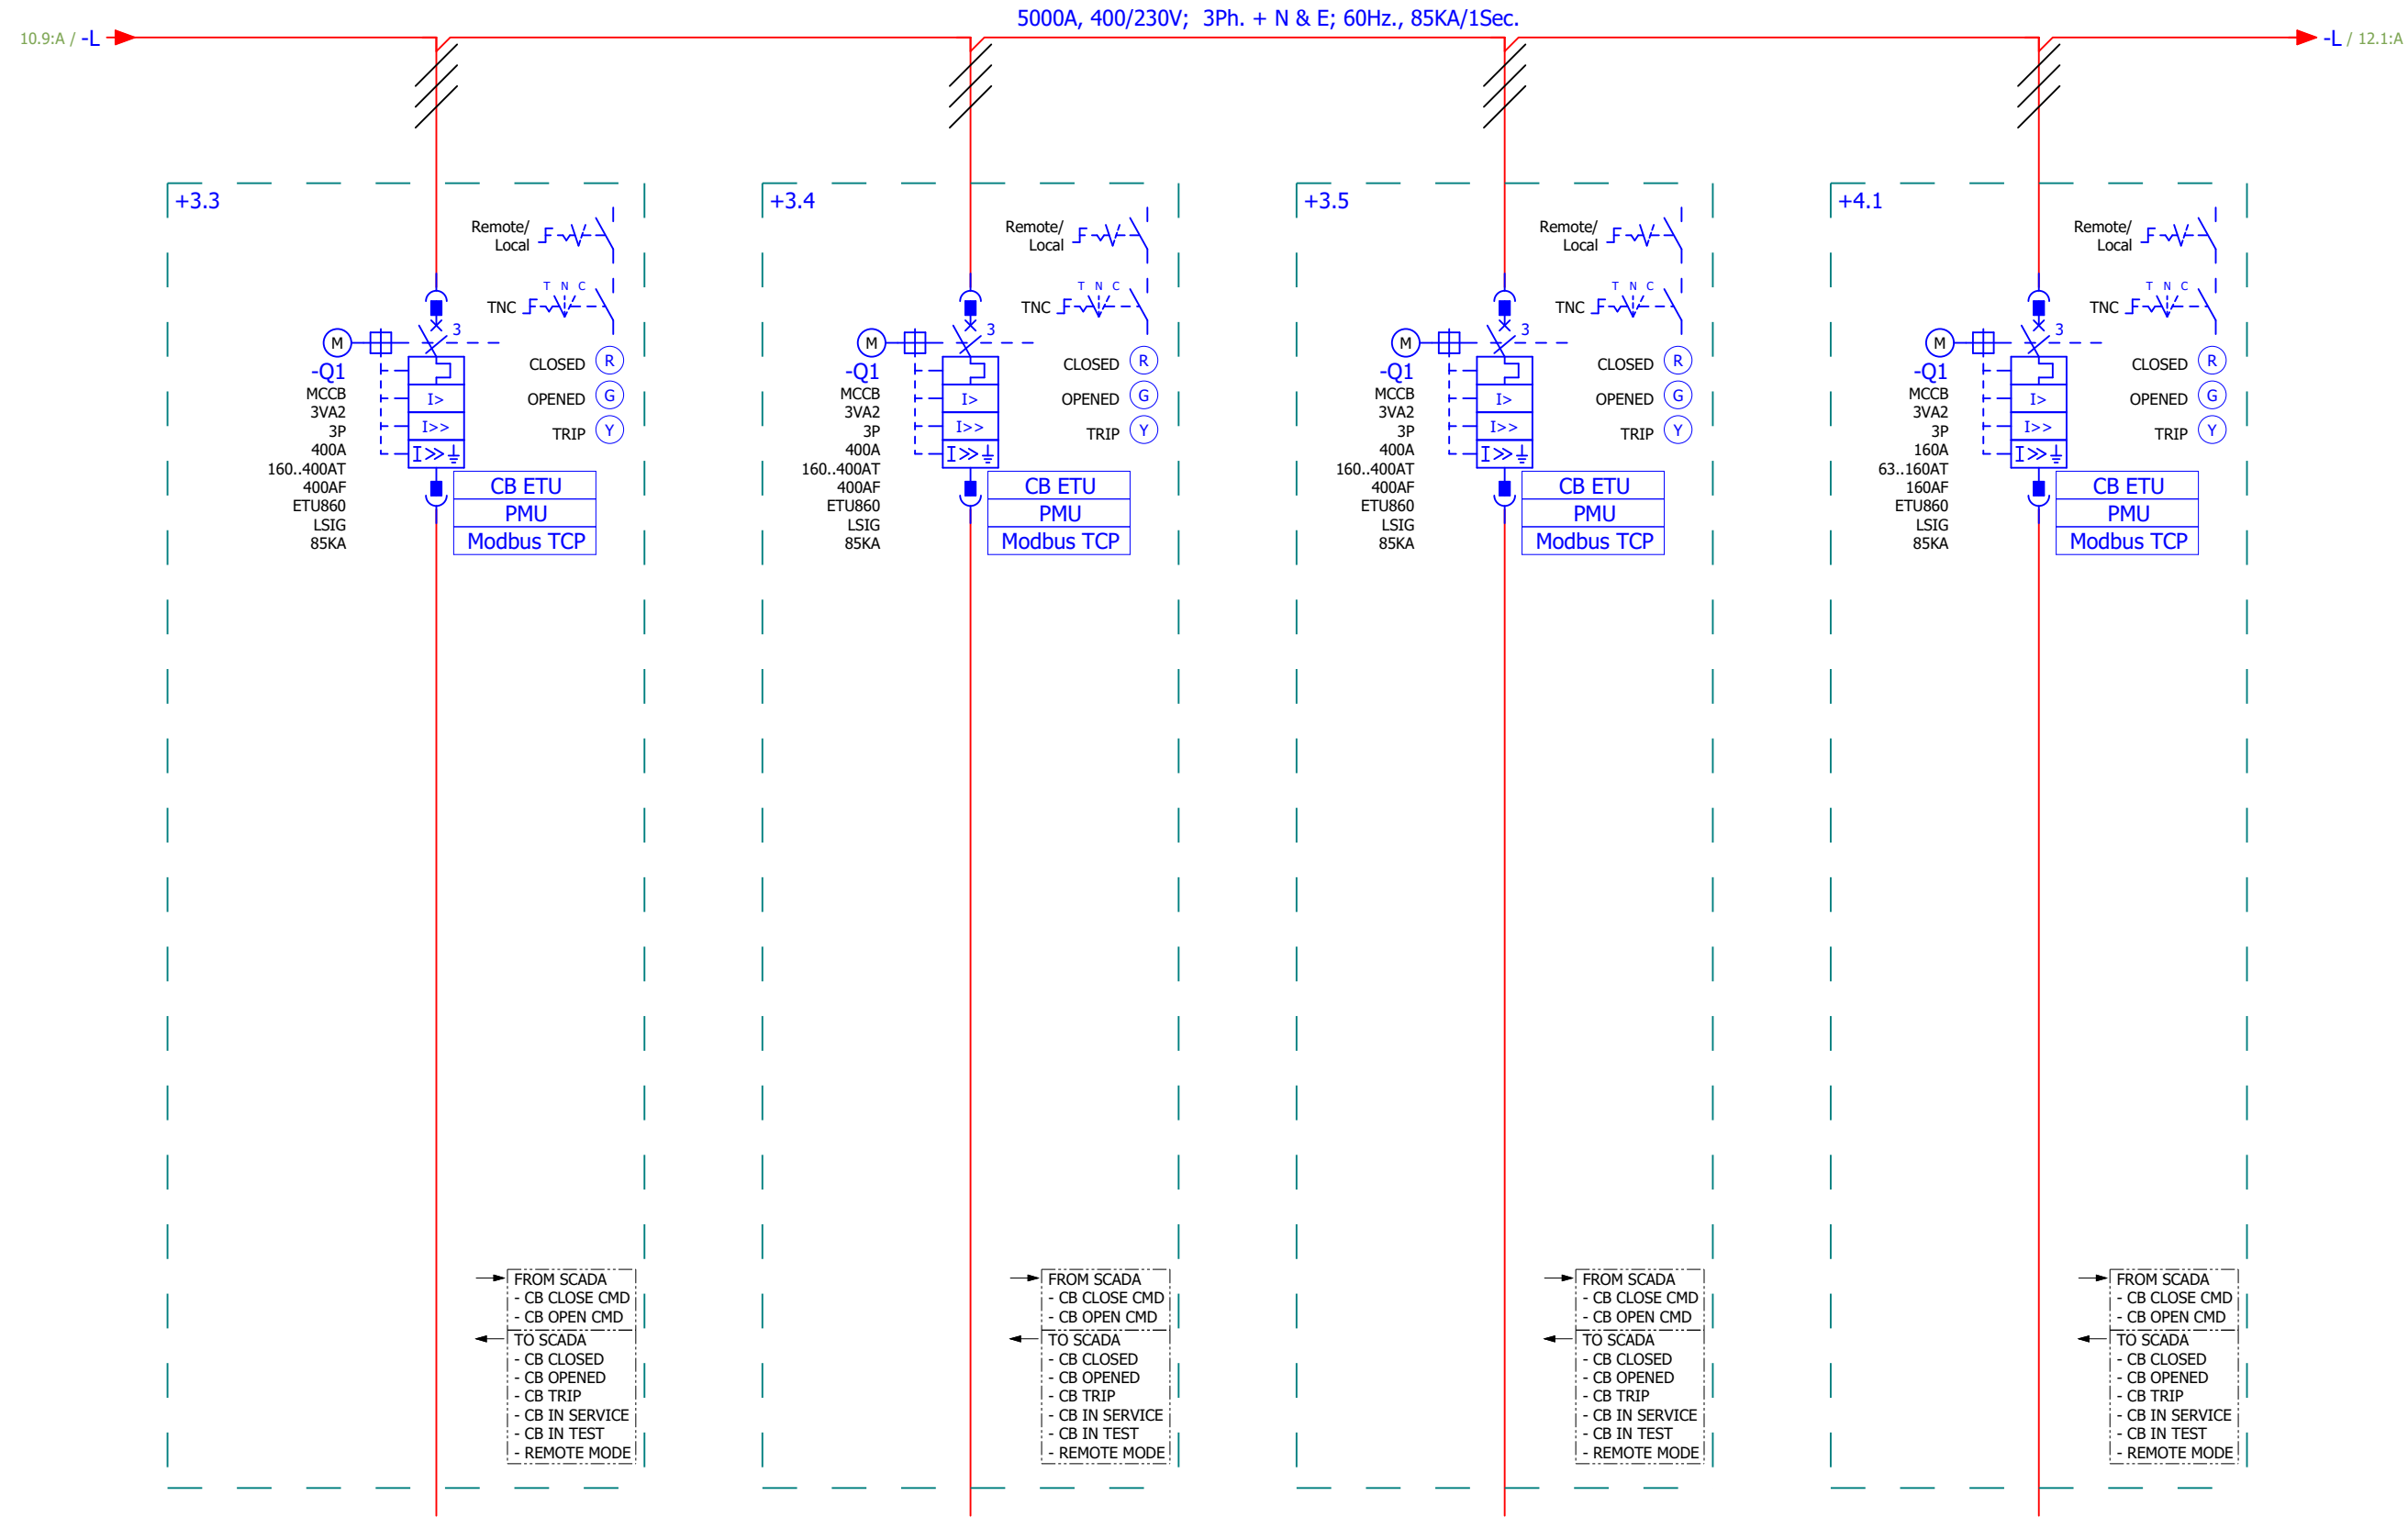

AMP. RATING	400A	400A	400A	160A
LOAD	176.40KVA	---	188.30KVA	60.60KVA
SERVICE	F-CCA-L1-MCC-1A-02	SPARE	F-CCA-L2M-MCC-1A-01	F-CCA-L1-MCC-1A-01
CABLE SIZE	2x(4C x 150)+(1C x 95 CPC)	---	1x(4C x 185)+(1C x 95 CPC)	1x(4C x 70)+(1C x 35 CPC)

REVISION					
REV	DESCRIPTION	PREP	CHKD	APPD	DATE

PROJECT
KING KHALID INTERNATIONAL
AIRPORT (KKIA) PROJECT
CONCOURSE-A

CLIENT

ENGINEER

CONTRACTOR


DRAWING TITLE
CCA-SS1-MDB-1A/B

SINGLE LINE DIAGRAM

MANUFACTURER	DRAWING NO. CCA-SS1-MDB-1A/B		
	PROJECT REFERENCE:		REC. 00
	SCALE : NTS	LOCATION: +	SIZE: A4
	SHEET NO:	11 of 18	

QUOTATION REF.

FILE NAME: 01-02_CCA-SS1-MDB-1A/B

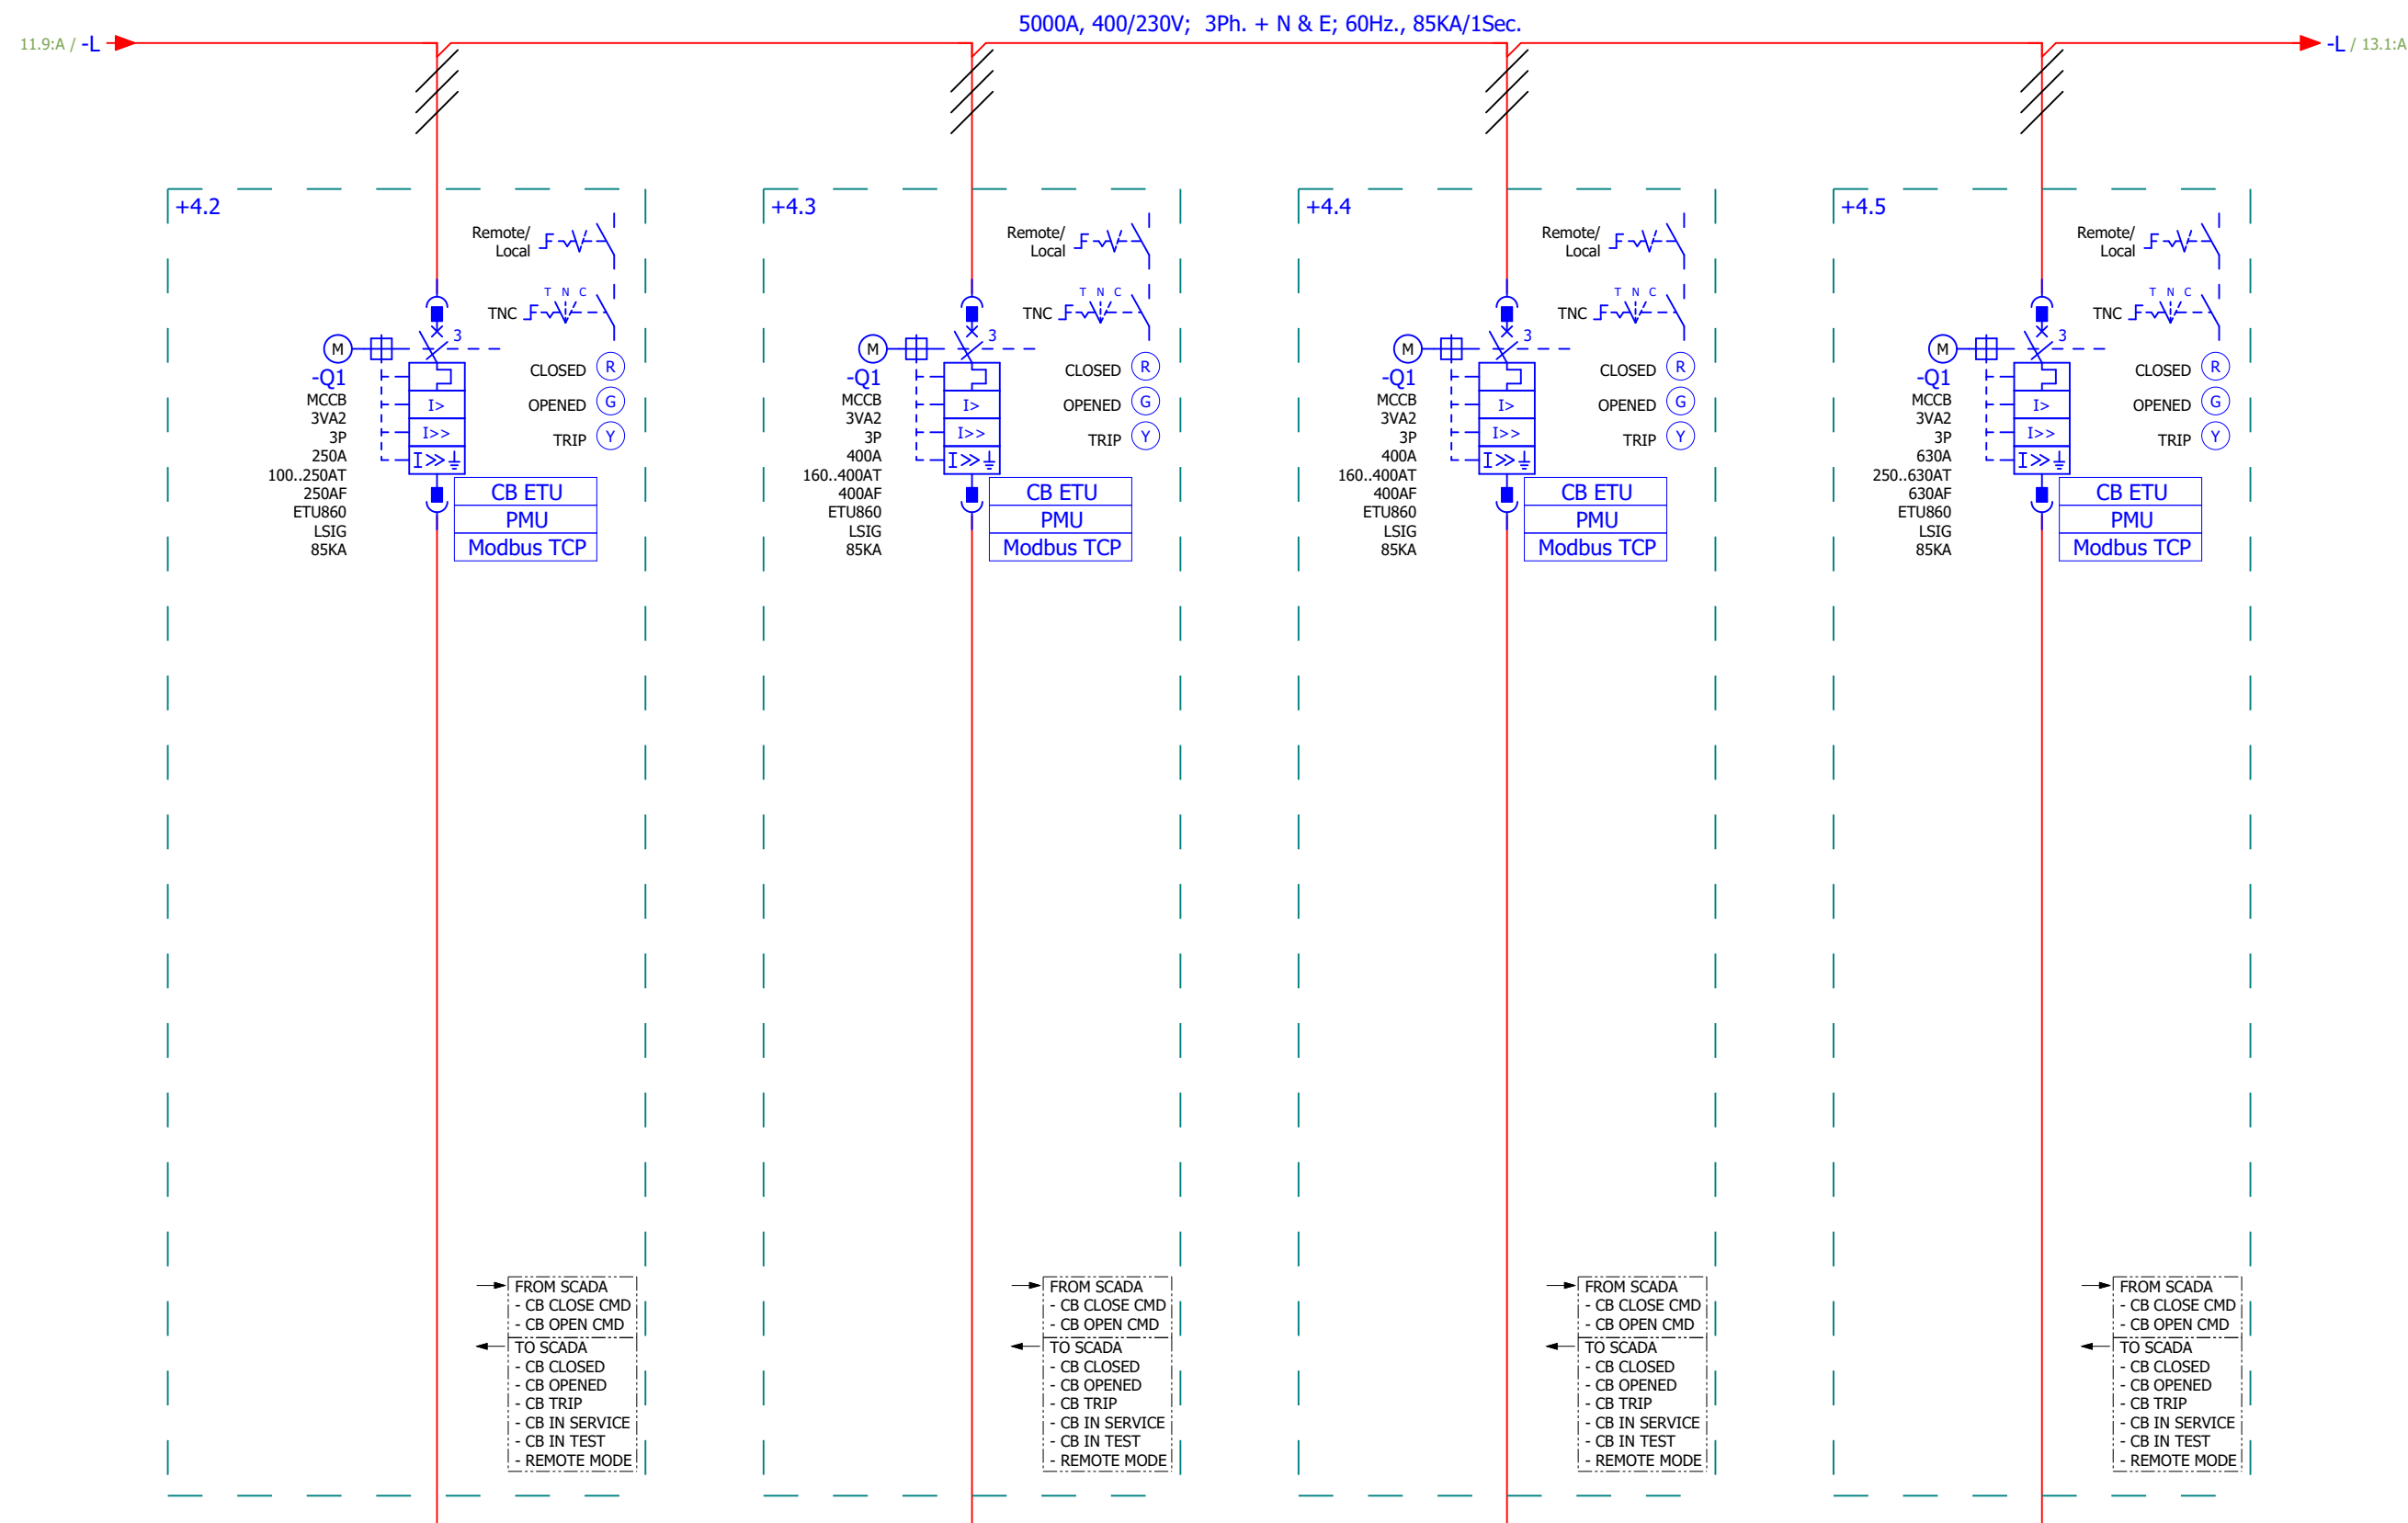

AMP. RATING	250A	400A	400A	630A
LOAD	---	---	---	---
SERVICE	F-CCA-L2M-MCC-1A-02	F-CCA-L1-UPS-1B-01	F-CCA-L1-UPS-1B-BYPASS	spare
CABLE SIZE	1x(4C x 120)+(1C x 70 CPC)	1x(4C x 185)+(1C x 95 CPC)	---	---

REVISION					
REV	DESCRIPTION	PREP	CHKD	APPD	DATE

PROJECT
KING KHALID INTERNATIONAL
AIRPORT (KKIA) PROJECT
CONCOURSE-A

CLIENT

ENGINEER

CONTRACTOR


DRAWING TITLE
CCA-SS1-MDB-1A/B

SINGLE LINE DIAGRAM

MANUFACTURER	DRAWING NO. CCA-SS1-MDB-1A/B		
	PROJECT REFERENCE:		REC. 00
	SCALE : NTS	LOCATION: +	SIZE: A4
	SHEET NO:	12 of 18	

QUOTATION REF.

FILE NAME: 01-02_CCA-SS1-MDB-1A/B

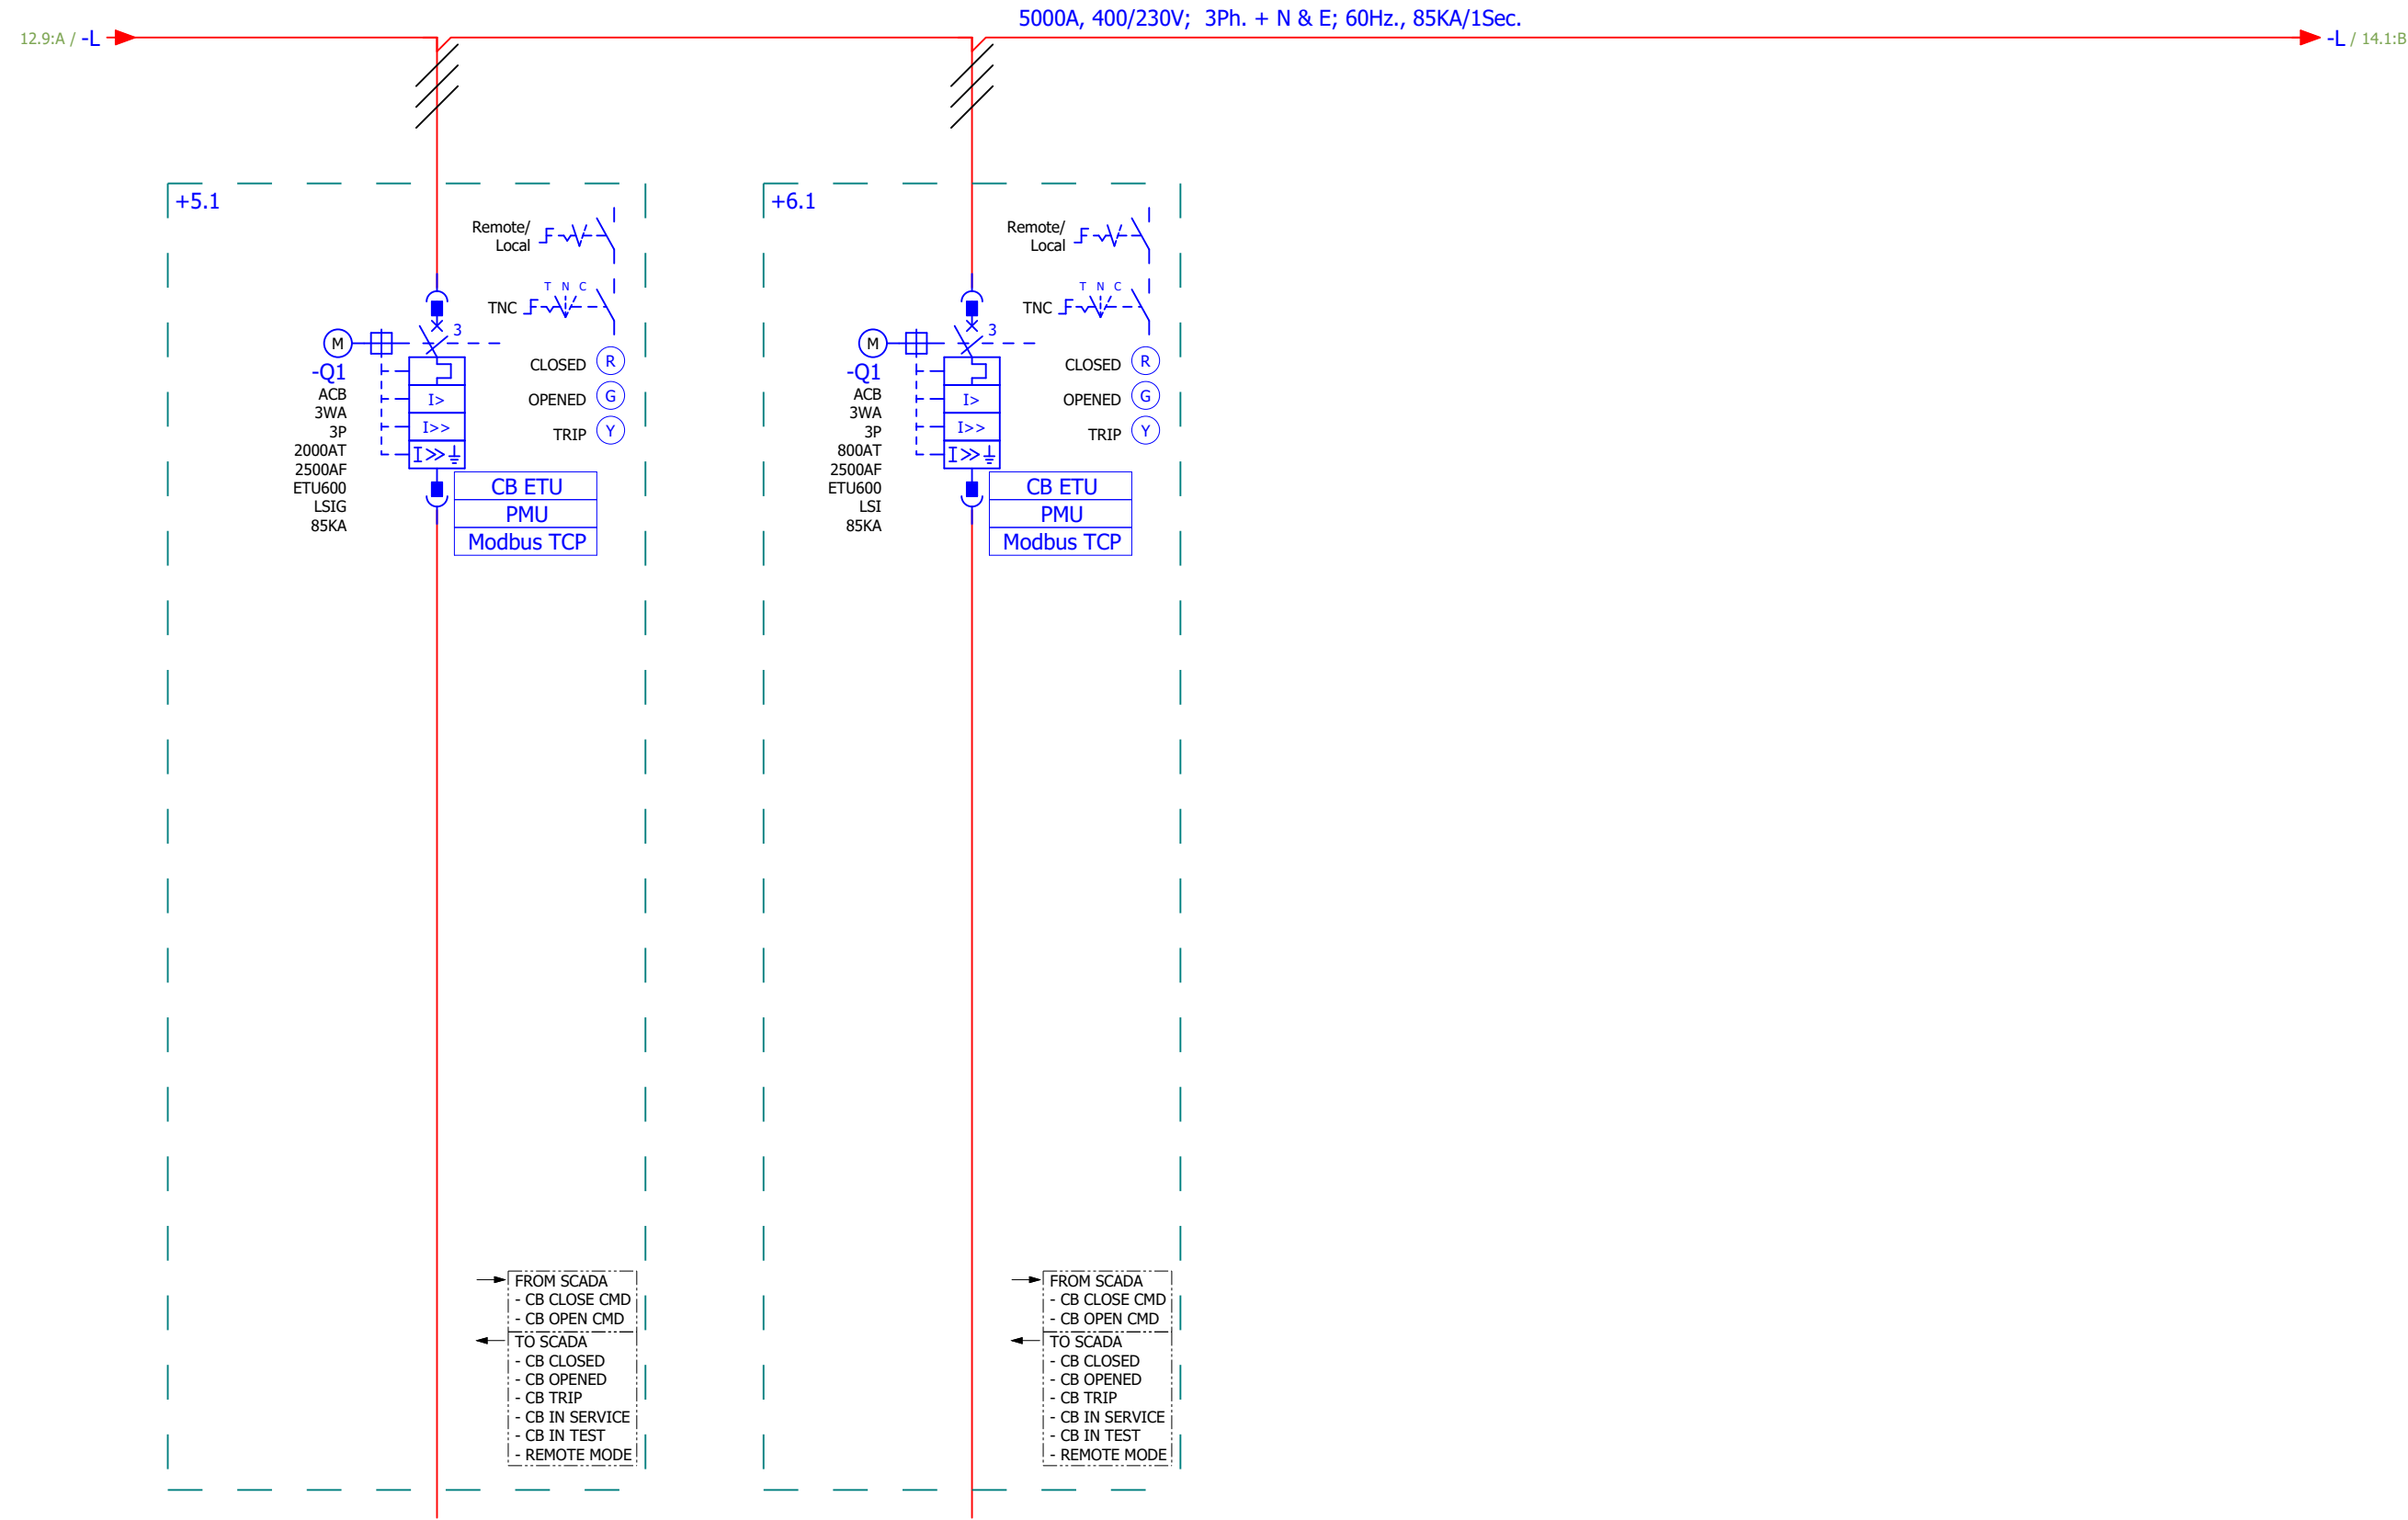

AMP. RATING	2000A	800A
LOAD	---	---
SERVICE	F-CCA-L1-SMDB-1A-02	F-CCA-SS1-ATS-1A
CABLE SIZE	5x(4C x 240)+(1C x N/A CPC)	---

REVISION					
REV	DESCRIPTION	PREP	CHKD	APPD	DATE

PROJECT
KING KHALID INTERNATIONAL
AIRPORT (KKIA) PROJECT
CONCOURSE-A

CLIENT

ENGINEER

CONTRACTOR


DRAWING TITLE
CCA-SS1-MDB-1A/B

SINGLE LINE DIAGRAM

MANUFACTURER	DRAWING NO. CCA-SS1-MDB-1A/B		
	PROJECT REFERENCE:		REC. 00
	SCALE : NTS	LOCATION: +	SIZE: A4
	SHEET NO:	13 of 18	

QUOTATION REF.

FILE NAME: 01-02_CCA-SS1-MDB-1A/B

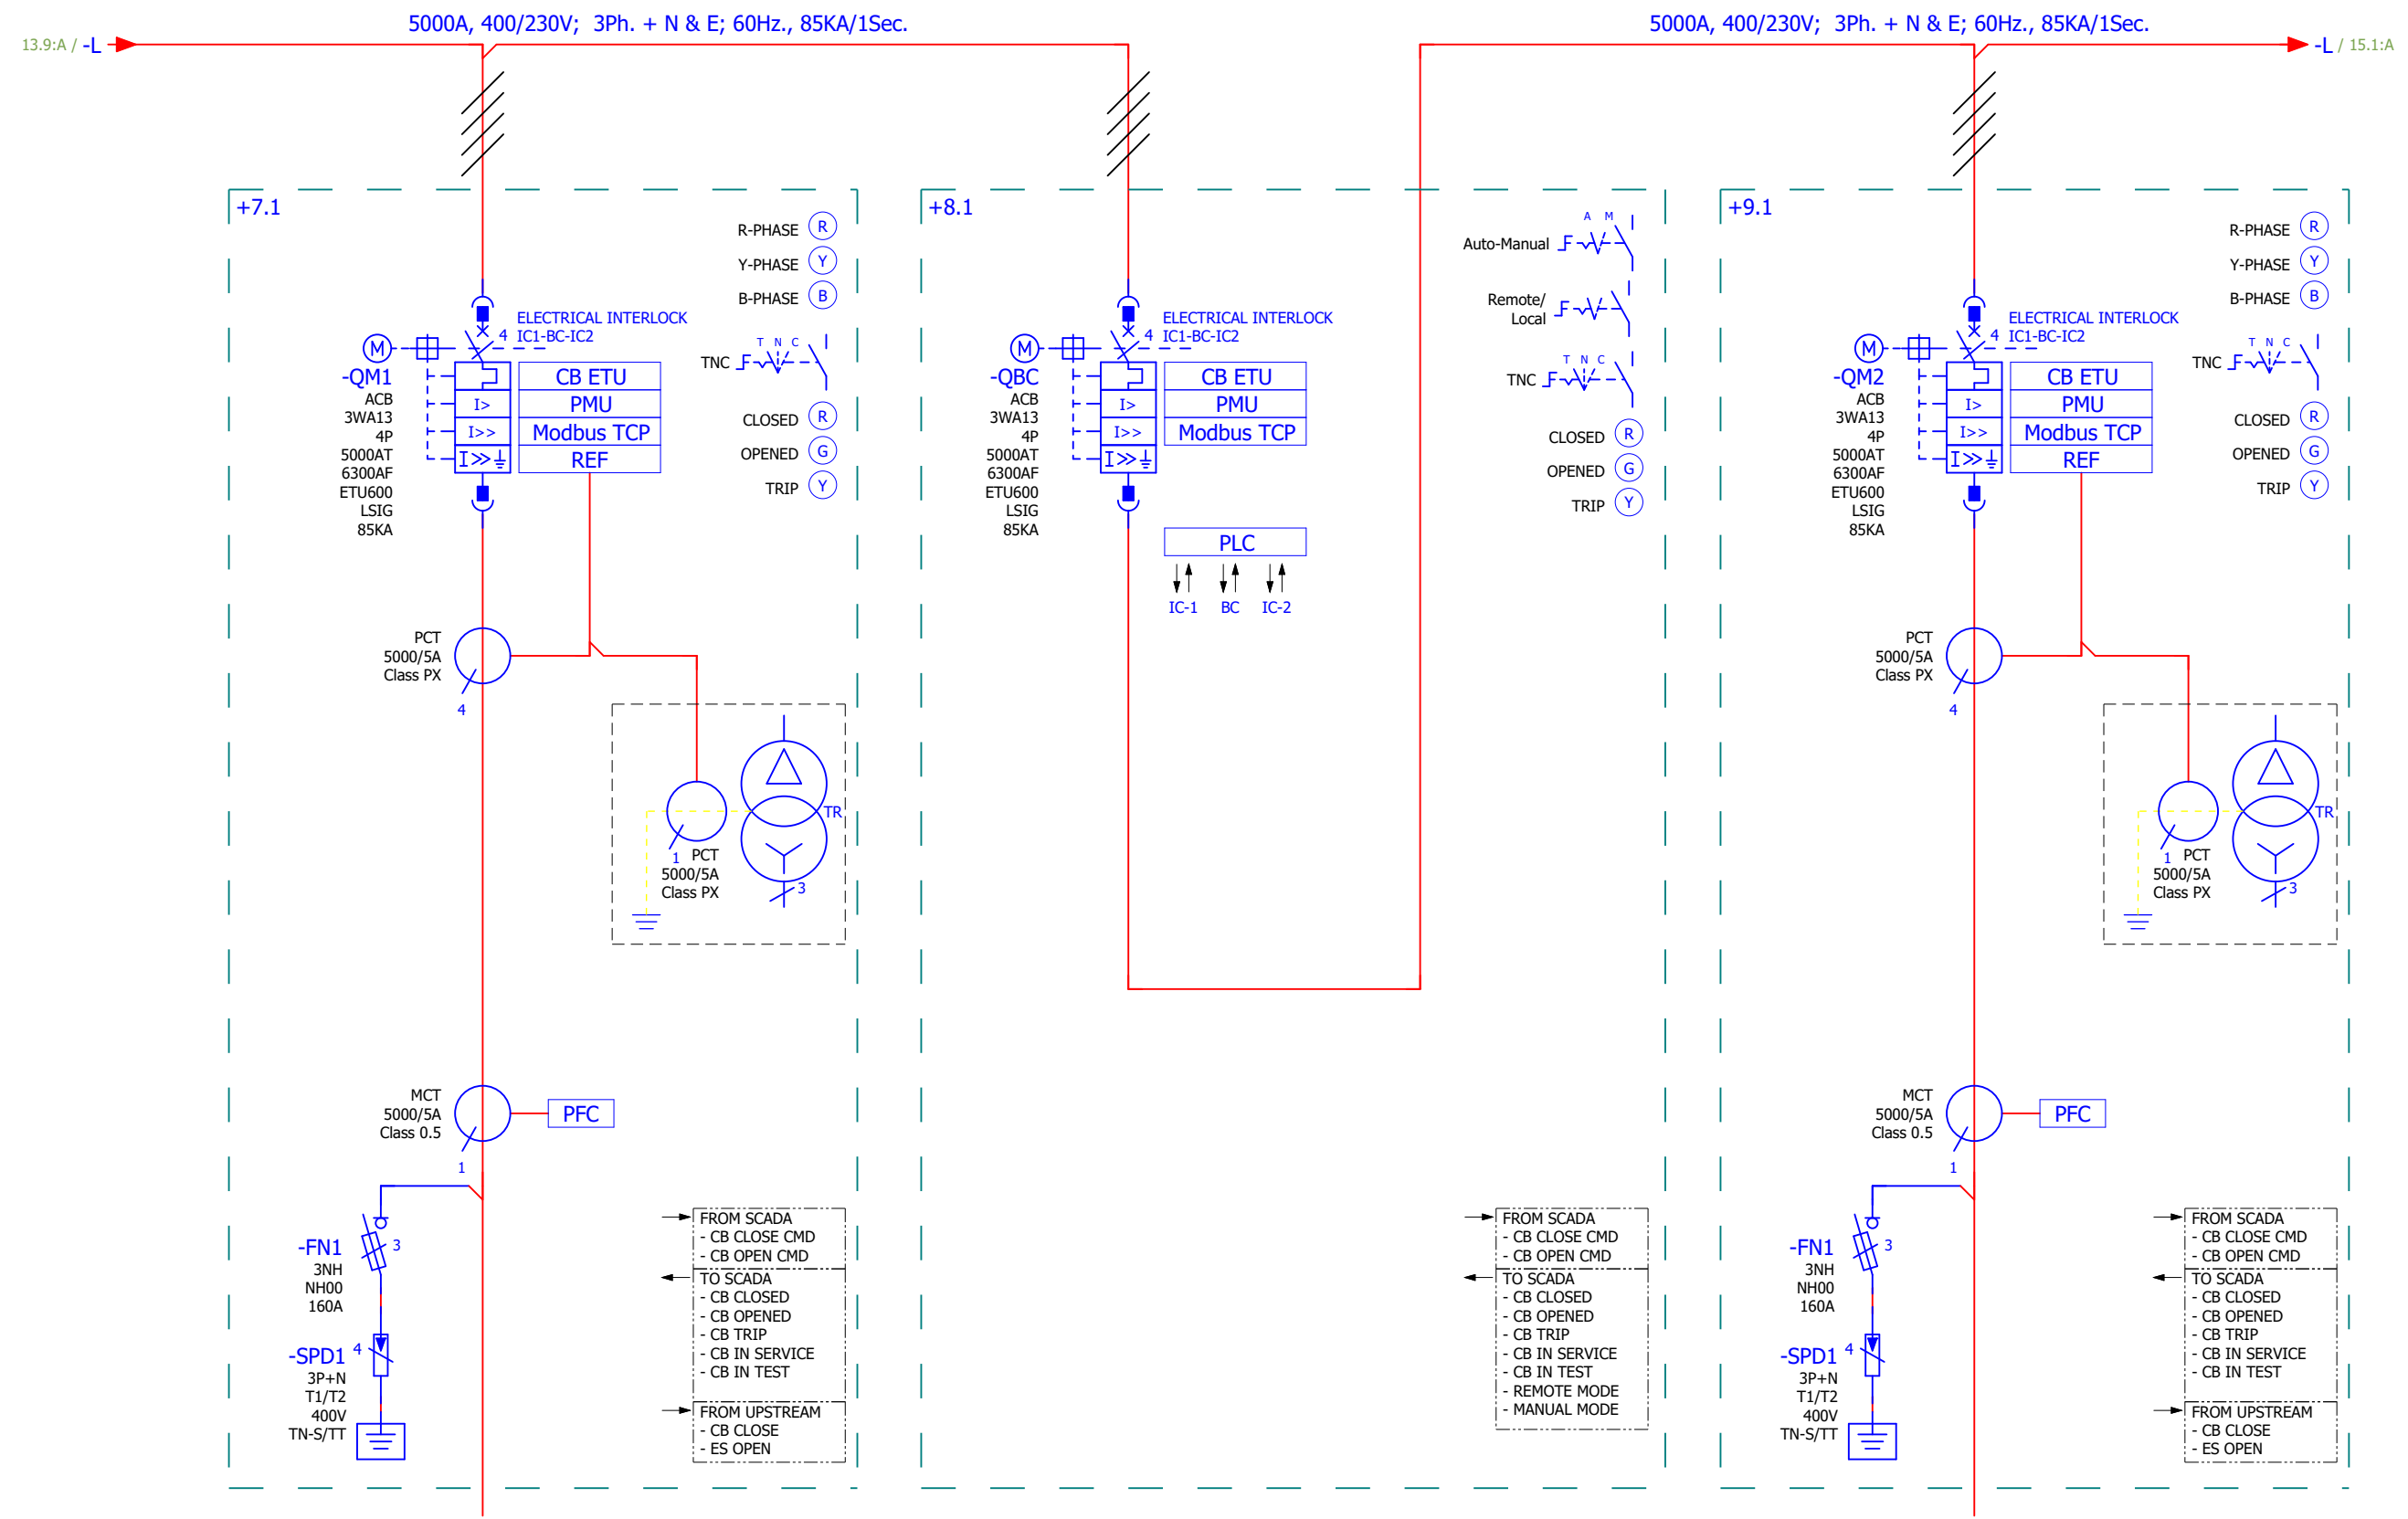


AMP. RATING	5000A	5000A	5000A
LOAD	---	---	---
SERVICE	F-CCA-SS1-MDB-1A	BUSCOUPLER	F-CCA-SS1-MDB-1B
CABLE SIZE	BUS DUCT 5000A	---	BUS DUCT 5000A

REVISION					
REV	DESCRIPTION	PREP	CHKD	APPD	DATE

PROJECT	KING KHALID INTERNATIONAL AIRPORT (KKIA) PROJECT CONCOURSE-A
CLIENT	
ENGINEER	
CONTRACTOR	

DRAWING TITLE			CCA-SS1-MDB-1A/B
			SINGLE LINE DIAGRAM
MANUFACTURER	DRAWING NO.		CCA-SS1-MDB-1A/B
	PROJECT REFERENCE:		REC. 00
	SCALE :	LOCATION:	SIZE: A4
	NTS	+	
SHEET NO: 14 of 18			
QUOTATION REF.			
FILE NAME: 01-02_CCA-SS1-MDB-1A/B			

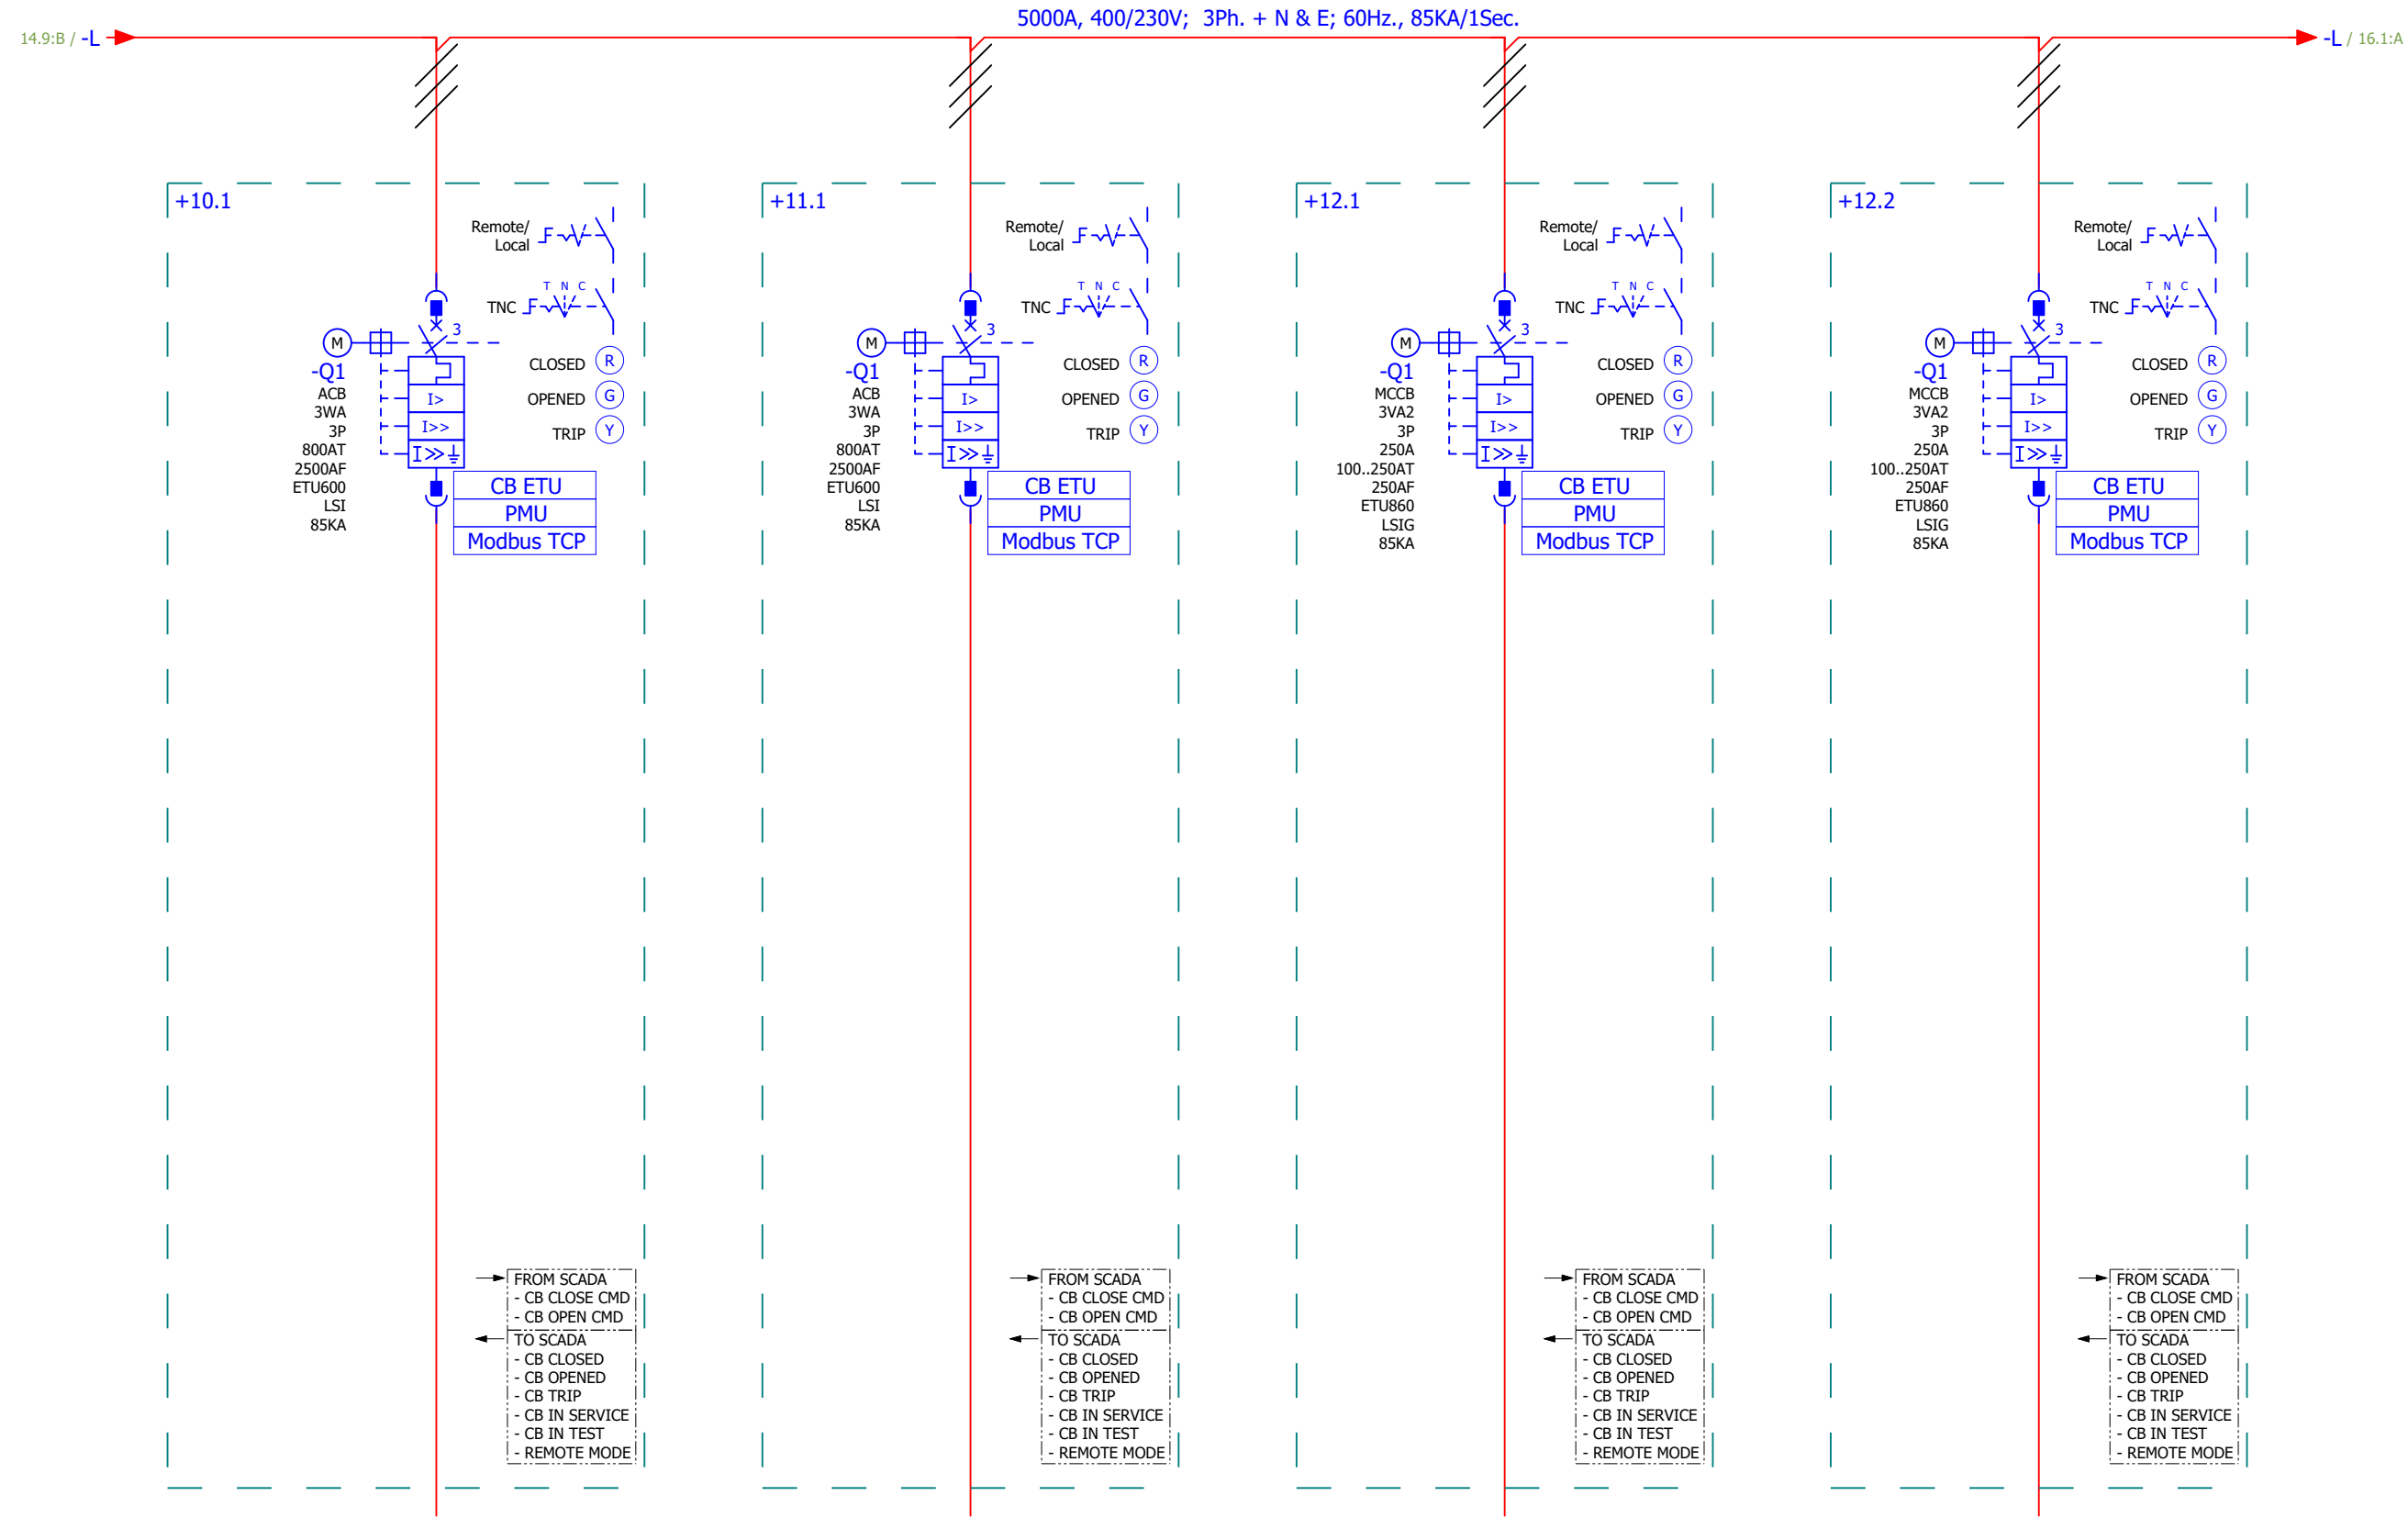

AMP. RATING	800A	800A	250A	250A
LOAD	279.60KVA	408.60KVA	---	107.50KVA
SERVICE	F-CCA-L2M-MCC-1B-02	F-CCA-L2M-MCC-1B-05	F-CCA-SS1-AHF-1B	F-CCA-L1-MCC-1B-02
CABLE SIZE	2x(4C x 300)+(1C x 120 CPC)	3x(4C x 240)+(1C x 120 CPC)	---	1x(4C x 240)+(1C x 120 CPC)

REVISION					
REV	DESCRIPTION	PREP	CHKD	APPD	DATE

PROJECT

KING KHALID INTERNATIONAL
AIRPORT (KKIA) PROJECT
CONCOURSE-A

CLIENT

ENGINEER

CONTRACTOR

DRAWING TITLE


CCA-SS1-MDB-1A/B

SINGLE LINE DIAGRAM

MANUFACTURER	DRAWING NO. CCA-SS1-MDB-1A/B		
	PROJECT REFERENCE:		REC. 00
	SCALE : NTS	LOCATION: +	SIZE: A4
	SHEET NO:	15 of 18	

QUOTATION REF.

FILE NAME: 01-02_CCA-SS1-MDB-1A/B

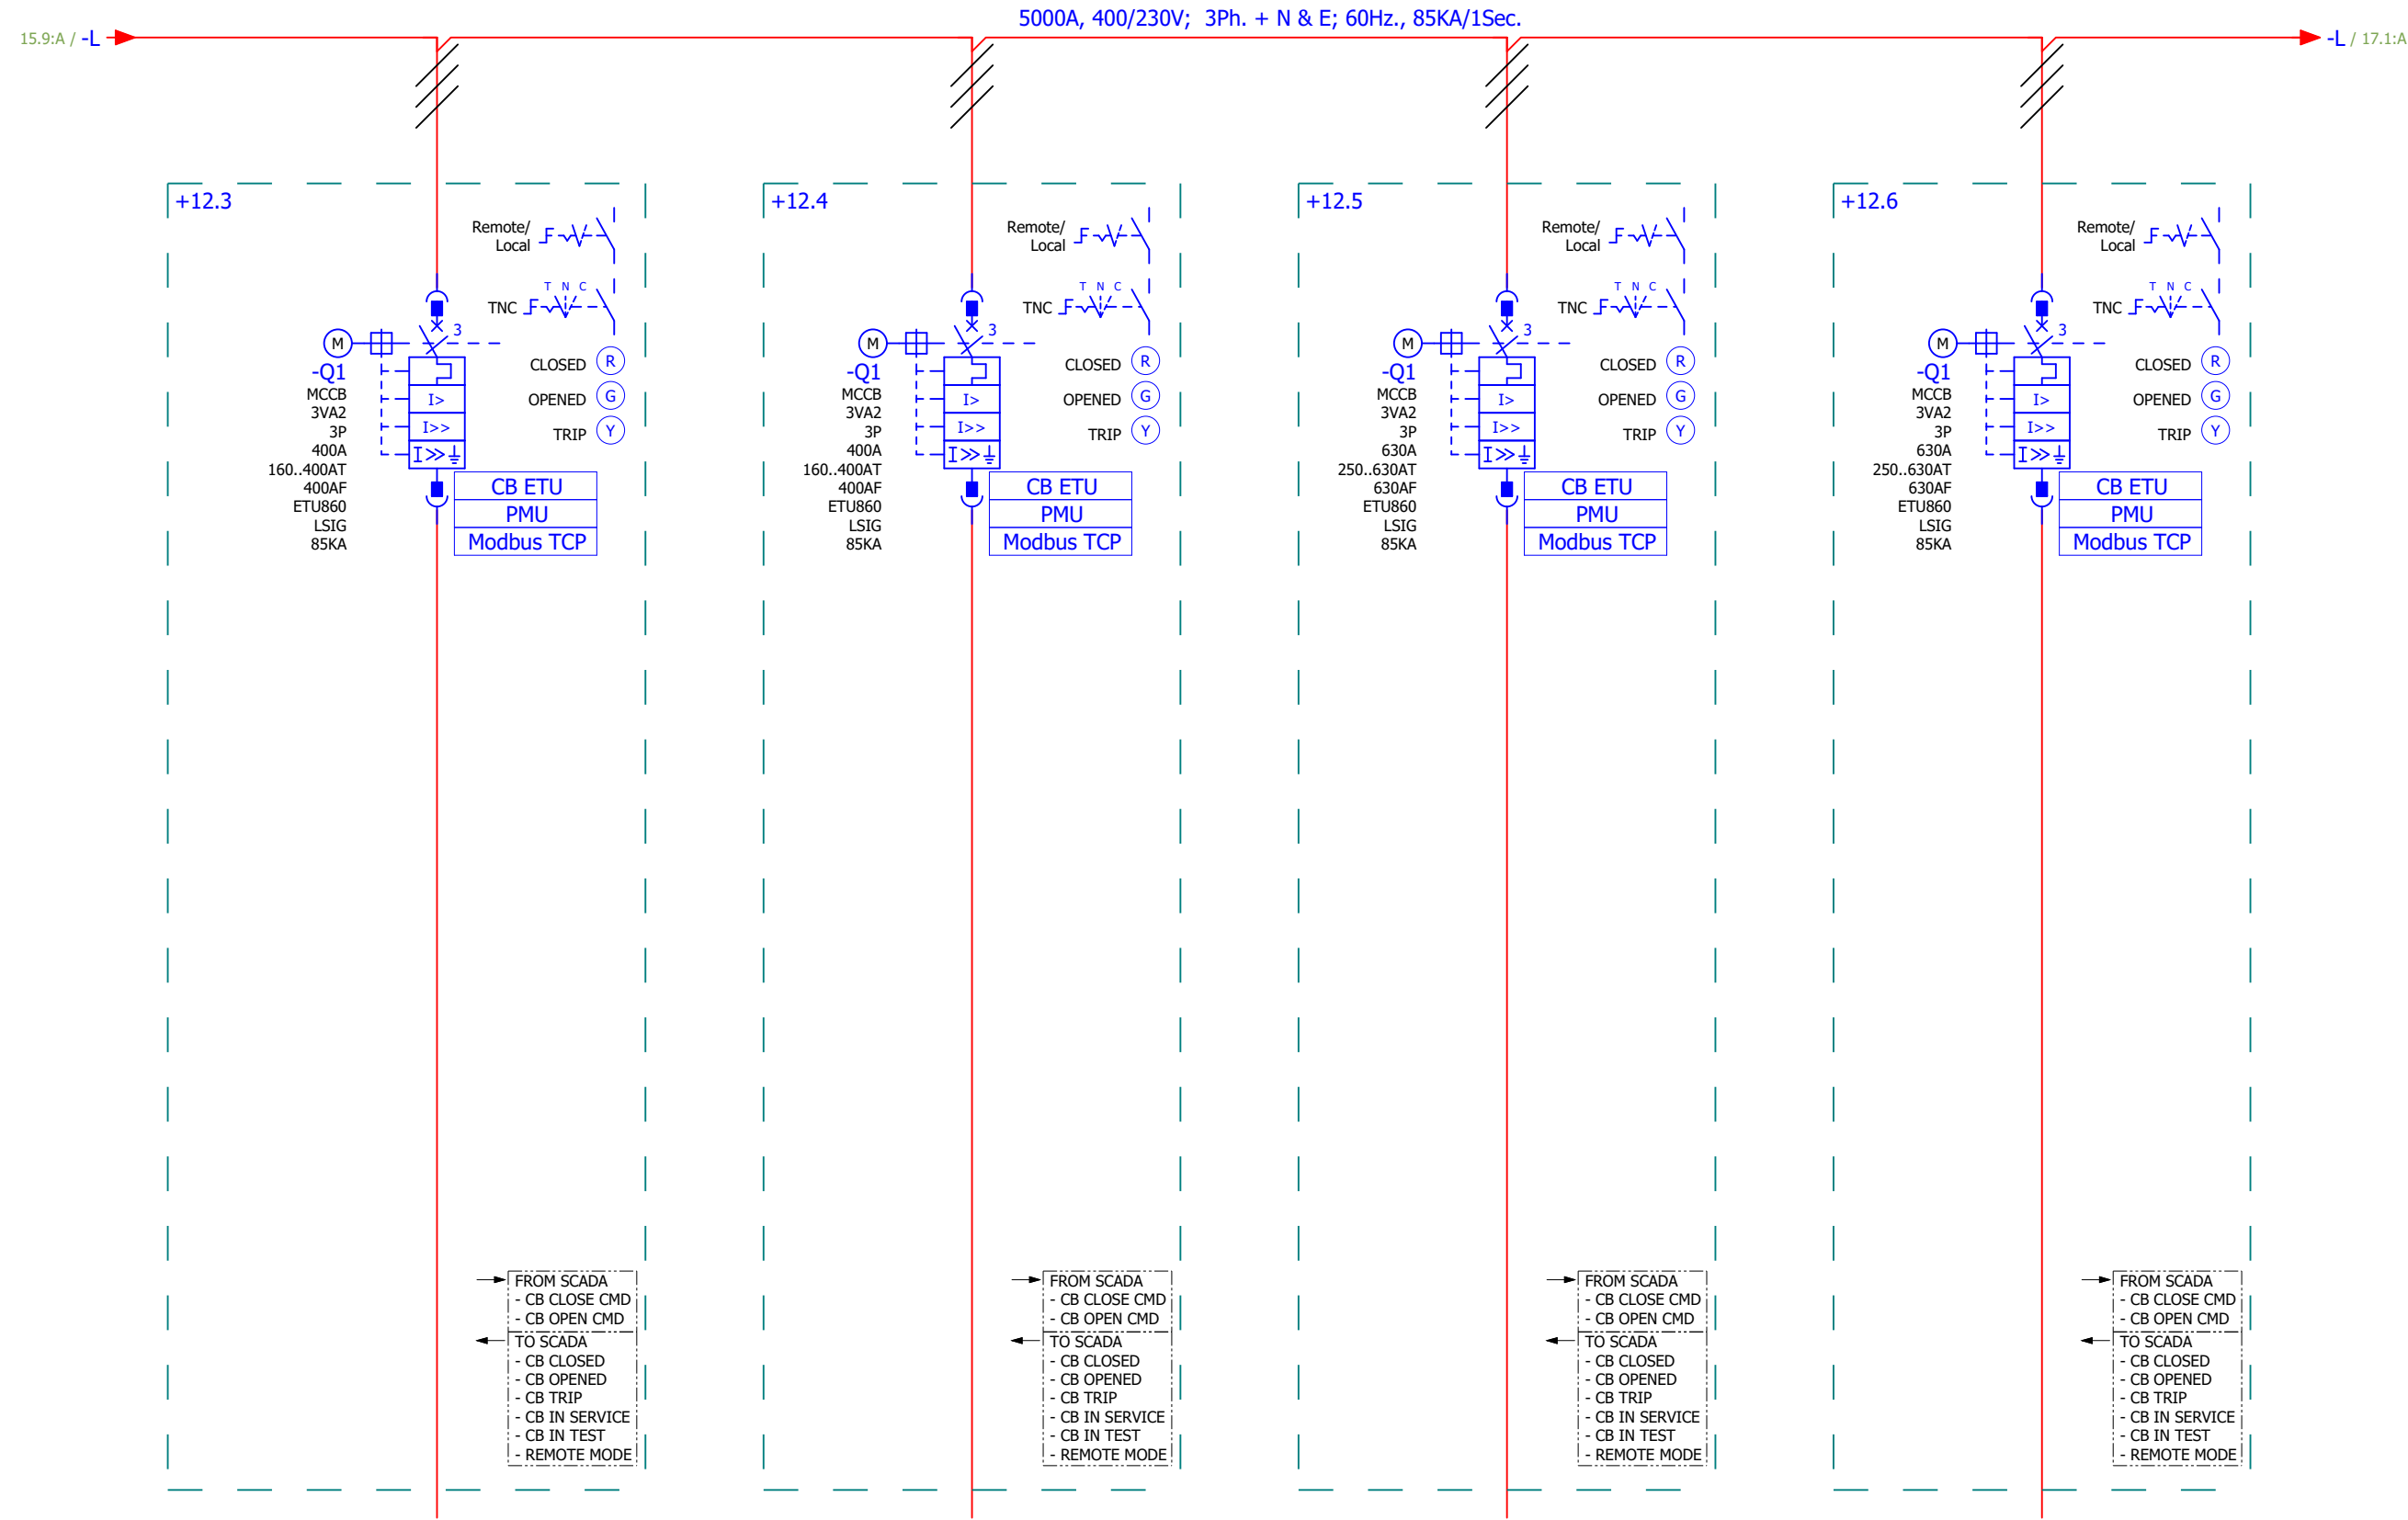

AMP. RATING	400A	400A	630A	630A
LOAD	215.00KVA	199.75KVA	---	069.10KVA
SERVICE	F-CCA-L2M-MCC-1B-03	F-CCA-L1-MCC-1B-01	spare	F-CCA-L2M-MCC-1B-01
CABLE SIZE	2x(4C x 240)+(1C x 120 CPC)	1x(4C x 240)+(1C x 120 CPC)	---	1x(4C x 240)+(1C x 120 CPC)

REVISION					
REV	DESCRIPTION	PREP	CHKD	APPD	DATE

PROJECT
KING KHALID INTERNATIONAL
AIRPORT (KKIA) PROJECT
CONCOURSE-A

CLIENT

ENGINEER

CONTRACTOR


DRAWING TITLE
CCA-SS1-MDB-1A/B

SINGLE LINE DIAGRAM

MANUFACTURER	DRAWING NO. CCA-SS1-MDB-1A/B		
	PROJECT REFERENCE:		REC. 00
	SCALE : NTS	LOCATION: +	SIZE: A4
	SHEET NO:	16 of 18	

QUOTATION REF.

FILE NAME: 01-02_CCA-SS1-MDB-1A/B

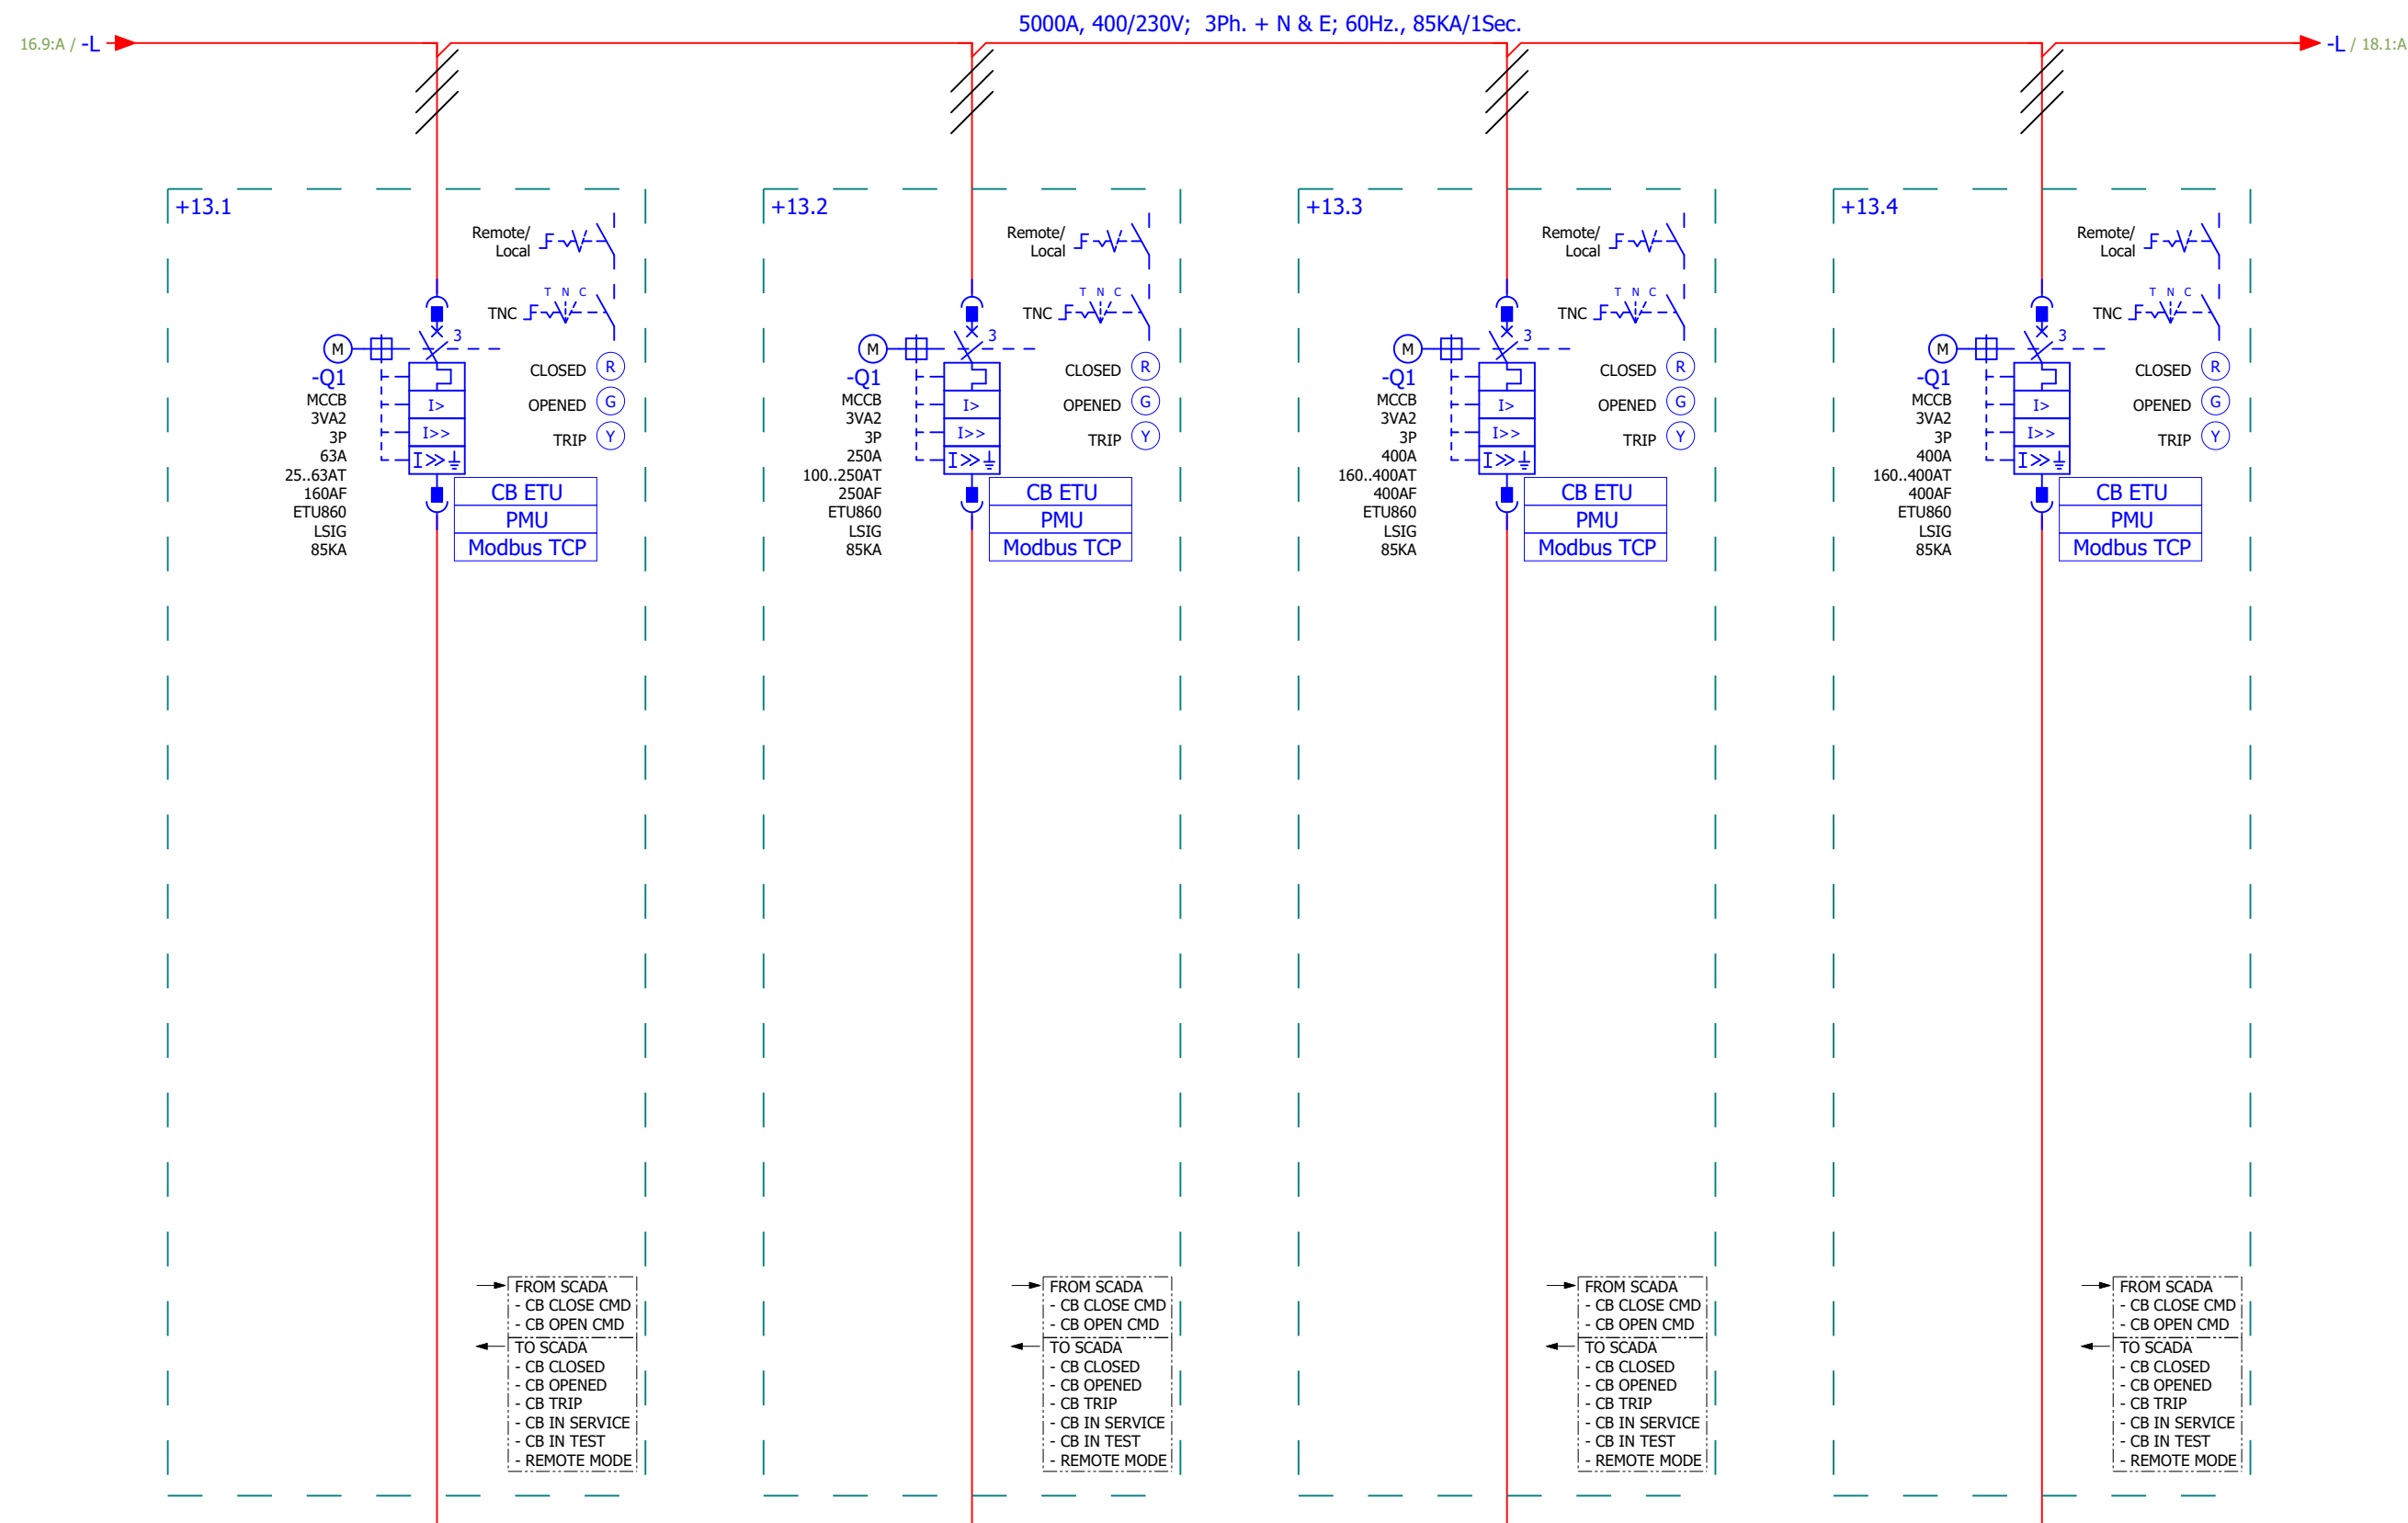

AMP. RATING	63A	250A	400A	400A
LOAD	31.25KVA	134.38KVA	---	160.20KVA
SERVICE	F-CCA-L2-SMDB-1B-01	F-CCA-L1-SMDB-1B-01	spare	F-CCA-L2M-MCC-1B-04
CABLE SIZE	---	---	---	1x(4C x 185)+(1C x 95 CPC)

REVISION					
REV	DESCRIPTION	PREP	CHKD	APPD	DATE

PROJECT
KING KHALID INTERNATIONAL
AIRPORT (KKIA) PROJECT
CONCOURSE-A

CLIENT

ENGINEER

CONTRACTOR


DRAWING TITLE
CCA-SS1-MDB-1A/B

SINGLE LINE DIAGRAM

MANUFACTURER	DRAWING NO. CCA-SS1-MDB-1A/B		
	PROJECT REFERENCE:		REC. 00
	SCALE : NTS	LOCATION: +	SIZE: A4
	SHEET NO:	17 of 18	

QUOTATION REF.

FILE NAME: 01-02_CCA-SS1-MDB-1A/B

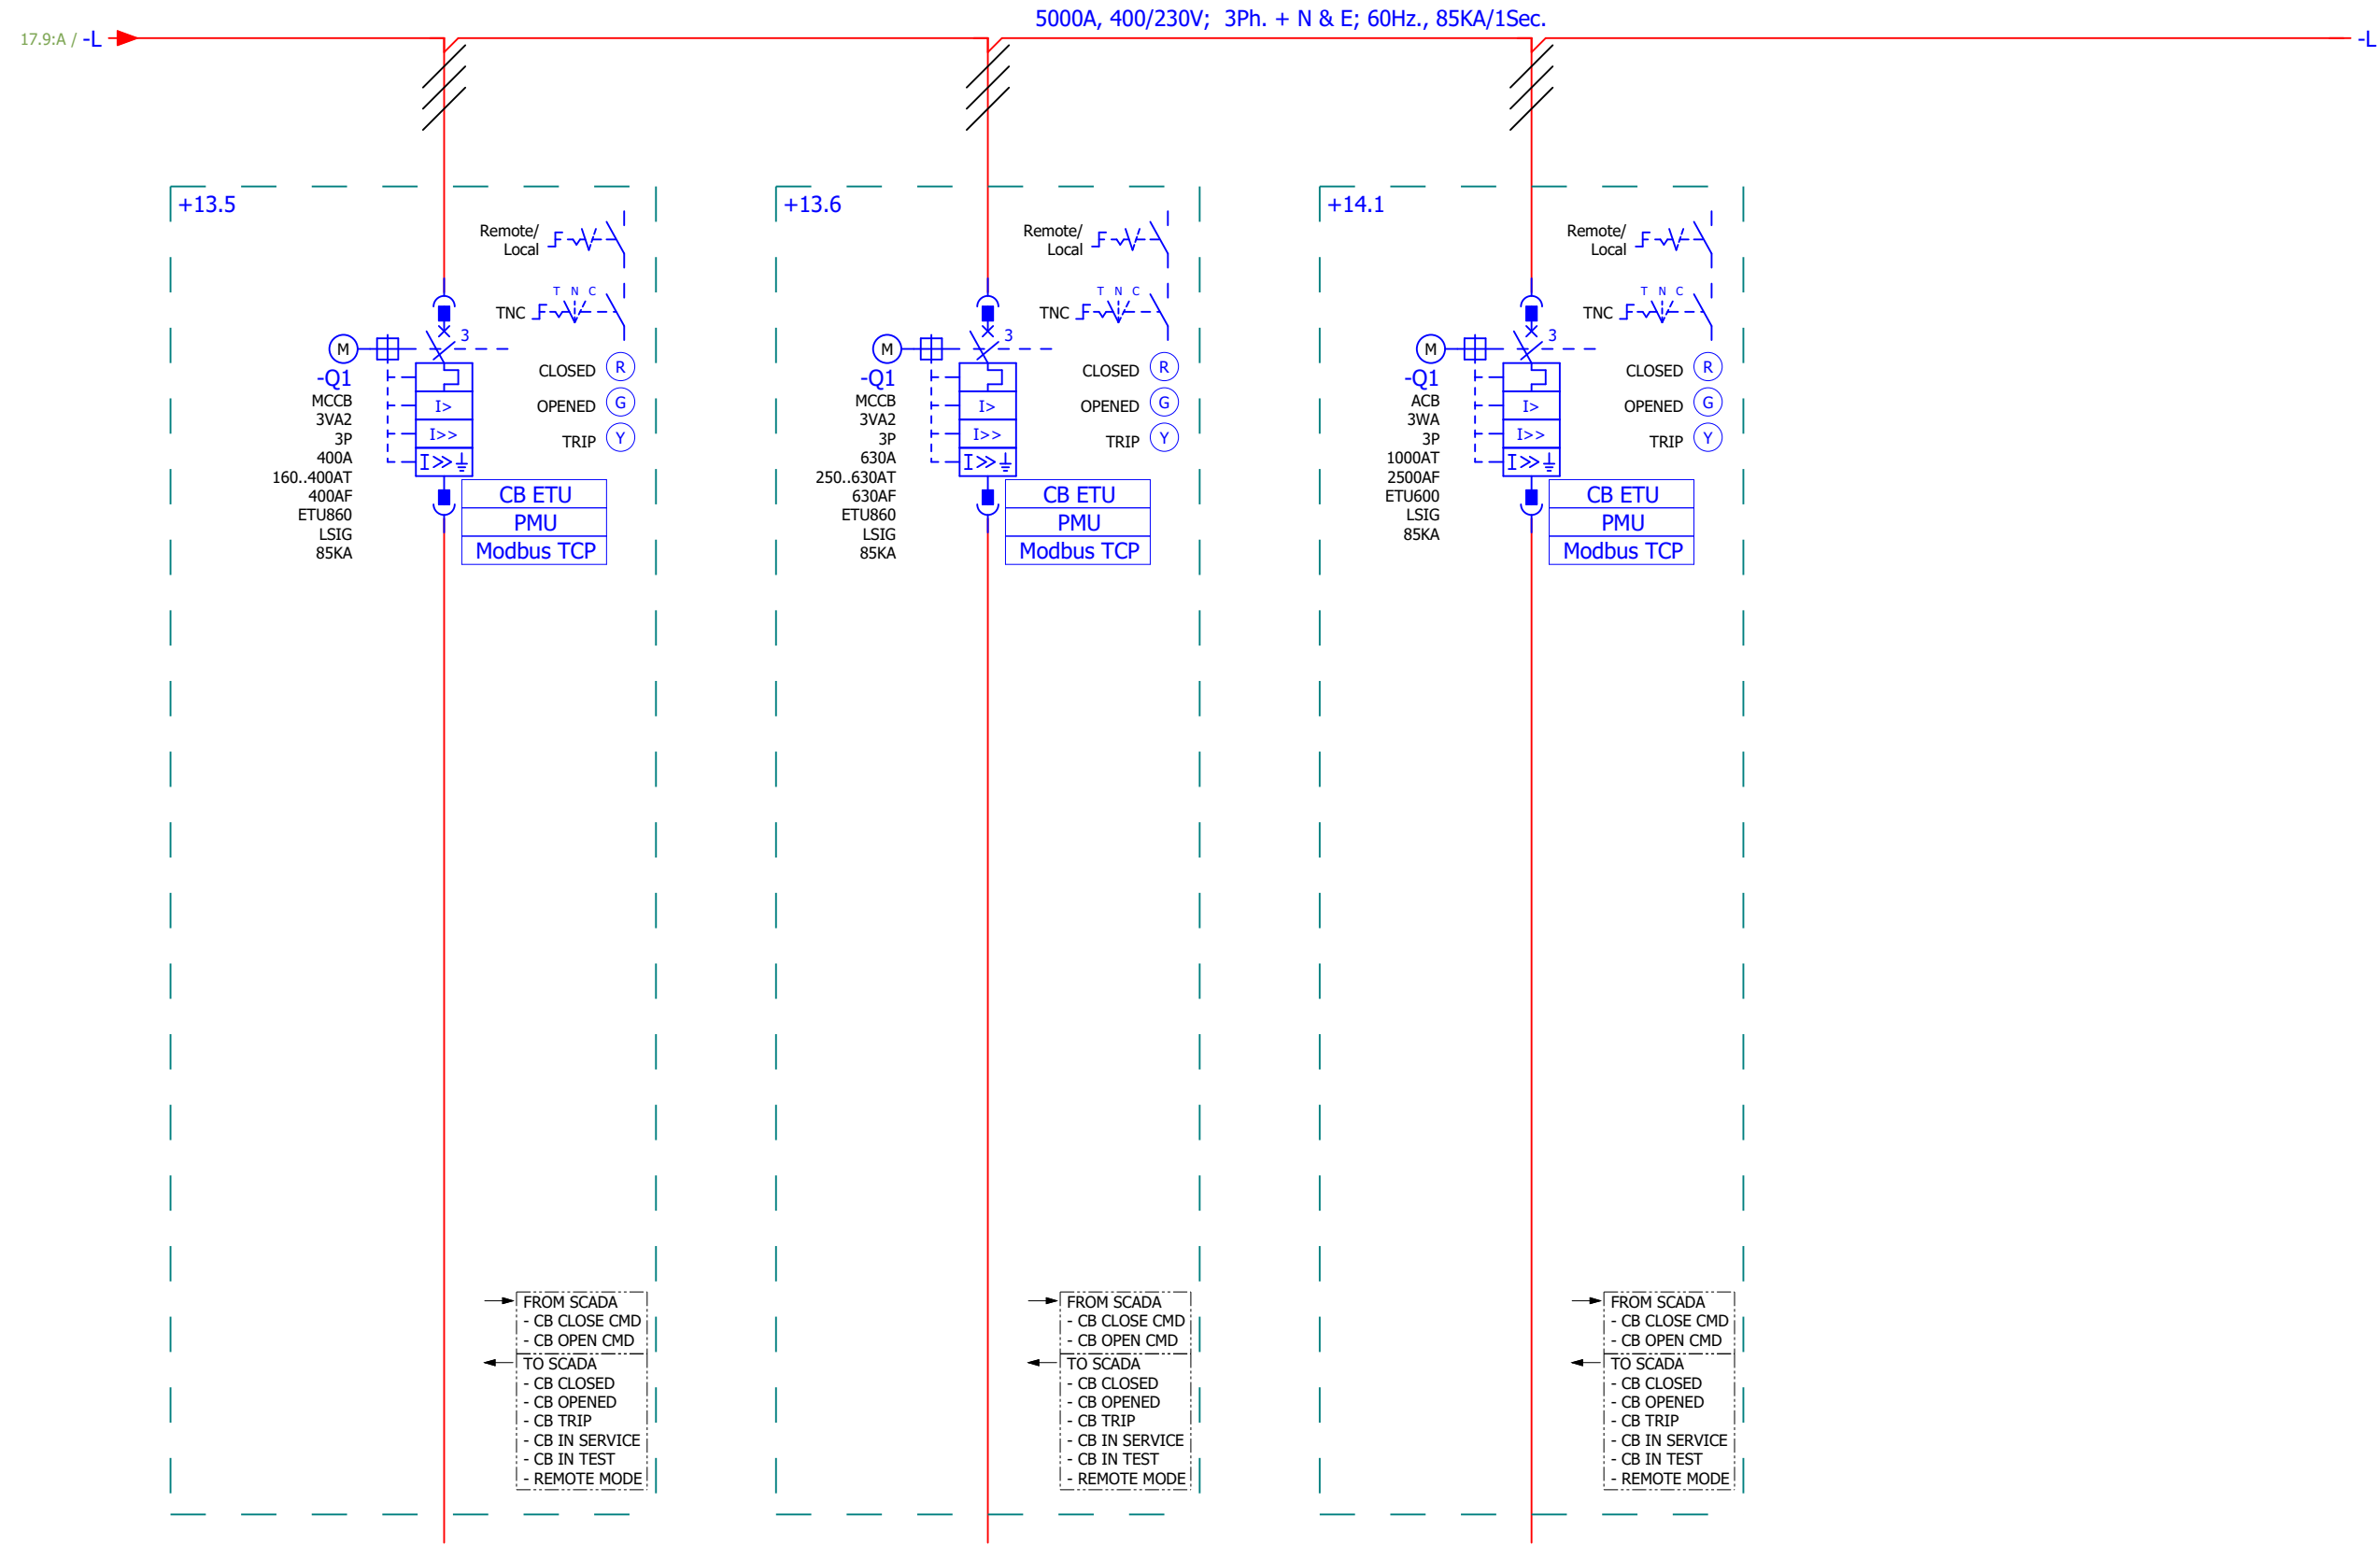

AMP. RATING	400A	630A	1000A
LOAD	160.00KVA	319.80KVA	---
SERVICE	F-CCA-L1-UPS-1B-02	F-CCA-L2M-MCC-1B-06	F-CCA-SS1-PFC-1B
CABLE SIZE	---	3x(4C x 185)+(1C x 95 CPC)	---

REVISION					
REV	DESCRIPTION	PREP	CHKD	APPD	DATE

PROJECT

KING KHALID INTERNATIONAL
AIRPORT (KKIA) PROJECT
CONCOURSE-A

CLIENT

ENGINEER

CONTRACTOR

DRAWING TITLE

CCA-SS1-MDB-1A/B

SINGLE LINE DIAGRAM

MANUFACTURER	DRAWING NO. CCA-SS1-MDB-1A/B		
	PROJECT REFERENCE:		REC. 00
	SCALE : NTS	LOCATION: +	SIZE: A4
	SHEET NO:	18 of 18	

QUOTATION REF.

FILE NAME: 01-02_CCA-SS1-MDB-1A/B

Bill of Material

Order number	Qty.	Description	Make
3SB6215-6AA20-1AA0	1	Compact pilot light 22 mm plastic round integrated LED 110V AC/DC red	SIEMENS
3SB6215-6AA40-1AA0	1	Compact pilot light 22 mm plastic round integrated LED 110V AC/DC green	SIEMENS
3SB6215-6AA30-1AA0	1	Compact pilot light 22 mm plastic round integrated LED 110V AC/DC yellow	SIEMENS
3SU1100-2BF60-1MA0	1	Selector switch, illuminable, 22 mm, round, plastic, white, selector switch, short, 2 switch positions O-I, latching, 10:30h/13:30h, with holder, 1 NO, 1 NC, screw terminal	SIEMENS
3SU1400-1AA10-1BA0	3	CONTACT MODULE WITH 1 CONTACT ELEMENT, 1 NO, SCREW TERMINAL, FOR FRONT PLATE MOUNTING	SIEMENS
3SU1002-2BM60-0AA0	1	Selector switch, illuminable, 22 mm, round, plastic, white, selector switch, short, 3 switch positions I>O<II, momentary contact type, actuating angle 2x45°, 10:30h/12h/13:30h	SIEMENS
3SU1550-0AA10-0AA0	1	HOLDER FOR 3 MODULES, METAL	SIEMENS
3WA1110-4GF64-7HA3-Z C01+F19	1	Withdrawable circuit breaker, with guide frame, IEC 60947-2, size 1, 3-pole, In=1000 A up to 690 V AC 50/60 Hz, breaking capacity M Icu=85/66 kA at 500/690 V, ETU600 LSIG electronic trip unit upgradeable, color display, Bluetooth, USB interface, basic protection LT, ST, INST, GFx, neutral conductor protection requires an external neutral point current sensor, trip alarm switch (1x CO), connection at rear flange, guide frame with shutter and position signaling switch, with internal voltage tap on lower stab of circuit breaker, with voltage tap module VTM680 and power supply of ETU600, able to communication, integrated metering type PMF-3 Advanced Power Monitor., Voltage, Energy, Power, Power factor, Frequency, Unbalance, Temperature, Power quality, with manual and motorized operating mechanism (M) 110-127 V AC / 110-125 V DC, Storage status and ready-to- close signaling switches, Auxiliary switches 4NO+4NC, Closing coil (CC) 100% OP 110-127 V AC / 110-125 V DC, applicable for continuous duty, Remote trip alarm reset (RR) 110-127 V AC / 110-125 V DC for momentary duty, without 2nd shunt trip, Shunt trip (ST) 100% OP 110-127 V AC / 110-125 V DC, suitable for continuous duty, Option C01 = Operations counter for circuit breaker Option F19 = COM190 COM module PROFINET IO Modbus TCP 2 switched Ethernet ports circuit breaker internal	SIEMENS
3WA9111-0AP03	1	Accessory Circuit breaker 3WA, protective cover IP55 not possible in combination with door sealing frame	SIEMENS
3WL9111-0BA21-0AA0	1	Accessories circuit breaker 3WL prot.cover f. mech. on/off lock mount f. safety lock	SIEMENS
3WA9111-0AA21	1	ACCESSORY CIRCUIT BREAKER 3WA, EXTERNAL METERING CURRENT SENSOR FOR N CONDUCTOR, FRAME SIZE 1, WINDOW TYPE, (WITHOUT COPPER BAR)	SIEMENS

REVISION					
REV	DESCRIPTION	PREP	CHKD	APPD	DATE
PROJECT					
KING KHALID INTERNATIONAL AIRPORT (KKIA) PROJECT CONCOURSE-A					
CLIENT					
ENGINEER					
CONTRACTOR					
DRAWING TITLE					
CCA-SS1-MDB-1A/B					
SUMMARIZED PARTS LIST					
MANUFACTURER		DRAWING NO. CCA-SS1-MDB-1A/B			
		PROJECT REFERENCE:			REC. 00
		SCALE : NTS		LOCATION: +1.1	SIZE: A4
		SHEET NO: 1 of			
QUOTATION REF.					
FILE NAME: 01-02_CCA-SS1-MDB-1A/B					

Device tag list

	+ / 9.3: C
3SB6215-6AA20-1AA0	1
3SB6215-6AA40-1AA0	1
3SB6215-6AA30-1AA0	1
3SU1100-2BF60-1MA0	1
3SU1400-1AA10-1BA0	1
3SU1002-2BM60-0AA0	1
3SU1550-0AA10-0AA0	1
-Q1	+ / 9.2: C
3WA1110-4GF64-7HA3-Z C01+F19	1
3WA9111-0AP03	1
3WL9111-0BA21-0AA0	1
3WA9111-0AA21	1

REVISION					
REV/	DESCRIPTION	PREP	CHKD	APPD	DATE
PROJECT					
KING KHALID INTERNATIONAL AIRPORT (KKIA) PROJECT CONCOURSE-A					
CLIENT					
ENGINEER					
CONTRACTOR					
DRAWING TITLE					
CCA-SS1-MDB-1A/B					
DEVICE TAG LIST					
MANUFACTURER		DRAWING NO. CCA-SS1-MDB-1A/B			
		PROJECT REFERENCE:			REC. 00
		SCALE : NTS		LOCATION: +1.1	SIZE: A4
		SHEET NO: 2 of			
QUOTATION REF.					
FILE NAME: 01-02_CCA-SS1-MDB-1A/B					

Bill of Material

Order number	Qty.	Description	Make
3SB6215-6AA20-1AA0	1	Compact pilot light 22 mm plastic round integrated LED 110V AC/DC red	SIEMENS
3SB6215-6AA40-1AA0	1	Compact pilot light 22 mm plastic round integrated LED 110V AC/DC green	SIEMENS
3SB6215-6AA30-1AA0	1	Compact pilot light 22 mm plastic round integrated LED 110V AC/DC yellow	SIEMENS
3SU1100-2BF60-1MA0	1	Selector switch, illuminable, 22 mm, round, plastic, white, selector switch, short, 2 switch positions O-I, latching, 10:30h/13:30h, with holder, 1 NO, 1 NC, screw terminal	SIEMENS
3SU1400-1AA10-1BA0	3	CONTACT MODULE WITH 1 CONTACT ELEMENT, 1 NO, SCREW TERMINAL, FOR FRONT PLATE MOUNTING	SIEMENS
3SU1002-2BM60-0AA0	1	Selector switch, illuminable, 22 mm, round, plastic, white, selector switch, short, 3 switch positions I>O<II, momentary contact type, actuating angle 2x45°, 10:30h/12h/13:30h	SIEMENS
3SU1550-0AA10-0AA0	1	HOLDER FOR 3 MODULES, METAL	SIEMENS
3VA2116-6KQ32-0AA0	1	circuit breaker 3VA2 IEC Frame 160 breaking capacity class H Icu=85 kA @ 415 V 3-pole, line protection ETU860, LSIG, In=160 A overload protection Ir=63 A...160 A short-circuit protection Isd=0.6..10x In, Ii=1.5..10x In neutral conductor protection optionally with external current transformer, up to 160% ground-fault protection, can be switched off Ig=0.2...1 x In, tg=0.05-0.8s nut keeper kit	SIEMENS
3VA9107-0NA10	1	EXT. N-CURRENT TRANSFORMER FOR N-PROTECTION ACCESSORY FOR: 3VA2 IN=160/250A	SIEMENS
3VA9267-0HA20	1	MOTOR OPERATOR 110-230 V AC / 110-250 V DC ACCESSORY FOR: 3VA2 100//160/250	SIEMENS
3VA9988-0AA12	1	AUXILIARY SWITCH CHANGEOVER CONTACTS TYPE HQ (7MM) ACCESSORY FOR 3VA-BREAKER 240VAC/250VDC 6A	SIEMENS
3VA9988-0AB12	1	TRIP ALARM SWITCH CHANGEOVER CONTACTS TYPE HQ (7MM) ACCESSORY FOR 3VA1 & 3VA20 UPTO 3VA25	SIEMENS
3VA9123-0KD00	1	DRAW-OUT UNIT COMPLETE KIT ACCESSORY FOR: CIRCUIT BREAKER, 3 POLE 3VA2 100/160/250.	SIEMENS
3VA9987-0KD81	1	crank handle for draw-out unit accessory for: draw-out unit	SIEMENS

REVISION					
REV	DESCRIPTION	PREP	CHKD	APPD	DATE
PROJECT					
KING KHALID INTERNATIONAL AIRPORT (KKIA) PROJECT CONCOURSE-A					
CLIENT					
ENGINEER					
CONTRACTOR					
DRAWING TITLE					
CCA-SS1-MDB-1A/B					
SUMMARIZED PARTS LIST					
MANUFACTURER		DRAWING NO. CCA-SS1-MDB-1A/B			
		PROJECT REFERENCE:			REC. 00
		SCALE : NTS		LOCATION: +2.1	SIZE: A4
		SHEET NO: 1 of			
QUOTATION REF.					
FILE NAME: 01-02_CCA-SS1-MDB-1A/B					

Device tag list

	+/-9.4°C
3SB6215-6AA20-1AA0	1
3SB6215-6AA40-1AA0	1
3SB6215-6AA30-1AA0	1
3SU1100-2BF60-1MA0	1
3SU1400-1AA10-1BA0	1
3SU1002-2BM60-0AA0	1
3SU1550-0AA10-0AA0	1

$-Q1$	$+9.4:C$
3VA2116-6KQ32-0AA0	1
3VA9107-0NA10	1
3VA9267-0HA20	1
3VA9988-0AA12	1
3VA9988-0AB12	1
3VA9123-0KD00	1
3VA9987-0KD81	1

REVISION					
REV	DESCRIPTION	PREP	CHKD	APPD	DATE
PROJECT					
KING KHALID INTERNATIONAL AIRPORT (KKIA) PROJECT CONCOURSE-A					
CLIENT					
ENGINEER					
CONTRACTOR					
DRAWING TITLE					
CCA-SS1-MDB-1A/B					
DEVICE TAG LIST					
MANUFACTURER		DRAWING NO. CCA-SS1-MDB-1A/B			
		PROJECT REFERENCE:			REC. 00
		SCALE : NTS		LOCATION: +2.1	SIZE: A4
		SHEET NO: 2 of			
QUOTATION REF.					
FILE NAME: 01-02_CCA-SS1-MDB-1A/B					

Bill of Material

Order number	Qty.	Description	Make
3SB6215-6AA20-1AA0	1	Compact pilot light 22 mm plastic round integrated LED 110V AC/DC red	SIEMENS
3SB6215-6AA40-1AA0	1	Compact pilot light 22 mm plastic round integrated LED 110V AC/DC green	SIEMENS
3SB6215-6AA30-1AA0	1	Compact pilot light 22 mm plastic round integrated LED 110V AC/DC yellow	SIEMENS
3SU1100-2BF60-1MA0	1	Selector switch, illuminable, 22 mm, round, plastic, white, selector switch, short, 2 switch positions O-I, latching, 10:30h/13:30h, with holder, 1 NO, 1 NC, screw terminal	SIEMENS
3SU1400-1AA10-1BA0	3	CONTACT MODULE WITH 1 CONTACT ELEMENT, 1 NO, SCREW TERMINAL, FOR FRONT PLATE MOUNTING	SIEMENS
3SU1002-2BM60-0AA0	1	Selector switch, illuminable, 22 mm, round, plastic, white, selector switch, short, 3 switch positions I>O<II, momentary contact type, actuating angle 2x45°, 10:30h/12h/13:30h	SIEMENS
3SU1550-0AA10-0AA0	1	HOLDER FOR 3 MODULES, METAL	SIEMENS
3VA2225-6KQ32-0AA0	1	circuit breaker 3VA2 IEC Frame 250 breaking capacity class H Icu=85 kA @ 415 V 3-pole, line protection ETU860, LSIG, In=250 A overload protection Ir=100 A...250 A short-circuit protection Isd=0.6..10x In, Ii=1.5..10x In neutral conductor protection optionally with external current transformer, up to 160% ground-fault protection, can be switched off Ig=0.2...1 x In, tg=0.05-0.8s nut keeper kit	SIEMENS
3VA9107-0NA10	1	EXT. N-CURRENT TRANSFORMER FOR N-PROTECTION ACCESSORY FOR: 3VA2 IN=160/250A	SIEMENS
3VA9267-0HA20	1	MOTOR OPERATOR 110-230 V AC / 110-250 V DC ACCESSORY FOR: 3VA2 100//160/250	SIEMENS
3VA9988-0AA12	1	AUXILIARY SWITCH CHANGEOVER CONTACTS TYPE HQ (7MM) ACCESSORY FOR 3VA-BREAKER 240VAC/250VDC 6A	SIEMENS
3VA9988-0AB12	1	TRIP ALARM SWITCH CHANGEOVER CONTACTS TYPE HQ (7MM) ACCESSORY FOR 3VA1 & 3VA20 UPTO 3VA25	SIEMENS
3VA9123-0KD00	1	DRAW-OUT UNIT COMPLETE KIT ACCESSORY FOR: CIRCUIT BREAKER, 3 POLE 3VA2 100/160/250.	SIEMENS
3VA9987-0KD81	1	crank handle for draw-out unit accessory for: draw-out unit	SIEMENS

REVISION					
REV	DESCRIPTION	PREP	CHKD	APPD	DATE
PROJECT					
KING KHALID INTERNATIONAL AIRPORT (KKIA) PROJECT CONCOURSE-A					
CLIENT					
ENGINEER					
CONTRACTOR					
DRAWING TITLE					
CCA-SS1-MDB-1A/B					
SUMMARIZED PARTS LIST					
MANUFACTURER		DRAWING NO. CCA-SS1-MDB-1A/B			
		PROJECT REFERENCE:			REC. 00
		SCALE : NTS		LOCATION: +2.2	SIZE: A4
		SHEET NO: 1 of			
QUOTATION REF.					
FILE NAME: 01-02_CCA-SS1-MDB-1A/B					

Device tag list

	+ / 9.6: C
3SB6215-6AA20-1AA0	1
3SB6215-6AA40-1AA0	1
3SB6215-6AA30-1AA0	1
3SU1100-2BF60-1MA0	1
3SU1400-1AA10-1BA0	1
3SU1002-2BM60-0AA0	1
3SU1550-0AA10-0AA0	1

	-Q1	+9.6°C
3VA2225-6KQ32-0AA0		1
3VA9107-0NA10		1
3VA9267-0HA20		1
3VA9988-0AA12		1
3VA9988-0AB12		1
3VA9123-0KD00		1
3VA9987-0KD81		1

REVISION						
REV	DESCRIPTION	PREP	CHKD	APPD	DATE	
PROJECT						
KING KHALID INTERNATIONAL AIRPORT (KKIA) PROJECT CONCOURSE-A						
CLIENT						
ENGINEER						
CONTRACTOR						
DRAWING TITLE						
CCA-SS1-MDB-1A/B						
DEVICE TAG LIST						
MANUFACTURER		DRAWING NO. CCA-SS1-MDB-1A/B				
		PROJECT REFERENCE:				REC. 00
		SCALE : NTS		LOCATION: +2.2		SIZE: A4
		SHEET NO: 2 of				
QUOTATION REF.						
FILE NAME: 01-02_CCA-SS1-MDB-1A/B						

1	2	3	4	5	6	7	8	9	10
A									
Bill of Material									

Device tag list

	+ / 9.8: C
3SB6215-6AA20-1AA0	1
3SB6215-6AA40-1AA0	1
3SB6215-6AA30-1AA0	1
3SU1100-2BF60-1MA0	1
3SU1400-1AA10-1BA0	1
3SU1002-2BM60-0AA0	1
3SU1550-0AA10-0AA0	1

	-Q1	+9.8:C
3VA2225-6KQ32-0AA0		1
3VA9107-0NA10		1
3VA9267-0HA20		1
3VA9988-0AA12		1
3VA9988-0AB12		1
3VA9123-0KD00		1
3VA9987-0KD81		1

REVISION					
REV	DESCRIPTION	PREP	CHKD	APPD	DATE

PROJECT	KING KHALID INTERNATIONAL AIRPORT (KKIA) PROJECT CONCOURSE-A				
CLIENT					
ENGINEER					
CONTRACTOR					
DRAWING TITLE	CCA-SS1-MDB-1A/B 				

Bill of Material

Order number	Qty.	Description	Make
3SB6215-6AA20-1AA0	1	Compact pilot light 22 mm plastic round integrated LED 110V AC/DC red	SIEMENS
3SB6215-6AA40-1AA0	1	Compact pilot light 22 mm plastic round integrated LED 110V AC/DC green	SIEMENS
3SB6215-6AA30-1AA0	1	Compact pilot light 22 mm plastic round integrated LED 110V AC/DC yellow	SIEMENS
3SU1100-2BF60-1MA0	1	Selector switch, illuminable, 22 mm, round, plastic, white, selector switch, short, 2 switch positions O-I, latching, 10:30h/13:30h, with holder, 1 NO, 1 NC, screw terminal	SIEMENS
3SU1400-1AA10-1BA0	3	CONTACT MODULE WITH 1 CONTACT ELEMENT, 1 NO, SCREW TERMINAL, FOR FRONT PLATE MOUNTING	SIEMENS
3SU1002-2BM60-0AA0	1	Selector switch, illuminable, 22 mm, round, plastic, white, selector switch, short, 3 switch positions I>O<II, momentary contact type, actuating angle 2x45°, 10:30h/12h/13:30h	SIEMENS
3SU1550-0AA10-0AA0	1	HOLDER FOR 3 MODULES, METAL	SIEMENS
3VA2340-6KQ32-0AA0	1	circuit breaker 3VA2 IEC Frame 400 breaking capacity class H Icu=85 kA @ 415 V 3-pole, line protection ETU860, LSIG, In=400 A overload protection Ir=160 A...400 A short-circuit protection Isd=0.6..10x In, Ii=1.5..10x In neutral conductor protection optionally with external current transformer, up to 160% ground-fault protection, can be switched off Ig=0.2...1 x In, tg=0.05-0.8s nut keeper kit	SIEMENS
3VA9307-0NA10	1	EXT. N-CURRENT TRANSFORMER FOR N-PROTECTION ACCESSORY FOR: 3VA2 IN=400/500/630 A	SIEMENS
3VA9467-0HA20	1	MOTOR OPERATOR 110-230 V AC / 110-250 V DC ACCESSORY FOR: 3VA2 400/630	SIEMENS
3VA9988-0AA12	1	AUXILIARY SWITCH CHANGEOVER CONTACTS TYPE HQ (7MM) ACCESSORY FOR 3VA-BREAKER 240VAC/250VDC 6A	SIEMENS
3VA9988-0AB12	1	TRIP ALARM SWITCH CHANGEOVER CONTACTS TYPE HQ (7MM) ACCESSORY FOR 3VA1 & 3VA20 UPTO 3VA25	SIEMENS
3VA9323-0KD00	1	draw-out unit complete kit accessory for: circuit breaker, 3-pole 3VA1 400/630 3VA2 400/630	SIEMENS
3VA9987-0KD81	1	crank handle for draw-out unit accessory for: draw-out unit	SIEMENS

REVISION					
REV	DESCRIPTION	PREP	CHKD	APPD	DATE
PROJECT					
KING KHALID INTERNATIONAL AIRPORT (KKIA) PROJECT CONCOURSE-A					
CLIENT					
ENGINEER					
CONTRACTOR					
DRAWING TITLE					
CCA-SS1-MDB-1A/B					
SUMMARIZED PARTS LIST					
MANUFACTURER		DRAWING NO. CCA-SS1-MDB-1A/B			
		PROJECT REFERENCE:			REC. 00
		SCALE : NTS		LOCATION: +2.4	SIZE: A4
		SHEET NO: 1 of			
QUOTATION REF.					
FILE NAME: 01-02_CCA-SS1-MDB-1A/B					

Device tag list

	<i>+10.3°C</i>
3SB6215-6AA20-1AA0	1
3SB6215-6AA40-1AA0	1
3SB6215-6AA30-1AA0	1
3SU1100-2BF60-1MA0	1
3SU1400-1AA10-1BA0	1
3SU1002-2BM60-0AA0	1
3SU1550-0AA10-0AA0	1

	-Q1	+10.2°C
3VA2340-6KQ32-0AA0		1
3VA9307-0NA10		1
3VA9467-0HA20		1
3VA9988-0AA12		1
3VA9988-0AB12		1
3VA9323-0KD00		1
3VA9987-0KD81		1

REVISION					
REV	DESCRIPTION	PREP	CHKD	APPD	DATE

PROJECT	KING KHALID INTERNATIONAL AIRPORT (KKIA) PROJECT CONCOURSE-A				
CLIENT					
ENGINEER					
CONTRACTOR					
DRAWING TITLE	CCA-SS1-MDB-1A/B DEVICE TAG LIST				
MANUFACTURER	DRAWING NO. CCA-SS1-MDB-1A/B PROJECT REFERENCE:				REC. 00
	SCALE : NTS		LOCATION: +2.4		SIZE: A4
	SHEET NO:		2 of		
QUOTATION REF.					
FILE NAME:	01-02_CCA-SS1-MDB-1A/B				

1	2	3	4	5	6	7	8	9	10
Bill of Material									

Device tag list

	+ / 14.9 : B
3SB6215-6AA20-1AA0	1
3SB6215-6AA40-1AA0	1
3SB6215-6AA30-1AA0	1
3SB6216-6AA20-1AA0	1
3SB6216-6AA30-1AA0	1
3SB6216-6AA50-1AA0	1
-QM2	+ / 14.7 : C
3WA1350-5NG72-7RA7-ZC01+F19+R55	1

REVISION						
REV/	DESCRIPTION	PREP	CHKD	APPD	DATE	
PROJECT						
KING KHALID INTERNATIONAL AIRPORT (KKIA) PROJECT CONCOURSE-A						
CLIENT						
ENGINEER						
CONTRACTOR						
DRAWING TITLE						
CCA-SS1-MDB-1A/B						
DEVICE TAG LIST						
MANUFACTURER		DRAWING NO. CCA-SS1-MDB-1A/B				
		PROJECT REFERENCE:				REC. 00
		SCALE : NTS		LOCATION: +9.1		SIZE: A4
		SHEET NO:		2 of		
QUOTATION REF.						
FILE NAME: 01-02_CCA-SS1-MDB-1A/B						

Bill of Material

Order number	Qty.	Description	Make
3SB6215-6AA20-1AA0	1	Compact pilot light 22 mm plastic round integrated LED 110V AC/DC red	SIEMENS
3SB6215-6AA40-1AA0	1	Compact pilot light 22 mm plastic round integrated LED 110V AC/DC green	SIEMENS
3SB6215-6AA30-1AA0	1	Compact pilot light 22 mm plastic round integrated LED 110V AC/DC yellow	SIEMENS
3SU1100-2BF60-1MA0	1	Selector switch, illuminable, 22 mm, round, plastic, white, selector switch, short, 2 switch positions O-I, latching, 10:30h/13:30h, with holder, 1 NO, 1 NC, screw terminal	SIEMENS
3SU1400-1AA10-1BA0	3	CONTACT MODULE WITH 1 CONTACT ELEMENT, 1 NO, SCREW TERMINAL, FOR FRONT PLATE MOUNTING	SIEMENS
3SU1002-2BM60-0AA0	1	Selector switch, illuminable, 22 mm, round, plastic, white, selector switch, short, 3 switch positions I>O<II, momentary contact type, actuating angle 2x45°, 10:30h/12h/13:30h	SIEMENS
3SU1550-0AA10-0AA0	1	HOLDER FOR 3 MODULES, METAL	SIEMENS
3VA2116-6KQ32-0AA0	1	circuit breaker 3VA2 IEC Frame 160 breaking capacity class H Icu=85 kA @ 415 V 3-pole, line protection ETU860, LSIG, In=160 A overload protection Ir=63 A...160 A short-circuit protection Isd=0.6..10x In, Ii=1.5..10x In neutral conductor protection optionally with external current transformer, up to 160% ground-fault protection, can be switched off Ig=0.2...1 x In, tg=0.05-0.8s nut keeper kit	SIEMENS
3VA9107-0NA10	1	EXT. N-CURRENT TRANSFORMER FOR N-PROTECTION ACCESSORY FOR: 3VA2 IN=160/250A	SIEMENS
3VA9267-0HA20	1	MOTOR OPERATOR 110-230 V AC / 110-250 V DC ACCESSORY FOR: 3VA2 100//160/250	SIEMENS
3VA9988-0AA12	1	AUXILIARY SWITCH CHANGEOVER CONTACTS TYPE HQ (7MM) ACCESSORY FOR 3VA-BREAKER 240VAC/250VDC 6A	SIEMENS
3VA9988-0AB12	1	TRIP ALARM SWITCH CHANGEOVER CONTACTS TYPE HQ (7MM) ACCESSORY FOR 3VA1 & 3VA20 UPTO 3VA25	SIEMENS
3VA9123-0KD00	1	DRAW-OUT UNIT COMPLETE KIT ACCESSORY FOR: CIRCUIT BREAKER, 3 POLE 3VA2 100/160/250.	SIEMENS
3VA9987-0KD81	1	crank handle for draw-out unit accessory for: draw-out unit	SIEMENS

REVISION					
REV	DESCRIPTION	PREP	CHKD	APPD	DATE
PROJECT					
KING KHALID INTERNATIONAL AIRPORT (KKIA) PROJECT CONCOURSE-A					
CLIENT					
ENGINEER					
CONTRACTOR					
DRAWING TITLE					
CCA-SS1-MDB-1A/B					
SUMMARIZED PARTS LIST					
MANUFACTURER		DRAWING NO. CCA-SS1-MDB-1A/B			
		PROJECT REFERENCE:			REC. 00
		SCALE : NTS		LOCATION: +3.1	SIZE: A4
		SHEET NO: 1 of			
QUOTATION REF.					
FILE NAME: 01-02_CCA-SS1-MDB-1A/B					

Device tag list

	<i>+/10.6:C</i>
3SB6215-6AA20-1AA0	1
3SB6215-6AA40-1AA0	1
3SB6215-6AA30-1AA0	1
3SU1100-2BF60-1MA0	1
3SU1400-1AA10-1BA0	1
3SU1002-2BM60-0AA0	1
3SU1550-0AA10-0AA0	1
-Q1	<i>+/10.6:C</i>
3VA2116-6KQ32-0AA0	1
3VA9107-0NA10	1
3VA9267-0HA20	1
3VA9988-0AA12	1
3VA9988-0AB12	1
3VA9123-0KD00	1
3VA9987-0KD81	1

REVISION					
REV	DESCRIPTION	PREP	CHKD	APPD	DATE

PROJECT	KING KHALID INTERNATIONAL AIRPORT (KKIA) PROJECT CONCOURSE-A				
CLIENT					
ENGINEER					
CONTRACTOR					
DRAWING TITLE	CCA-SS1-MDB-1A/B 				

Bill of Material

Order number	Qty.	Description	Make
3SB6215-6AA20-1AA0	1	Compact pilot light 22 mm plastic round integrated LED 110V AC/DC red	SIEMENS
3SB6215-6AA40-1AA0	1	Compact pilot light 22 mm plastic round integrated LED 110V AC/DC green	SIEMENS
3SB6215-6AA30-1AA0	1	Compact pilot light 22 mm plastic round integrated LED 110V AC/DC yellow	SIEMENS
3SU1100-2BF60-1MA0	1	Selector switch, illuminable, 22 mm, round, plastic, white, selector switch, short, 2 switch positions O-I, latching, 10:30h/13:30h, with holder, 1 NO, 1 NC, screw terminal	SIEMENS
3SU1400-1AA10-1BA0	3	CONTACT MODULE WITH 1 CONTACT ELEMENT, 1 NO, SCREW TERMINAL, FOR FRONT PLATE MOUNTING	SIEMENS
3SU1002-2BM60-0AA0	1	Selector switch, illuminable, 22 mm, round, plastic, white, selector switch, short, 3 switch positions I>O<II, momentary contact type, actuating angle 2x45°, 10:30h/12h/13:30h	SIEMENS
3SU1550-0AA10-0AA0	1	HOLDER FOR 3 MODULES, METAL	SIEMENS
3VA2116-6KQ32-0AA0	1	circuit breaker 3VA2 IEC Frame 160 breaking capacity class H Icu=85 kA @ 415 V 3-pole, line protection ETU860, LSIG, In=160 A overload protection Ir=63 A...160 A short-circuit protection Isd=0.6..10x In, Ii=1.5..10x In neutral conductor protection optionally with external current transformer, up to 160% ground-fault protection, can be switched off Ig=0.2...1 x In, tg=0.05-0.8s nut keeper kit	SIEMENS
3VA9107-0NA10	1	EXT. N-CURRENT TRANSFORMER FOR N-PROTECTION ACCESSORY FOR: 3VA2 IN=160/250A	SIEMENS
3VA9267-0HA20	1	MOTOR OPERATOR 110-230 V AC / 110-250 V DC ACCESSORY FOR: 3VA2 100//160/250	SIEMENS
3VA9988-0AA12	1	AUXILIARY SWITCH CHANGEOVER CONTACTS TYPE HQ (7MM) ACCESSORY FOR 3VA-BREAKER 240VAC/250VDC 6A	SIEMENS
3VA9988-0AB12	1	TRIP ALARM SWITCH CHANGEOVER CONTACTS TYPE HQ (7MM) ACCESSORY FOR 3VA1 & 3VA20 UPTO 3VA25	SIEMENS
3VA9123-0KD00	1	DRAW-OUT UNIT COMPLETE KIT ACCESSORY FOR: CIRCUIT BREAKER, 3 POLE 3VA2 100/160/250.	SIEMENS
3VA9987-0KD81	1	crank handle for draw-out unit accessory for: draw-out unit	SIEMENS

REVISION						
REV	DESCRIPTION	PREP	CHKD	APPD	DATE	
PROJECT						
KING KHALID INTERNATIONAL AIRPORT (KKIA) PROJECT CONCOURSE-A						
CLIENT						
ENGINEER						
CONTRACTOR						
DRAWING TITLE						
CCA-SS1-MDB-1A/B						
SUMMARIZED PARTS LIST						
MANUFACTURER		DRAWING NO. CCA-SS1-MDB-1A/B				
		PROJECT REFERENCE:				REC. 00
		SCALE : NTS		LOCATION: +4.1	SIZE: A4	
		SHEET NO: 1 of				
QUOTATION REF.						
FILE NAME: 01-02_CCA-SS1-MDB-1A/B						

Device tag list

	+/11.8:C
3SB6215-6AA20-1AA0	1
3SB6215-6AA40-1AA0	1
3SB6215-6AA30-1AA0	1
3SU1100-2BF60-1MA0	1
3SU1400-1AA10-1BA0	1
3SU1002-2BM60-0AA0	1
3SU1550-0AA10-0AA0	1
-Q1	+/11.8:C
3VA2116-6KQ32-0AA0	1
3VA9107-0NA10	1
3VA9267-0HA20	1
3VA9988-0AA12	1
3VA9988-0AB12	1
3VA9123-0KD00	1
3VA9987-0KD81	1

REVISION					
REV	DESCRIPTION	PREP	CHKD	APPD	DATE
PROJECT					
KING KHALID INTERNATIONAL AIRPORT (KKIA) PROJECT CONCOURSE-A					
CLIENT					
ENGINEER					
CONTRACTOR					
DRAWING TITLE					
CCA-SS1-MDB-1A/B					
DEVICE TAG LIST					
MANUFACTURER	DRAWING NO. CCA-SS1-MDB-1A/B				
	PROJECT REFERENCE:				REC. 00
	SCALE : NTS		LOCATION: +4.1	SIZE: A4	
	SHEET NO: 2 of				
QUOTATION REF.					
FILE NAME: 01-02_CCA-SS1-MDB-1A/B					

Bill of Material

Order number	Qty.	Description	Make
3SB6215-6AA20-1AA0	1	Compact pilot light 22 mm plastic round integrated LED 110V AC/DC red	SIEMENS
3SB6215-6AA40-1AA0	1	Compact pilot light 22 mm plastic round integrated LED 110V AC/DC green	SIEMENS
3SB6215-6AA30-1AA0	1	Compact pilot light 22 mm plastic round integrated LED 110V AC/DC yellow	SIEMENS
3SU1100-2BF60-1MA0	1	Selector switch, illuminable, 22 mm, round, plastic, white, selector switch, short, 2 switch positions O-I, latching, 10:30h/13:30h, with holder, 1 NO, 1 NC, screw terminal	SIEMENS
3SU1400-1AA10-1BA0	3	CONTACT MODULE WITH 1 CONTACT ELEMENT, 1 NO, SCREW TERMINAL, FOR FRONT PLATE MOUNTING	SIEMENS
3SU1002-2BM60-0AA0	1	Selector switch, illuminable, 22 mm, round, plastic, white, selector switch, short, 3 switch positions I>O<II, momentary contact type, actuating angle 2x45°, 10:30h/12h/13:30h	SIEMENS
3SU1550-0AA10-0AA0	1	HOLDER FOR 3 MODULES, METAL	SIEMENS
3WA1120-4GF64-7HA3-ZC01+F19	1	Withdrawable circuit breaker with guide frame, IEC 60947-2, frame size 1, 3-poles, In=2000A up to 690V AC 50/60Hz, breaking capacity M Icu=85/66kA at 500/690V, Trip unit ETU600 LSIG upgrade ready , colordisplay, bluetooth and USB interface, Protection LT, ST, INST, GFx, N-protection required an external N-sensor, incl. trip alarm switch (1xCO), rear connection flange, guide frame with shutter and position signal. switch (3xW),, with internal voltage tap on lower stab of circuit breaker, with voltage tap module VTM680 and power supply of ETU600, able to communication, integrated metering type PMF-3 Advanced Power Monitor., Voltage, Energy, Power, Power factor, Frequency, Unbalance, Temperature, Power quality,, with manual and motorized operating mechanism (M) 110-127 V AC / 110-125 V DC, Storage status and ready-to- close signaling switches, Auxiliary switches 4NO+4NC,, Closing coil (CC) 100% OP 110-127 V AC / 110-125 V DC, applicable for continuous duty, Remote trip alarm reset (RR) 110-127 V AC / 110-125 V DC for momentary duty,, without 2nd shunt trip,, Shunt trip (ST) 100% OP 110-127 V AC / 110-125 V DC, suitable for continuous duty,, Option C01 = Operations counter for circuit breaker, Option F19 = COM190 COM module PROFINET IO Modbus TCP 2 switched Ethernet ports circuit breaker internal	SIEMENS
3WA9111-0AA21	1	ACCESSORY CIRCUIT BREAKER 3WA, EXTERNAL METERING CURRENT SENSOR FOR N CONDUCTOR, FRAME SIZE 1, WINDOW TYPE, (WITHOUT COPPER BAR)	SIEMENS

REVISION					
REV	DESCRIPTION	PREP	CHKD	APPD	DATE

PROJECT

KING KHALID INTERNATIONAL
AIRPORT (KKIA) PROJECT
CONCOURSE-A

CLIENT _____

ENGINEER

CONTRACTOR	

DRAWING TITLE

CCA-SS1-MDB-1A/B

QUANTITY ORDERED

SUMMARIZED PARTS LIST			
MANUFACTURER	DRAWING NO. CCA-SS1-MDB-1A/B		
	PROJECT REFERENCE:		REC. 00
	SCALE : NTS	LOCATION: +5.1	SIZE: A4
	SHEET NO: 1 of		

QUOTATION REF.

FILE NAME: 01-02_CCA-SS1-MDB-1A/B

1	2	3	4	5	6	7	8	9	10																																																																																									
A	Device tag list																																																																																																	
B	<table><tr><td colspan="8"></td><td>+/13.3:C</td></tr><tr><td colspan="8">3SB6215-6AA20-1AA0</td><td>1</td></tr><tr><td colspan="8">3SB6215-6AA40-1AA0</td><td>1</td></tr><tr><td colspan="8">3SB6215-6AA30-1AA0</td><td>1</td></tr><tr><td colspan="8">3SU1100-2BF60-1MA0</td><td>1</td></tr><tr><td colspan="8">3SU1400-1AA10-1BA0</td><td>1</td></tr><tr><td colspan="8">3SU1002-2BM60-0AA0</td><td>1</td></tr><tr><td colspan="8">3SU1550-0AA10-0AA0</td><td>1</td></tr><tr><td colspan="8"></td><td></td></tr><tr><td colspan="8"></td><td></td></tr></table>																	+/13.3:C	3SB6215-6AA20-1AA0								1	3SB6215-6AA40-1AA0								1	3SB6215-6AA30-1AA0								1	3SU1100-2BF60-1MA0								1	3SU1400-1AA10-1BA0								1	3SU1002-2BM60-0AA0								1	3SU1550-0AA10-0AA0								1																	
								+/13.3:C																																																																																										
3SB6215-6AA20-1AA0								1																																																																																										
3SB6215-6AA40-1AA0								1																																																																																										
3SB6215-6AA30-1AA0								1																																																																																										
3SU1100-2BF60-1MA0								1																																																																																										
3SU1400-1AA10-1BA0								1																																																																																										
3SU1002-2BM60-0AA0								1																																																																																										
3SU1550-0AA10-0AA0								1																																																																																										
C																																																																																																		
D																																																																																																		
E																																																																																																		
F																																																																																																		
G																																																																																																		
H																																																																																																		

REVISION					
REV	DESCRIPTION	PREP	CHKD	APPD	DATE
PROJECT KING KHALID INTERNATIONAL AIRPORT (KKIA) PROJECT CONCOURSE-A					
CLIENT					
ENGINEER					
CONTRACTOR					
DRAWING TITLE CCA-SS1-MDB-1A/B DEVICE TAG LIST					
MANUFACTURER		DRAWING NO. CCA-SS1-MDB-1A/B			
		PROJECT REFERENCE:			REC. 00
		SCALE : NTS	LOCATION: +5.1	SIZE: A4	
		SHEET NO: 2 of			
QUOTATION REF.					
FILE NAME: 01-02_CCA-SS1-MDB-1A/B					

Bill of Material

Order number	Qty.	Description	Make
3SB6215-6AA20-1AA0	1	Compact pilot light 22 mm plastic round integrated LED 110V AC/DC red	SIEMENS
3SB6215-6AA40-1AA0	1	Compact pilot light 22 mm plastic round integrated LED 110V AC/DC green	SIEMENS
3SB6215-6AA30-1AA0	1	Compact pilot light 22 mm plastic round integrated LED 110V AC/DC yellow	SIEMENS
3SU1100-2BF60-1MA0	1	Selector switch, illuminable, 22 mm, round, plastic, white, selector switch, short, 2 switch positions O-I, latching, 10:30h/13:30h, with holder, 1 NO, 1 NC, screw terminal	SIEMENS
3SU1400-1AA10-1BA0	3	CONTACT MODULE WITH 1 CONTACT ELEMENT, 1 NO, SCREW TERMINAL, FOR FRONT PLATE MOUNTING	SIEMENS
3SU1002-2BM60-0AA0	1	Selector switch, illuminable, 22 mm, round, plastic, white, selector switch, short, 3 switch positions I>O<II, momentary contact type, actuating angle 2x45°, 10:30h/12h/13:30h	SIEMENS
3SU1550-0AA10-0AA0	1	HOLDER FOR 3 MODULES, METAL	SIEMENS
3WA1108-4GF64-7HA3-Z C01+F19	1	Withdrawable circuit breaker, with guide frame, IEC 60947-2, size 1, 3-pole, In=800 A up to 690 V AC 50/60 Hz, breaking capacity M Icu=85/66 kA at 500/690 V, ETU600 LSIG electronic trip unit upgradeable, color display, Bluetooth, USB interface, basic protection LT, ST, INST, GFx, neutral conductor protection requires an external neutral point current sensor, trip alarm switch (1x CO), connection at rear flange, guide frame with shutter and position signaling switch, with internal voltage tap on lower stab of circuit breaker, with voltage tap module VTM680 and power supply of ETU600, able to communication, integrated metering type PMF-3 Advanced Power Monitor., Voltage, Energy, Power, Power factor, Frequency, Unbalance, Temperature, Power quality, with manual and motorized operating mechanism (M) 110-127 V AC / 110-125 V DC, Storage status and ready-to- close signaling switches, Auxiliary switches 4NO+4NC, Closing coil (CC) 100% OP 110-127 V AC / 110-125 V DC, applicable for continuous duty, Remote trip alarm reset (RR) 110-127 V AC / 110-125 V DC for momentary duty, without 2nd shunt trip, Shunt trip (ST) 100% OP 110-127 V AC / 110-125 V DC, suitable for continuous duty, Option C01 = Operations counter for circuit breaker Option F19 = COM190 COM module PROFINET IO Modbus TCP 2 switched Ethernet ports circuit breaker internal	SIEMENS
3WA9111-0AA21	1	ACCESSORY CIRCUIT BREAKER 3WA, EXTERNAL METERING CURRENT SENSOR FOR N CONDUCTOR, FRAME SIZE 1, WINDOW TYPE, (WITHOUT COPPER BAR)	SIEMENS

REVISION					
REV	DESCRIPTION	PREP	CHKD	APPD	DATE
PROJECT					
KING KHALID INTERNATIONAL AIRPORT (KKIA) PROJECT CONCOURSE-A					
CLIENT					
ENGINEER					
CONTRACTOR					
DRAWING TITLE					
CCA-SS1-MDB-1A/B					
SUMMARIZED PARTS LIST					
MANUFACTURER		DRAWING NO. CCA-SS1-MDB-1A/B			
		PROJECT REFERENCE:			REC. 00
		SCALE : NTS		LOCATION: +6.1	SIZE: A4
		SHEET NO: 1 of			
QUOTATION REF.					
FILE NAME: 01-02_CCA-SS1-MDB-1A/B					

1	2	3	4	5	6	7	8	9	10																																																																																									
A	Device tag list																																																																																																	
B	<table><tr><td colspan="8"></td><td>+/13.4:C</td></tr><tr><td colspan="8">3SB6215-6AA20-1AA0</td><td>1</td></tr><tr><td colspan="8">3SB6215-6AA40-1AA0</td><td>1</td></tr><tr><td colspan="8">3SB6215-6AA30-1AA0</td><td>1</td></tr><tr><td colspan="8">3SU1100-2BF60-1MA0</td><td>1</td></tr><tr><td colspan="8">3SU1400-1AA10-1BA0</td><td>1</td></tr><tr><td colspan="8">3SU1002-2BM60-0AA0</td><td>1</td></tr><tr><td colspan="8">3SU1550-0AA10-0AA0</td><td>1</td></tr><tr><td colspan="8"></td><td></td></tr><tr><td colspan="8"></td><td></td></tr></table>																	+/13.4:C	3SB6215-6AA20-1AA0								1	3SB6215-6AA40-1AA0								1	3SB6215-6AA30-1AA0								1	3SU1100-2BF60-1MA0								1	3SU1400-1AA10-1BA0								1	3SU1002-2BM60-0AA0								1	3SU1550-0AA10-0AA0								1																	
								+/13.4:C																																																																																										
3SB6215-6AA20-1AA0								1																																																																																										
3SB6215-6AA40-1AA0								1																																																																																										
3SB6215-6AA30-1AA0								1																																																																																										
3SU1100-2BF60-1MA0								1																																																																																										
3SU1400-1AA10-1BA0								1																																																																																										
3SU1002-2BM60-0AA0								1																																																																																										
3SU1550-0AA10-0AA0								1																																																																																										
C																																																																																																		
D																																																																																																		
E																																																																																																		
F																																																																																																		
G																																																																																																		
H																																																																																																		

REVISION					
REV	DESCRIPTION	PREP	CHKD	APPD	DATE
PROJECT KING KHALID INTERNATIONAL AIRPORT (KKIA) PROJECT CONCOURSE-A					
CLIENT					
ENGINEER					
CONTRACTOR					
DRAWING TITLE CCA-SS1-MDB-1A/B DEVICE TAG LIST					
MANUFACTURER		DRAWING NO. CCA-SS1-MDB-1A/B			
		PROJECT REFERENCE:			REC. 00
		SCALE : NTS	LOCATION: +6.1	SIZE: A4	
		SHEET NO: 2 of			
QUOTATION REF.					
FILE NAME: 01-02_CCA-SS1-MDB-1A/B					

Bill of Material

Order number	Qty.	Description	Make
3SB6215-6AA20-1AA0	1	Compact pilot light 22 mm plastic round integrated LED 110V AC/DC red	SIEMENS
3SB6215-6AA40-1AA0	1	Compact pilot light 22 mm plastic round integrated LED 110V AC/DC green	SIEMENS
3SB6215-6AA30-1AA0	1	Compact pilot light 22 mm plastic round integrated LED 110V AC/DC yellow	SIEMENS
3SB6216-6AA20-1AA0	1	COMPACT PILOT LIGHT 22 MM PLASTIC ROUND INTEGRATED LED 220V AC RED	SIEMENS
3SB6216-6AA30-1AA0	1	COMPACT PILOT LIGHT 22 MM PLASTIC ROUND INTEGRATED LED 220V AC YELLOW	SIEMENS
3SB6216-6AA50-1AA0	1	COMPACT PILOT LIGHT 22 MM PLASTIC ROUND INTEGRATED LED 220V AC BLUE	SIEMENS
3WA1350-5NG72-7RA7-ZC01+F19+R55	1	Withdrawable circuit breaker, with guide frame, IEC 60947-2, size 3, 4-pole, N pole on left, In=5000 A up to 690 V AC 50/60 Hz, breaking capacity H Icu=100/85 kA at 500/690 V, ETU600 LSIG Hi-Z electronic trip unit upgradeable, color display, Bluetooth, USB interface, basic protection LT, ST, INST, GFx, with GF high-impedance input, including protection of the N conductor (internal neutral point sensor available), trip alarm switch (1x CO), connection at rear horizontal guide frame with shutter and position signaling switch, with internal voltage tap on upper stab of circuit breaker, with voltage tap module VTM680 and power supply of ETU600, able to communication, integrated metering type PMF-3 Advanced Power Monitor., Voltage, Energy, Power, Power factor, Frequency, Unbalance, Temperature, Power quality, with manual and motorized operating mechanism (M) 110-127 V AC / 110-125 V DC, Storage status and ready-to- close signaling switches, Auxiliary switches 4NO+4NC, Closing coil (CC) 5% OP 110-127 V AC / 110-125 V DC, for momentary duty, Remote trip alarm reset (RR) 110-127 V AC / 110-125 V DC for momentary duty, without 2nd shunt trip, Shunt trip (ST) 5% OP 110-127 V AC / 110-125 V DC, for momentary duty, Option C01 = Operations counter for circuit breaker Option F19 = COM190 COM module PROFINET IO Modbus TCP 2 switched Ethernet ports circuit breaker internal Option R55 = Mutual mechanical interlocking with 2 m bowden cable for circuit breakers in withdraw- able design necessary once for each circuit breaker.	SIEMENS

REVISION					
REV	DESCRIPTION	PREP	CHKD	APPD	DATE

PROJECT	KING KHALID INTERNATIONAL AIRPORT (KKIA) PROJECT CONCOURSE-A
---------	--

CLIENT

ENGINEER

CONTRACTOR

DRAWING TITLE
CCA-SS1-MDB-1A/B

SUMMARIZED PARTS LIST			
MANUFACTURER	DRAWING NO. CCA-SS1-MDB-1A/B		
	PROJECT REFERENCE:		REC. 00
	SCALE : NTS	LOCATION: +7.1	SIZE: A4
	SHEET NO: 1 of		

QUOTATION REF.
FILE NAME: 01-02_CCA-SS1-MDB-1A/B

Device tag list

	<i>+14.3:B</i>
3SB6215-6AA20-1AA0	1
3SB6215-6AA40-1AA0	1
3SB6215-6AA30-1AA0	1
3SB6216-6AA20-1AA0	1
3SB6216-6AA30-1AA0	1
3SB6216-6AA50-1AA0	1

[illegible]

REVISION					
REV	DESCRIPTION	PREP	CHKD	APPD	DATE

PROJECT	KING KHALID INTERNATIONAL AIRPORT (KKIA) PROJECT CONCOURSE-A
---------	--

CLIENT

ENGINEER

CONTRACTOR	

DRAWING TITLE

CCA-SS1-MDB-1A/B

DEVICE TAG LIST			
MANUFACTURER	DRAWING NO. CCA-SS1-MDB-1A/B		
	PROJECT REFERENCE:		REC. 00
	SCALE : NTS	LOCATION: +7.1	SIZE: A4
	SHEET NO: 2 of		

QUOTATION REF.
FILE NAME: 01-02_CCA-SS1-MDB-1A/B

Bill of Material

Order number	Qty.	Description	Make
3SB6215-6AA20-1AA0	1	Compact pilot light 22 mm plastic round integrated LED 110V AC/DC red	SIEMENS
3SB6215-6AA40-1AA0	1	Compact pilot light 22 mm plastic round integrated LED 110V AC/DC green	SIEMENS
3SB6215-6AA30-1AA0	1	Compact pilot light 22 mm plastic round integrated LED 110V AC/DC yellow	SIEMENS
6ED1052-2FB08-0BA2	1	LOGO! 230RCEo, logic module, power supply / I/O: 115 V/230 V/relay, 8 DI/4 DO, without display, memory 400 blocks, modularly expandable, Ethernet, integrated web server, data log, user-defined web pages, standard microSD card for LOGO! Soft Comfort V8.4 or higher, older projects executable cloud connection, MQTT in all LOGO! 8.4 basic unit	SIEMENS
6ED1055-1FB00-0BA2	1	LOGO! DM8 230R expansion module, PS/I/O: 230V/230V/relay, 2 MW, 4 DI/4 DO for LOGO! 8	SIEMENS
3SU1100-2BF60-1MA0	1	Selector switch, illuminable, 22 mm, round, plastic, white, selector switch, short, 2 switch positions O-I, latching, 10:30h/13:30h, with holder, 1 NO, 1 NC, screw terminal	SIEMENS
3SU1400-1AA10-1BA0	2	CONTACT MODULE WITH 1 CONTACT ELEMENT, 1 NO, SCREW TERMINAL, FOR FRONT PLATE MOUNTING	SIEMENS
3SU1100-2BF60-1BA0	1	Selector switch, illuminable, 22 mm, round, plastic, white, selector switch, short, 2 switch positions O-I, latching, 10:30h/13:30h, with holder, 1 NO, screw terminal	SIEMENS
3WA1350-5NG72-7RA7-ZC01+F19+R55	1	Withdrawable circuit breaker, with guide frame, IEC 60947-2, size 3, 4-pole, N pole on left, In=5000 A up to 690 V AC 50/60 Hz, breaking capacity H Icu=100/85 kA at 500/690 V, ETU600 LSIG Hi-Z electronic trip unit upgradeable, color display, Bluetooth, USB interface, basic protection LT, ST, INST, GFx, with GF high-impedance input, including protection of the N conductor (internal neutral point sensor available), trip alarm switch (1x CO), connection at rear horizontal guide frame with shutter and position signaling switch, with internal voltage tap on upper stab of circuit breaker, with voltage tap module VTM680 and power supply of ETU600, able to communication, integrated metering type PMF-3 Advanced Power Monitor., Voltage, Energy, Power, Power factor, Frequency, Unbalance, Temperature, Power quality, with manual and motorized operating mechanism (M) 110-127 V AC / 110-125 V DC, Storage status and ready-to- close signaling switches, Auxiliary switches 4NO+4NC, Closing coil (CC) 5% OP 110-127 V AC / 110-125 V DC, for momentary duty, Remote trip alarm reset (RR) 110-127 V AC / 110-125 V DC for momentary duty, without 2nd shunt trip, Shunt trip (ST) 5% OP 110-127 V AC / 110-125 V DC, for momentary duty, Option C01 = Operations counter for circuit breaker Option F19 = COM190 COM module PROFINET IO Modbus TCP 2 switched Ethernet ports circuit breaker internal Option R55 = Mutual mechanical interlocking with 2 m bowden cable for circuit breakers in withdraw- able design necessary once for each circuit breaker.	SIEMENS

REVISION					
REV	DESCRIPTION	PREP	CHKD	APPD	DATE
PROJECT					
KING KHALID INTERNATIONAL AIRPORT (KKIA) PROJECT CONCOURSE-A					
CLIENT					
ENGINEER					
CONTRACTOR					
DRAWING TITLE					
CCA-SS1-MDB-1A/B					
SUMMARIZED PARTS LIST					
MANUFACTURER		DRAWING NO. CCA-SS1-MDB-1A/B			
		PROJECT REFERENCE:			REC. 00
		SCALE : NTS		LOCATION: +8.1	SIZE: A4
		SHEET NO: 1 of			
QUOTATION REF.					
FILE NAME: 01-02_CCA-SS1-MDB-1A/B					

Device tag list

	+/ <i>14.5:C</i>
3SB6215-6AA20-1AA0	1
3SB6215-6AA40-1AA0	1
3SB6215-6AA30-1AA0	1
6ED1052-2FB08-0BA2	1
6ED1055-1FB00-0BA2	1
3SU1100-2BF60-1MA0	1
3SU1400-1AA10-1BA0	1
- <i>QBC</i>	+/ <i>14.4:C</i>
3WA1350-5NG72-7RA7-ZC01+F19+R55	1

REVISION					
REV/	DESCRIPTION	PREP	CHKD	APPD	DATE
PROJECT					
KING KHALID INTERNATIONAL AIRPORT (KKIA) PROJECT CONCOURSE-A					
CLIENT					
ENGINEER					
CONTRACTOR					
DRAWING TITLE					
CCA-SS1-MDB-1A/B					
DEVICE TAG LIST					
MANUFACTURER		DRAWING NO. CCA-SS1-MDB-1A/B			
		PROJECT REFERENCE:			REC. 00
		SCALE : NTS		LOCATION: +8.1	SIZE: A4
		SHEET NO: 2 of			
QUOTATION REF.					
FILE NAME: 01-02_CCA-SS1-MDB-1A/B					

Bill of Material

Order number	Qty.	Description	Make
3SB6215-6AA20-1AA0	1	Compact pilot light 22 mm plastic round integrated LED 110V AC/DC red	SIEMENS
3SB6215-6AA40-1AA0	1	Compact pilot light 22 mm plastic round integrated LED 110V AC/DC green	SIEMENS
3SB6215-6AA30-1AA0	1	Compact pilot light 22 mm plastic round integrated LED 110V AC/DC yellow	SIEMENS
3SU1100-2BF60-1MA0	1	Selector switch, illuminable, 22 mm, round, plastic, white, selector switch, short, 2 switch positions O-I, latching, 10:30h/13:30h, with holder, 1 NO, 1 NC, screw terminal	SIEMENS
3SU1400-1AA10-1BA0	3	CONTACT MODULE WITH 1 CONTACT ELEMENT, 1 NO, SCREW TERMINAL, FOR FRONT PLATE MOUNTING	SIEMENS
3SU1002-2BM60-0AA0	1	Selector switch, illuminable, 22 mm, round, plastic, white, selector switch, short, 3 switch positions I>O<II, momentary contact type, actuating angle 2x45°, 10:30h/12h/13:30h	SIEMENS
3SU1550-0AA10-0AA0	1	HOLDER FOR 3 MODULES, METAL	SIEMENS
3WA1108-4GF64-7HA3-Z C01+F19	1	Withdrawable circuit breaker, with guide frame, IEC 60947-2, size 1, 3-pole, In=800 A up to 690 V AC 50/60 Hz, breaking capacity M Icu=85/66 kA at 500/690 V, ETU600 LSIG electronic trip unit upgradeable, color display, Bluetooth, USB interface, basic protection LT, ST, INST, GFx, neutral conductor protection requires an external neutral point current sensor, trip alarm switch (1x CO), connection at rear flange, guide frame with shutter and position signaling switch, with internal voltage tap on lower stab of circuit breaker, with voltage tap module VTM680 and power supply of ETU600, able to communication, integrated metering type PMF-3 Advanced Power Monitor., Voltage, Energy, Power, Power factor, Frequency, Unbalance, Temperature, Power quality, with manual and motorized operating mechanism (M) 110-127 V AC / 110-125 V DC, Storage status and ready-to- close signaling switches, Auxiliary switches 4NO+4NC, Closing coil (CC) 100% OP 110-127 V AC / 110-125 V DC, applicable for continuous duty, Remote trip alarm reset (RR) 110-127 V AC / 110-125 V DC for momentary duty, without 2nd shunt trip, Shunt trip (ST) 100% OP 110-127 V AC / 110-125 V DC, suitable for continuous duty, Option C01 = Operations counter for circuit breaker Option F19 = COM190 COM module PROFINET IO Modbus TCP 2 switched Ethernet ports circuit breaker internal	SIEMENS
3WA9111-0AA21	1	ACCESSORY CIRCUIT BREAKER 3WA, EXTERNAL METERING CURRENT SENSOR FOR N CONDUCTOR, FRAME SIZE 1, WINDOW TYPE, (WITHOUT COPPER BAR)	SIEMENS

REVISION					
REV	DESCRIPTION	PREP	CHKD	APPD	DATE

PROJECT

KING KHALID INTERNATIONAL
AIRPORT (KKIA) PROJECT
CONCOURSE-A

CLIENT _____

ENGINEER

CONTRACTOR	

DRAWING TITLE

CCA-SS1-MDB-1A/B

QUANTITY ORDERED

SUMMARIZED PARTS LIST			
MANUFACTURER	DRAWING NO. CCA-SS1-MDB-1A/B		
	PROJECT REFERENCE:		REC. 00
	SCALE : NTS	LOCATION: +10.1	SIZE: A4
	SHEET NO: 1 of		

QUOTATION REF.

FILE NAME: 01-02_CCA-SS1-MDB-1A/B

Device tag list

	+/15.3:C
3SB6215-6AA20-1AA0	1
3SB6215-6AA40-1AA0	1
3SB6215-6AA30-1AA0	1
3SU1100-2BF60-1MA0	1
3SU1400-1AA10-1BA0	1
3SU1002-2BM60-0AA0	1
3SU1550-0AA10-0AA0	1
-Q1	+/15.2:C
3WA1108-4GF64-7HA3-Z C01+F19	1
3WA9111-0AA21	1

REVISION					
REV	DESCRIPTION	PREP	CHKD	APPD	DATE
PROJECT					
KING KHALID INTERNATIONAL AIRPORT (KKIA) PROJECT CONCOURSE-A					
CLIENT					
ENGINEER					
CONTRACTOR					
DRAWING TITLE					
CCA-SS1-MDB-1A/B					
DEVICE TAG LIST					
MANUFACTURER		DRAWING NO. CCA-SS1-MDB-1A/B			
		PROJECT REFERENCE:			REC. 00
		SCALE : NTS		LOCATION: +10.1	SIZE: A4
		SHEET NO: 2 of			
QUOTATION REF.					
FILE NAME: 01-02_CCA-SS1-MDB-1A/B					

Bill of Material

Order number	Qty.	Description	Make
3SB6215-6AA20-1AA0	1	Compact pilot light 22 mm plastic round integrated LED 110V AC/DC red	SIEMENS
3SB6215-6AA40-1AA0	1	Compact pilot light 22 mm plastic round integrated LED 110V AC/DC green	SIEMENS
3SB6215-6AA30-1AA0	1	Compact pilot light 22 mm plastic round integrated LED 110V AC/DC yellow	SIEMENS
3SU1100-2BF60-1MA0	1	Selector switch, illuminable, 22 mm, round, plastic, white, selector switch, short, 2 switch positions O-I, latching, 10:30h/13:30h, with holder, 1 NO, 1 NC, screw terminal	SIEMENS
3SU1400-1AA10-1BA0	3	CONTACT MODULE WITH 1 CONTACT ELEMENT, 1 NO, SCREW TERMINAL, FOR FRONT PLATE MOUNTING	SIEMENS
3SU1002-2BM60-0AA0	1	Selector switch, illuminable, 22 mm, round, plastic, white, selector switch, short, 3 switch positions I>O<II, momentary contact type, actuating angle 2x45°, 10:30h/12h/13:30h	SIEMENS
3SU1550-0AA10-0AA0	1	HOLDER FOR 3 MODULES, METAL	SIEMENS
3WA1108-4GF64-7HA3-Z C01+F19	1	Withdrawable circuit breaker, with guide frame, IEC 60947-2, size 1, 3-pole, In=800 A up to 690 V AC 50/60 Hz, breaking capacity M Icu=85/66 kA at 500/690 V, ETU600 LSIG electronic trip unit upgradeable, color display, Bluetooth, USB interface, basic protection LT, ST, INST, GFx, neutral conductor protection requires an external neutral point current sensor, trip alarm switch (1x CO), connection at rear flange, guide frame with shutter and position signaling switch, with internal voltage tap on lower stab of circuit breaker, with voltage tap module VTM680 and power supply of ETU600, able to communication, integrated metering type PMF-3 Advanced Power Monitor., Voltage, Energy, Power, Power factor, Frequency, Unbalance, Temperature, Power quality, with manual and motorized operating mechanism (M) 110-127 V AC / 110-125 V DC, Storage status and ready-to- close signaling switches, Auxiliary switches 4NO+4NC, Closing coil (CC) 100% OP 110-127 V AC / 110-125 V DC, applicable for continuous duty, Remote trip alarm reset (RR) 110-127 V AC / 110-125 V DC for momentary duty, without 2nd shunt trip, Shunt trip (ST) 100% OP 110-127 V AC / 110-125 V DC, suitable for continuous duty, Option C01 = Operations counter for circuit breaker Option F19 = COM190 COM module PROFINET IO Modbus TCP 2 switched Ethernet ports circuit breaker internal	SIEMENS
3WA9111-0AA21	1	ACCESSORY CIRCUIT BREAKER 3WA, EXTERNAL METERING CURRENT SENSOR FOR N CONDUCTOR, FRAME SIZE 1, WINDOW TYPE, (WITHOUT COPPER BAR)	SIEMENS

REVISION					
REV	DESCRIPTION	PREP	CHKD	APPD	DATE

PROJECT

KING KHALID INTERNATIONAL
AIRPORT (KKIA) PROJECT
CONCOURSE-A

CLIENT

ENGINEER

CONTRACTOR

DRAWING TITLE

CCA-SS1-MDB-1A/B

SUMMARIZED PARTS LIST			
MANUFACTURER	DRAWING NO. CCA-SS1-MDB-1A/B		
	PROJECT REFERENCE:		REC. 00
	SCALE :	LOCATION:	SIZE:
	NTS	+11.1	A4
SHEET NO: 1 of			

QUOTATION REF.
FILE NAME: 01-02_CCA-SS1-MDB-1A/B

1	2	3	4	5	6	7	8	9	10																																																																																									
A	Device tag list																																																																																																	
B	<table><tr><td colspan="8"></td><td><i>+/15.4:C</i></td></tr><tr><td colspan="8">3SB6215-6AA20-1AA0</td><td>1</td></tr><tr><td colspan="8">3SB6215-6AA40-1AA0</td><td>1</td></tr><tr><td colspan="8">3SB6215-6AA30-1AA0</td><td>1</td></tr><tr><td colspan="8">3SU1100-2BF60-1MA0</td><td>1</td></tr><tr><td colspan="8">3SU1400-1AA10-1BA0</td><td>1</td></tr><tr><td colspan="8">3SU1002-2BM60-0AA0</td><td>1</td></tr><tr><td colspan="8">3SU1550-0AA10-0AA0</td><td>1</td></tr><tr><td colspan="8"></td><td></td></tr><tr><td colspan="8"></td><td></td></tr></table>																	<i>+/15.4:C</i>	3SB6215-6AA20-1AA0								1	3SB6215-6AA40-1AA0								1	3SB6215-6AA30-1AA0								1	3SU1100-2BF60-1MA0								1	3SU1400-1AA10-1BA0								1	3SU1002-2BM60-0AA0								1	3SU1550-0AA10-0AA0								1																	
								<i>+/15.4:C</i>																																																																																										
3SB6215-6AA20-1AA0								1																																																																																										
3SB6215-6AA40-1AA0								1																																																																																										
3SB6215-6AA30-1AA0								1																																																																																										
3SU1100-2BF60-1MA0								1																																																																																										
3SU1400-1AA10-1BA0								1																																																																																										
3SU1002-2BM60-0AA0								1																																																																																										
3SU1550-0AA10-0AA0								1																																																																																										
C																																																																																																		
D																																																																																																		
E																																																																																																		
F																																																																																																		
G																																																																																																		
H																																																																																																		
								REVISION																																																																																										
								REV	DESCRIPTION	PREP	CHKD	APPD	DATE																																																																																					
								PROJECT																																																																																										
								KING KHALID INTERNATIONAL AIRPORT (KKIA) PROJECT CONCOURSE-A																																																																																										
								CLIENT																																																																																										
								ENGINEER																																																																																										
								CONTRACTOR																																																																																										
								DRAWING TITLE																																																																																										
								CCA-SS1-MDB-1A/B																																																																																										
								DEVICE TAG LIST																																																																																										
								MANUFACTURER																																																																																										
								DRAWING NO. CCA-SS1-MDB-1A/B																																																																																										
								PROJECT REFERENCE:			REC. 00																																																																																							
								SCALE : NTS		LOCATION: +11.1		SIZE: A4																																																																																						
								SHEET NO:		2 of																																																																																								
								QUOTATION REF.																																																																																										
								FILE NAME: 01-02_CCA-SS1-MDB-1A/B																																																																																										

Bill of Material

Order number	Qty.	Description	Make
3SB6215-6AA20-1AA0	1	Compact pilot light 22 mm plastic round integrated LED 110V AC/DC red	SIEMENS
3SB6215-6AA40-1AA0	1	Compact pilot light 22 mm plastic round integrated LED 110V AC/DC green	SIEMENS
3SB6215-6AA30-1AA0	1	Compact pilot light 22 mm plastic round integrated LED 110V AC/DC yellow	SIEMENS
3SU1100-2BF60-1MA0	1	Selector switch, illuminable, 22 mm, round, plastic, white, selector switch, short, 2 switch positions O-I, latching, 10:30h/13:30h, with holder, 1 NO, 1 NC, screw terminal	SIEMENS
3SU1400-1AA10-1BA0	3	CONTACT MODULE WITH 1 CONTACT ELEMENT, 1 NO, SCREW TERMINAL, FOR FRONT PLATE MOUNTING	SIEMENS
3SU1002-2BM60-0AA0	1	Selector switch, illuminable, 22 mm, round, plastic, white, selector switch, short, 3 switch positions I>O<II, momentary contact type, actuating angle 2x45°, 10:30h/12h/13:30h	SIEMENS
3SU1550-0AA10-0AA0	1	HOLDER FOR 3 MODULES, METAL	SIEMENS
3VA2225-6KQ32-0AA0	1	circuit breaker 3VA2 IEC Frame 250 breaking capacity class H Icu=85 kA @ 415 V 3-pole, line protection ETU860, LSIG, In=250 A overload protection Ir=100 A...250 A short-circuit protection Isd=0.6..10x In, Ii=1.5..10x In neutral conductor protection optionally with external current transformer, up to 160% ground-fault protection, can be switched off Ig=0.2...1 x In, tg=0.05-0.8s nut keeper kit	SIEMENS
3VA9107-0NA10	1	EXT. N-CURRENT TRANSFORMER FOR N-PROTECTION ACCESSORY FOR: 3VA2 IN=160/250A	SIEMENS
3VA9267-0HA20	1	MOTOR OPERATOR 110-230 V AC / 110-250 V DC ACCESSORY FOR: 3VA2 100//160/250	SIEMENS
3VA9988-0AA12	1	AUXILIARY SWITCH CHANGEOVER CONTACTS TYPE HQ (7MM) ACCESSORY FOR 3VA-BREAKER 240VAC/250VDC 6A	SIEMENS
3VA9988-0AB12	1	TRIP ALARM SWITCH CHANGEOVER CONTACTS TYPE HQ (7MM) ACCESSORY FOR 3VA1 & 3VA20 UPTO 3VA25	SIEMENS
3VA9123-0KD00	1	DRAW-OUT UNIT COMPLETE KIT ACCESSORY FOR: CIRCUIT BREAKER, 3 POLE 3VA2 100/160/250.	SIEMENS
3VA9987-0KD81	1	crank handle for draw-out unit accessory for: draw-out unit	SIEMENS

REVISION						
REV	DESCRIPTION	PREP	CHKD	APPD	DATE	
PROJECT						
KING KHALID INTERNATIONAL AIRPORT (KKIA) PROJECT CONCOURSE-A						
CLIENT						
ENGINEER						
CONTRACTOR						
DRAWING TITLE						
CCA-SS1-MDB-1A/B						
SUMMARIZED PARTS LIST						
MANUFACTURER		DRAWING NO. CCA-SS1-MDB-1A/B				
		PROJECT REFERENCE:				REC. 00
		SCALE : NTS		LOCATION: +12.1	SIZE: A4	
		SHEET NO: 1 of				
QUOTATION REF.						
FILE NAME: 01-02_CCA-SS1-MDB-1A/B						

Device tag list

	<i>+15.6°C</i>
3SB6215-6AA20-1AA0	1
3SB6215-6AA40-1AA0	1
3SB6215-6AA30-1AA0	1
3SU1100-2BF60-1MA0	1
3SU1400-1AA10-1BA0	1
3SU1002-2BM60-0AA0	1
3SU1550-0AA10-0AA0	1

	-Q1	+15.6°C
3VA2225-6KQ32-0AA0		1
3VA9107-0NA10		1
3VA9267-0HA20		1
3VA9988-0AA12		1
3VA9988-0AB12		1
3VA9123-0KD00		1
3VA9987-0KD81		1

REVISION					
REV	DESCRIPTION	PREP	CHKD	APPD	DATE

PROJECT	KING KHALID INTERNATIONAL AIRPORT (KKIA) PROJECT CONCOURSE-A				
CLIENT					
ENGINEER					
CONTRACTOR					
DRAWING TITLE	CCA-SS1-MDB-1A/B 				

1	2	3	4	5	6	7	8	9	10
A									
Bill of Material									

Device tag list

	<i>+17.3°C</i>
3SB6215-6AA20-1AA0	1
3SB6215-6AA40-1AA0	1
3SB6215-6AA30-1AA0	1
3SU1100-2BF60-1MA0	1
3SU1400-1AA10-1BA0	1
3SU1002-2BM60-0AA0	1
3SU1550-0AA10-0AA0	1

	-Q1	+17.2°C
3VA2163-6KQ32-0AA0		1
3VA9107-0NA10		1
3VA9267-0HA20		1
3VA9988-0AA12		1
3VA9988-0AB12		1
3VA9123-0KD00		1
3VA9987-0KD81		1

REVISION					
REV	DESCRIPTION	PREP	CHKD	APPD	DATE

PROJECT	KING KHALID INTERNATIONAL AIRPORT (KKIA) PROJECT CONCOURSE-A				
CLIENT					
ENGINEER					
CONTRACTOR					
DRAWING TITLE	CCA-SS1-MDB-1A/B 				

Bill of Material

Order number	Qty.	Description	Make
3SB6215-6AA20-1AA0	1	Compact pilot light 22 mm plastic round integrated LED 110V AC/DC red	SIEMENS
3SB6215-6AA40-1AA0	1	Compact pilot light 22 mm plastic round integrated LED 110V AC/DC green	SIEMENS
3SB6215-6AA30-1AA0	1	Compact pilot light 22 mm plastic round integrated LED 110V AC/DC yellow	SIEMENS
3SU1100-2BF60-1MA0	1	Selector switch, illuminable, 22 mm, round, plastic, white, selector switch, short, 2 switch positions O-I, latching, 10:30h/13:30h, with holder, 1 NO, 1 NC, screw terminal	SIEMENS
3SU1400-1AA10-1BA0	3	CONTACT MODULE WITH 1 CONTACT ELEMENT, 1 NO, SCREW TERMINAL, FOR FRONT PLATE MOUNTING	SIEMENS
3SU1002-2BM60-0AA0	1	Selector switch, illuminable, 22 mm, round, plastic, white, selector switch, short, 3 switch positions I>O<II, momentary contact type, actuating angle 2x45°, 10:30h/12h/13:30h	SIEMENS
3SU1550-0AA10-0AA0	1	HOLDER FOR 3 MODULES, METAL	SIEMENS
3WA1110-4GF64-7HA3-Z C01+F19	1	Withdrawable circuit breaker, with guide frame, IEC 60947-2, size 1, 3-pole, In=1000 A up to 690 V AC 50/60 Hz, breaking capacity M Icu=85/66 kA at 500/690 V, ETU600 LSIG electronic trip unit upgradeable, color display, Bluetooth, USB interface, basic protection LT, ST, INST, GFx, neutral conductor protection requires an external neutral point current sensor, trip alarm switch (1x CO), connection at rear flange, guide frame with shutter and position signaling switch, with internal voltage tap on lower stab of circuit breaker, with voltage tap module VTM680 and power supply of ETU600, able to communication, integrated metering type PMF-3 Advanced Power Monitor., Voltage, Energy, Power, Power factor, Frequency, Unbalance, Temperature, Power quality, with manual and motorized operating mechanism (M) 110-127 V AC / 110-125 V DC, Storage status and ready-to- close signaling switches, Auxiliary switches 4NO+4NC, Closing coil (CC) 100% OP 110-127 V AC / 110-125 V DC, applicable for continuous duty, Remote trip alarm reset (RR) 110-127 V AC / 110-125 V DC for momentary duty, without 2nd shunt trip, Shunt trip (ST) 100% OP 110-127 V AC / 110-125 V DC, suitable for continuous duty, Option C01 = Operations counter for circuit breaker Option F19 = COM190 COM module PROFINET IO Modbus TCP 2 switched Ethernet ports circuit breaker internal	SIEMENS

REVISION						
REV	DESCRIPTION	PREP	CHKD	APPD	DATE	
PROJECT						
KING KHALID INTERNATIONAL AIRPORT (KKIA) PROJECT CONCOURSE-A						
CLIENT						
ENGINEER						
CONTRACTOR						
DRAWING TITLE						
CCA-SS1-MDB-1A/B						
SUMMARIZED PARTS LIST						
MANUFACTURER		DRAWING NO. CCA-SS1-MDB-1A/B				
		PROJECT REFERENCE:				REC. 00
		SCALE : NTS		LOCATION: +14.1	SIZE: A4	
		SHEET NO: 1 of				
QUOTATION REF.						
FILE NAME: 01-02_CCA-SS1-MDB-1A/B						

1	2	3	4	5	6	7	8	9	10																																																																																									
A	Device tag list																																																																																																	
B	<table><tr><td colspan="8"></td><td><i>+ / 18.6 : C</i></td></tr><tr><td colspan="8">3SB6215-6AA20-1AA0</td><td>1</td></tr><tr><td colspan="8">3SB6215-6AA40-1AA0</td><td>1</td></tr><tr><td colspan="8">3SB6215-6AA30-1AA0</td><td>1</td></tr><tr><td colspan="8">3SU1100-2BF60-1MA0</td><td>1</td></tr><tr><td colspan="8">3SU1400-1AA10-1BA0</td><td>1</td></tr><tr><td colspan="8">3SU1002-2BM60-0AA0</td><td>1</td></tr><tr><td colspan="8">3SU1550-0AA10-0AA0</td><td>1</td></tr><tr><td colspan="8"></td><td></td></tr><tr><td colspan="8"></td><td></td></tr></table>																	<i>+ / 18.6 : C</i>	3SB6215-6AA20-1AA0								1	3SB6215-6AA40-1AA0								1	3SB6215-6AA30-1AA0								1	3SU1100-2BF60-1MA0								1	3SU1400-1AA10-1BA0								1	3SU1002-2BM60-0AA0								1	3SU1550-0AA10-0AA0								1																	
								<i>+ / 18.6 : C</i>																																																																																										
3SB6215-6AA20-1AA0								1																																																																																										
3SB6215-6AA40-1AA0								1																																																																																										
3SB6215-6AA30-1AA0								1																																																																																										
3SU1100-2BF60-1MA0								1																																																																																										
3SU1400-1AA10-1BA0								1																																																																																										
3SU1002-2BM60-0AA0								1																																																																																										
3SU1550-0AA10-0AA0								1																																																																																										
C																																																																																																		
D																																																																																																		
E																																																																																																		
F																																																																																																		
G																																																																																																		
H																																																																																																		

								<i>+ / 18.6 : C</i>
3SB6215-6AA20-1AA0								1
3SB6215-6AA40-1AA0								1
3SB6215-6AA30-1AA0								1
3SU1100-2BF60-1MA0								1
3SU1400-1AA10-1BA0								1
3SU1002-2BM60-0AA0								1
3SU1550-0AA10-0AA0								1

								<i>- Q1 + / 18.6 : C</i>
3WA1110-4GF64-7HA3-Z C01+F19								1

REVISION					
REV	DESCRIPTION	PREP	CHKD	APPD	DATE
PROJECT					
KING KHALID INTERNATIONAL AIRPORT (KKIA) PROJECT CONCOURSE-A					
CLIENT					
ENGINEER					
CONTRACTOR					
DRAWING TITLE					
CCA-SS1-MDB-1A/B					
DEVICE TAG LIST					
MANUFACTURER	DRAWING NO. CCA-SS1-MDB-1A/B				
	PROJECT REFERENCE:				REC. 00
	SCALE : NTS		LOCATION: +14.1		SIZE: A4
	SHEET NO:		2 of		
QUOTATION REF.					
FILE NAME: 01-02_CCA-SS1-MDB-1A/B					

Bill of Material

Order number	Qty.	Description	Make
3SB6215-6AA20-1AA0	1	Compact pilot light 22 mm plastic round integrated LED 110V AC/DC red	SIEMENS
3SB6215-6AA40-1AA0	1	Compact pilot light 22 mm plastic round integrated LED 110V AC/DC green	SIEMENS
3SB6215-6AA30-1AA0	1	Compact pilot light 22 mm plastic round integrated LED 110V AC/DC yellow	SIEMENS
3SU1100-2BF60-1MA0	1	Selector switch, illuminable, 22 mm, round, plastic, white, selector switch, short, 2 switch positions O-I, latching, 10:30h/13:30h, with holder, 1 NO, 1 NC, screw terminal	SIEMENS
3SU1400-1AA10-1BA0	3	CONTACT MODULE WITH 1 CONTACT ELEMENT, 1 NO, SCREW TERMINAL, FOR FRONT PLATE MOUNTING	SIEMENS
3SU1002-2BM60-0AA0	1	Selector switch, illuminable, 22 mm, round, plastic, white, selector switch, short, 3 switch positions I>O<II, momentary contact type, actuating angle 2x45°, 10:30h/12h/13:30h	SIEMENS
3SU1550-0AA10-0AA0	1	HOLDER FOR 3 MODULES, METAL	SIEMENS
3VA2340-6KQ32-0AA0	1	circuit breaker 3VA2 IEC Frame 400 breaking capacity class H Icu=85 kA @ 415 V 3-pole, line protection ETU860, LSIG, In=400 A overload protection Ir=160 A...400 A short-circuit protection Isd=0.6..10x In, Ii=1.5..10x In neutral conductor protection optionally with external current transformer, up to 160% ground-fault protection, can be switched off Ig=0.2...1 x In, tg=0.05-0.8s nut keeper kit	SIEMENS
3VA9307-0NA10	1	EXT. N-CURRENT TRANSFORMER FOR N-PROTECTION ACCESSORY FOR: 3VA2 IN=400/500/630 A	SIEMENS
3VA9467-0HA20	1	MOTOR OPERATOR 110-230 V AC / 110-250 V DC ACCESSORY FOR: 3VA2 400/630	SIEMENS
3VA9988-0AA12	1	AUXILIARY SWITCH CHANGEOVER CONTACTS TYPE HQ (7MM) ACCESSORY FOR 3VA-BREAKER 240VAC/250VDC 6A	SIEMENS
3VA9988-0AB12	1	TRIP ALARM SWITCH CHANGEOVER CONTACTS TYPE HQ (7MM) ACCESSORY FOR 3VA1 & 3VA20 UPTO 3VA25	SIEMENS
3VA9323-0KD00	1	draw-out unit complete kit accessory for: circuit breaker, 3-pole 3VA1 400/630 3VA2 400/630	SIEMENS
3VA9987-0KD81	1	crank handle for draw-out unit accessory for: draw-out unit	SIEMENS

REVISION						
REV	DESCRIPTION	PREP	CHKD	APPD	DATE	
PROJECT						
KING KHALID INTERNATIONAL AIRPORT (KKIA) PROJECT CONCOURSE-A						
CLIENT						
ENGINEER						
CONTRACTOR						
DRAWING TITLE						
CCA-SS1-MDB-1A/B						
SUMMARIZED PARTS LIST						
MANUFACTURER		DRAWING NO. CCA-SS1-MDB-1A/B				
		PROJECT REFERENCE:				REC. 00
		SCALE : NTS		LOCATION: +2.5	SIZE: A4	
		SHEET NO: 1 of				
QUOTATION REF.						
FILE NAME: 01-02_CCA-SS1-MDB-1A/B						

Device tag list

	<i>+10.4°C</i>
3SB6215-6AA20-1AA0	1
3SB6215-6AA40-1AA0	1
3SB6215-6AA30-1AA0	1
3SU1100-2BF60-1MA0	1
3SU1400-1AA10-1BA0	1
3SU1002-2BM60-0AA0	1
3SU1550-0AA10-0AA0	1

	-Q1	+10.4:C
3VA2340-6KQ32-0AA0		1
3VA9307-0NA10		1
3VA9467-0HA20		1
3VA9988-0AA12		1
3VA9988-0AB12		1
3VA9323-0KD00		1
3VA9987-0KD81		1

REVISION						
REV	DESCRIPTION	PREP	CHKD	APPD	DATE	
PROJECT						
KING KHALID INTERNATIONAL AIRPORT (KKIA) PROJECT CONCOURSE-A						
CLIENT						
ENGINEER						
CONTRACTOR						
DRAWING TITLE						
CCA-SS1-MDB-1A/B						
DEVICE TAG LIST						
MANUFACTURER		DRAWING NO. CCA-SS1-MDB-1A/B				
		PROJECT REFERENCE:				REC. 00
		SCALE : NTS		LOCATION: +2.5		SIZE: A4
		SHEET NO: 2 of				
QUOTATION REF.						
FILE NAME: 01-02_CCA-SS1-MDB-1A/B						

Bill of Material

Order number	Qty.	Description	Make
3SB6215-6AA20-1AA0	1	Compact pilot light 22 mm plastic round integrated LED 110V AC/DC red	SIEMENS
3SB6215-6AA40-1AA0	1	Compact pilot light 22 mm plastic round integrated LED 110V AC/DC green	SIEMENS
3SB6215-6AA30-1AA0	1	Compact pilot light 22 mm plastic round integrated LED 110V AC/DC yellow	SIEMENS
3SU1100-2BF60-1MA0	1	Selector switch, illuminable, 22 mm, round, plastic, white, selector switch, short, 2 switch positions O-I, latching, 10:30h/13:30h, with holder, 1 NO, 1 NC, screw terminal	SIEMENS
3SU1400-1AA10-1BA0	3	CONTACT MODULE WITH 1 CONTACT ELEMENT, 1 NO, SCREW TERMINAL, FOR FRONT PLATE MOUNTING	SIEMENS
3SU1002-2BM60-0AA0	1	Selector switch, illuminable, 22 mm, round, plastic, white, selector switch, short, 3 switch positions I>O<II, momentary contact type, actuating angle 2x45°, 10:30h/12h/13:30h	SIEMENS
3SU1550-0AA10-0AA0	1	HOLDER FOR 3 MODULES, METAL	SIEMENS
3VA2116-6KQ32-0AA0	1	circuit breaker 3VA2 IEC Frame 160 breaking capacity class H Icu=85 kA @ 415 V 3-pole, line protection ETU860, LSIG, In=160 A overload protection Ir=63 A...160 A short-circuit protection Isd=0.6..10x In, Ii=1.5..10x In neutral conductor protection optionally with external current transformer, up to 160% ground-fault protection, can be switched off Ig=0.2...1 x In, tg=0.05-0.8s nut keeper kit	SIEMENS
3VA9107-0NA10	1	EXT. N-CURRENT TRANSFORMER FOR N-PROTECTION ACCESSORY FOR: 3VA2 IN=160/250A	SIEMENS
3VA9267-0HA20	1	MOTOR OPERATOR 110-230 V AC / 110-250 V DC ACCESSORY FOR: 3VA2 100//160/250	SIEMENS
3VA9988-0AA12	1	AUXILIARY SWITCH CHANGEOVER CONTACTS TYPE HQ (7MM) ACCESSORY FOR 3VA-BREAKER 240VAC/250VDC 6A	SIEMENS
3VA9988-0AB12	1	TRIP ALARM SWITCH CHANGEOVER CONTACTS TYPE HQ (7MM) ACCESSORY FOR 3VA1 & 3VA20 UPTO 3VA25	SIEMENS
3VA9123-0KD00	1	DRAW-OUT UNIT COMPLETE KIT ACCESSORY FOR: CIRCUIT BREAKER, 3 POLE 3VA2 100/160/250.	SIEMENS
3VA9987-0KD81	1	crank handle for draw-out unit accessory for: draw-out unit	SIEMENS

REVISION					
REV	DESCRIPTION	PREP	CHKD	APPD	DATE

PROJECT

KING KHALID INTERNATIONAL
AIRPORT (KKIA) PROJECT
CONCOURSE-A

CLIENT

ENGINEER

CONTRACTOR

DRAWING TITLE

CCA-SS1-MDB-1A/B

SUMMARIZED PARTS LIST			
MANUFACTURER	DRAWING NO. CCA-SS1-MDB-1A/B		
	PROJECT REFERENCE:		REC. 00
	SCALE :	LOCATION:	SIZE:
	NTS	+3.2	A4
SHEET NO: 1 of			

QUOTATION REF.
FILE NAME: 01-02_CCA-SS1-MDB-1A/B

Device tag list

	<i>+/10.8:C</i>
3SB6215-6AA20-1AA0	1
3SB6215-6AA40-1AA0	1
3SB6215-6AA30-1AA0	1
3SU1100-2BF60-1MA0	1
3SU1400-1AA10-1BA0	1
3SU1002-2BM60-0AA0	1
3SU1550-0AA10-0AA0	1
-Q1	<i>+/10.8:C</i>
3VA2116-6KQ32-0AA0	1
3VA9107-0NA10	1
3VA9267-0HA20	1
3VA9988-0AA12	1
3VA9988-0AB12	1
3VA9123-0KD00	1
3VA9987-0KD81	1

REVISION					
REV/	DESCRIPTION	PREP	CHKD	APPD	DATE
PROJECT					
KING KHALID INTERNATIONAL AIRPORT (KKIA) PROJECT CONCOURSE-A					
CLIENT					
ENGINEER					
CONTRACTOR					
DRAWING TITLE					
CCA-SS1-MDB-1A/B					
DEVICE TAG LIST					
MANUFACTURER		DRAWING NO. CCA-SS1-MDB-1A/B			
		PROJECT REFERENCE:			REC. 00
		SCALE : NTS		LOCATION: +3.2	SIZE: A4
		SHEET NO: 2 of			
QUOTATION REF.					
FILE NAME: 01-02_CCA-SS1-MDB-1A/B					

Bill of Material

Order number	Qty.	Description	Make
3SB6215-6AA20-1AA0	1	Compact pilot light 22 mm plastic round integrated LED 110V AC/DC red	SIEMENS
3SB6215-6AA40-1AA0	1	Compact pilot light 22 mm plastic round integrated LED 110V AC/DC green	SIEMENS
3SB6215-6AA30-1AA0	1	Compact pilot light 22 mm plastic round integrated LED 110V AC/DC yellow	SIEMENS
3SU1100-2BF60-1MA0	1	Selector switch, illuminable, 22 mm, round, plastic, white, selector switch, short, 2 switch positions O-I, latching, 10:30h/13:30h, with holder, 1 NO, 1 NC, screw terminal	SIEMENS
3SU1400-1AA10-1BA0	3	CONTACT MODULE WITH 1 CONTACT ELEMENT, 1 NO, SCREW TERMINAL, FOR FRONT PLATE MOUNTING	SIEMENS
3SU1002-2BM60-0AA0	1	Selector switch, illuminable, 22 mm, round, plastic, white, selector switch, short, 3 switch positions I>O<II, momentary contact type, actuating angle 2x45°, 10:30h/12h/13:30h	SIEMENS
3SU1550-0AA10-0AA0	1	HOLDER FOR 3 MODULES, METAL	SIEMENS
3VA2340-6KQ32-0AA0	1	circuit breaker 3VA2 IEC Frame 400 breaking capacity class H Icu=85 kA @ 415 V 3-pole, line protection ETU860, LSIG, In=400 A overload protection Ir=160 A...400 A short-circuit protection Isd=0.6..10x In, Ii=1.5..10x In neutral conductor protection optionally with external current transformer, up to 160% ground-fault protection, can be switched off Ig=0.2...1 x In, tg=0.05-0.8s nut keeper kit	SIEMENS
3VA9307-0NA10	1	EXT. N-CURRENT TRANSFORMER FOR N-PROTECTION ACCESSORY FOR: 3VA2 IN=400/500/630 A	SIEMENS
3VA9467-0HA20	1	MOTOR OPERATOR 110-230 V AC / 110-250 V DC ACCESSORY FOR: 3VA2 400/630	SIEMENS
3VA9988-0AA12	1	AUXILIARY SWITCH CHANGEOVER CONTACTS TYPE HQ (7MM) ACCESSORY FOR 3VA-BREAKER 240VAC/250VDC 6A	SIEMENS
3VA9988-0AB12	1	TRIP ALARM SWITCH CHANGEOVER CONTACTS TYPE HQ (7MM) ACCESSORY FOR 3VA1 & 3VA20 UPTO 3VA25	SIEMENS
3VA9323-0KD00	1	draw-out unit complete kit accessory for: circuit breaker, 3-pole 3VA1 400/630 3VA2 400/630	SIEMENS
3VA9987-0KD81	1	crank handle for draw-out unit accessory for: draw-out unit	SIEMENS

REVISION					
REV	DESCRIPTION	PREP	CHKD	APPD	DATE
PROJECT					
KING KHALID INTERNATIONAL AIRPORT (KKIA) PROJECT CONCOURSE-A					
CLIENT					
ENGINEER					
CONTRACTOR					
DRAWING TITLE					
CCA-SS1-MDB-1A/B					
SUMMARIZED PARTS LIST					
MANUFACTURER		DRAWING NO. CCA-SS1-MDB-1A/B			
		PROJECT REFERENCE:			REC. 00
		SCALE : NTS		LOCATION: +3.3	SIZE: A4
		SHEET NO: 1 of			
QUOTATION REF.					
FILE NAME: 01-02_CCA-SS1-MDB-1A/B					

Device tag list

	+/ <i>11.3:C</i>
3SB6215-6AA20-1AA0	1
3SB6215-6AA40-1AA0	1
3SB6215-6AA30-1AA0	1
3SU1100-2BF60-1MA0	1
3SU1400-1AA10-1BA0	1
3SU1002-2BM60-0AA0	1
3SU1550-0AA10-0AA0	1

	-Q1	+11.2°C
3VA2340-6KQ32-0AA0		1
3VA9307-0NA10		1
3VA9467-0HA20		1
3VA9988-0AA12		1
3VA9988-0AB12		1
3VA9323-0KD00		1
3VA9987-0KD81		1

REVISION						
REV	DESCRIPTION	PREP	CHKD	APPD	DATE	
PROJECT						
KING KHALID INTERNATIONAL AIRPORT (KKIA) PROJECT CONCOURSE-A						
CLIENT						
ENGINEER						
CONTRACTOR						
DRAWING TITLE						
CCA-SS1-MDB-1A/B						
DEVICE TAG LIST						
MANUFACTURER		DRAWING NO. CCA-SS1-MDB-1A/B				
		PROJECT REFERENCE:				REC. 00
		SCALE : NTS		LOCATION: +3.3	SIZE: A4	
		SHEET NO: 2 of				
QUOTATION REF.						
FILE NAME: 01-02_CCA-SS1-MDB-1A/B						

Bill of Material

Order number	Qty.	Description	Make
3SB6215-6AA20-1AA0	1	Compact pilot light 22 mm plastic round integrated LED 110V AC/DC red	SIEMENS
3SB6215-6AA40-1AA0	1	Compact pilot light 22 mm plastic round integrated LED 110V AC/DC green	SIEMENS
3SB6215-6AA30-1AA0	1	Compact pilot light 22 mm plastic round integrated LED 110V AC/DC yellow	SIEMENS
3SU1100-2BF60-1MA0	1	Selector switch, illuminable, 22 mm, round, plastic, white, selector switch, short, 2 switch positions O-I, latching, 10:30h/13:30h, with holder, 1 NO, 1 NC, screw terminal	SIEMENS
3SU1400-1AA10-1BA0	3	CONTACT MODULE WITH 1 CONTACT ELEMENT, 1 NO, SCREW TERMINAL, FOR FRONT PLATE MOUNTING	SIEMENS
3SU1002-2BM60-0AA0	1	Selector switch, illuminable, 22 mm, round, plastic, white, selector switch, short, 3 switch positions I>O<II, momentary contact type, actuating angle 2x45°, 10:30h/12h/13:30h	SIEMENS
3SU1550-0AA10-0AA0	1	HOLDER FOR 3 MODULES, METAL	SIEMENS
3VA2340-6KQ32-0AA0	1	circuit breaker 3VA2 IEC Frame 400 breaking capacity class H Icu=85 kA @ 415 V 3-pole, line protection ETU860, LSIG, In=400 A overload protection Ir=160 A...400 A short-circuit protection Isd=0.6..10x In, Ii=1.5..10x In neutral conductor protection optionally with external current transformer, up to 160% ground-fault protection, can be switched off Ig=0.2...1 x In, tg=0.05-0.8s nut keeper kit	SIEMENS
3VA9307-0NA10	1	EXT. N-CURRENT TRANSFORMER FOR N-PROTECTION ACCESSORY FOR: 3VA2 IN=400/500/630 A	SIEMENS
3VA9467-0HA20	1	MOTOR OPERATOR 110-230 V AC / 110-250 V DC ACCESSORY FOR: 3VA2 400/630	SIEMENS
3VA9988-0AA12	1	AUXILIARY SWITCH CHANGEOVER CONTACTS TYPE HQ (7MM) ACCESSORY FOR 3VA-BREAKER 240VAC/250VDC 6A	SIEMENS
3VA9988-0AB12	1	TRIP ALARM SWITCH CHANGEOVER CONTACTS TYPE HQ (7MM) ACCESSORY FOR 3VA1 & 3VA20 UPTO 3VA25	SIEMENS
3VA9323-0KD00	1	draw-out unit complete kit accessory for: circuit breaker, 3-pole 3VA1 400/630 3VA2 400/630	SIEMENS
3VA9987-0KD81	1	crank handle for draw-out unit accessory for: draw-out unit	SIEMENS

REVISION						
REV	DESCRIPTION	PREP	CHKD	APPD	DATE	
PROJECT						
KING KHALID INTERNATIONAL AIRPORT (KKIA) PROJECT CONCOURSE-A						
CLIENT						
ENGINEER						
CONTRACTOR						
DRAWING TITLE						
CCA-SS1-MDB-1A/B						
SUMMARIZED PARTS LIST						
MANUFACTURER		DRAWING NO. CCA-SS1-MDB-1A/B				
		PROJECT REFERENCE:				REC. 00
		SCALE : NTS		LOCATION: +3.4	SIZE: A4	
		SHEET NO: 1 of				
QUOTATION REF.						
FILE NAME: 01-02_CCA-SS1-MDB-1A/B						

1	2	3	4	5	6	7	8	9	10	
A	Device tag list									
		</								

		+/11.4:C
3SB6215-6AA20-1AA0		1
3SB6215-6AA40-1AA0		1
3SB6215-6AA30-1AA0		1
3SU1100-2BF60-1MA0		1
3SU1400-1AA10-1BA0		1
3SU1002-2BM60-0AA0		1
3SU1550-0AA10-0AA0		1
-Q1		+/11.4:C
3VA2340-6KQ32-0AA0		1
3VA9307-0NA10		1
3VA9467-0HA20		1
3VA9988-0AA12		1
3VA9988-0AB12		1
3VA9323-0KD00		1
3VA9987-0KD81		1

1	2	3	4	5	6	7	8	9	10
A	Bill of Material								
B									
C									
D									
E									
F									
G									
H									

Device tag list

	+/-11.6°C
3SB6215-6AA20-1AA0	1
3SB6215-6AA40-1AA0	1
3SB6215-6AA30-1AA0	1
3SU1100-2BF60-1MA0	1
3SU1400-1AA10-1BA0	1
3SU1002-2BM60-0AA0	1
3SU1550-0AA10-0AA0	1

	-Q1	+11.6°C
3VA2340-6KQ32-0AA0		1
3VA9307-0NA10		1
3VA9467-0HA20		1
3VA9988-0AA12		1
3VA9988-0AB12		1
3VA9323-0KD00		1
3VA9987-0KD81		1

REVISION						
REV	DESCRIPTION	PREP	CHKD	APPD	DATE	
PROJECT						
KING KHALID INTERNATIONAL AIRPORT (KKIA) PROJECT CONCOURSE-A						
CLIENT						
ENGINEER						
CONTRACTOR						
DRAWING TITLE						
CCA-SS1-MDB-1A/B						
DEVICE TAG LIST						
MANUFACTURER		DRAWING NO. CCA-SS1-MDB-1A/B				
		PROJECT REFERENCE:				REC. 00
		SCALE : NTS		LOCATION: +3.5		SIZE: A4
		SHEET NO: 2 of				
QUOTATION REF.						
FILE NAME: 01-02_CCA-SS1-MDB-1A/B						

Bill of Material

Order number	Qty.	Description	Make
3SB6215-6AA20-1AA0	1	Compact pilot light 22 mm plastic round integrated LED 110V AC/DC red	SIEMENS
3SB6215-6AA40-1AA0	1	Compact pilot light 22 mm plastic round integrated LED 110V AC/DC green	SIEMENS
3SB6215-6AA30-1AA0	1	Compact pilot light 22 mm plastic round integrated LED 110V AC/DC yellow	SIEMENS
3VA2225-6KQ32-0AA0	1	circuit breaker 3VA2 IEC Frame 250 breaking capacity class H Icu=85 kA @ 415 V 3-pole, line protection ETU860, LSIG, In=250 A overload protection Ir=100 A...250 A short-circuit protection Isd=0.6..10x In, Ii=1.5..10x In neutral conductor protection optionally with external current transformer, up to 160% ground-fault protection, can be switched off Ig=0.2...1 x In, tg=0.05-0.8s nut keeper kit	SIEMENS
3VA9107-0NA10	1	EXT. N-CURRENT TRANSFORMER FOR N-PROTECTION ACCESSORY FOR: 3VA2 IN=160/250A	SIEMENS
3VA9267-0HA20	1	MOTOR OPERATOR 110-230 V AC / 110-250 V DC ACCESSORY FOR: 3VA2 100//160/250	SIEMENS
3VA9988-0AA12	1	AUXILIARY SWITCH CHANGEOVER CONTACTS TYPE HQ (7MM) ACCESSORY FOR 3VA-BREAKER 240VAC/250VDC 6A	SIEMENS
3VA9988-0AB12	1	TRIP ALARM SWITCH CHANGEOVER CONTACTS TYPE HQ (7MM) ACCESSORY FOR 3VA1 & 3VA20 UPTO 3VA25	SIEMENS
3VA9123-0KD00	1	DRAW-OUT UNIT COMPLETE KIT ACCESSORY FOR: CIRCUIT BREAKER, 3 POLE 3VA2 100/160/250.	SIEMENS
3VA9987-0KD81	1	crank handle for draw-out unit accessory for: draw-out unit	SIEMENS

REVISION					
REV	DESCRIPTION	PREP	CHKD	APPD	DATE
PROJECT					
KING KHALID INTERNATIONAL AIRPORT (KKIA) PROJECT CONCOURSE-A					
CLIENT					
ENGINEER					
CONTRACTOR					
DRAWING TITLE					
CCA-SS1-MDB-1A/B					
SUMMARIZED PARTS LIST					
MANUFACTURER		DRAWING NO. CCA-SS1-MDB-1A/B			
		PROJECT REFERENCE:			REC. 00
		SCALE : NTS		LOCATION: +4.2	SIZE: A4
		SHEET NO: 1 of			
QUOTATION REF.					
FILE NAME: 01-02_CCA-SS1-MDB-1A/B					

Device tag list

-Q1	+12.2°C
3VA2225-6KQ32-0AA0	1
3VA9107-0NA10	1
3VA9267-0HA20	1
3VA9988-0AA12	1
3VA9988-0AB12	1
3VA9123-0KD00	1
3VA9987-0KD81	1

REVISION					
REV	DESCRIPTION	PREP	CHKD	APPD	DATE
PROJECT					
KING KHALID INTERNATIONAL AIRPORT (KKIA) PROJECT CONCOURSE-A					
CLIENT					
ENGINEER					
CONTRACTOR					
DRAWING TITLE					
CCA-SS1-MDB-1A/B					
DEVICE TAG LIST					
MANUFACTURER		DRAWING NO. CCA-SS1-MDB-1A/B			
		PROJECT REFERENCE:			REC. 00
		SCALE : NTS		LOCATION: +4.2	SIZE: A4
		SHEET NO: 2 of			
QUOTATION REF.					
FILE NAME: 01-02_CCA-SS1-MDB-1A/B					

Bill of Material

Order number	Qty.	Description	Make
3SB6215-6AA20-1AA0	1	Compact pilot light 22 mm plastic round integrated LED 110V AC/DC red	SIEMENS
3SB6215-6AA40-1AA0	1	Compact pilot light 22 mm plastic round integrated LED 110V AC/DC green	SIEMENS
3SB6215-6AA30-1AA0	1	Compact pilot light 22 mm plastic round integrated LED 110V AC/DC yellow	SIEMENS
3VA2340-6KQ32-0AA0	1	circuit breaker 3VA2 IEC Frame 400 breaking capacity class H Icu=85 kA @ 415 V 3-pole, line protection ETU860, LSIG, In=400 A overload protection Ir=160 A...400 A short-circuit protection Isd=0.6..10x In, Ii=1.5..10x In neutral conductor protection optionally with external current transformer, up to 160% ground-fault protection, can be switched off Ig=0.2...1 x In, tg=0.05-0.8s nut keeper kit	SIEMENS
3VA9307-0NA10	1	EXT. N-CURRENT TRANSFORMER FOR N-PROTECTION ACCESSORY FOR: 3VA2 IN=400/500/630 A	SIEMENS
3VA9467-0HA20	1	MOTOR OPERATOR 110-230 V AC / 110-250 V DC ACCESSORY FOR: 3VA2 400/630	SIEMENS
3VA9988-0AA12	1	AUXILIARY SWITCH CHANGEOVER CONTACTS TYPE HQ (7MM) ACCESSORY FOR 3VA-BREAKER 240VAC/250VDC 6A	SIEMENS
3VA9988-0AB12	1	TRIP ALARM SWITCH CHANGEOVER CONTACTS TYPE HQ (7MM) ACCESSORY FOR 3VA1 & 3VA20 UPTO 3VA25	SIEMENS
3VA9323-0KD00	1	draw-out unit complete kit accessory for: circuit breaker, 3-pole 3VA1 400/630 3VA2 400/630	SIEMENS
3VA9987-0KD81	1	crank handle for draw-out unit accessory for: draw-out unit	SIEMENS

REVISION					
REV	DESCRIPTION	PREP	CHKD	APPD	DATE

PROJECT

KING KHALID INTERNATIONAL
AIRPORT (KKIA) PROJECT
CONCOURSE-A

CLIENT

ENGINEER

CONTRACTOR

DRAWING TITLE

CCA-SS1-MDB-1A/B

SUMMARIZED PARTS LIST

MANUFACTURER	DRAWING NO. CCA-SS1-MDB-1A/B		
	PROJECT REFERENCE:		REC. 00
	SCALE : NTS	LOCATION: +4.3	SIZE: A4
	SHEET NO: 1 of		

QUOTATION REF.

FILE NAME: 01-02_CCA-SS1-MDB-1A/B

1	2	3	4	5	6	7	8	9	10	
A	Device tag list									
B										
C										
D										
E										
F										
G										
H										

	-Q1	+12.4:C
3VA2340-6KQ32-0AA0		1
3VA9307-0NA10		1
3VA9467-0HA20		1
3VA9988-0AA12		1
3VA9988-0AB12		1
3VA9323-0KD00		1
3VA9987-0KD81		1

REVISION					
REV	DESCRIPTION	PREP	CHKD	APPD	DATE
PROJECT					
KING KHALID INTERNATIONAL AIRPORT (KKIA) PROJECT CONCOURSE-A					
CLIENT					
ENGINEER					
CONTRACTOR					
DRAWING TITLE					
CCA-SS1-MDB-1A/B					
DEVICE TAG LIST					
MANUFACTURER	DRAWING NO. CCA-SS1-MDB-1A/B				
	PROJECT REFERENCE:				REC. 00
	SCALE : NTS		LOCATION: +4.3		SIZE: A4
	SHEET NO:		2 of		
QUOTATION REF.					
FILE NAME: 01-02_CCA-SS1-MDB-1A/B					

Bill of Material

Order number	Qty.	Description	Make
3SB6215-6AA20-1AA0	1	Compact pilot light 22 mm plastic round integrated LED 110V AC/DC red	SIEMENS
3SB6215-6AA40-1AA0	1	Compact pilot light 22 mm plastic round integrated LED 110V AC/DC green	SIEMENS
3SB6215-6AA30-1AA0	1	Compact pilot light 22 mm plastic round integrated LED 110V AC/DC yellow	SIEMENS
3VA2340-6KQ32-0AA0	1	circuit breaker 3VA2 IEC Frame 400 breaking capacity class H Icu=85 kA @ 415 V 3-pole, line protection ETU860, LSIG, In=400 A overload protection Ir=160 A...400 A short-circuit protection Isd=0.6..10x In, Ii=1.5..10x In neutral conductor protection optionally with external current transformer, up to 160% ground-fault protection, can be switched off Ig=0.2...1 x In, tg=0.05-0.8s nut keeper kit	SIEMENS
3VA9307-0NA10	1	EXT. N-CURRENT TRANSFORMER FOR N-PROTECTION ACCESSORY FOR: 3VA2 IN=400/500/630 A	SIEMENS
3VA9467-0HA20	1	MOTOR OPERATOR 110-230 V AC / 110-250 V DC ACCESSORY FOR: 3VA2 400/630	SIEMENS
3VA9988-0AA12	1	AUXILIARY SWITCH CHANGEOVER CONTACTS TYPE HQ (7MM) ACCESSORY FOR 3VA-BREAKER 240VAC/250VDC 6A	SIEMENS
3VA9988-0AB12	1	TRIP ALARM SWITCH CHANGEOVER CONTACTS TYPE HQ (7MM) ACCESSORY FOR 3VA1 & 3VA20 UPTO 3VA25	SIEMENS
3VA9323-0KD00	1	draw-out unit complete kit accessory for: circuit breaker, 3-pole 3VA1 400/630 3VA2 400/630	SIEMENS
3VA9987-0KD81	1	crank handle for draw-out unit accessory for: draw-out unit	SIEMENS

REVISION					
REV	DESCRIPTION	PREP	CHKD	APPD	DATE

PROJECT	KING KHALID INTERNATIONAL AIRPORT (KKIA) PROJECT CONCOURSE-A
---------	--

CLIENT

ENGINEER

CONTRACTOR	
------------	--

DRAWING TITLE

CCA-SS1-MDB-1A/B

SUMMARIZED PARTS LIST			
MANUFACTURER	DRAWING NO. CCA-SS1-MDB-1A/B		
	PROJECT REFERENCE:		REC. 00
	SCALE : NTS	LOCATION: +4.4	SIZE: A4
	SHEET NO: 1 of		

QUOTATION REF.

FILE NAME: 01-02_CCA-SS1-MDB-1A/B

Device tag list

-Q1	+12.6°C
3VA2340-6KQ32-0AA0	1
3VA9307-0NA10	1
3VA9467-0HA20	1
3VA9988-0AA12	1
3VA9988-0AB12	1
3VA9323-0KD00	1
3VA9987-0KD81	1

REVISION					
REV	DESCRIPTION	PREP	CHKD	APPD	DATE
PROJECT					
KING KHALID INTERNATIONAL AIRPORT (KKIA) PROJECT CONCOURSE-A					
CLIENT					
ENGINEER					
CONTRACTOR					
DRAWING TITLE					
CCA-SS1-MDB-1A/B					
DEVICE TAG LIST					
MANUFACTURER		DRAWING NO. CCA-SS1-MDB-1A/B			
		PROJECT REFERENCE:			REC. 00
		SCALE : NTS		LOCATION: +4.4	SIZE: A4
		SHEET NO: 2 of			
QUOTATION REF.					
FILE NAME: 01-02_CCA-SS1-MDB-1A/B					

Bill of Material

Order number	Qty.	Description	Make
3SB6215-6AA20-1AA0	1	Compact pilot light 22 mm plastic round integrated LED 110V AC/DC red	SIEMENS
3SB6215-6AA40-1AA0	1	Compact pilot light 22 mm plastic round integrated LED 110V AC/DC green	SIEMENS
3SB6215-6AA30-1AA0	1	Compact pilot light 22 mm plastic round integrated LED 110V AC/DC yellow	SIEMENS
3VA2463-6KQ32-0AA0	1	circuit breaker 3VA2 IEC Frame 630 breaking capacity class H Icu=85 kA @ 415 V 3-pole, line protection ETU860, LSIG, In=630 A overload protection Ir=250 A...630 A short-circuit protection Isd=0.6..9x In, Ii=1.5..9x In neutral conductor protection optionally with external current transformer, up to 160% ground-fault protection, can be switched off Ig=0.2...1 x In, tg=0.05-0.8s nut keeper kit	SIEMENS
3VA9307-0NA10	1	EXT. N-CURRENT TRANSFORMER FOR N-PROTECTION ACCESSORY FOR: 3VA2 IN=400/500/630 A	SIEMENS
3VA9467-0HA20	1	MOTOR OPERATOR 110-230 V AC / 110-250 V DC ACCESSORY FOR: 3VA2 400/630	SIEMENS
3VA9988-0AA12	1	AUXILIARY SWITCH CHANGEOVER CONTACTS TYPE HQ (7MM) ACCESSORY FOR 3VA-BREAKER 240VAC/250VDC 6A	SIEMENS
3VA9988-0AB12	1	TRIP ALARM SWITCH CHANGEOVER CONTACTS TYPE HQ (7MM) ACCESSORY FOR 3VA1 & 3VA20 UPTO 3VA25	SIEMENS
3VA9323-0KD00	1	draw-out unit complete kit accessory for: circuit breaker, 3-pole 3VA1 400/630 3VA2 400/630	SIEMENS
3VA9987-0KD81	1	crank handle for draw-out unit accessory for: draw-out unit	SIEMENS

REVISION						
REV	DESCRIPTION	PREP	CHKD	APPD	DATE	
PROJECT						
KING KHALID INTERNATIONAL AIRPORT (KKIA) PROJECT CONCOURSE-A						
CLIENT						
ENGINEER						
CONTRACTOR						
DRAWING TITLE						
CCA-SS1-MDB-1A/B						
SUMMARIZED PARTS LIST						
MANUFACTURER		DRAWING NO. CCA-SS1-MDB-1A/B				
		PROJECT REFERENCE:				REC. 00
		SCALE : NTS		LOCATION: +4.5	SIZE: A4	
		SHEET NO: 1 of				
QUOTATION REF.						
FILE NAME: 01-02_CCA-SS1-MDB-1A/B						

1	2	3	4	5	6	7	8	9	10	
A	Device tag list									

	-Q1	+12.8:C
3VA2463-6KQ32-0AA0		1
3VA9307-0NA10		1
3VA9467-0HA20		1
3VA9988-0AA12		1
3VA9988-0AB12		1
3VA9323-0KD00		1
3VA9987-0KD81		1

Bill of Material

Order number	Qty.	Description	Make
3SB6215-6AA20-1AA0	1	Compact pilot light 22 mm plastic round integrated LED 110V AC/DC red	SIEMENS
3SB6215-6AA40-1AA0	1	Compact pilot light 22 mm plastic round integrated LED 110V AC/DC green	SIEMENS
3SB6215-6AA30-1AA0	1	Compact pilot light 22 mm plastic round integrated LED 110V AC/DC yellow	SIEMENS
3SU1100-2BF60-1MA0	1	Selector switch, illuminable, 22 mm, round, plastic, white, selector switch, short, 2 switch positions O-I, latching, 10:30h/13:30h, with holder, 1 NO, 1 NC, screw terminal	SIEMENS
3SU1400-1AA10-1BA0	3	CONTACT MODULE WITH 1 CONTACT ELEMENT, 1 NO, SCREW TERMINAL, FOR FRONT PLATE MOUNTING	SIEMENS
3SU1002-2BM60-0AA0	1	Selector switch, illuminable, 22 mm, round, plastic, white, selector switch, short, 3 switch positions I>O<II, momentary contact type, actuating angle 2x45°, 10:30h/12h/13:30h	SIEMENS
3SU1550-0AA10-0AA0	1	HOLDER FOR 3 MODULES, METAL	SIEMENS
3VA2225-6KQ32-0AA0	1	circuit breaker 3VA2 IEC Frame 250 breaking capacity class H Icu=85 kA @ 415 V 3-pole, line protection ETU860, LSIG, In=250 A overload protection Ir=100 A...250 A short-circuit protection Isd=0.6..10x In, Ii=1.5..10x In neutral conductor protection optionally with external current transformer, up to 160% ground-fault protection, can be switched off Ig=0.2...1 x In, tg=0.05-0.8s nut keeper kit	SIEMENS
3VA9107-0NA10	1	EXT. N-CURRENT TRANSFORMER FOR N-PROTECTION ACCESSORY FOR: 3VA2 IN=160/250A	SIEMENS
3VA9267-0HA20	1	MOTOR OPERATOR 110-230 V AC / 110-250 V DC ACCESSORY FOR: 3VA2 100//160/250	SIEMENS
3VA9988-0AA12	1	AUXILIARY SWITCH CHANGEOVER CONTACTS TYPE HQ (7MM) ACCESSORY FOR 3VA-BREAKER 240VAC/250VDC 6A	SIEMENS
3VA9988-0AB12	1	TRIP ALARM SWITCH CHANGEOVER CONTACTS TYPE HQ (7MM) ACCESSORY FOR 3VA1 & 3VA20 UPTO 3VA25	SIEMENS
3VA9123-0KD00	1	DRAW-OUT UNIT COMPLETE KIT ACCESSORY FOR: CIRCUIT BREAKER, 3 POLE 3VA2 100/160/250.	SIEMENS
3VA9987-0KD81	1	crank handle for draw-out unit accessory for: draw-out unit	SIEMENS

REVISION						
REV	DESCRIPTION	PREP	CHKD	APPD	DATE	
PROJECT						
KING KHALID INTERNATIONAL AIRPORT (KKIA) PROJECT CONCOURSE-A						
CLIENT						
ENGINEER						
CONTRACTOR						
DRAWING TITLE						
CCA-SS1-MDB-1A/B						
SUMMARIZED PARTS LIST						
MANUFACTURER		DRAWING NO. CCA-SS1-MDB-1A/B				
		PROJECT REFERENCE:				REC. 00
		SCALE : NTS		LOCATION: +12.2	SIZE: A4	
		SHEET NO: 1 of				
QUOTATION REF.						
FILE NAME: 01-02_CCA-SS1-MDB-1A/B						

Device tag list

	<i>+/-15.8°C</i>
3SB6215-6AA20-1AA0	1
3SB6215-6AA40-1AA0	1
3SB6215-6AA30-1AA0	1
3SU1100-2BF60-1MA0	1
3SU1400-1AA10-1BA0	1
3SU1002-2BM60-0AA0	1
3SU1550-0AA10-0AA0	1

	-Q1	+15.8°C
3VA2225-6KQ32-0AA0		1
3VA9107-0NA10		1
3VA9267-0HA20		1
3VA9988-0AA12		1
3VA9988-0AB12		1
3VA9123-0KD00		1
3VA9987-0KD81		1

REVISION						
REV	DESCRIPTION	PREP	CHKD	APPD	DATE	
PROJECT						
KING KHALID INTERNATIONAL AIRPORT (KKIA) PROJECT CONCOURSE-A						
CLIENT						
ENGINEER						
CONTRACTOR						
DRAWING TITLE						
CCA-SS1-MDB-1A/B						
DEVICE TAG LIST						
MANUFACTURER		DRAWING NO. CCA-SS1-MDB-1A/B				
		PROJECT REFERENCE:				REC. 00
		SCALE : NTS		LOCATION: +12.2		SIZE: A4
		SHEET NO: 2 of				
QUOTATION REF.						
FILE NAME: 01-02_CCA-SS1-MDB-1A/B						

1	2	3	4	5	6	7	8	9	10
A	Bill of Material								
B									
C									
D									
E									
F									
G									
H									

Device tag list

	<i>+/16.3:C</i>
3SB6215-6AA20-1AA0	1
3SB6215-6AA40-1AA0	1
3SB6215-6AA30-1AA0	1
3SU1100-2BF60-1MA0	1
3SU1400-1AA10-1BA0	1
3SU1002-2BM60-0AA0	1
3SU1550-0AA10-0AA0	1
-Q1	<i>+/16.2:C</i>
3VA2340-6KQ32-0AA0	1
3VA9307-0NA10	1
3VA9467-0HA20	1
3VA9988-0AA12	1
3VA9988-0AB12	1
3VA9323-0KD00	1
3VA9987-0KD81	1

REVISION					
REV	DESCRIPTION	PREP	CHKD	APPD	DATE
PROJECT					
KING KHALID INTERNATIONAL AIRPORT (KKIA) PROJECT CONCOURSE-A					
CLIENT					
ENGINEER					
CONTRACTOR					
DRAWING TITLE					
CCA-SS1-MDB-1A/B					
DEVICE TAG LIST					
MANUFACTURER	DRAWING NO. CCA-SS1-MDB-1A/B				
	PROJECT REFERENCE:				REC. 00
	SCALE : NTS		LOCATION: +12.3	SIZE: A4	
	SHEET NO: 2 of				
QUOTATION REF.					
FILE NAME: 01-02_CCA-SS1-MDB-1A/B					

1	2	3	4	5	6	7	8	9	10
A	Bill of Material								
B									
C									
D									
E									
F									
G									
H									

Device tag list

	+/-16.4°C
3SB6215-6AA20-1AA0	1
3SB6215-6AA40-1AA0	1
3SB6215-6AA30-1AA0	1
3SU1100-2BF60-1MA0	1
3SU1400-1AA10-1BA0	1
3SU1002-2BM60-0AA0	1
3SU1550-0AA10-0AA0	1

	-Q1	+16.4°C
3VA2340-6KQ32-0AA0		1
3VA9307-0NA10		1
3VA9467-0HA20		1
3VA9988-0AA12		1
3VA9988-0AB12		1
3VA9323-0KD00		1
3VA9987-0KD81		1

REVISION					
REV	DESCRIPTION	PREP	CHKD	APPD	DATE

PROJECT	KING KHALID INTERNATIONAL AIRPORT (KKIA) PROJECT CONCOURSE-A				
CLIENT					
ENGINEER					
CONTRACTOR					
DRAWING TITLE	CCA-SS1-MDB-1A/B DEVICE TAG LIST				
MANUFACTURER	DRAWING NO. CCA-SS1-MDB-1A/B PROJECT REFERENCE:				REC. 00
	SCALE : NTS		LOCATION: +12.4		SIZE: A4
	SHEET NO:		2 of		
QUOTATION REF.					
FILE NAME:	01-02_CCA-SS1-MDB-1A/B				

Bill of Material

Order number	Qty.	Description	Make
3SB6215-6AA20-1AA0	1	Compact pilot light 22 mm plastic round integrated LED 110V AC/DC red	SIEMENS
3SB6215-6AA40-1AA0	1	Compact pilot light 22 mm plastic round integrated LED 110V AC/DC green	SIEMENS
3SB6215-6AA30-1AA0	1	Compact pilot light 22 mm plastic round integrated LED 110V AC/DC yellow	SIEMENS
3SU1100-2BF60-1MA0	1	Selector switch, illuminable, 22 mm, round, plastic, white, selector switch, short, 2 switch positions O-I, latching, 10:30h/13:30h, with holder, 1 NO, 1 NC, screw terminal	SIEMENS
3SU1400-1AA10-1BA0	3	CONTACT MODULE WITH 1 CONTACT ELEMENT, 1 NO, SCREW TERMINAL, FOR FRONT PLATE MOUNTING	SIEMENS
3SU1002-2BM60-0AA0	1	Selector switch, illuminable, 22 mm, round, plastic, white, selector switch, short, 3 switch positions I>O<II, momentary contact type, actuating angle 2x45°, 10:30h/12h/13:30h	SIEMENS
3SU1550-0AA10-0AA0	1	HOLDER FOR 3 MODULES, METAL	SIEMENS
3VA2463-6KQ32-0AA0	1	circuit breaker 3VA2 IEC Frame 630 breaking capacity class H Icu=85 kA @ 415 V 3-pole, line protection ETU860, LSIG, In=630 A overload protection Ir=250 A...630 A short-circuit protection Isd=0.6..9x In, Ii=1.5..9x In neutral conductor protection optionally with external current transformer, up to 160% ground-fault protection, can be switched off Ig=0.2...1 x In, tg=0.05-0.8s nut keeper kit	SIEMENS
3VA9307-0NA10	1	EXT. N-CURRENT TRANSFORMER FOR N-PROTECTION ACCESSORY FOR: 3VA2 IN=400/500/630 A	SIEMENS
3VA9467-0HA20	1	MOTOR OPERATOR 110-230 V AC / 110-250 V DC ACCESSORY FOR: 3VA2 400/630	SIEMENS
3VA9988-0AA12	1	AUXILIARY SWITCH CHANGEOVER CONTACTS TYPE HQ (7MM) ACCESSORY FOR 3VA-BREAKER 240VAC/250VDC 6A	SIEMENS
3VA9988-0AB12	1	TRIP ALARM SWITCH CHANGEOVER CONTACTS TYPE HQ (7MM) ACCESSORY FOR 3VA1 & 3VA20 UPTO 3VA25	SIEMENS
3VA9323-0KD00	1	draw-out unit complete kit accessory for: circuit breaker, 3-pole 3VA1 400/630 3VA2 400/630	SIEMENS
3VA9987-0KD81	1	crank handle for draw-out unit accessory for: draw-out unit	SIEMENS

REVISION						
REV	DESCRIPTION	PREP	CHKD	APPD	DATE	
PROJECT						
KING KHALID INTERNATIONAL AIRPORT (KKIA) PROJECT CONCOURSE-A						
CLIENT						
ENGINEER						
CONTRACTOR						
DRAWING TITLE						
CCA-SS1-MDB-1A/B						
SUMMARIZED PARTS LIST						
MANUFACTURER		DRAWING NO. CCA-SS1-MDB-1A/B				
		PROJECT REFERENCE:				REC. 00
		SCALE : NTS		LOCATION: +12.5	SIZE: A4	
		SHEET NO: 1 of				
QUOTATION REF.						
FILE NAME: 01-02_CCA-SS1-MDB-1A/B						

Device tag list

	+/16.6:C
3SB6215-6AA20-1AA0	1
3SB6215-6AA40-1AA0	1
3SB6215-6AA30-1AA0	1
3SU1100-2BF60-1MA0	1
3SU1400-1AA10-1BA0	1
3SU1002-2BM60-0AA0	1
3SU1550-0AA10-0AA0	1
-Q1	+/16.6:C
3VA2463-6KQ32-0AA0	1
3VA9307-0NA10	1
3VA9467-0HA20	1
3VA9988-0AA12	1
3VA9988-0AB12	1
3VA9323-0KD00	1
3VA9987-0KD81	1

REVISION					
REV	DESCRIPTION	PREP	CHKD	APPD	DATE
PROJECT					
KING KHALID INTERNATIONAL AIRPORT (KKIA) PROJECT CONCOURSE-A					
CLIENT					
ENGINEER					
CONTRACTOR					
DRAWING TITLE					
CCA-SS1-MDB-1A/B					
DEVICE TAG LIST					
MANUFACTURER	DRAWING NO. CCA-SS1-MDB-1A/B				
	PROJECT REFERENCE:				REC. 00
	SCALE : NTS		LOCATION: +12.5	SIZE: A4	
	SHEET NO: 2 of				
QUOTATION REF.					
FILE NAME: 01-02_CCA-SS1-MDB-1A/B					

1	2	3	4	5	6	7	8	9	10																																																												
Bill of Material																																																																					
<table><tr><th>Order number</th><th>Qty.</th><th>Description</th><th>Make</th></tr><tr><td>3SB6215-6AA20-1AA0</td><td>1</td><td>Compact pilot light 22 mm plastic round integrated LED 110V AC/DC red</td><td>SIEMENS</td></tr><tr><td>3SB6215-6AA40-1AA0</td><td>1</td><td>Compact pilot light 22 mm plastic round integrated LED 110V AC/DC green</td><td>SIEMENS</td></tr><tr><td>3SB6215-6AA30-1AA0</td><td>1</td><td>Compact pilot light 22 mm plastic round integrated LED 110V AC/DC yellow</td><td>SIEMENS</td></tr><tr><td>3SU1100-2BF60-1MA0</td><td>1</td><td>Selector switch, illuminable, 22 mm, round, plastic, white, selector switch, short, 2 switch positions O-I, latching, 10:30h/13:30h, with holder, 1 NO, 1 NC, screw terminal</td><td>SIEMENS</td></tr><tr><td>3SU1400-1AA10-1BA0</td><td>3</td><td>CONTACT MODULE WITH 1 CONTACT ELEMENT, 1 NO, SCREW TERMINAL, FOR FRONT PLATE MOUNTING</td><td>SIEMENS</td></tr><tr><td>3SU1002-2BM60-0AA0</td><td>1</td><td>Selector switch, illuminable, 22 mm, round, plastic, white, selector switch, short, 3 switch positions I>O<II, momentary contact type, actuating angle 2x45°, 10:30h/12h/13:30h</td><td>SIEMENS</td></tr><tr><td>3SU1550-0AA10-0AA0</td><td>1</td><td>HOLDER FOR 3 MODULES, METAL</td><td>SIEMENS</td></tr><tr><td>3VA2463-6KQ32-0AA0</td><td>1</td><td>circuit breaker 3VA2 IEC Frame 630 breaking capacity class H Icu=85 kA @ 415 V 3-pole, line protection ETU860, LSIG, In=630 A overload protection Ir=250 A...630 A short-circuit protection Isd=0.6..9x In, Ii=1.5..9x In neutral conductor protection optionally with external current transformer, up to 160% ground-fault protection, can be switched off Ig=0.2...1 x In, tg=0.05-0.8s nut keeper kit</td><td>SIEMENS</td></tr><tr><td>3VA9307-0NA10</td><td>1</td><td>EXT. N-CURRENT TRANSFORMER FOR N-PROTECTION ACCESSORY FOR: 3VA2 IN=400/500/630 A</td><td>SIEMENS</td></tr><tr><td>3VA9467-0HA20</td><td>1</td><td>MOTOR OPERATOR 110-230 V AC / 110-250 V DC ACCESSORY FOR: 3VA2 400/630</td><td>SIEMENS</td></tr><tr><td>3VA9988-0AA12</td><td>1</td><td>AUXILIARY SWITCH CHANGEOVER CONTACTS TYPE HQ (7MM) ACCESSORY FOR 3VA-BREAKER 240VAC/250VDC 6A</td><td>SIEMENS</td></tr><tr><td>3VA9988-0AB12</td><td>1</td><td>TRIP ALARM SWITCH CHANGEOVER CONTACTS TYPE HQ (7MM) ACCESSORY FOR 3VA1 & 3VA20 UPTO 3VA25</td><td>SIEMENS</td></tr><tr><td>3VA9323-0KD00</td><td>1</td><td>draw-out unit complete kit accessory for: circuit breaker, 3-pole 3VA1 400/630 3VA2 400/630</td><td>SIEMENS</td></tr><tr><td>3VA9987-0KD81</td><td>1</td><td>crank handle for draw-out unit accessory for: draw-out unit</td><td>SIEMENS</td></tr></table>										Order number	Qty.	Description	Make	3SB6215-6AA20-1AA0	1	Compact pilot light 22 mm plastic round integrated LED 110V AC/DC red	SIEMENS	3SB6215-6AA40-1AA0	1	Compact pilot light 22 mm plastic round integrated LED 110V AC/DC green	SIEMENS	3SB6215-6AA30-1AA0	1	Compact pilot light 22 mm plastic round integrated LED 110V AC/DC yellow	SIEMENS	3SU1100-2BF60-1MA0	1	Selector switch, illuminable, 22 mm, round, plastic, white, selector switch, short, 2 switch positions O-I, latching, 10:30h/13:30h, with holder, 1 NO, 1 NC, screw terminal	SIEMENS	3SU1400-1AA10-1BA0	3	CONTACT MODULE WITH 1 CONTACT ELEMENT, 1 NO, SCREW TERMINAL, FOR FRONT PLATE MOUNTING	SIEMENS	3SU1002-2BM60-0AA0	1	Selector switch, illuminable, 22 mm, round, plastic, white, selector switch, short, 3 switch positions I>O<II, momentary contact type, actuating angle 2x45°, 10:30h/12h/13:30h	SIEMENS	3SU1550-0AA10-0AA0	1	HOLDER FOR 3 MODULES, METAL	SIEMENS	3VA2463-6KQ32-0AA0	1	circuit breaker 3VA2 IEC Frame 630 breaking capacity class H Icu=85 kA @ 415 V 3-pole, line protection ETU860, LSIG, In=630 A overload protection Ir=250 A...630 A short-circuit protection Isd=0.6..9x In, Ii=1.5..9x In neutral conductor protection optionally with external current transformer, up to 160% ground-fault protection, can be switched off Ig=0.2...1 x In, tg=0.05-0.8s nut keeper kit	SIEMENS	3VA9307-0NA10	1	EXT. N-CURRENT TRANSFORMER FOR N-PROTECTION ACCESSORY FOR: 3VA2 IN=400/500/630 A	SIEMENS	3VA9467-0HA20	1	MOTOR OPERATOR 110-230 V AC / 110-250 V DC ACCESSORY FOR: 3VA2 400/630	SIEMENS	3VA9988-0AA12	1	AUXILIARY SWITCH CHANGEOVER CONTACTS TYPE HQ (7MM) ACCESSORY FOR 3VA-BREAKER 240VAC/250VDC 6A	SIEMENS	3VA9988-0AB12	1	TRIP ALARM SWITCH CHANGEOVER CONTACTS TYPE HQ (7MM) ACCESSORY FOR 3VA1 & 3VA20 UPTO 3VA25	SIEMENS	3VA9323-0KD00	1	draw-out unit complete kit accessory for: circuit breaker, 3-pole 3VA1 400/630 3VA2 400/630	SIEMENS	3VA9987-0KD81	1	crank handle for draw-out unit accessory for: draw-out unit	SIEMENS
Order number	Qty.	Description	Make																																																																		
3SB6215-6AA20-1AA0	1	Compact pilot light 22 mm plastic round integrated LED 110V AC/DC red	SIEMENS																																																																		
3SB6215-6AA40-1AA0	1	Compact pilot light 22 mm plastic round integrated LED 110V AC/DC green	SIEMENS																																																																		
3SB6215-6AA30-1AA0	1	Compact pilot light 22 mm plastic round integrated LED 110V AC/DC yellow	SIEMENS																																																																		
3SU1100-2BF60-1MA0	1	Selector switch, illuminable, 22 mm, round, plastic, white, selector switch, short, 2 switch positions O-I, latching, 10:30h/13:30h, with holder, 1 NO, 1 NC, screw terminal	SIEMENS																																																																		
3SU1400-1AA10-1BA0	3	CONTACT MODULE WITH 1 CONTACT ELEMENT, 1 NO, SCREW TERMINAL, FOR FRONT PLATE MOUNTING	SIEMENS																																																																		
3SU1002-2BM60-0AA0	1	Selector switch, illuminable, 22 mm, round, plastic, white, selector switch, short, 3 switch positions I>O<II, momentary contact type, actuating angle 2x45°, 10:30h/12h/13:30h	SIEMENS																																																																		
3SU1550-0AA10-0AA0	1	HOLDER FOR 3 MODULES, METAL	SIEMENS																																																																		
3VA2463-6KQ32-0AA0	1	circuit breaker 3VA2 IEC Frame 630 breaking capacity class H Icu=85 kA @ 415 V 3-pole, line protection ETU860, LSIG, In=630 A overload protection Ir=250 A...630 A short-circuit protection Isd=0.6..9x In, Ii=1.5..9x In neutral conductor protection optionally with external current transformer, up to 160% ground-fault protection, can be switched off Ig=0.2...1 x In, tg=0.05-0.8s nut keeper kit	SIEMENS																																																																		
3VA9307-0NA10	1	EXT. N-CURRENT TRANSFORMER FOR N-PROTECTION ACCESSORY FOR: 3VA2 IN=400/500/630 A	SIEMENS																																																																		
3VA9467-0HA20	1	MOTOR OPERATOR 110-230 V AC / 110-250 V DC ACCESSORY FOR: 3VA2 400/630	SIEMENS																																																																		
3VA9988-0AA12	1	AUXILIARY SWITCH CHANGEOVER CONTACTS TYPE HQ (7MM) ACCESSORY FOR 3VA-BREAKER 240VAC/250VDC 6A	SIEMENS																																																																		
3VA9988-0AB12	1	TRIP ALARM SWITCH CHANGEOVER CONTACTS TYPE HQ (7MM) ACCESSORY FOR 3VA1 & 3VA20 UPTO 3VA25	SIEMENS																																																																		
3VA9323-0KD00	1	draw-out unit complete kit accessory for: circuit breaker, 3-pole 3VA1 400/630 3VA2 400/630	SIEMENS																																																																		
3VA9987-0KD81	1	crank handle for draw-out unit accessory for: draw-out unit	SIEMENS																																																																		
REVISION																																																																					
REV	DESCRIPTION	PREP	CHKD	APPD	DATE																																																																
PROJECT KING KHALID INTERNATIONAL AIRPORT (KKIA) PROJECT CONCOURSE-A																																																																					
CLIENT																																																																					
ENGINEER																																																																					
CONTRACTOR																																																																					
DRAWING TITLE CCA-SS1-MDB-1A/B																																																																					
SUMMARIZED PARTS LIST																																																																					
MANUFACTURER		DRAWING NO. CCA-SS1-MDB-1A/B																																																																			
		PROJECT REFERENCE:					REC. 00																																																														
		SCALE : NTS		LOCATION: +12.6		SIZE: A4																																																															
		SHEET NO:		1 of																																																																	
QUOTATION REF.																																																																					
FILE NAME: 01-02_CCA-SS1-MDB-1A/B																																																																					

Device tag list

	<i>+16.8°C</i>
3SB6215-6AA20-1AA0	1
3SB6215-6AA40-1AA0	1
3SB6215-6AA30-1AA0	1
3SU1100-2BF60-1MA0	1
3SU1400-1AA10-1BA0	1
3SU1002-2BM60-0AA0	1
3SU1550-0AA10-0AA0	1

	-Q1	+16.8°C
3VA2463-6KQ32-0AA0		1
3VA9307-0NA10		1
3VA9467-0HA20		1
3VA9988-0AA12		1
3VA9988-0AB12		1
3VA9323-0KD00		1
3VA9987-0KD81		1

REVISION					
REV	DESCRIPTION	PREP	CHKD	APPD	DATE

PROJECT	KING KHALID INTERNATIONAL AIRPORT (KKIA) PROJECT CONCOURSE-A				
CLIENT					
ENGINEER					
CONTRACTOR					
DRAWING TITLE	CCA-SS1-MDB-1A/B 				

Bill of Material

Order number	Qty.	Description	Make
3SB6215-6AA20-1AA0	1	Compact pilot light 22 mm plastic round integrated LED 110V AC/DC red	SIEMENS
3SB6215-6AA40-1AA0	1	Compact pilot light 22 mm plastic round integrated LED 110V AC/DC green	SIEMENS
3SB6215-6AA30-1AA0	1	Compact pilot light 22 mm plastic round integrated LED 110V AC/DC yellow	SIEMENS
3SU1100-2BF60-1MA0	1	Selector switch, illuminable, 22 mm, round, plastic, white, selector switch, short, 2 switch positions O-I, latching, 10:30h/13:30h, with holder, 1 NO, 1 NC, screw terminal	SIEMENS
3SU1400-1AA10-1BA0	3	CONTACT MODULE WITH 1 CONTACT ELEMENT, 1 NO, SCREW TERMINAL, FOR FRONT PLATE MOUNTING	SIEMENS
3SU1002-2BM60-0AA0	1	Selector switch, illuminable, 22 mm, round, plastic, white, selector switch, short, 3 switch positions I>O<II, momentary contact type, actuating angle 2x45°, 10:30h/12h/13:30h	SIEMENS
3SU1550-0AA10-0AA0	1	HOLDER FOR 3 MODULES, METAL	SIEMENS
3VA2225-6KQ32-0AA0	1	circuit breaker 3VA2 IEC Frame 250 breaking capacity class H Icu=85 kA @ 415 V 3-pole, line protection ETU860, LSIG, In=250 A overload protection Ir=100 A...250 A short-circuit protection Isd=0.6..10x In, Ii=1.5..10x In neutral conductor protection optionally with external current transformer, up to 160% ground-fault protection, can be switched off Ig=0.2...1 x In, tg=0.05-0.8s nut keeper kit	SIEMENS
3VA9107-0NA10	1	EXT. N-CURRENT TRANSFORMER FOR N-PROTECTION ACCESSORY FOR: 3VA2 IN=160/250A	SIEMENS
3VA9267-0HA20	1	MOTOR OPERATOR 110-230 V AC / 110-250 V DC ACCESSORY FOR: 3VA2 100//160/250	SIEMENS
3VA9988-0AA12	1	AUXILIARY SWITCH CHANGEOVER CONTACTS TYPE HQ (7MM) ACCESSORY FOR 3VA-BREAKER 240VAC/250VDC 6A	SIEMENS
3VA9988-0AB12	1	TRIP ALARM SWITCH CHANGEOVER CONTACTS TYPE HQ (7MM) ACCESSORY FOR 3VA1 & 3VA20 UPTO 3VA25	SIEMENS
3VA9123-0KD00	1	DRAW-OUT UNIT COMPLETE KIT ACCESSORY FOR: CIRCUIT BREAKER, 3 POLE 3VA2 100/160/250.	SIEMENS
3VA9987-0KD81	1	crank handle for draw-out unit accessory for: draw-out unit	SIEMENS

REVISION						
REV	DESCRIPTION	PREP	CHKD	APPD	DATE	
PROJECT						
KING KHALID INTERNATIONAL AIRPORT (KKIA) PROJECT CONCOURSE-A						
CLIENT						
ENGINEER						
CONTRACTOR						
DRAWING TITLE						
CCA-SS1-MDB-1A/B						
SUMMARIZED PARTS LIST						
MANUFACTURER		DRAWING NO. CCA-SS1-MDB-1A/B				
		PROJECT REFERENCE:				REC. 00
		SCALE : NTS		LOCATION: +13.2	SIZE: A4	
		SHEET NO: 1 of				
QUOTATION REF.						
FILE NAME: 01-02_CCA-SS1-MDB-1A/B						

Device tag list

	+/17.4:C
3SB6215-6AA20-1AA0	1
3SB6215-6AA40-1AA0	1
3SB6215-6AA30-1AA0	1
3SU1100-2BF60-1MA0	1
3SU1400-1AA10-1BA0	1
3SU1002-2BM60-0AA0	1
3SU1550-0AA10-0AA0	1
-Q1	+/17.4:C
3VA2225-6KQ32-0AA0	1
3VA9107-0NA10	1
3VA9267-0HA20	1
3VA9988-0AA12	1
3VA9988-0AB12	1
3VA9123-0KD00	1
3VA9987-0KD81	1

REVISION					
REV	DESCRIPTION	PREP	CHKD	APPD	DATE
PROJECT					
KING KHALID INTERNATIONAL AIRPORT (KKIA) PROJECT CONCOURSE-A					
CLIENT					
ENGINEER					
CONTRACTOR					
DRAWING TITLE					
CCA-SS1-MDB-1A/B					
DEVICE TAG LIST					
MANUFACTURER	DRAWING NO. CCA-SS1-MDB-1A/B				
	PROJECT REFERENCE:				REC. 00
	SCALE : NTS		LOCATION: +13.2	SIZE: A4	
	SHEET NO: 2 of				
QUOTATION REF.					
FILE NAME: 01-02_CCA-SS1-MDB-1A/B					

1	2	3	4	5	6	7	8	9	10
A	Bill of Material								
B									
C									
D									
E									
F									
G									
H									

Device tag list

	+/17.6:C
3SB6215-6AA20-1AA0	1
3SB6215-6AA40-1AA0	1
3SB6215-6AA30-1AA0	1
3SU1100-2BF60-1MA0	1
3SU1400-1AA10-1BA0	1
3SU1002-2BM60-0AA0	1
3SU1550-0AA10-0AA0	1
-Q1	+/17.6:C
3VA2340-6KQ32-0AA0	1
3VA9307-0NA10	1
3VA9467-0HA20	1
3VA9988-0AA12	1
3VA9988-0AB12	1
3VA9323-0KD00	1
3VA9987-0KD81	1

REVISION					
REV	DESCRIPTION	PREP	CHKD	APPD	DATE
PROJECT					
KING KHALID INTERNATIONAL AIRPORT (KKIA) PROJECT CONCOURSE-A					
CLIENT					
ENGINEER					
CONTRACTOR					
DRAWING TITLE					
CCA-SS1-MDB-1A/B					
DEVICE TAG LIST					
MANUFACTURER	DRAWING NO. CCA-SS1-MDB-1A/B				
	PROJECT REFERENCE:				REC. 00
	SCALE : NTS		LOCATION: +13.3	SIZE: A4	
	SHEET NO: 2 of				
QUOTATION REF.					
FILE NAME: 01-02_CCA-SS1-MDB-1A/B					

1	2	3	4	5	6	7	8	9	10
A	Bill of Material								
B									
C									
D									
E									
F									
G									
H									

Device tag list

	<i>+17.8°C</i>
3SB6215-6AA20-1AA0	1
3SB6215-6AA40-1AA0	1
3SB6215-6AA30-1AA0	1
3SU1100-2BF60-1MA0	1
3SU1400-1AA10-1BA0	1
3SU1002-2BM60-0AA0	1
3SU1550-0AA10-0AA0	1

-Q1	+I7.8:C
3VA2340-6KQ32-0AA0	1
3VA9307-0NA10	1
3VA9467-0HA20	1
3VA9988-0AA12	1
3VA9988-0AB12	1
3VA9323-0KD00	1
3VA9987-0KD81	1

REVISION					
REV	DESCRIPTION	PREP	CHKD	APPD	DATE

PROJECT	KING KHALID INTERNATIONAL AIRPORT (KKIA) PROJECT CONCOURSE-A				
CLIENT					
ENGINEER					
CONTRACTOR					
DRAWING TITLE	CCA-SS1-MDB-1A/B 				

Device tag list

	<i>+/18.3:C</i>
3SB6215-6AA20-1AA0	1
3SB6215-6AA40-1AA0	1
3SB6215-6AA30-1AA0	1
3SU1100-2BF60-1MA0	1
3SU1400-1AA10-1BA0	1
3SU1002-2BM60-0AA0	1
3SU1550-0AA10-0AA0	1
-Q1	<i>+/18.2:C</i>
3VA2340-6KQ32-0AA0	1
3VA9307-0NA10	1
3VA9467-0HA20	1
3VA9988-0AA12	1
3VA9988-0AB12	1
3VA9323-0KD00	1
3VA9987-0KD81	1

REVISION					
REV	DESCRIPTION	PREP	CHKD	APPD	DATE
PROJECT					
KING KHALID INTERNATIONAL AIRPORT (KKIA) PROJECT CONCOURSE-A					
CLIENT					
ENGINEER					
CONTRACTOR					
DRAWING TITLE					
CCA-SS1-MDB-1A/B					
DEVICE TAG LIST					
MANUFACTURER	DRAWING NO. CCA-SS1-MDB-1A/B				
	PROJECT REFERENCE:				REC. 00
	SCALE : NTS		LOCATION: +13.5	SIZE: A4	
	SHEET NO:		1 of		
QUOTATION REF.					
FILE NAME: 01-02_CCA-SS1-MDB-1A/B					

Bill of Material

Order number	Qty.	Description	Make
3SB6215-6AA20-1AA0	1	Compact pilot light 22 mm plastic round integrated LED 110V AC/DC red	SIEMENS
3SB6215-6AA40-1AA0	1	Compact pilot light 22 mm plastic round integrated LED 110V AC/DC green	SIEMENS
3SB6215-6AA30-1AA0	1	Compact pilot light 22 mm plastic round integrated LED 110V AC/DC yellow	SIEMENS
3SU1100-2BF60-1MA0	1	Selector switch, illuminable, 22 mm, round, plastic, white, selector switch, short, 2 switch positions O-I, latching, 10:30h/13:30h, with holder, 1 NO, 1 NC, screw terminal	SIEMENS
3SU1400-1AA10-1BA0	3	CONTACT MODULE WITH 1 CONTACT ELEMENT, 1 NO, SCREW TERMINAL, FOR FRONT PLATE MOUNTING	SIEMENS
3SU1002-2BM60-0AA0	1	Selector switch, illuminable, 22 mm, round, plastic, white, selector switch, short, 3 switch positions I>O<II, momentary contact type, actuating angle 2x45°, 10:30h/12h/13:30h	SIEMENS
3SU1550-0AA10-0AA0	1	HOLDER FOR 3 MODULES, METAL	SIEMENS
3VA2463-6KQ32-0AA0	1	circuit breaker 3VA2 IEC Frame 630 breaking capacity class H Icu=85 kA @ 415 V 3-pole, line protection ETU860, LSIG, In=630 A overload protection Ir=250 A...630 A short-circuit protection Isd=0.6..9x In, Ii=1.5..9x In neutral conductor protection optionally with external current transformer, up to 160% ground-fault protection, can be switched off Ig=0.2...1 x In, tg=0.05-0.8s nut keeper kit	SIEMENS
3VA9307-0NA10	1	EXT. N-CURRENT TRANSFORMER FOR N-PROTECTION ACCESSORY FOR: 3VA2 IN=400/500/630 A	SIEMENS
3VA9467-0HA20	1	MOTOR OPERATOR 110-230 V AC / 110-250 V DC ACCESSORY FOR: 3VA2 400/630	SIEMENS
3VA9988-0AA12	1	AUXILIARY SWITCH CHANGEOVER CONTACTS TYPE HQ (7MM) ACCESSORY FOR 3VA-BREAKER 240VAC/250VDC 6A	SIEMENS
3VA9988-0AB12	1	TRIP ALARM SWITCH CHANGEOVER CONTACTS TYPE HQ (7MM) ACCESSORY FOR 3VA1 & 3VA20 UPTO 3VA25	SIEMENS
3VA9323-0KD00	1	draw-out unit complete kit accessory for: circuit breaker, 3-pole 3VA1 400/630 3VA2 400/630	SIEMENS
3VA9987-0KD81	1	crank handle for draw-out unit accessory for: draw-out unit	SIEMENS

REVISION						
REV	DESCRIPTION	PREP	CHKD	APPD	DATE	
PROJECT						
KING KHALID INTERNATIONAL AIRPORT (KKIA) PROJECT CONCOURSE-A						
CLIENT						
ENGINEER						
CONTRACTOR						
DRAWING TITLE						
CCA-SS1-MDB-1A/B						
SUMMARIZED PARTS LIST						
MANUFACTURER		DRAWING NO. CCA-SS1-MDB-1A/B				
		PROJECT REFERENCE:				REC. 00
		SCALE : NTS		LOCATION: +13.6	SIZE: A4	
		SHEET NO: 1 of				
QUOTATION REF.						
FILE NAME: 01-02_CCA-SS1-MDB-1A/B						

Device tag list

	<i>+18.4°C</i>
3SB6215-6AA20-1AA0	1
3SB6215-6AA40-1AA0	1
3SB6215-6AA30-1AA0	1
3SU1100-2BF60-1MA0	1
3SU1400-1AA10-1BA0	1
3SU1002-2BM60-0AA0	1
3SU1550-0AA10-0AA0	1

	-Q1	+18.4°C
3VA2463-6KQ32-0AA0		1
3VA9307-0NA10		1
3VA9467-0HA20		1
3VA9988-0AA12		1
3VA9988-0AB12		1
3VA9323-0KD00		1
3VA9987-0KD81		1

REVISION					
REV	DESCRIPTION	PREP	CHKD	APPD	DATE

PROJECT	KING KHALID INTERNATIONAL AIRPORT (KKIA) PROJECT CONCOURSE-A				
CLIENT					
ENGINEER					
CONTRACTOR					
DRAWING TITLE	CCA-SS1-MDB-1A/B 				