
WeatherStation PRO

Quick Installation Guide

1. Before you begin

Required materials:
- Display Freenove ESP32 3.2"
- USB DATA cable
- Windows 10/11 PC
- Internet



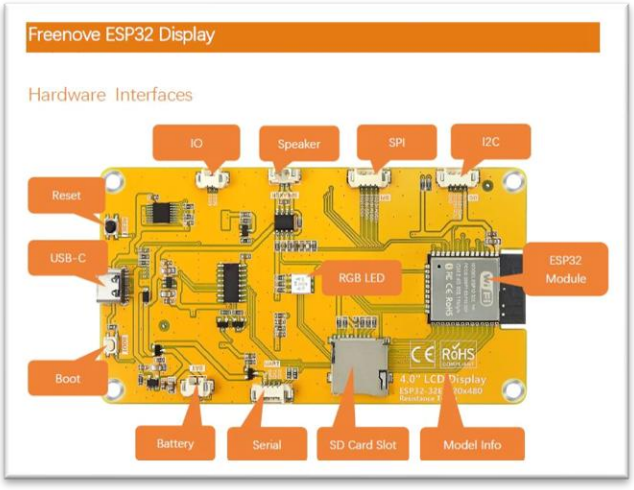

WARNING: use a USB DATA cable.


2. Install Arduino IDE

1. Go to the Arduino website.


https://www.arduino.cc/en/software/




2. Download Arduino IDE.

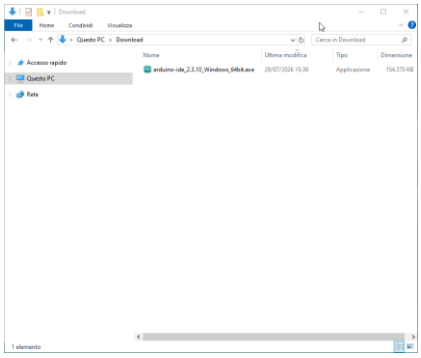


3. Open the file.

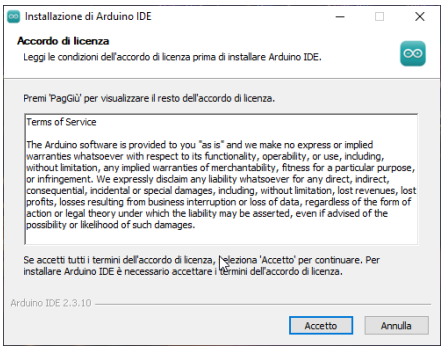


4. Click Next until finished.

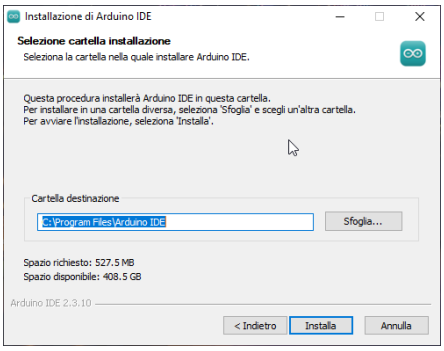

5. Start Arduino IDE.

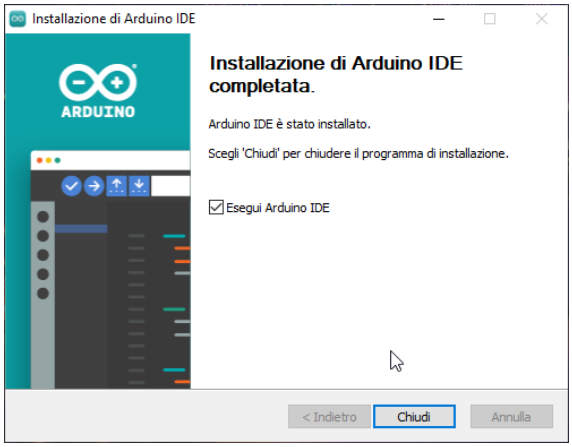


6.Check: Arduino IDE opens.

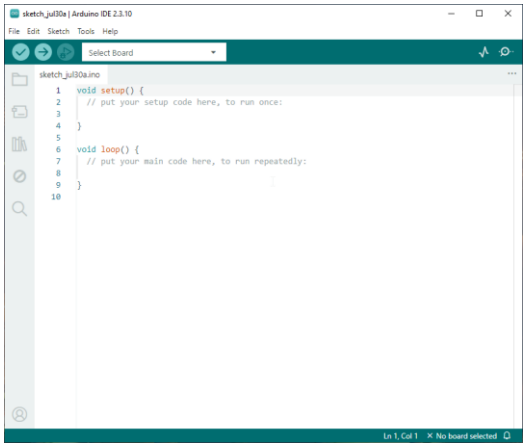

3. Set up Arduino IDE for ESP32

1. File > Preferences.

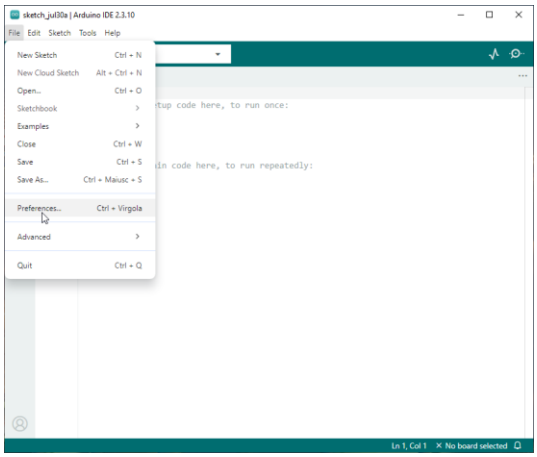

2. Enter the Boards Manager URLin ARDUINO IDE.
https://raw.githubusercontent.com/espressif/arduino-esp32/ghpages/package_esp32_index.json

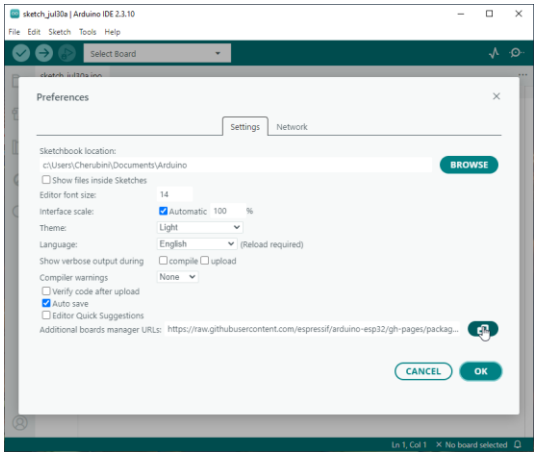


Figure 1

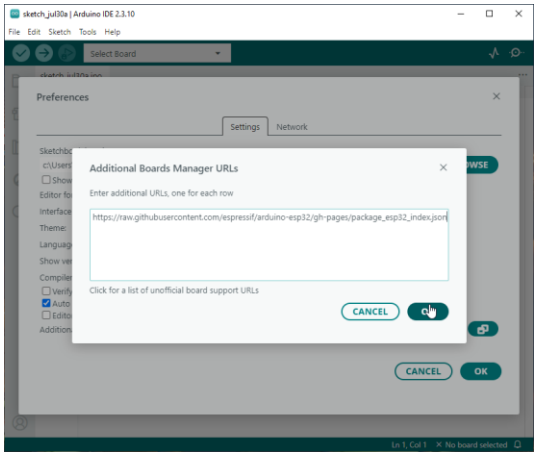


Figure 2

3. Open Boards Manager and Search for ESP32.



Figure 3

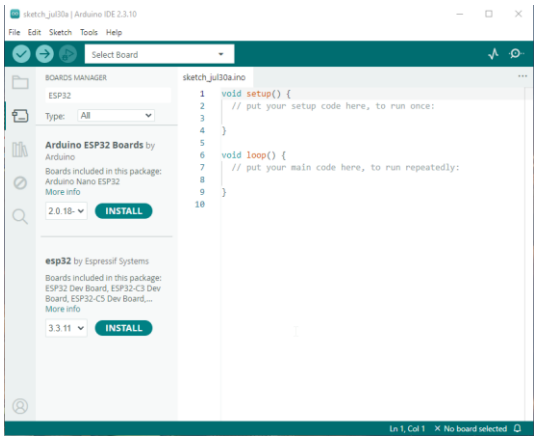


Figure 4

4. Install ESP32 by Espressif Systems.

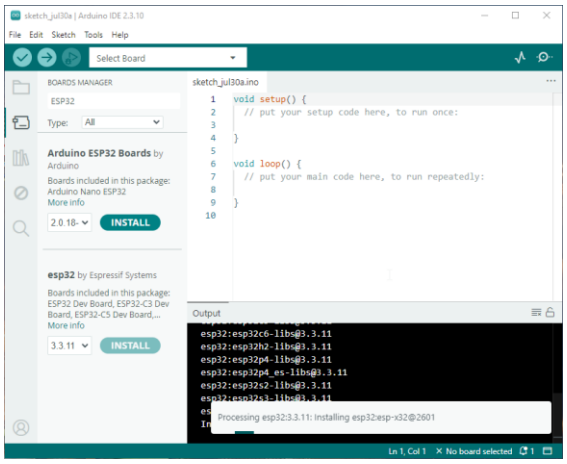


Figure 5

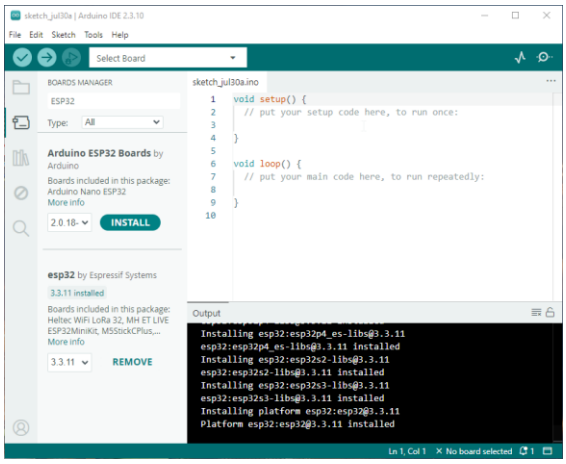


Figure 6

5. Install ArduinoJso - Benoit Blanchon

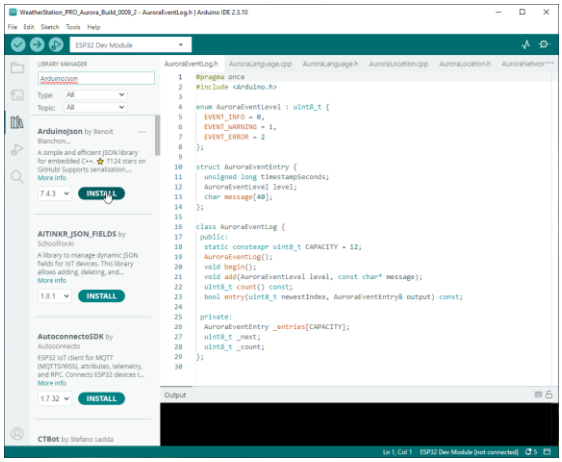


Figure 7

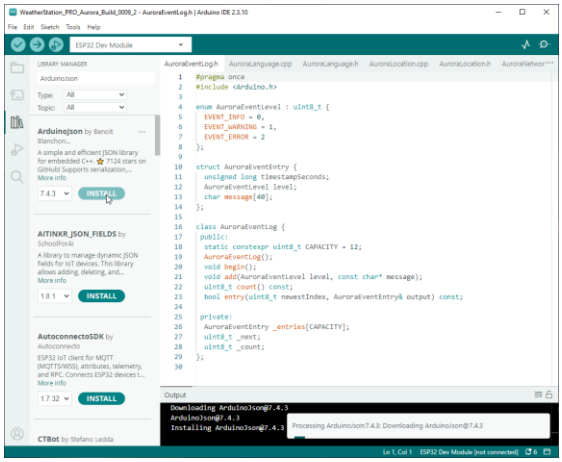


Figure 8

4. Install the libraries

1 Go to this link: https://freenove.com/tutorial

2. Download the files for your display and unzip them

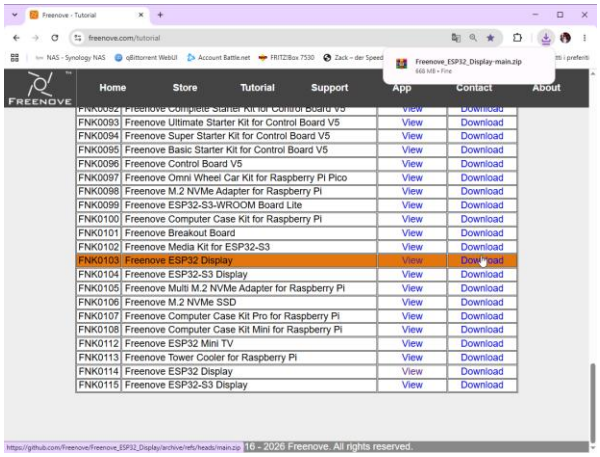


Figure 9

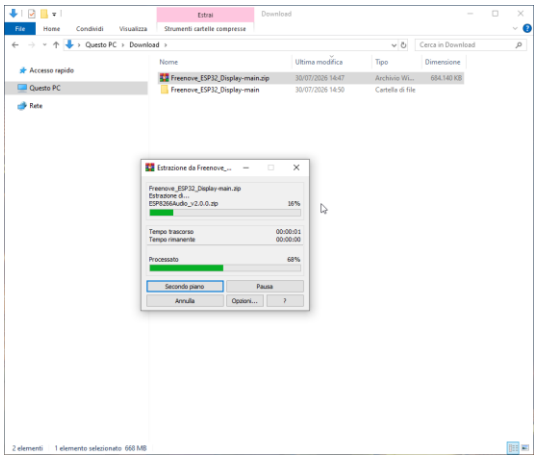


Figure 10

2. Install all the libraries you downloaded for your display

Sketch>Include Library> Add .ZIP Library....Downloads>Freenove_ESP32_Display-main>Freenove_ESP32_Display-main>Libraries

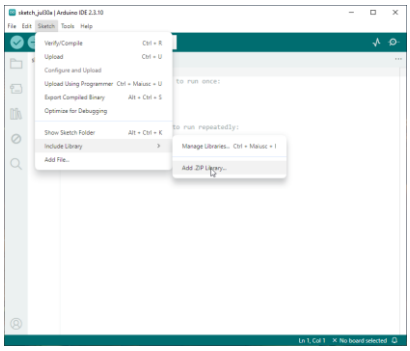


Figure 11

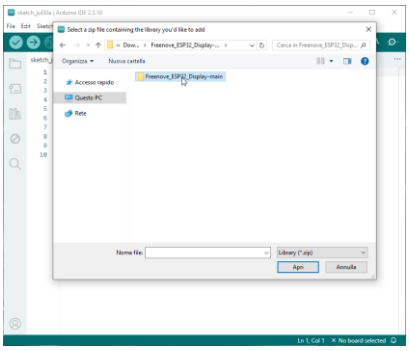


Figure 12

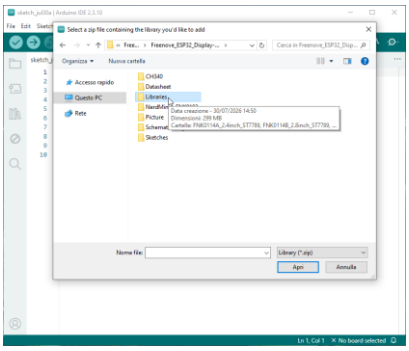


Figure 3

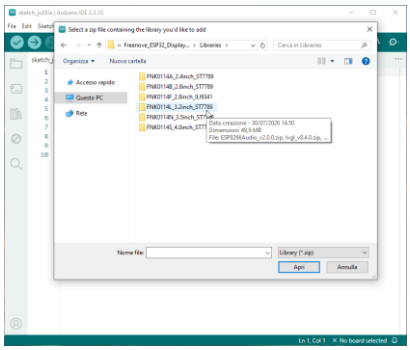


Figure 3

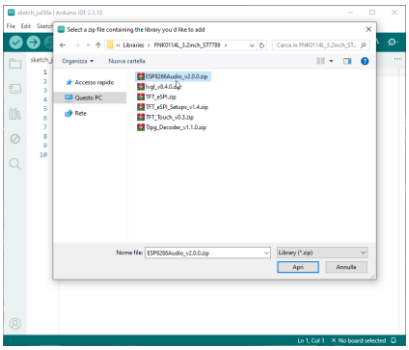


Figure 4

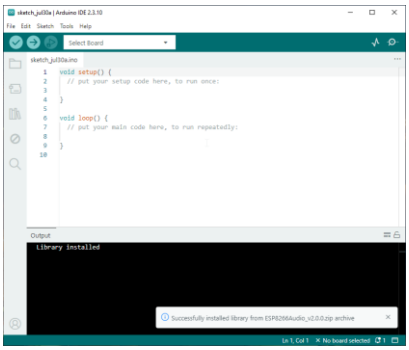


Figure 5

3. Repeat the same procedure for all six libraries Install all the required libraries.

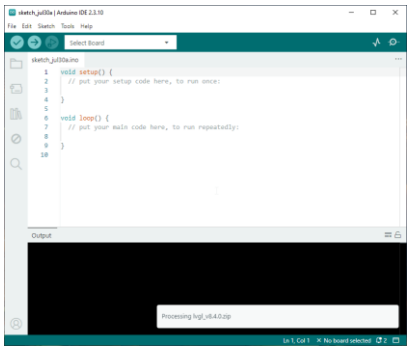


Figure 13

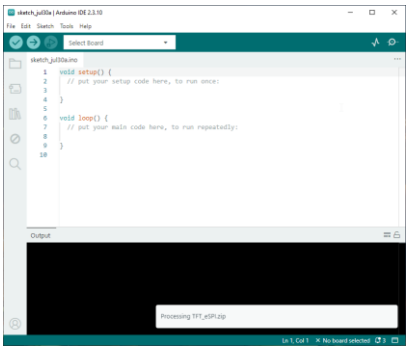


Figure 14

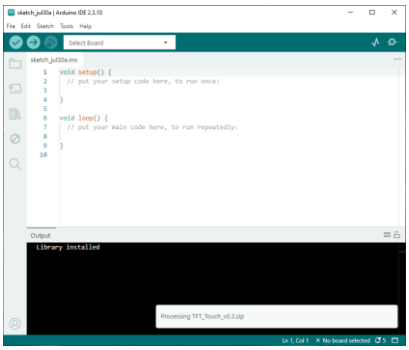


Figure 3

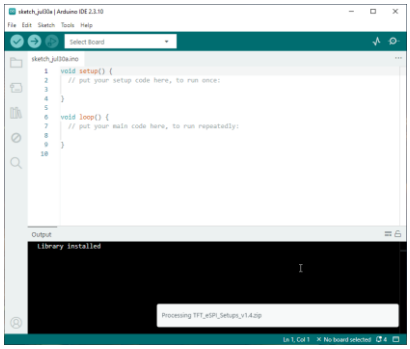


Figure 4


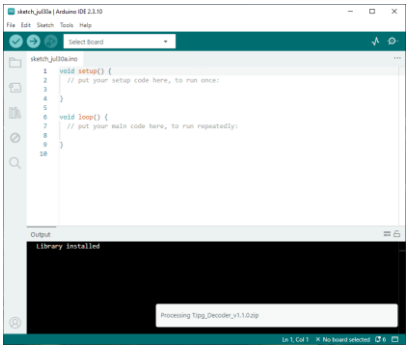



Figure 5


5. Download WeatherStation PRO

1. Open GitHub.
https://github.com/Simch1/WeatherStation_PRO

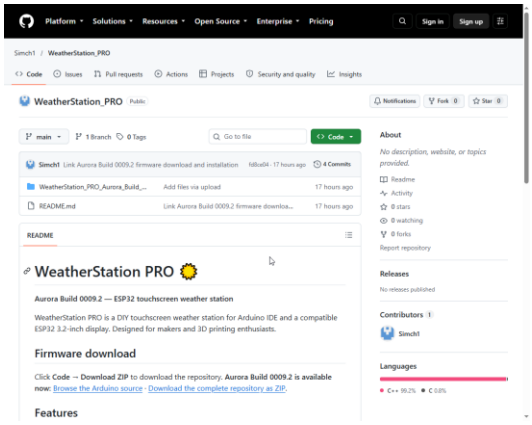


2. Code > Download ZIP and Extract the ZIP file.
https://github.com/Simch1/WeatherStation_PRO/archive/refs/heads/main.zip

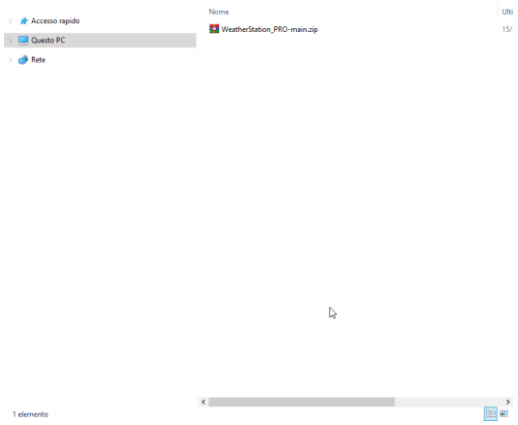

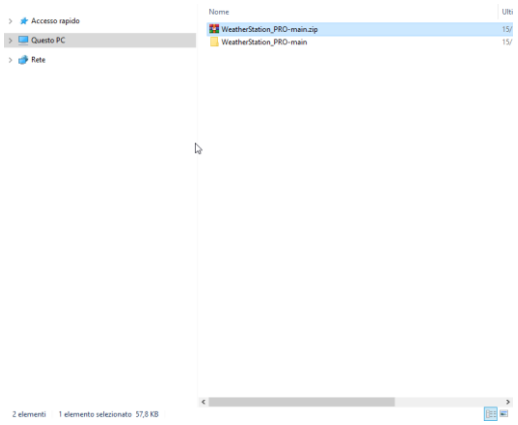


3. Open WeatherStation_PRO.ino. and select the correct motherboard: Tool>Board>esp> ESP32 Dev Module

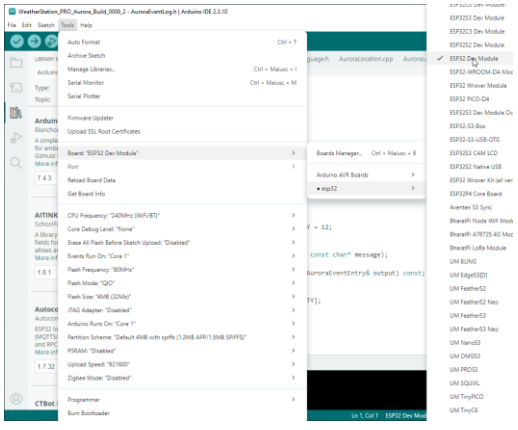


6. Upload the firmware


1. Connect the display and select the COM

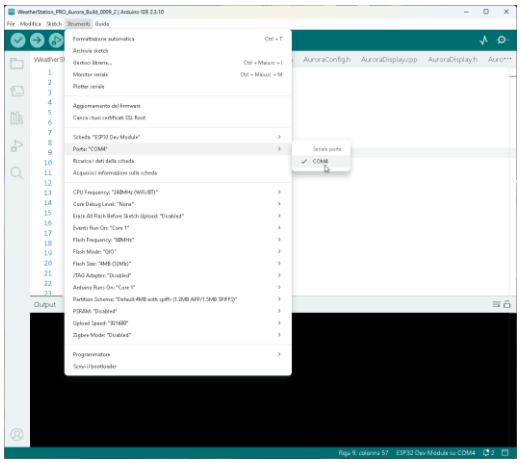


2. Select the board.

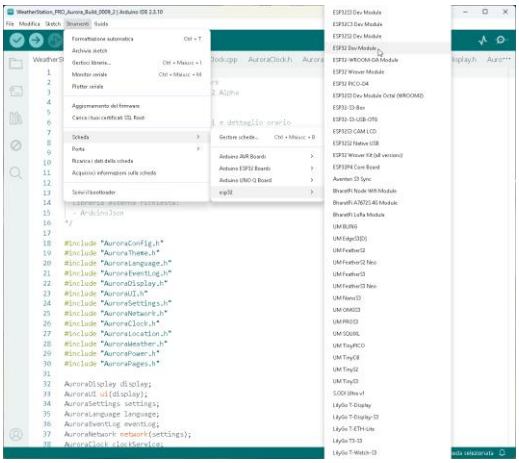

3. Click Upload.

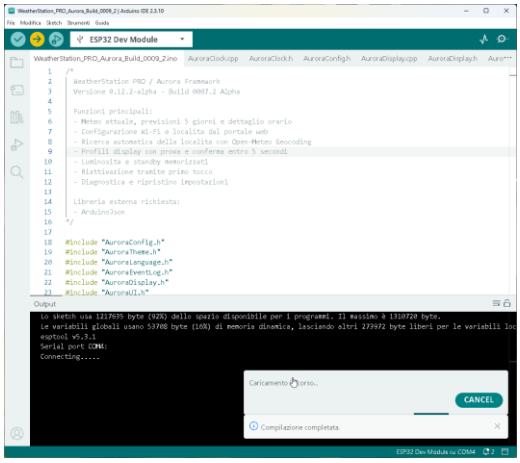

4. Wait for Upload complete.

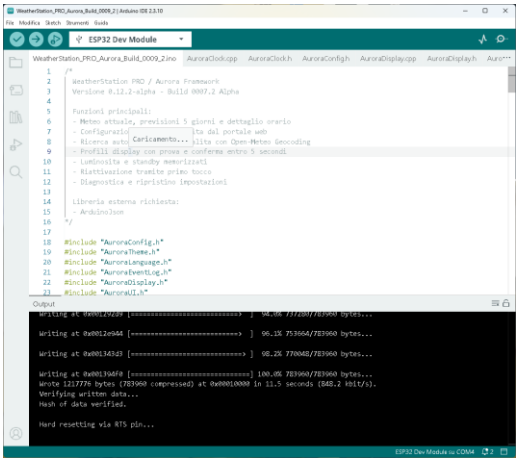

7. Configure Wi-Fi

To establish a Wi-Fi connection with your mobile phone and configure the network, password, and location for weather information, watch the video.

8. Final check

Check: Time, Date, Temperature, Humidity, Weather and Wi-Fi.
If everything is correct, installation is complete.

9. If something does not work

Check: USB DATA cable, COM port, ESP32 board, firmware upload and Wi-Fi configuration.