
```

function varargout = main(varargin)
% MAIN MATLAB code for main.fig
%     MAIN, by itself, creates a new MAIN or raises the existing
%     singleton*.
%
%     H = MAIN returns the handle to a new MAIN or the handle to
%     the existing singleton*.
%
%     MAIN('CALLBACK',hObject,eventData,handles,...) calls the local
%     function named CALLBACK in MAIN.M with the given input
%     arguments.
%
%     MAIN('Property','Value',...) creates a new MAIN or raises the
%     existing singleton*. Starting from the left, property value
%     pairs are
%     applied to the GUI before main_OpeningFcn gets called. An
%     unrecognized property name or invalid value makes property
%     application
%     stop. All inputs are passed to main_OpeningFcn via varargin.
%
%     *See GUI Options on GUIDE's Tools menu. Choose "GUI allows
%     only one
%     instance to run (singleton)".
%
% See also: GUIDE, GUIDATA, GUIHANDLES

% Edit the above text to modify the response to help main

% Last Modified by GUIDE v2.5 13-Dec-2023 02:16:36

% Begin initialization code - DO NOT EDIT
gui_Singleton = 1;
gui_State = struct('gui_Name',       mfilename, ...
                  'gui_Singleton',   gui_Singleton, ...
                  'gui_OpeningFcn', @main_OpeningFcn, ...
                  'gui_OutputFcn',  @main_OutputFcn, ...
                  'gui_LayoutFcn',  [], ...
                  'gui_Callback',    []);
if nargin && ischar(varargin{1})
    gui_State.gui_Callback = str2func(varargin{1});
end

if nargout
    [varargout{1:nargout}] = gui_mainfcn(gui_State, varargin{:});
else
    gui_mainfcn(gui_State, varargin{:});
end
% End initialization code - DO NOT EDIT

% --- Executes just before main is made visible.
function main_OpeningFcn(hObject, eventdata, handles, varargin)

```

```

% This function has no output args, see OutputFcn.
% hObject    handle to figure
% eventdata  reserved - to be defined in a future version of MATLAB
% handles     structure with handles and user data (see GUIDATA)
% varargin   command line arguments to main (see VARARGIN)

% Choose default command line output for main
handles.output = hObject;

% Update handles structure
guidata(hObject, handles);

% UIWAIT makes main wait for user response (see UIRESUME)
% uiwait(handles.figure1);

% --- Outputs from this function are returned to the command line.
function varargout = main_OutputFcn(hObject, eventdata, handles)
% varargout  cell array for returning output args (see VARARGOUT);
% hObject    handle to figure
% eventdata  reserved - to be defined in a future version of MATLAB
% handles     structure with handles and user data (see GUIDATA)

% Get default command line output from handles structure
varargout{1} = handles.output;

function amp_Callback(hObject, eventdata, handles)
% hObject    handle to amp (see GCBO)
% eventdata  reserved - to be defined in a future version of MATLAB
% handles     structure with handles and user data (see GUIDATA)

% Hints: get(hObject,'String') returns contents of amp as text
%        str2double(get(hObject,'String')) returns contents of amp as
%        a double

% --- Executes during object creation, after setting all properties.
function amp_CreateFcn(hObject, eventdata, handles)
% hObject    handle to amp (see GCBO)
% eventdata  reserved - to be defined in a future version of MATLAB
% handles     empty - handles not created until after all CreateFcns
%             called

% Hint: edit controls usually have a white background on Windows.
%       See ISPC and COMPUTER.
if ispc && isequal(get(hObject,'BackgroundColor'),
    get(0,'defaultUicontrolBackgroundColor'))
    set(hObject,'BackgroundColor','white');
end

```

```

function freq_Callback(hObject, eventdata, handles)
% hObject    handle to freq (see GCBO)
% eventdata  reserved - to be defined in a future version of MATLAB
% handles    structure with handles and user data (see GUIDATA)

% Hints: get(hObject,'String') returns contents of freq as text
%        str2double(get(hObject,'String')) returns contents of freq as
%        a double

% --- Executes during object creation, after setting all properties.
function freq_CreateFcn(hObject, eventdata, handles)
% hObject    handle to freq (see GCBO)
% eventdata  reserved - to be defined in a future version of MATLAB
% handles    empty - handles not created until after all CreateFcns
%            called

% Hint: edit controls usually have a white background on Windows.
%       See ISPC and COMPUTER.
if ispc && isequal(get(hObject,'BackgroundColor'),
    get(0,'defaultUicontrolBackgroundColor'))
    set(hObject,'BackgroundColor','white');
end

% Plot Callback

function plot_Callback(hObject, eventdata, handles)

global selected
global t
global sinSignal
global squareWave
global t_rec
% Retrieve amplitude and frequency values from GUI input
    amplitude = str2double(get(handles.amp, 'String'));
    frequency = str2double(get(handles.freq, 'String'));
    t = linspace(0,5,1000);
    %t = linspace(0, 1,1000); % Time vector

if strcmp(selected, 'Sin wave')
    % Generate sin wave
    sinSignal = amplitude * sin(2 * pi * frequency * t);

    % Plot sin wave
    plot(handles.prime, t, sinSignal,'r','LineWidth', 2);
    xlabel(handles.prime, 'Time');
    ylabel(handles.prime, 'Amplitude');
    title(handles.prime, 'Sine Wave');
    grid(handles.prime, 'on');
    %axis(handles.prime, [min(t) max(t) min(sinSignal)-1
    max(sinSignal)+1]);

```

```

elseif strcmp(selected, 'Rectangular wave')
% Retrieve duty cycle value from GUI input
    dutyCycle = str2double(get(handles.duty, 'String')); % Convert
percentage to fraction

    t_rec = linspace(-20,20); % Time vector
    % Generate square wave
    squareWave = amplitude * square(2 * pi * (frequency/100) * t_rec,
dutyCycle);

% Plot the square wave
    plot(handles.third, t_rec, squareWave, 'm', 'LineWidth', 2);
    xlabel(handles.third, 'Time');
    ylabel(handles.third, 'Amplitude');
    title(handles.third, 'Rectangular Wave');
    grid(handles.third, 'on');
    %axis(handles.third, [min(t_rec)-5 max(t_rec)+5 min(squareWave)-5
max(squareWave)+5]);
end

% Menu Callback
function menu_Callback(hObject, eventdata, handles)
contents = cellstr(get(hObject, 'String'));
option = contents{get(hObject, 'Value')};

global selected
selected = option;
%guidata(hObject,handles)

if strcmp(selected, 'Sin wave')
    % Hide duty cycle UI component
    set(handles.dc, 'Visible', 'off');
    set(handles.duty, 'Visible', 'off');
elseif strcmp(selected, 'Rectangular wave')
    % Show duty cycle UI component
    set(handles.dc, 'Visible', 'on');
    set(handles.duty, 'Visible', 'on');
end

% --- Executes during object creation, after setting all properties.
function menu_CreateFcn(hObject, eventdata, handles)
% hObject    handle to menu (see GCBO)
% eventdata  reserved - to be defined in a future version of MATLAB
% handles    empty - handles not created until after all CreateFcns
called

% Hint: popupmenu controls usually have a white background on Windows.
%         See ISPC and COMPUTER.
if ispc && isequal(get(hObject, 'BackgroundColor'),
get(0, 'defaultUicontrolBackgroundColor'))
    set(hObject, 'BackgroundColor', 'white');
end

```

```

% --- Executes on key press with focus on menu and none of its
% controls.
function menu_KeyPressFcn(hObject, eventdata, handles)
% hObject    handle to menu (see GCBO)
% eventdata  structure with the following fields (see
%             MATLAB.UI.CONTROL.UICONTROL)
% Key: name of the key that was pressed, in lower case
% Character: character interpretation of the key(s) that was pressed
% Modifier: name(s) of the modifier key(s) (i.e., control, shift)
%            pressed
% handles     structure with handles and user data (see GUIDATA)

function duty_Callback(hObject, eventdata, handles)
% hObject    handle to duty (see GCBO)
% eventdata  reserved - to be defined in a future version of MATLAB
% handles     structure with handles and user data (see GUIDATA)

% Hints: get(hObject,'String') returns contents of duty as text
%        str2double(get(hObject,'String')) returns contents of duty as
%        a double

% --- Executes during object creation, after setting all properties.
function duty_CreateFcn(hObject, eventdata, handles)
% hObject    handle to duty (see GCBO)
% eventdata  reserved - to be defined in a future version of MATLAB
% handles     empty - handles not created until after all CreateFcns
%             called

% Hint: edit controls usually have a white background on Windows.
%       See ISPC and COMPUTER.
if ispc && isequal(get(hObject,'BackgroundColor'),
    get(0,'defaultUicontrolBackgroundColor'))
    set(hObject,'BackgroundColor','white');
end

function edit4_Callback(hObject, eventdata, handles)
% hObject    handle to duty (see GCBO)
% eventdata  reserved - to be defined in a future version of MATLAB
% handles     structure with handles and user data (see GUIDATA)

% Hints: get(hObject,'String') returns contents of duty as text
%        str2double(get(hObject,'String')) returns contents of duty as
%        a double

% --- Executes during object creation, after setting all properties.
function edit4_CreateFcn(hObject, eventdata, handles)
% hObject    handle to duty (see GCBO)
% eventdata  reserved - to be defined in a future version of MATLAB
% handles     empty - handles not created until after all CreateFcns
%             called

```

```

% Hint: edit controls usually have a white background on Windows.
%       See ISPC and COMPUTER.
if ispc && isequal(get(hObject,'BackgroundColor'),
    get(0,'defaultUicontrolBackgroundColor'))
    set(hObject,'BackgroundColor','white');
end

function fsc_Callback(hObject, eventdata, handles)
% hObject    handle to fs (see GCBO)
% eventdata  reserved - to be defined in a future version of MATLAB
% handles    structure with handles and user data (see GUIDATA)
global squareWave
% Check the state of the radio button
if get(hObject,'Value') == 1 % If the radio button is selected
    set(handles.con, 'Value', 0);

    t=-1:0.01:1;
    Wo=2*pi;
    n=1:2:5;
    x=(4./(n.*pi))*sin(Wo*n'*t));

    % Plot the coefficients
    plot(handles.four,t, x,'b','Linewidth',2);
    xlabel(handles.four,'Coefficient Index (n)');
    ylabel(handles.four,'Coefficient Value');
    title(handles.four,'Fourier Series Coefficients of a Square
Wave');
    grid(handles.four, 'on');
    %axis([-1 50 -5 15]); % Set x-axis from 0 to 1 and y-axis from -1
to 1
end

function clc_Callback(hObject, eventdata, handles)
% hObject    handle to clc (see GCBO)
% eventdata  reserved - to be defined in a future version of MATLAB
% handles    structure with handles and user data (see GUIDATA)
% Clear plots
% If the radio button is selecteds
cla(handles.third); % Clear the plot (assuming handles.third is your
plot's axes)
cla(handles.second);
cla(handles.prime);
cla(handles.four);

set(handles.con, 'Value', 0);
set(handles.fsc, 'Value', 0);

set(handles.left, 'Value', 0);
set(handles.right, 'Value', 0);

grid(handles.second, 'off');
grid(handles.third, 'off');

```

```

grid(handles.prime, 'off');
grid(handles.third, 'off');

% Clear the values of edit boxes (assuming these are edit boxes)
set(handles.shift, 'String', ''); % Clear the value of the 'shift'
    edit box
set(handles.amp, 'String', ''); % Clear the value of the 'amp' edit
    box
set(handles.freq, 'String', ''); % Clear the value of the 'freq'
    edit box
set(handles.duty, 'String', ''); % Clear the value of the 'duty'
    edit box

% Clear titles and labels
delete(get(handles.third, 'Title')); % Clear title for handles.third
delete(get(handles.second, 'Title')); % Clear title for handles.second
delete(get(handles.prime, 'Title')); % Clear title for handles.prime
delete(get(handles.four, 'Title'));

delete(get(handles.third, 'XLabel')); % Clear x-axis label for
    handles.third
delete(get(handles.second, 'XLabel')); % Clear x-axis label for
    handles.second
delete(get(handles.prime, 'XLabel')); % Clear x-axis label for
    handles.prime
delete(get(handles.four, 'XLabel'));

delete(get(handles.third, 'YLabel')); % Clear y-axis label for
    handles.third
delete(get(handles.second, 'YLabel')); % Clear y-axis label for
    handles.second
delete(get(handles.prime, 'YLabel')); % Clear y-axis label for
    handles.prime
delete(get(handles.four, 'YLabel'));

% --- Executes during object creation, after setting all properties.
function msg_CreateFcn(hObject, eventdata, handles)
% hObject    handle to msg (see GCBO)
% eventdata  reserved - to be defined in a future version of MATLAB
% handles    empty - handles not created until after all CreateFcns
    called
msgbox('Welcome to my GUI');

% --- Executes on button press in left.
function left_Callback(hObject, eventdata, handles)
% hObject    handle to left (see GCBO)
% eventdata  reserved - to be defined in a future version of MATLAB
% handles    structure with handles and user data (see GUIDATA)
if get(hObject, 'Value') == 1
    set(handles.right, 'Value', 0);
    set(handles.shift, 'Visible', 'on');
else
    set(handles.shift, 'Visible', 'off');

```

```

end
% Hint: get(hObject,'Value') returns toggle state of left

% --- Executes on button press in right.
function right_Callback(hObject, eventdata, handles)
% hObject    handle to right (see GCBO)
% eventdata  reserved - to be defined in a future version of MATLAB
% handles    structure with handles and user data (see GUIDATA)
if get(hObject,'Value') == 1
    set(handles.left, 'Value', 0);
    set(handles.shift, 'Visible', 'on');
else
    set(handles.shift, 'Visible', 'off');
end
% Hint: get(hObject,'Value') returns toggle state of right

% --- Executes on selection change in popupmenu3.
function popupmenu3_Callback(hObject, eventdata, handles)
% hObject    handle to popupmenu3 (see GCBO)
% eventdata  reserved - to be defined in a future version of MATLAB
% handles    structure with handles and user data (see GUIDATA)

% Hints: contents = cellstr(get(hObject,'String')) returns popupmenu3
%         contents as cell array
%         contents{get(hObject,'Value')} returns selected item from
%         popupmenu3

% --- Executes during object creation, after setting all properties.
function popupmenu3_CreateFcn(hObject, eventdata, handles)
% hObject    handle to popupmenu3 (see GCBO)
% eventdata  reserved - to be defined in a future version of MATLAB
% handles    empty - handles not created until after all CreateFcns
%             called

% Hint: popupmenu controls usually have a white background on Windows.
%       See ISPC and COMPUTER.
if ispc && isequal(get(hObject,'BackgroundColor'),
    get(0,'defaultUicontrolBackgroundColor'))
    set(hObject,'BackgroundColor','white');
end

% --- Executes on button press in togglebutton1.
function togglebutton1_Callback(hObject, eventdata, handles)
% hObject    handle to togglebutton1 (see GCBO)
% eventdata  reserved - to be defined in a future version of MATLAB
% handles    structure with handles and user data (see GUIDATA)

% Hint: get(hObject,'Value') returns toggle state of togglebutton1

```

```

function shift_Callback(hObject, eventdata, handles)
% hObject    handle to shift (see GCBO)
% eventdata  reserved - to be defined in a future version of MATLAB
% handles    structure with handles and user data (see GUIDATA)
    % Get the value entered in the shift textbox from the GUI
    global t
    global t_rec
    global selected
    global sinSignal
    global squareWave

    CT_shift = str2double(get(handles.shift, 'String'));

    if strcmp(selected, 'Sin wave') && get(handles.left, 'Value') ==
1
        shifted_sine_wave=t-CT_shift;
        plot(handles.second, shifted_sine_wave,
sinSignal, 'k', 'LineWidth', 2);
        xlabel(handles.second, 'Time');
        ylabel(handles.second, 'Amplitude');
        title(handles.second, 'Sin Wave with Left Shift');
        grid(handles.second, 'on');
        %axis(handles.second, [min(t)-1 max(t)+1 min(sinSignal)-1
max(sinSignal)+1]);

        elseif strcmp(selected, 'Sin wave') &&
get(handles.right, 'Value') == 1
            shifted_sine_wave=t+CT_shift;
            plot(handles.second, shifted_sine_wave,
sinSignal, 'k', 'LineWidth', 2);
            xlabel(handles.second, 'Time');
            ylabel(handles.second, 'Amplitude');
            title(handles.second, 'Sin Wave with Right Shift');
            grid(handles.second, 'on');
            %axis(handles.second, [min(t)-1 max(t)+1 min(sinSignal)-1
max(sinSignal)+1]);

        elseif strcmp(selected, 'Rectangular wave') &&
get(handles.left, 'Value') == 1
            shifted_rect_wave=t_rec-CT_shift;
            plot(handles.four, shifted_rect_wave, squareWave, 'k', 'LineWidth',
2);
            xlabel(handles.four, 'Time');
            ylabel(handles.four, 'Amplitude');
            title(handles.four, 'Rectangular Wave with Left Shift');
            grid(handles.four, 'on');
            %axis(handles.four, [min(t_rec)-5 max(t_rec)+5 min(squareWave)-1
max(squareWave)+1]);

        elseif strcmp(selected, 'Rectangular wave') &&
get(handles.right, 'Value') == 1
            shifted_rect_wave=t_rec+CT_shift;

```

```

    plot(handles.four, shifted_rect_wave, squareWave, 'k', 'LineWidth',
2);
    xlabel(handles.four, 'Time');
    ylabel(handles.four, 'Amplitude');
    title(handles.four, 'Rectangular Wave with Right Shift');
    grid(handles.four, 'on');
    %axis(handles.four, [min(t_rec)-5 max(t_rec)+5 min(squareWave)-1
max(squareWave)+1]);
    else
        disp('Please select the wave and shift direction.');
```

```

    end

% Hints: get(hObject, 'String') returns contents of shift as text
%         str2double(get(hObject, 'String')) returns contents of shift
%         as a double

% --- Executes during object creation, after setting all properties.
function shift_CreateFcn(hObject, eventdata, handles)
% hObject    handle to shift (see GCBO)
% eventdata  reserved - to be defined in a future version of MATLAB
% handles    empty - handles not created until after all CreateFcns
%            called

% Hint: edit controls usually have a white background on Windows.
%         See ISPC and COMPUTER.
if ispc && isequal(get(hObject, 'BackgroundColor'),
    get(0, 'defaultUicontrolBackgroundColor'))
    set(hObject, 'BackgroundColor', 'white');
end



% --- Executes on button press in con.
function con_Callback(hObject, eventdata, handles)
% hObject    handle to con (see GCBO)
% eventdata  reserved - to be defined in a future version of MATLAB
% handles    structure with handles and user data (see GUIDATA)
global sinSignal
global squareWave
%global t

if get(hObject, 'Value') == 1 % If the radio button is selected
set(handles.fsc, 'Value', 0);
set(handles.clc, 'Value', 0);
    y = conv(sinSignal, squareWave);
    t = 0:(length(y)-1);
    % Plotting the result
    plot(handles.second, t, y, 'k', 'LineWidth', 2);
    xlabel(handles.second, 'Time');
    ylabel(handles.second, 'Amplitude');
    title(handles.second, 'Convolution');
    grid(handles.second, 'on');
    ylim(handles.second, [min(y)-1 max(y)+1]);

```

end

% Hint: get(hObject,'Value') returns toggle state of con

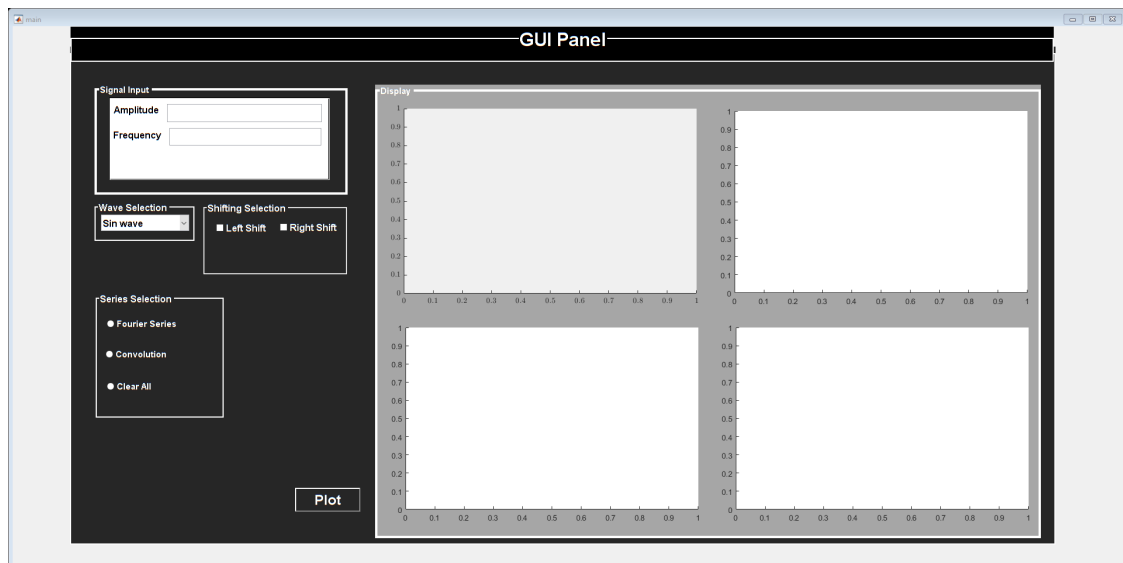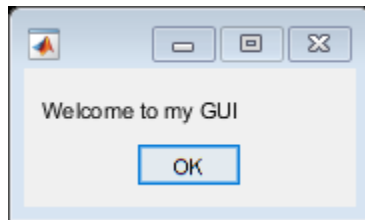

Published with MATLAB® R2017a