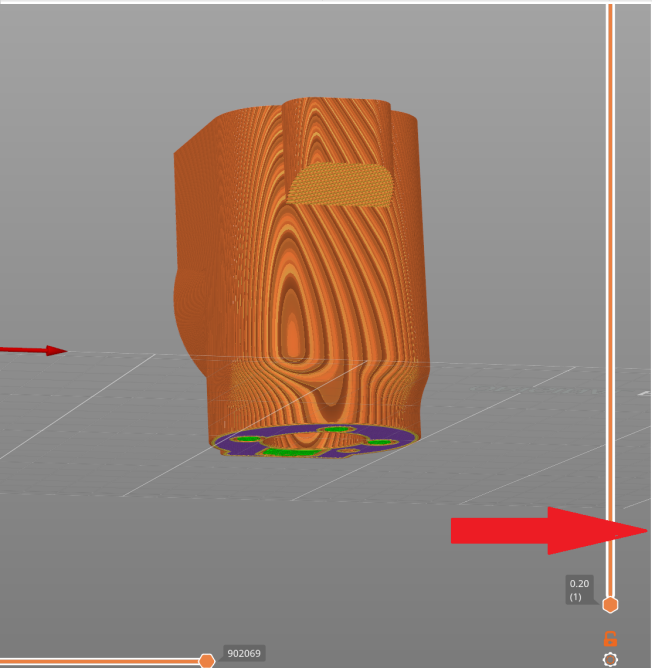


We used a Prusa MK4 with the default Prusament PETG filament profile. To ensure your PAR6 robot functions properly, please try to match these print settings on your own printer. While the mass doesn't need to be exact for every part, you should aim for the values listed in the table once your model is sliced. Note: Make sure to deduct the mass of any support material! Mass in the table is for the parts without any support material!



Object manipulation

World coordinates: X Y Z

Position: 123.6 105.11 41.05 mm

Rotate (relative): 0 0 0 °

Scale factors: 100 100 100 %

Size [World]: 57 63.1 82.1 mm

☐ Inches

Info

Size: 57.00 x 63.10 x 82.10 Volume: 83349.48

Facets: 811318 (1 shell)

No errors detected

Sliced Info

Used Filament (g) 73.36 (266.36)


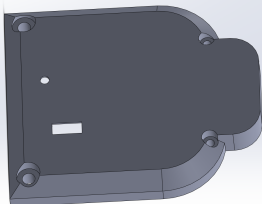
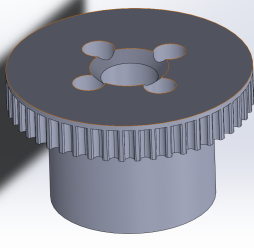
Used Filament (m) 24.01







Used Filament (mm³) 57760.40

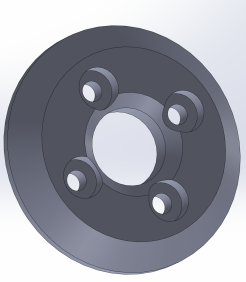
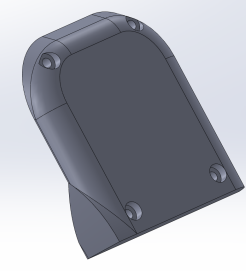
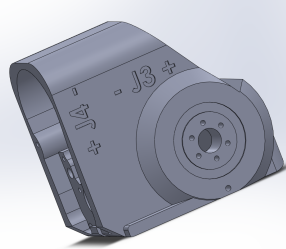


Cost 2.20

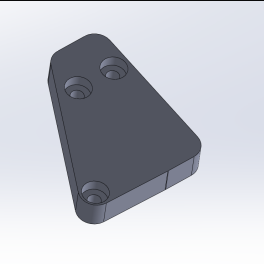
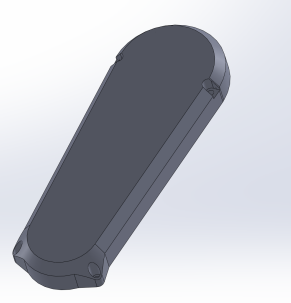
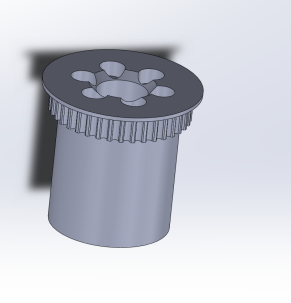
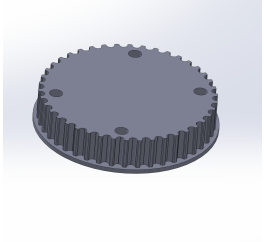
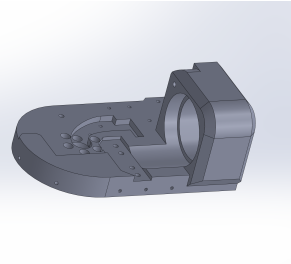
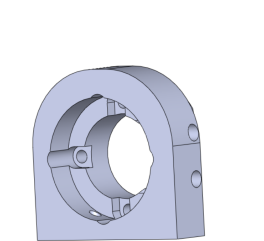
Estimated printing time: - normal mode 5h59m







Export G-code





IMG	Part name	mass (g)	Infill type	Infill %	Layer h	Top layers	Bot layers	Perimeters
	Wrist	70	honey	25	0.15	6	5	3
	Wrist lid	8.3	honey	25	0.15	6	5	3
	Wrist pulley	19.8	honey	50	0.15	6	5	3

	J5_part	93.7	honey	25	0.15	6	5	3
	Electronics_lid_lower_arm_basic	8.7	honey	25	0.15	6	5	3
	electronics_lid_lower_arm_connector_cov er	2	honey	25	0.15	6	5	3
	electronics_lid_lower_arm_connector	9	honey	25	0.15	6	5	3
	J5_belt_lid	17.6	honey	25	0.15	6	5	3
	J4_output_pulley	40.7	honey	50	0.15	6	5	3

	J4_bearing_backplate	4	honey	25	0.15	6	5	3
	Elbow_lid	19.7	honey	25	0.15	6	5	3
	Elbow_part	172.8	honey	25	0.15	6	5	3
	J4_limiter	1	honey	25	0.15	6	5	3
	upper_arm	192.6	honey	35	0.15	6	5	3

	Elbow_blocker	4.8	honey	25	0.15	6	5	3
	Upper_arm_cover	26	honey	25	0.15	6	5	3
	Upper_arm_pulley_38t	22.3	honey	50	0.15	6	5	3
	42_pulley	8.5	honey	50	0.15	6	5	3
	Turret	179.1	honey	25	0.15	6	5	3
	J2_turret_motor_holder	33.8	honey	50	0.15	6	5	3

	J2_cover	11.1	honey	25	0.15	6	5	3
	J2_blocker	9.4	honey	25	0.15	6	5	3
	J2_bearing_backplate	7	honey	25	0.15	6	5	3
	J2_shaft	37.4	honey	50	0.15	6	5	3
	Turret_wire_cover	1.7	honey	25	0.15	6	5	3
	Turret_cover	29	honey	25	0.15	6	5	3

	Base	317	honey	25	0.15	6	5	3
	Base_lid_electronics	35	honey	25	0.15	6	5	3
	J1_bottom_lid	6.1	honey	25	0.15	6	5	3
	Base_bearing_backplate	7.2	honey	25	0.15	6	5	3