

AlGainP Visible Laser Diode

ADL-65052TL


6-2D-LD65-004_Rev.01


★650nm 5mW 50°C Low Current Operation


- Features
 - 1. Low operating current
 - 2. High efficiency
 - 3. FFP single lateral mode
- Applications
 - 1. Laser pointers
 - 2. Industrial laser markers / measuring instruments
 - 3. Bar code readers

Absolute maximum ratings

| Parameter | Symbol | Condition | Rating | Unit |
|----------------------|-----------------|-----------|---------|------|
| Light output power | Po | CW | 7 | mW |
| Reverse voltage (LD) | V _{RL} | - | 2 | V |
| Reverse voltage (PD) | V _{RD} | - | 30 | V |
| Forward current (PD) | I _{FD} | - | 10 | mA |
| Case temperature | T _C | - | -10~+50 | °C |
| Storage temperature | Ts | - | -40~+85 | °C |

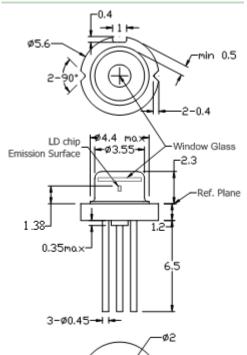





Electrical and optical characteristics (T_c=25 °C)

| Parameter | Symbol | Min. | Тур. | Max. | Unit | Conditions |
|-----------------------------------|------------------------------------|------|------|------|-------|--|
| Peak wavelength | λ | 645 | 655 | 660 | nm | P _o =5mW |
| Threshold current | I _{th} | - | 15 | 20 | mA | |
| Operating current | l _{op} | - | 20 | 22 | mA | P _o =5mW |
| Operating voltage | V _{op} | - | 2.2 | 2.5 | V | P _o =5mW |
| Differential efficiency | η | 0.5 | 1.0 | 1.4 | mW/mA | P _o =3-5mW |
| Monitor current | l _m | 0.05 | 0.1 | 0.3 | mA | P _o =5mW, V _{RD} =5V |
| Parallel divergence angle | θ // | 6 | 8 | 12 | deg | |
| Perpendicular divergence angle | $	heta_{\scriptscriptstyle \perp}$ | 24 | 27 | 32 | deg | |
| Parallel FFP deviation angle | $\Delta 	heta$ # | -3 | 0 | +3 | deg | P _o =5mW |
| Perpendicular FFP deviation angle | $\Delta 	heta$ $_{\perp}$ | -3 | 0 | +3 | deg | |
| Emission point accuracy | $\Delta x \Delta y \Delta z$ | -80 | 0 | +80 | um | |

- Do not operate the device above maximum ratings. Doing so may cause unexpected and permanent damage to the device.
- Take precautions to avoid electrostatic discharge and/or momentary power spikes. A change in the characteristics of the laser or premature failure may result. Proper heat sinking of the device assures stability and lifetime. Always ensure that maximum operating temperatures are not exceeded.
- Observing visible or invisible laser beams with the human eye directly, or indirectly, can cause permanent damage. Use a camera to observe the laser. No laser device should be used in any application or situation where life or property is at risk in event of device failure. Specifications are subject to change without notice. Ensure that you have the latest specification by contacting us prior to purchase or use of the product.

* For reference only. Contents above are subject to change without notice

Contact

For US, Canada Ayase America Inc. For EU Ayase Europe GmbH For Japan Ayase Co., Ltd.

e-mail: info@ayaseamerica.com e-mail: info@ayase-europe.de e-mail: info@ayasecorporation.com

+1-408-988-5277 +49-0-6122-533-811

+81-45-532-9501






AlGainP Visible Laser Diode

ADL-65052TL

6-2D-LD65-004_Rev.01

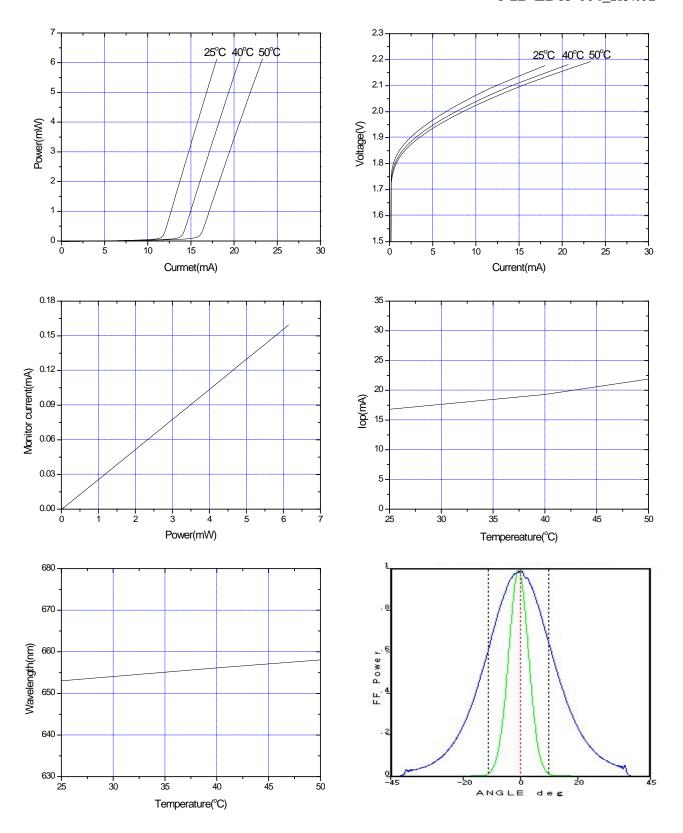

* For reference only. Contents above are subject to change without notice

Contact For US, Canada For EU For Japan

Ayase America Inc. Ayase Europe GmbH Ayase Co., Ltd.

e-mail:

info@ayaseamerica.com info@ayase-europe.de e-mail: info@ayasecorporation.com

+1-408-988-5277 +49-0-6122-533-811 +81-45-532-9501

