

ECHOLOGGER Update Utility


The ECHOLOGGER Update Utility is designed to upgrade the firmware of Echologger's single-frequency and dual-frequency echosounders. It supports only the Windows operating system.

Note: Firmware can only be updated in full-duplex mode via RS232 or USB. Devices operating in RS485 mode must be switched to RS232 mode (refer to the wiring diagrams in the manual).


The firmware for single frequency echosounders, such as the ECT400 and EU400, can be updated using this utility if they were manufactured in 2015 or later. Similarly, the firmware for dual frequency echosounders, including the ECT D24, ECT D052, and ECT D032, can be updated using this utility if they were manufactured in 2019 or later.

1. Run the **EchosounderUpdateUtility.exe** file.


The GUI will appear.

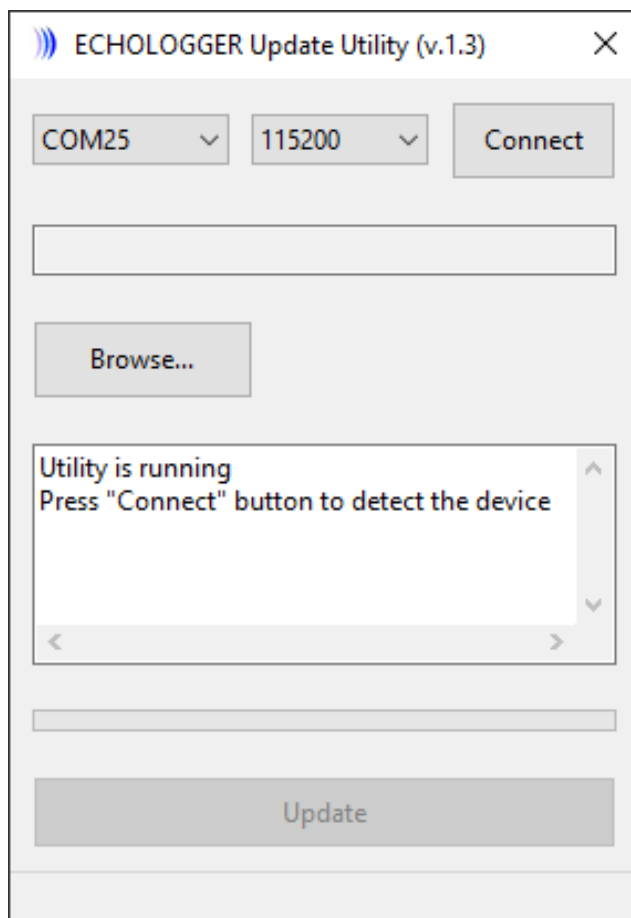

2. Select a correct serial port and the device's baud rate, then press the 'Connect' button.
If the device is detected, a success popup will appear on the screen.

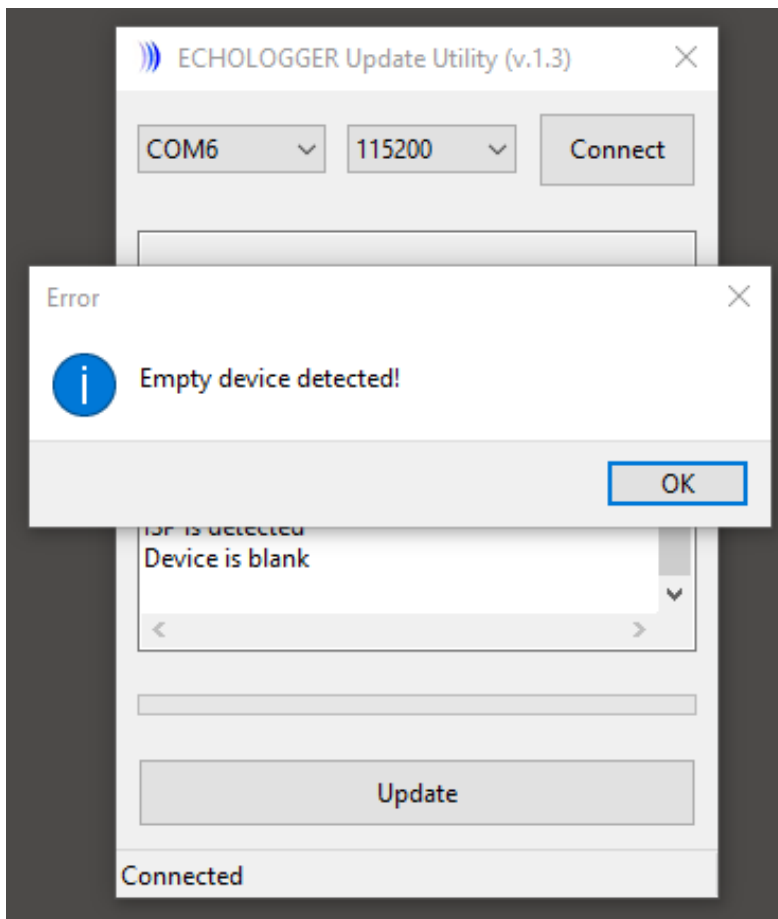

If the device is not detected, an error popup will appear.

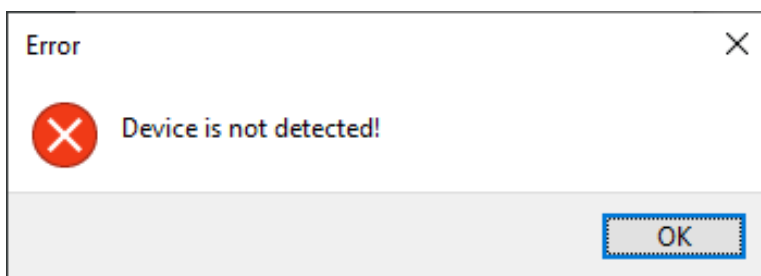


Ensure the device is properly connected and the baud rate is set correctly. Press the 'Connect' button again.

3. Press the 'Browse...' button to select a firmware '*.hex' file from the file system.


4. Press the 'Update' button.

The utility will begin updating the firmware.


If an incorrect file is selected, a warning popup will appear on the screen."

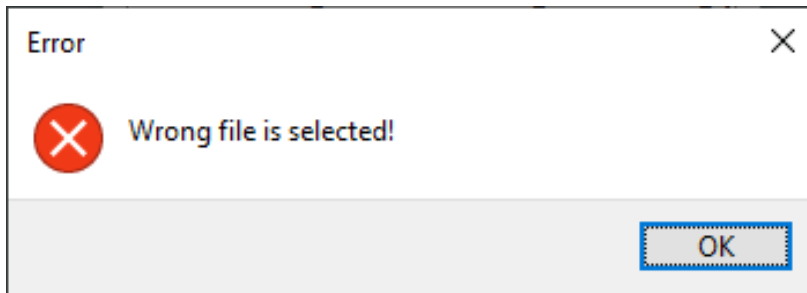

If the firmware to be uploaded is not newer than the version currently on the device, a warning popup will appear on screen:

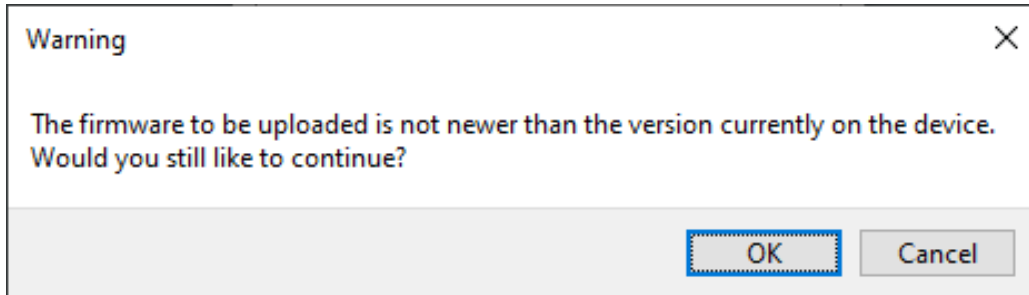


If the firmware version is not recognized, a warning popup will also appear on the screen:

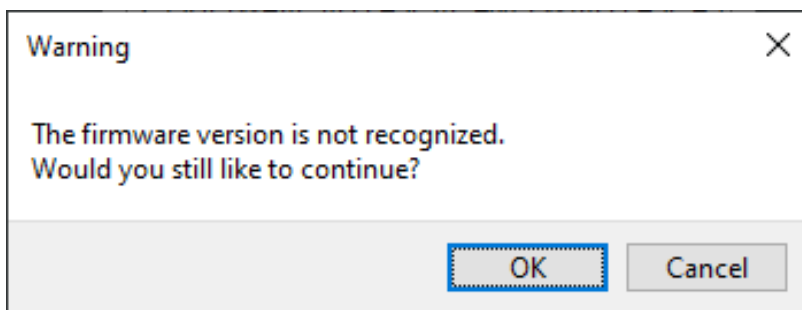

In this case, the user can proceed with the upgrade procedure but is solely responsible for any potential damage to the device.

5. After the upgrade, the device's power must be turned off and then back on. (only for Dual-Frequency Echosounders)

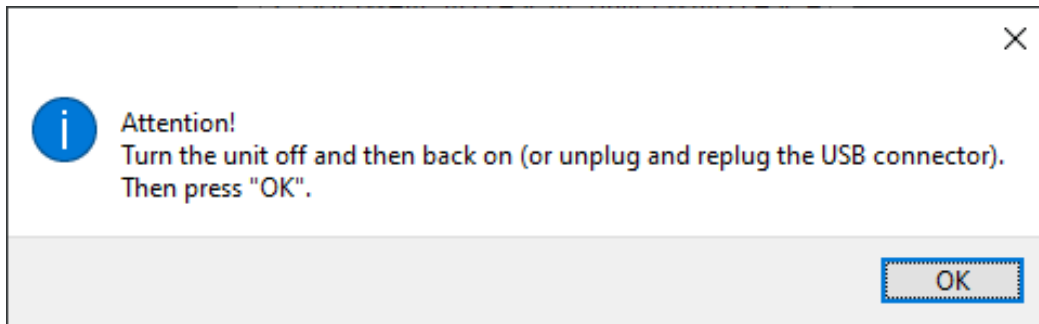

6. Update completed.

