


### 0.300-INCH SEVEN SEGMENT DISPLAYS

## HIGH EFFICIENCY GREEN MAN3400A ORANGE MAN3600A

RED MAN70A YELLOW MAN3800A



### DESCRIPTION

The MAN3400A, MAN3600A, MAN70A and MAN3800A Series provides a choice of color of LED displays. Standard units are available in Red, Green, Orange and Yellow. They can be mounted in arrays with 0.400-inch (10.16 mm) center-to-center spacing. Yellow and High Efficiency Green displays are constructed with Grey face and neutral segment color. Red displays have Black faces and Red segment color. Others have face and segment color corresponding to the emitted light.

### **FEATURES**

- Common anode or common cathode models
- Red, Yellow, Green and Orange
- Fast switching excellent for multiplexing
- Low power consumption
- Bold solid segments that are highly legible
- Solid state reliability long operation life
- Impact resistant plastic construction
- Directly compatible with integrated circuits
- High brightness with high contrast
- Categorized for Luminous Intensity (See Note 6)
- Standard 14 pin dual-in-line package configuration
- Wide angle viewing...150°

### APPLICATIONS

- Digital readout displays
- Instrument panels
- Point of sale equipment
- Calculators
- Digital clocks

MODEL NUMBER	RS	
PART NUMBER	COLOR	DESCRIPTION
MAN3410A	High Efficiency Green	Common Anode; Right Hand Decimal
MAN3420A	High Efficiency Green	Common Anode: Left Hand Decimal
MAN3440A	High Efficiency Green	Common Cathode; Right Hand Decimal
MAN3610A	Orangé	Common Anode; Right Hand Decimal
MAN3620A	Orange	Common Anode: Left Hand Decimal
MAN3630A	Orange	Common Anode; Overflow ±1
MAN3640A	Orange	Common Cathode; Right Hand Decimal
MAN71A	Red	Common Anode; Right Hand Decimal
MAN72A	Red	Common Anode; Left Hand Decimal
MAN73A	Red	Common Anode; Overflow ±1
MAN74A	Red	Common Cathode; Right Hand Decimal
MAN3810A	Yellow	Common Anode: Right Hand Decimal
MAN3820A	Yellow	Common Anode; Left Hand Decimal
MAN3840A	Yellow	Common Cathode; Right Hand Decimal



# 0.300-INCH SEVEN SEGMENT DISPLAYS

	MIN.	TYP.	MAX.	UNITS	TEST CONDITIONS
MAN3410A, 3420A, 3440A					<del>"</del>
Luminous Intensity, digit average	750	3200		$\mu$ cd	$I_E = 10 \text{ mA}$
(See Notes 1 and 3)	900	4000		$\mu$ cd	I <sub>F</sub> =60 mA peak, 1:6 DF
Peak emission wavelength		562		nm	
Spectral line half width		30		nm	
Forward voltage					
Segment		2.2	3.0	V	$l_{\rm F}$ =20 mA
Decimal point		2.2	3.0	V	I <sub>F</sub> =20 mA
Dynamic resistance					
Segment		12		Ω	I <sub>F</sub> =20 mA
Decimal point		12		Ω	I <sub>F</sub> =20 mA
Capacitance					
Segment		40		pF	V=0
Decimal point		40	- N.	pF	V=0
Reverse current					
Segment Decimal point			100	$\mu A$	V <sub>R</sub> =5.0 V
<u> </u>			100	μΑ	V <sub>R</sub> =5.0 V
MAN3610A, 3620A, 3630A, 3640A					
Luminous Intensity, digit average (See Note 1 and 3)	510	1800		$\mu$ cd	$I_F=10 \text{ mA}$
				***	***
Peak emission wavelength		630		nm	
Spectral line half width		40		nm	
Forward voltage					
Segment			2.5	V	$I_F=20 \text{ mA}$
Decimal point			2.5	V	I <sub>F</sub> =20 mA
Dynamic resistance					
Segment Posimal point		26		Ω	I <sub>F</sub> =20 mA
Decimal point		26		Ω	I <sub>F</sub> =20 mA
Capacitance		0.5		_	
Segment Decimal point		35 35		pF	V=0
<u> </u>	***	35		pF	V=0
Reverse current					
Segment Decimal point			100	$\mu$ A	V <sub>R</sub> =5.0 V
Decimal politic			100	$\mu A$	V <sub>R</sub> =5.0 V



# 0.300-INCH SEVEN SEGMENT DISPLAYS

	MIN.	TYP.	MAX.	LIMITO	TEAT COMPLETIONS
MAN71A, 72A, 73A, 74A	MIN.	ITP.	MAX.	UNITS	TEST CONDITIONS
Luminous Intensity, digit average (See Note 1 and 3)	125	350		$\mu$ cd	$I_F = 10 \text{ mA}$
Peak emission wavelength		660		nm	
Spectral line half width		20		nm	
Forward voltage Segment Decimal point		-	2.0 2.0	V	I <sub>F</sub> =20 mA I <sub>F</sub> =20 mA
Dynamic resistance Segment Decimal point		2	,	Ω	I <sub>pk</sub> =100 mA I <sub>pk</sub> =100 mA
Capacitance Segment Decimal point		35 35	80 80	pF pF	V=0 V=0
Reverse current Segment Decimal point			100 100	μ <b>Α</b> μ <b>Α</b>	V <sub>R</sub> =5.0 V V <sub>R</sub> =5.0 V
MAN3810A, 3820A, 3840A Luminous Intensity, digit average (See Note 1 and 3)	450	1700		$\mu$ cd	I <sub>F</sub> =10 mA
Peak emission wavelength		585		nm	
Spectral line half width		40		nm	
Forward voltage Segment Decimal point			3.0 3.0	V	I <sub>F</sub> =20 mA I <sub>F</sub> =20 mA
Dynamic resistance Segment Decimal point		26 26		ΩΩ	I <sub>F</sub> =20 mA I <sub>F</sub> =20 mA
Capacitance Segment Decimal point		35 35		pF pF	V=0 V=0
Reverse current Segment Decimal point	,		100 100	μA μA	V <sub>B</sub> =5.0 V V <sub>B</sub> =5.0 V



### 0.300-INCH **SEVEN SEGMENT DISPLAYS**

80	-	-	γ.	 у.	3	¥ .	š	8 X	8 - '	·	200	8		w.	VL.	220				386

For optimum ON and OFF contrast, one of the following filters or equivalents should be used over the display:

DEVICE TYPE	FILTER	DEVICE TYPE	FILTER
MAN3610A MAN3620A MAN3630A MAN3640A	Panelgraphic Scarlet 65 Homalite 100-1670	MAN71A MAN72A MAN73A MAN74A	Panelgraphic Red 60 Homalite 100-1605
MAN3410A MAN3420A MAN3440A	Panelgraphic Green 48 Homalite 100-1440 Green	MAN3810A MAN3820A MAN3840A	Panelgraphic Yellow 25 or Amber 23 Homalite 100-1720 or 100-1726 Panelgraphic Grey 10 Homalite 100-1266 Grey

ABSOLUTE MAXIMUM RATINGS			
	HIGH EFF. GREEN MAN3410A MAN3420A MAN3440A	RI MAN71A MAN72A MAN74A	ED MAN73A
Power dissipation at 25°C ambient Derate linearly from 50°C Storage and operating temperature Continuous forward current	600 mW	480 mW	300 mW
	-12 mW/°C	-6.9 mW/°C	-4.29 mW/°C
	-40°C to +85°C	-40°C to +85°C	-40°C to +85°C
Total Per segment Decimal point Reverse voltage	240 mA	240 mA	150 mA
	30 mA	30 mA	30 mA
	30 mA	30 mA	30 mA
Per segment. Decimal point. Soldering time at 260°C (See Notes 4 and 5).	6.0 V	6.0 V	6.0 V
	6.0 V	6.0 V	6.0 V
	5 sec.	5 sec.	5 sec.
	YELLOW MAN3810A MAN3820A MAN3840A	ORA MAN3610A MAN3620A MAN3640A	NGE MAN3630A
Power dissipation at 25°C ambient Derate linearly from 50°C. Storage and operating temperature Continuous forward current	600 mW	600 mW	375 mW
	-10.3 mW/°C	-8.6 mW/°C	-5.36 mW/°C
	-40°C to +85°C	-40°C to +85°C	-40°C to +85°C
Total Per segment Decimal point Reverse voltage	200 mA	240 mA	150 mA
	25 mA	30 mA	30 mA
	25 mA	30 mA	30 mA
Per segment. Decimal point. Soldering time at 260°C (See Notes 4 and 5).	6.0 V	6.0 V	6.0 V
	6.0 V	6.0 V	6.0 V
	5 sec.	5 sec.	5 sec.

TYPICAL THERMAL CHARACTERISTICS	
GREEN/YELLOW	
Thermal resistance junction to free air $\Phi_{JA}$	160°C/M
Forward voltage temperature coefficient	-1.5 mV/°C
Thermal resistance junction to free air Ф <sub>JA</sub>	160°C/W
Thermal resistance junction to free air $\Phi_{\text{JA}}$ .  Wavelength temperature coefficient (case temperature).  Forward voltage temperature coefficient	1.0Å/°C
Forward voltage temperature coefficient	−2.0 mV/°C

#### NOTES

The digit average Luminous Intensity is obtained by summing the Luminous Intensity of each segment and dividing by the total number of segments. Intensity will not vary more than ±33.3% between all segments within a digit.
 The curve in Figures 3, 6, 9, and 12 is normalized to the brightness at 25°C to indicate the relative Luminous Intensity over the operating

temperature range.

3. The decimal point is designed to have the same surface brightness as the segments, therefore, the Luminous Intensity of the decimal point is .3 times the Luminous Intensity of the segments, since the area of the decimal point is .3 times the area of the average segment.


4. Leads of the device immersed to 1/16 inch from the body. Maximum device surface temprature is 140°C.

5. For flux removal, Freon TF, Freon TE, Isoproponal or water may be used up to their boiling points.

6. All displays are categorized for Luminous Intensity. The Intensity category is marked on each part as a suffix letter to the part number.



# 0.300-INCH SEVEN SEGMENT DISPLAYS

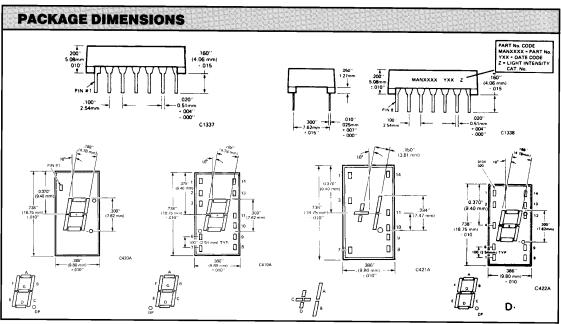

	ELECTRICAL CONNECTIONS											
Pin No.	A MAN3410A, 3610A, 71A, 3810A	B MAN3420A, 72A, 3620A, 3820A	C MAN3630A, 73A	D MAN3440A, 3640A, 74A, 3840								
1	Cathode A	Cathode A	Anode C, D	Anode F								
2	Cathode F	Cathode F	No Pin	Anode G								
3	Common Anode	Common Anode	Anode C. D	No Pin								
4	No Pin	No Pin	No Pin	Common Cathode								
5 6	No Pin	No Pin	No Pin	No Pin								
6	No Connection	Cathode D.P.	No Pin	Anode E								
7	Cathode E	Cathode E	Cathode D	Anode D								
8	Cathode D	Cathode D	Cathode C	Anode C								
9	Cathode D.P.	No Connection	No Connection	Anode D.P.								
10	Cathode C	Cathode C	Cathode B	No Pin								
11	Cathode G	Cathode G	Cathode A	No Pin								
12	No Pin	No Pin	No Pin	Common Cathode								
13	Cathode B	Cathode B	No Pin	Anode B								
14	Common Anode	Common Anode	Anode A, B	Anode A								

