

深圳市首韩科技有限公司

SHENZHEN SHOUHAN TECHNOLOGYCO.,LTD

Tel: 0755-27597601 Fax: 0755-27597491

承 认 书 SPECIFICATION FOR APPROVAL

客 户 Customer:					
产品名称 Project:	电感				
规格型号 Part No:	CYA0650-68UH				
贵公司承认印 Approal signatures					
料 号/Part No.	签 章/Signatures				
	日期 Date:				

拟制/Drawn李春风审核/Check钟华华批准/Approved罗孝金



^{食幹"}深圳市首韩科技有限公司


1.Features


- ①. High performance (Isat) realize by metal dust core.
- ②. Low profile: Thickness max.2.0 \sim 5. 0mm.
- ③. Low loss and low resistance.
- ④. Capable of corresponding high frequency $1MHz\sim5MHz$.
- ⑤ Ultra low buzz noise, due to composite construction.
- ⑥. The products contain no lead and also support lead-free soldering.

2. Applications area

Ideally used in NB/Desktop/server/Graphic card, LCD TV/Projector, etc as DC-DC Converter.


3. Externl Dimensions (unit: mm)

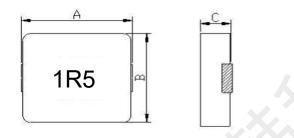



UNIT: mm A:7.2±0.2 B:6.6±0.2 C:5.0MAX D:3.0±0.5 E:1.5±0.2

4. Product Code

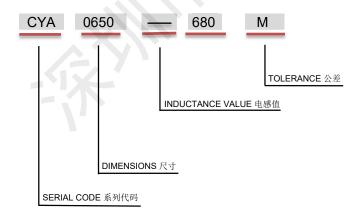

Code 代码	Tolerance 公差	
J	±5%	
K	±10%	
L	±15%	
M	±20%	
Р	±25%	
N	±30%	

• 电感值Inductance Value

(1R0:1.0uH; 100: 10uH; 101:100uH)



分 深圳市首韩科技有限公司

5. Electrical Characteristics

CYA0650 Series

C.Y PART NO	L0(uH) Inductance	Rdc (mΩ	2) @25°C	Heat Rating Current DC Amps. Idc (A)	Saturation Current DC Amps. Isat (A)	TEST FREQ (KHZ)
	(uH) @ (0A)	Тур.	Max.			
CYA0650-R22M	0.22±20%	1.1	1.3	30.0	35.0	100KHZ/1.0v
CYA0650-R36M	0.36±20%	2.7	3.1	21.0	25.0	100KHZ/1.0v
CYA0650-R39M	0.39±20%	3.2	3.5	20.0	23.0	100KHZ/1.0v
CYA0650-R47M	0.47±20%	3.3	3.8	20.0	21.0	100KHZ/1.0v
CYA0650-R56M	0.56±20%	3.4	3.6	20.0	18.0	100KHZ/1.0v
CYA0650-R68M	0.68±20%	3.9	4.2	18.0	16.0	100KHZ/1.0v
CYA0650-R82M	0.82±20%	4.6	4.9	16.5	17.0	100KHZ/1.0v
CYA0650-1R0M	1.00±20%	5.6	6.5	12.0	13.0	100KHZ/1.0v
CYA0650-1R5M	1.50±20%	7.0	8.5	10.0	12.5	100KHZ/1.0v
CYA0650-2R2M	2.20±20%	11.2	12.5	9.5	10.0	100KHZ/1.0v
CYA0650-3R3M	3.30±20%	19.9	20.9	8.5	9.0	100KHZ/1.0v
CYA0650-4R7M	4.70±20%	26.0	29.0	6.0	8.0	100KHZ/1.0v
CYA0650-5R6M	5.60±20%	31.5	34.4	6.0	7.0	100KHZ/1.0v
CYA0650-6R8M	6.80±20%	35.0	40.0	5.5	7.0	100KHZ/1.0v
CYA0650-8R2M	8.20±20%	40.0	43.0	5.5	6.5	100KHZ/1.0v
CYA0650-100M	10.00±20%	48.0	55.0	4.5	6.0	100KHZ/1.0v
CYA0650-120M	12.00±20%	58.0	65.0	4.0	5.0	100KHZ/1.0v
CYA0650-150M	15.00±20%	78.0	85.0	3.1	4.0	100KHZ/1.0v
CYA0650-180M	18.00±20%	83.0	105.0	3.0	3.5	100KHZ/1.0v
CYA0650-220M	22.00±20%	110.0	130.0	2.6	3.5	100KHZ/1.0v
CYA0650-330M	33.00±20%	160.0	200.0	2.3	3.0	100KHZ/1.0v
CYA0650-470M	47.00±20%	250.0	290.0	2.0	2.8	100KHZ/1.0v
CYA0650-680M	68.00±20%	315.0	350.0	1.8	2.0	100KHZ/1.0v




資 深圳市首韩科技有限公司

Notes

- 1.All test data is reference to 25℃ ambient.
- 2.Idc: DC current (A) that will cause an approximate $\triangle T$ of 40°C
- 3. Isat : DC current (A) that will cause L0 to drop approximately 30%
- 4. Operating Temperature Range -55°C to +125°C
- 5.The part temperature (ambient + temp rise) should not exceed 125 °C under worse case operating conditions. Circuit design, component. PWB trace size and thickness airflow and other cooling provisions all affect the part temperature. Part temperature should be verified in the den application.
- 6. The rated current as listde is either the saturation current or the heating current depending on which value is lower.

6.Minimum Packaging and storage

包装Packing

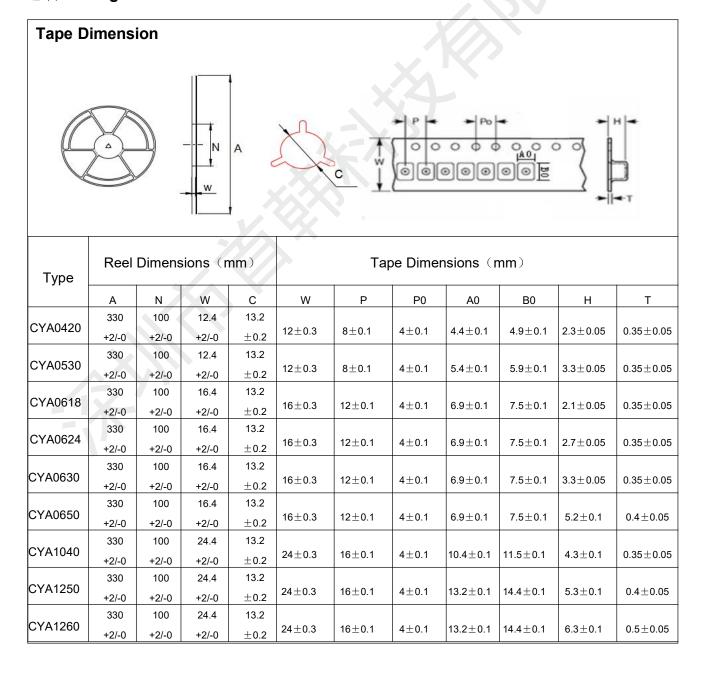




^{食幹"}深圳市首韩科技有限公司

• Tape Carrier Packaging:

Туре	Standard Quantity (pcs/reel)	Туре	Standard Quantity (pcs/reel)
CYA0420	3000	CYA1250	400
CYA5030	2000	CYA1265	400
CYA6030	1000		
CYA1040	1000		

Tearing Off Force

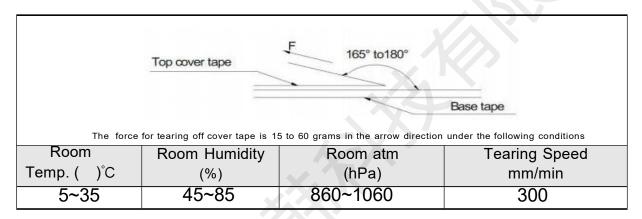

Application Notice

Storage ConditionsTo maintain the solderability of terminal electrodes:

- 1. Temperature and humidity conditions: Less than 30°C and 70% RH.
- 2. Recommended products should be used within 6 months form the time of delivery.
- 3. The packaging material should be kept where no chlorine or sulfur exists in the air. Transportation
- 1. Products should be handled with care to avoid damage or contamination from perspiration and skin oils.
- 2. The use of tweezers or vacuum pick up is strongly recommended for individual components. Bulk handling should ensure that abrasion and mechanical shock are minimized.