SSS-ALP-002-01-B

2" Alphabet and Number Mega Kit Stencil - character "B" (1 of 36 in kit)

Scale 1:4 when printed on 11x17 (tabloid) at 100% · units: inches · black with red outline = CUT layer exactly as in the DXF (bridges = white gaps); grey with red outline = material sheet, its outline is cut

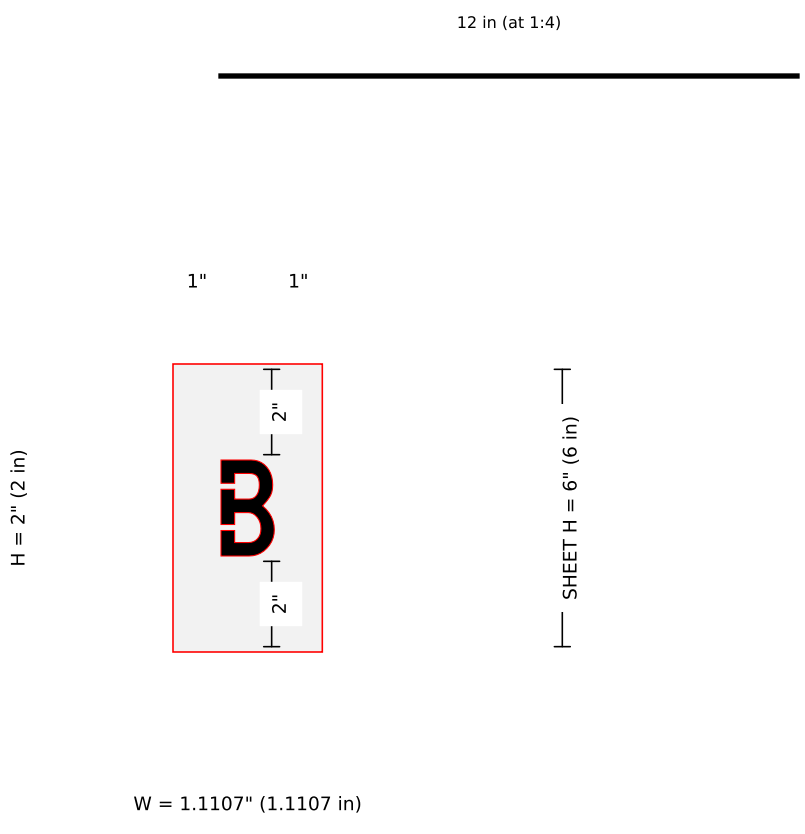

Pieces: 1 · sheet 3.111 x 6 in (border L/R/B/T 1/1/2/2 in), sheet outline on CUT
REVIEWED by Josh 2026-11-04 (small-kit review, josh_audit/review_smallkits/pass.csv). 1-800 piece count: 60 (our 48x120 split kept; one file per character).
Interim default: standard FHWA/DOT letterform (FHWA Series C via Roadgeek 2014, MIT), no 1-800 image traced. Kit scaled so the widest character = W 1.5 in, every character height = H 2 in. This char 1.111 x 2.000 in.
KIT REBUILT 2026-11-04: outline from the TrueType quadratic curves, flattened at chord error <= 0.002 in; stencil bridges = SMALL-KIT RULE (Matt approved 2026-11-04, kits under 4 in): width 40% of stroke clamped 0.125-0.36 in; one bridge per enclosed opening, two per opening on 0/O/8; placement per 1-800-Stencil (O top/bottom, 0/8 left/right mid-height, bowls stem-to-bowl).
DOT/FHWA spacing (Series C side bearings, scaled): 0.34 in to next character. Mega/alpha-number kit: punctuation pieces in 1-800 image not built (A-Z, 0-9 only).
Bridges (center x,y / stroke crossed / width / angle): (0.14,1.45) 0.285" w=0.125" -180.0deg; (0.14,0.59) 0.285" w=0.125" 180.0deg