Search, not prompt length: a configurable rigorous LLM fact-checker evaluated on SciFact

Libor Burian — independent researcher

October 2026 · code, data and logs: https://github.com/BurnyCoder/auto-fact-checker

Abstract. We turn a long, hand-written "rigorous scientific fact-check" prompt into a configurable system in which each sentence and each list of the prompt is a toggle. Every evaluative condition (45 verdict labels and 12 conditions such as Bayesian or empiricist assessment) is scored 0–100% with a self-reported confidence. Execution ranges from one non-agentic API call to Codex / Claude Code agents with subagents and separate calls per claim and per scientist persona. In a pre-registered evaluation on 200 balanced binary SciFact claims with `gpt-6-luna`, the full prompt with hosted web search beat a minimal single call: balanced accuracy 0.865 vs 0.755, Δ = +0.110 [95% CI +0.062, +0.160], exact McNemar p = 2.7×10^{-5}. A pre-registered ablation attributes the whole gain to retrieval: the minimal prompt with the same search reached 0.890. The rigorous prompt added no detectable accuracy given search (Δ = −0.025 [−0.061, +0.010], p = 0.27) while producing 8.5× more output tokens. In post-hoc arms, the full prompt also failed to help without search (0.765 vs 0.755), although it may improve ranking (AUROC +0.047 [+0.013, +0.082]). Codex and Claude Code agents running the full prompt were not better than single calls on 40 claims. A pre-registered evaluation of the correct-until-labelled-accurate loop shows that it raises gold-evidence correctness only from 49% to 62%, while labelling every answer correct. On our own pre-registered benchmark of 20 AI-research passages with 48 injected errors, one agent pass fixed 96–97% of the errors (mean score ≈ 40 ⟶ 86–90 of 100). Three further passes added nothing (rigorous arm Δ +0.45 [−4.6, +4.8]). Under the rigorous prompt they eroded fixes (fix rate −0.067 [−0.117, −0.022]; post hoc, the lost facts were hedged or deleted), and a naive prompt did at least as well at one sixth of the time. Test–retest noise was ±2–3 pp. All verdict and corrector systems use one inexpensive model (`gpt-6-luna`) except one Claude Haiku agent arm; the benchmarks are short SciFact claims and 20 AI-research passages.

1. Introduction

LLM fact-checking pipelines usually split text into claims, retrieve evidence and verify each claim [1], [2], [3], [4]. Practitioners also write long "be rigorous" prompts that enumerate failure modes (overgeneralization, cherry-picking, category errors), epistemic stances (Bayesian, frequentist, empiricist) and exemplary scientists. Such prompts are hard to evaluate because they bundle many interventions. Our contributions:

1. A system that makes each component of such a prompt independently switchable. Each component is also scored with a confidence in a machine-readable output contract. The execution strategy (API call vs agent, subagents, per-claim and per-persona calls, iteration) is configurable per pipeline step (§2).
2. A pre-registered paired evaluation on SciFact [5] that separates the effect of the prompt from the effect of web search, with a measured noise floor (§3–4).
3. Two pre-registered tests of iterative self-correction. One judges corrections against gold evidence (SciFact); the other uses a new benchmark of real AI-research passages with known injected errors, scored on a 0–100 spectrum pass by pass (§4).

2. System

Prompt as blocks. The original prompt (Appendix A) is split into 20 sections, verbatim except for light rewording where a sentence was cut, for example "Evaluate it from both bayesian and frequentist perspectives." Four added sections (a NeurIPS-reviewer role, claim classification, 0–100% scoring and confidence) make 24 toggles. The lists (45 verdict labels, degrees fully / partially / slightly, 10 style adjectives, 63 scientists, 15 claim types) are editable. A test asserts that the all-on prompt contains every list item of the original and every sentence kept verbatim.

Output contract. Each answer ends with JSON. Per claim it holds:

- accuracy and confidence
- claim types with confidences
- every selected label with a degree, score and confidence

- 12 conditions, each with a pre-defined meaning for its score (e.g. “Bayesian perspective: posterior probability that the claim is true”)
- a corrected claim

The JSON also holds a corrected text and a list of issues. Claim types, confidences, labels and conditions are requested only while their sections are enabled; accuracy, corrections and issues always are. Parsing tolerates common JSON defects; a repair step re-extracts the JSON if it is still missing.

Execution. A run has five configurable steps: extract (Claimify-style decomposition [6]), check, perspective, synthesize and repair (repair runs only when an answer lacks the JSON). Each step independently chooses:
- API call (OpenAI Responses / Anthropic Messages with server-side web search) or agent (Codex CLI / Claude Code)
- model, reasoning effort, search on/off and its caps
- subagents, prompt template and prompt override

Claims can be checked as a whole text, by agent subagents, or by separate calls; scientist personas likewise. “Iterate until accurate” re-checks the corrected text until every claim reaches a threshold. Every call passes through one context that logs full prompts and outputs and enforces a global spend cap.

3. Evaluation design (pre-registered)

The design (docs/benchmark.md) was committed before any paid call.

Data. SciFact [5] claims whose evidence labels are all SUPPORT or all CONTRADICT; NEI and conflicting claims are dropped. The pool is the validation and train splits; nothing was tuned on it. The sample is balanced, $n = 200$, seed 0, excluding the 6 pilot claims used only to measure cost.

Prediction rule. p = overall accuracy / 100; SUPPORT iff $p \geq 0.5$. Unparseable outputs count as wrong.

Systems (all `gpt-6-luna`, effort low, one call per claim):
- A: minimal prompt, no search
- B: full default prompt, with hosted web search capped at 3 tool calls and dataset hosts blocked
- C: minimal prompt with B’s search

Metrics. Primary: balanced accuracy, compared with an exact McNemar test [7], [8] and a 95% paired-bootstrap CI over 10,000 resamples [9]. Secondary: accuracy with Wilson CI, macro-F1, AUROC, Brier score.

Hypotheses. H1: BA(B) > BA(A). It is supported only if $\Delta > 0$, the CI excludes 0 and $p < 0.05$. H2 (secondary): C − A isolates search; B − C isolates the prompt given search.

Sample size. The pre-registered rule (largest balanced n within about $5 at the pilot’s measured cost) was applied conservatively at the pilot’s worst-case cost (≈ 208) and rounded down to $n = 200$. It exceeds the $n \approx 155$ that Connor’s approximation [10] gives for $\delta = 10$ pp at 20% discordance (two-sided $\alpha = 0.05$, 80% power).

Leakage control. Dataset hosts were blocked. Every consulted URL was logged and flagged if it matched a dataset host or “scifact”.

4. Results

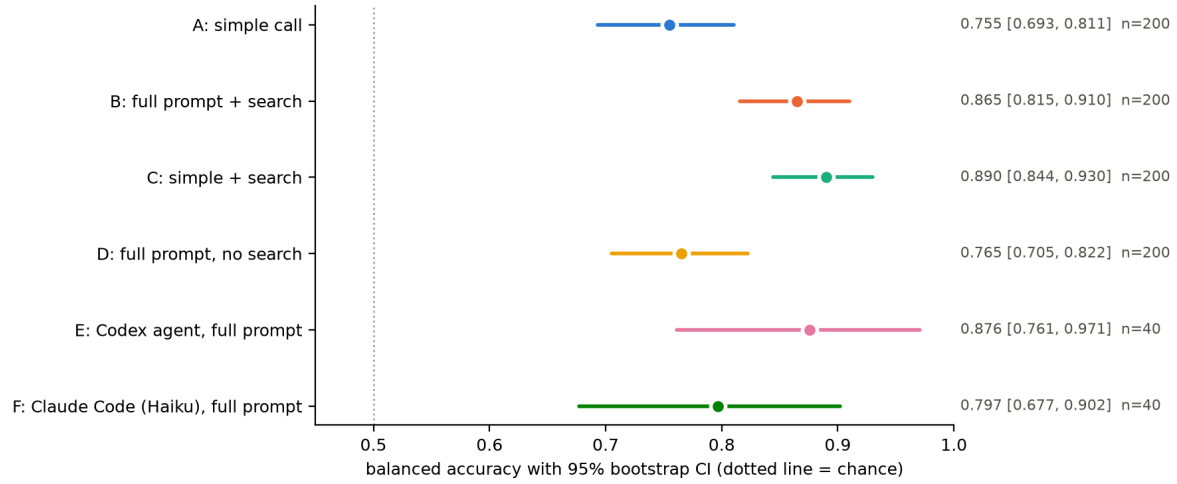


Figure 1: Balanced accuracy with 95% percentile-bootstrap CIs over items (n per system shown).

system	n	bal. acc.	acc. [Wilson 95%]	recall S / C	AUROC	Brier	cost $
A minimal	200	0.755	0.755 [0.691, 0.809]	0.79 / 0.72	0.844	0.165	0.06
B full + search	200	0.865	0.865 [0.811, 0.906]	0.85 / 0.88	0.944	0.101	2.97
C minimal + search	200	0.890	0.890 [0.839, 0.926]	0.85 / 0.93	0.956	0.087	2.30
D full, no search†	200	0.765	0.765 [0.702, 0.818]	0.75 / 0.78	0.891	0.142	0.44
E Codex agent, full†	40	0.876	0.875 [0.739, 0.945]	0.87 / 0.88	0.917	0.113	0 (subscr.)
F Claude Code agent (Haiku), full†	40	0.797	0.775 [0.625, 0.877]	0.65 / 0.94	0.962	0.161	0 (subscr.)

Table 1: Per-system results; recall S / C = SUPPORT / CONTRADICT recall. † post hoc. No leak flags occurred in A–E; F had one benign flag (a paperswithcode author page); D had one transient API failure, re-run once.

comparison	Δ bal. acc. [95% CI]	McNemar b / c, p	status
B − A	+0.110 [+0.062, +0.160]	3 / 25, 2.7×10^{-5}	pre-registered primary: H1 supported
C − A	+0.135 [+0.086, +0.186]	2 / 29, 4.6×10^{-7}	pre-registered secondary
B − C	−0.025 [−0.061, +0.010]	9 / 4, 0.27	pre-registered secondary
A′ − A (re-run)	+0.005 [−0.020, +0.031]	3 / 4, 1.0	noise control
D − A	+0.010 [−0.026, +0.047]	6 / 8, 0.79	post hoc
B − D	+0.100 [+0.055, +0.148]	2 / 22, 3.6×10^{-5}	post hoc
E − C (n = 40)	−0.059 [−0.167, +0.034]	3 / 1, 0.62	post hoc
F − C (n = 40)	−0.138 [−0.250, −0.045]	6 / 0, 0.031	post hoc; model differs

Table 2: Paired comparisons on shared items. In "X − Y", b = only Y (the subtracted system) correct, c = only X correct.

H1 is supported. The improvement is concentrated in CONTRADICT claims (recall 0.72 → 0.88). These are expert negations that the model accepts as plausible without evidence (Fig. 2: A gives a large cluster of CONTRADICT claims 65–95%).

Search explains the gain. C − A (+0.135) is at least as large as B − A, and B − C is indistinguishable from 0. The CI rules out a benefit of the rigorous prompt larger than about 1 pp given search. B produced 3,562 output tokens per claim on average, vs 420 for C. Post hoc, the full prompt without search (D) also matched A (Δ +0.010 [−0.026, +0.047]). Its AUROC was higher (+0.047 [+0.013, +0.082]) with less extreme scores, a hypothesis for future pre-registered work. A Codex agent running the full prompt (E, n = 40) reached 0.876, statistically indistinguishable from the API systems on the same items. A Claude Code agent with `claude-haiku-5-5` (F) ranked claims well (AUROC 0.962, below B's 0.978 and C's 0.992 on the same 40 claims) but was sceptical (SUPPORT recall 0.65). Its lower balanced accuracy versus C (p = 0.031) is one of 18 post-hoc tests (9 comparisons × 2 metrics) and confounded by the model.

Noise. A re-run of A agreed on 96.5% of predictions, so differences above about 3 pp are unlikely to be sampling noise of the generator.

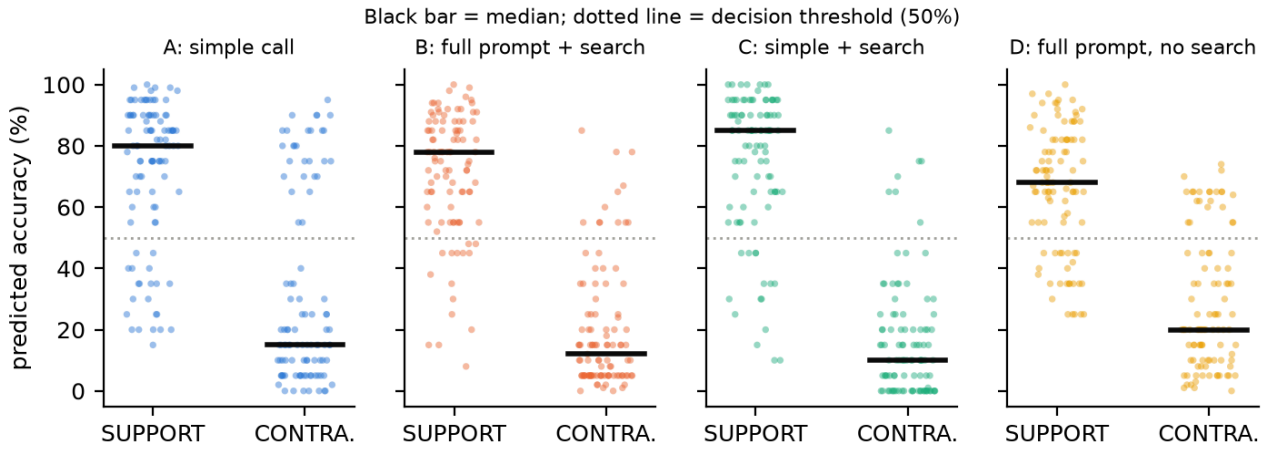


Figure 2: Predicted accuracy by gold label for the 200-item systems (black bar: median).

Qualitative validation. On three AI research / philosophy / engineering texts with planted errors (answer key with sources in the repository), eight runs covered all execution presets: single call, Codex and Claude agents, Claude subagents, per-claim agents, per-claim × per-scientist calls, and iteration. Together they agreed with the key on all 42 claim verdicts, with complete JSON contracts (a ninth run tested subagent delegation on a 2-claim text). The errors are textbook, so this demonstrates function, not accuracy. Two observations:

- Merging three scientist personas pulled scores toward 50%. For example, "the Turing test is widely accepted as a sufficient test for consciousness" scored 46% after synthesis vs 5–25% in single runs.
- One correction pass raised a text's self-assessed accuracy from 18% to 95%. Because the same model grades its own correction, this measures self-consistency, not truth.

Is "labelled correct" correct? (Exp07, pre-registered.) We also tested the iterate-until-accurate loop. A Codex agent (`gpt-6-luna`, live web search) corrected and re-checked 100 SciFact claims until it rated every claim ≥ 90%, with at most 20 passes. A cross-family judge (`claude-haiku-5-5`, 93% accurate on the original claims) compared each text with the gold abstract. Correct means the central claim is entailed, nothing is contradicted, and the text addresses the same question.

- Gold-correctness rose from 49% to 62% (Δ +0.13 [+0.02, +0.24], McNemar 10 / 23, p = 0.035).
- The loop labelled all 100 answers correct, but only 62% [52, 71] were.
- Passes after the first correction added nothing (61% ⟶ 62%).
- 20% of originally correct texts became incorrect: the checker rated 44 of 54 true claims below 90% and rewrote them into hedged or narrower statements.

With Luna as judge (post hoc) the self-label precision is 61% and extra passes add 0.00. An exploratory Claude Code loop with claim and scientist subagents failed in the opposite direction. On 2 of 3 claims it ran all 20 passes without ever labelling its text correct, although both judges found its final texts correct; the third claim was refused. A self-assessed stopping rule does not track gold correctness (Fig. 3).

Post hoc, on the same 100 claims.

- **Verdicts.** The agent's first-pass verdict reaches 0.921 balanced accuracy. That compares with 0.774 / 0.779 without evidence (A / D), 0.903 / 0.923 with API search (B / C), and 0.934 for a judge given the cited paper.
- **Corrections.** Only 62% of corrected texts are correct. The agent detects 93% of false claims but repairs about half.
- **One pass vs. the loop.** A single agent pass (keep the original if rated ≥ 90%, else use its correction) already reaches 62% (from 49%). The full loop adds +0.00 [−0.06, +0.06] at 2.5× the cost; the two answers are identical on 76 of 100 claims.
- Swapping the judge to Luna gives the same picture: 37% ⟶ 62% ⟶ 61%.

Exp07 claims (n = 100)	original	single agent pass	full loop
texts correct (Haiku judge)	49%	62%	62%
texts correct (Luna judge)	37%	62%	61%
notional cost / time per claim	–	$0.023 / 34 s	$0.059 / 100 s

Table 3: Post hoc: correction accuracy of one agent pass vs. the iterate-until-accurate loop on the same claims.

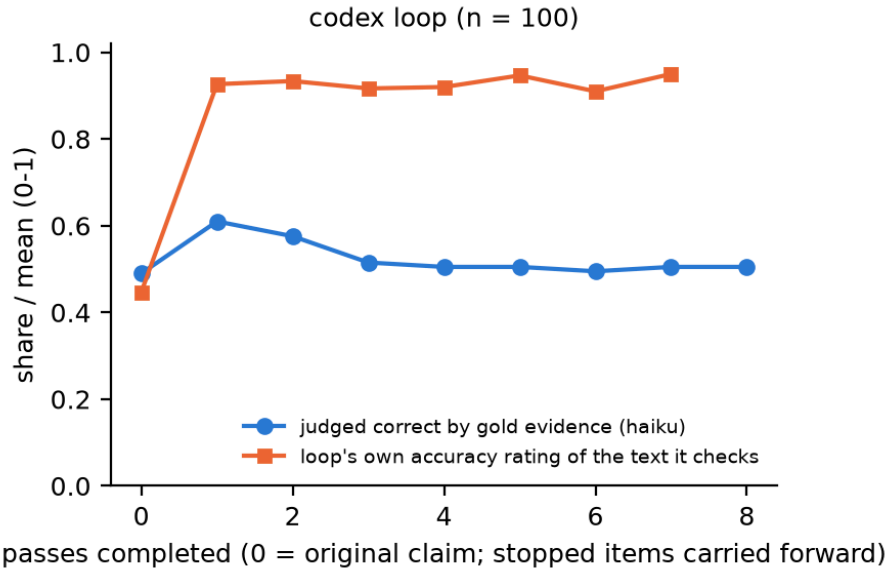


Figure 3: Exp07: the loop's own accuracy rating vs. gold-evidence correctness of the latest proposed text after k passes. Correctness carries items forward after they stop (n = 100); the self-rating covers only items still looping (n = 100, 90, 24, 9, 4, 3, 1, 1).

Obviously wrong AI-research text (Exp08, pre-registered). We built a benchmark (ai_errors_v1) in the spirit of synthetic perturbation [11].

- **Passages:** 10 Wikipedia leads and 10 arXiv abstracts about AI research, with k ∈ {0, ..., 5} injected one-fact errors (48 in total, e.g. 2012 ⟶ 2022, 28.4 ⟶ 284 BLEU, CIFAR-10 ⟶ CIFAR-100) and 4 clean controls.
- **Injection:** `gpt-6-luna` proposed the edits; code validated them; the AI coding agent that built the repository checked every edit individually (4 of 48 repaired, 2 relabelled).
- **Arms:** a Codex agent with web search was forced through 4 correction passes with either the naive ("Fact-check the following text.") or the full rigorous prompt.
- **Judge:** `claude-haiku-5-5`, given the original passage, the injected errors and the candidate. It scored each error (corrected 1, partially 0.5, uncorrected 0) and the whole text (0–100).
- **Validity:** original passages scored 99.1, and the corrupted-input score fell with k (Spearman ρ = −0.81).

n = 20 passages, 48 errors	naive prompt	rigorous prompt
score: corrupted ⟶ pass 1 ⟶ pass 4	38.6 ⟶ 90.4 ⟶ 89.4	40.0 ⟶ 85.7 ⟶ 86.2
pass 4 − pass 1 (95% CI)	−1.0 [−6.8, +5.3]	+0.45 [−4.6, +4.8]
errors fixed, pass 1 ⟶ pass 4	0.958 ⟶ 0.969	0.969 ⟶ 0.896
words (original 157), pass 1 ⟶ pass 4	150 ⟶ 191	176 ⟶ 254
time / output tokens per pass	18 s / 1.5k	110 s / 18k

Table 4: Exp08: one correction pass vs. four (primary judge `claude-haiku-5-5`, scored against the original passage).

Results.

- **One pass** raised the score by +51.8 [+34.1, +68.9] (naive) and +45.8 [+28.8, +61.9] (rigorous), Wilcoxon p < 0.001.
- **Passes 2–4** did not change it in either arm or under either judge.
- **Erosion under the rigorous prompt:** the per-passage fix rate fell by 0.067 [0.022, 0.117] (6 of 16 passages worse, none better, p = 0.015). Post hoc, no fixed error reverted to the false fact. All 7 lost fixes were hedged or deleted while the passage grew 62%, and the loop's self-rating stayed at 96%.

- **Prompt:** the rigorous prompt scored lower than the naive one after pass 1 (−4.65 [−10.2, +1.8], 16 of 20 passages worse, Wilcoxon p = 0.017).
- **Clean controls** were rewritten in every pass by both arms.
- **Audit (post hoc, by the AI coding agent).** All 22 statements the judge flagged as "introduced errors" after pass 1 were checked against the primary papers. None was unambiguously false. 13 were true details from the primary source, e.g. the Transformer paper's results text reports 41.0 BLEU where its abstract says 41.8, self-attention is permutation-equivariant [12], and AlexNet's "500,000 neurons" matches the NeurIPS abstract page (its PDF says 650,000). The other 9 were hedges. A judge anchored on the source passage penalises correct additions, so the holistic score likely underestimates accuracy when correctors add true details.

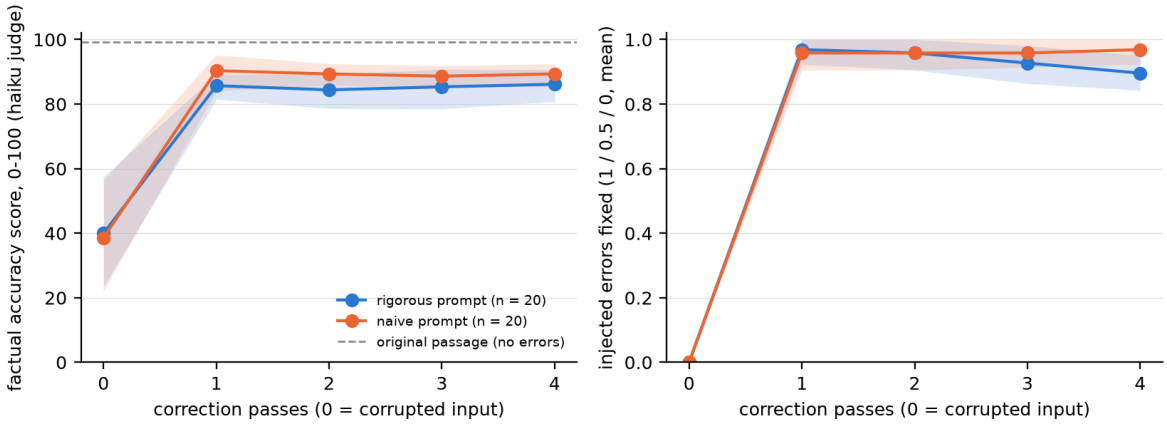


Figure 4: Exp08: mean 0–100 score and mean per-error fix score after each forced correction pass, with 95% bootstrap bands (n = 20 passages, 48 injected errors; pass 0 = corrupted input).

5. Related work

Decompose–retrieve–verify pipelines include FActScore [2], SAFE [1], FacTool [3], VeriScore [4] and FIRE [13]; Factcheck-Bench [14] and OpenFactCheck [15] benchmark such checkers. Claimify [6] studies claim extraction. Our system reuses this decomposition but focuses on making a monolithic expert prompt modular and auditable. Our ablation finding (retrieval dominates) agrees with those pipelines' emphasis on evidence retrieval. To our knowledge, the lack of a gain from enumerating rigor criteria has not been measured in this form before; we did not run a systematic literature search to confirm this. Iterative self-refinement [16] improves many generation tasks, but intrinsic self-correction without external feedback often fails or degrades answers [17]. Exp07–08 add that, **with** web search, the gain comes from the first correction and further passes trade specific facts for hedges. Injecting synthetic errors to obtain known ground truth follows FactCC [11].

6. Limitations

- **One corrector model, one setting.** `gpt-6-luna` at low effort (F and the judges use Claude Haiku). Stronger models or other efforts may use the rigorous instructions differently.
- **SciFact: short single claims.** SciFact scores only binary truth. The prompt's distinctive outputs (label scores, condition assessments with confidences, corrections) were not evaluated against human judgments, and the calibration of the self-reported confidences was not measured.
- **Contamination and gold semantics.** SciFact (2020) is likely in pretraining data, and its labels are relative to one abstract.
- **Leakage.** Host blocking and URL flagging (0 flags except one benign flag in F) cannot exclude unknown mirrors.
- **Post-hoc arms** (D, E, F) are exploratory. E and F have n = 40 and are underpowered.
- **Agent isolation.** With subscription authentication, Codex agents still load the user's global AGENTS.md; only a counter-instruction is applied.
- **Exp08 scope.** 20 passages (power only for $d_z \gtrsim 0.65$), with synthetic one-fact errors in famous, likely memorised sources whose originals the agent can find online. The same model family injected and corrected the errors, and the reference-based judge penalises true additions. The QC of the injected errors and the audit of judge-flagged statements were done by an AI coding agent, not by a human expert.

- **Delegation and refusals.** In four smoke tests, Codex (`gpt-6-luna`) never actually spawned a sub-agent and twice reported a fabricated sub-agent answer. Claude Haiku refused some biomedical claims non-deterministically (biosafety filter); one refusal is scored wrong in F.

7. Conclusion

Making a long expert prompt modular allowed a clean test of what it buys. For binary verification of scientific claims with an inexpensive model, web search is what matters. The rigorous instruction set adds cost and output volume but no measurable accuracy. Likewise, iterating until the model rates its own correction accurate is not verification: 38% of such "verified" texts were wrong by gold evidence. Whether its labels, condition scores and confidences are **valid** is an open, testable question that needs human-annotated multi-dimensional judgments, which is our next step. For correction, one agent pass with search is the useful unit: further passes did not improve gold correctness (Exp07) or injected errors (Exp08). With a long prompt they slowly replaced correct specifics with hedges.

Cost and reproducibility. All experiments and development together cost $7.35 in billed API usage (ledger: `logs/spend.jsonl`). Commands, configurations, per-item predictions, analysis scripts and the pre-registration are in the repository.

Bibliography

[1] J. Wei, C. Yang, X. Song, and others, "Long-form factuality in large language models," in *NeurIPS 2024*, 2024. [Online]. Available: https://arxiv.org/abs/2403.18802

[2] S. Min and others, "FActScore: Fine-grained Atomic Evaluation of Factual Precision in Long Form Text Generation," in *EMNLP 2023*, 2023. [Online]. Available: https://arxiv.org/abs/2305.14251

[3] I.-C. Chern and others, "FacTool: Factuality Detection in Generative AI -- A Tool Augmented Framework for Multi-Task and Multi-Domain Scenarios," 2023. [Online]. Available: https://arxiv.org/abs/2307.13528

[4] Y. Song, Y. Kim, and M. Iyyer, "VeriScore: Evaluating the factuality of verifiable claims in long-form text generation," in *Findings of EMNLP 2024*, 2024. [Online]. Available: https://arxiv.org/abs/2406.19276

[5] D. Wadden *et al.*, "Fact or Fiction: Verifying Scientific Claims," in *EMNLP 2020*, 2020. [Online]. Available: https://arxiv.org/abs/2004.14974

[6] D. Metropolitansky and J. Larson, "Towards Effective Extraction and Evaluation of Factual Claims," in *ACL 2025*, 2025. [Online]. Available: https://arxiv.org/abs/2502.10855

[7] Q. McNemar, "Note on the sampling error of the difference between correlated proportions or percentages," *Psychometrika*, vol. 12, 1947.

[8] T. G. Dietterich, "Approximate Statistical Tests for Comparing Supervised Classification Learning Algorithms," *Neural Computation*, vol. 10, 1998.

[9] T. Berg-Kirkpatrick, D. Burkett, and D. Klein, "An Empirical Investigation of Statistical Significance in NLP," in *EMNLP-CoNLL 2012*, 2012.

[10] R. J. Connor, "Sample size for testing differences in proportions for the paired-sample design," *Biometrics*, vol. 43, 1987.

[11] W. Kryściński, B. McCann, C. Xiong, and R. Socher, "Evaluating the Factual Consistency of Abstractive Text Summarization," in *EMNLP 2020*, 2020. [Online]. Available: https://arxiv.org/abs/1910.12840

[12] J. Lee, Y. Lee, J. Kim, A. R. Kosiorek, S. Choi, and Y. W. Teh, "Set Transformer: A Framework for Attention-based Permutation-Invariant Neural Networks," in *ICML 2019*, 2019. [Online]. Available: https://arxiv.org/abs/1810.00825

[13] Z. Xie and others, "FIRE: Fact-checking with Iterative Retrieval and Verification," 2024. [Online]. Available: https://arxiv.org/abs/2411.00784

[14] Y. Wang and others, "Factcheck-Bench: Fine-Grained Evaluation Benchmark for Automatic Fact-checkers," 2023. [Online]. Available: https://arxiv.org/abs/2311.09000

[15] Y. Wang, M. Wang, H. Iqbal, G. Georgiev, J. Geng, and P. Nakov, "OpenFactCheck: Building, Benchmarking Customized Fact-Checking Systems and Evaluating the Factuality of Claims and LLMs," in *COLING 2025*, 2025. [Online]. Available: https://arxiv.org/abs/2405.05583

[16] A. Madaan and others, "Self-Refine: Iterative Refinement with Self-Feedback," in *NeurIPS 2023*, 2023. [Online]. Available: https://arxiv.org/abs/2303.17651

[17] J. Huang *et al.*, "Large Language Models Cannot Self-Correct Reasoning Yet," in *ICLR 2024*, 2024. [Online]. Available: https://arxiv.org/abs/2310.01798

8. Appendix A: original prompt (verbatim, abridged lists)

Fact-check every distinct factual claim in the following text. For each claim, research it in depth scientifically by searching the web and using reputable scientific sources as much as possible to verify it, then write a detailed analysis, report whether it's fully, partially, slightly: accurate, inaccurate, misleading, oversimplified, … (45 labels) … Note any important nuance, context and complexity that's omitted. Be as scientific, pedantic, sceptical, direct, logical, technical, academic, rigorous, steelmanning, in good faith, etc., as possible. Classify strengths and weaknesses, advantages and disadvantages, limitations and potentials, ups and downs, good and bad. Evaluate it from both empiricist and rational perspectives. Evaluate it from both bayesian and frequentist perspectives. Do not just agree, do not be sycophantic, you can be blunt, do not sugarcoat things. Maximize predictive power and explanatory power. I want accuracy and precision. You are the most rigorous scientist, think like and apply scientific rigor like Karl Popper, … (63 names) … Synthesize as many scientific perspectives, empirical fact checks, scientific analyses, etc. as possible. Double check yourself as well. Search the web a lot. Think a lot. Quote the specific claims and provide your findings with sources you relied on. Quote directly from sources in your findings. Write a corrected version of each claim after each claim, and corrected version of the whole text at the end. Write a list of all issues in the overall text, that you found, in one sentence, at the end.

9. Appendix B: configurations

System configurations are JSON files in `configs/bench/`:

- A = `baseline.json`
- B = `full_single_openai.json`
- C = `baseline_search.json`
- D = `full_no_search.json`
- E = `full_agent_codex.json`
- F = `full_agent_claude.json`

The defaults are in `src/auto_fact_checker/config.py`. Blocked hosts: huggingface.co, github.com, githubusercontent.com, kaggle.com, paperswithcode.com, allenai.org.