




Top View



Rear View

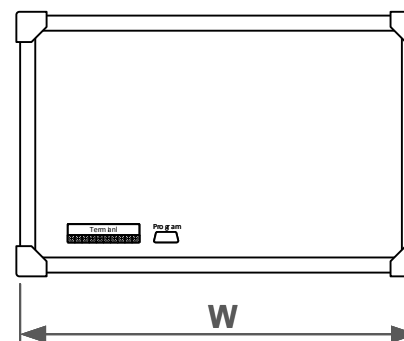

Left View

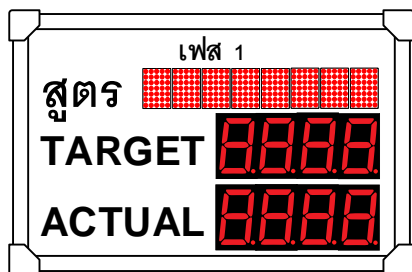

Right View

Front View

Detail

DISPLAY 7 Segment SIZE 4" Matrix 5x7 2.3"

Supply

- 110-240VAC | 50-60Hz

INPUT

- Counter NPN PNP contact 2 Channel

- Reset Counter 1 Channel

OUTPUT

- Relay Alarm 1 Channel

COMMUNICATION

- RS485 Modbus RTU slave

FUNCTION

- ตั้งค่า ตัวคูณตัวหารได้ 1 - 999

- ตั้งค่า ทศนิยมได้

- ตั้งค่า Setpoint Alarm ได้ 0 - 9999

- ตั้งค่า Input Mode การนับ ขึ้น/ลง ได้

FEATURE

- TARGET แสดงค่า เป้าหมายที่ตั้งค่าด้วย Remote

- ACTUAL แสดงค่า ของ Counter ที่นับได้

- สตร แสดงค่า ตัวอักษรที่บันทึกไว้

- Set point ใช้งานการทำงานของ Counter

เมื่อนับขึ้น Setpoint >= Count ให้ Relay Alarm ทำงาน

ตัวเครื่องประกอบด้วย

- Display 7 Segment 4" + Matrix 2.3" + Control board 1 ชุด


- อ้างอิง โปรแกรม C451v2

Technical Specification

Power Supply	100-240 VAC, 50-60Hz
Display	7 Segment 4"
Input	Counter npn,pnp 2 Channel
Output	Relay Alarm 1 Channel
Memory	EEPROM Internal 1k
Setting	Remote IR.
Communication	RS485 Modbus RTU slave

REMARK	
Frame	Aluminum
Color	Black
Protection	IP30
Model	TGM-63166
APPEND	
Dimension	1.2" <input type="checkbox"/>
milli meter (mm.)	2.3" <input type="checkbox"/>
(1.2", 2.3", 4", 8", 12")	4" 700W x 600H x 100D mm. <input checked="" type="checkbox"/>
Character	Arial (Font), White PVC Sticker

PRIMUS CO., LTD.		
Draft by	SUPHOT	
Date	29.12.2020	
Revision	0	
Customer		
Approve		
Program Process	3	day.

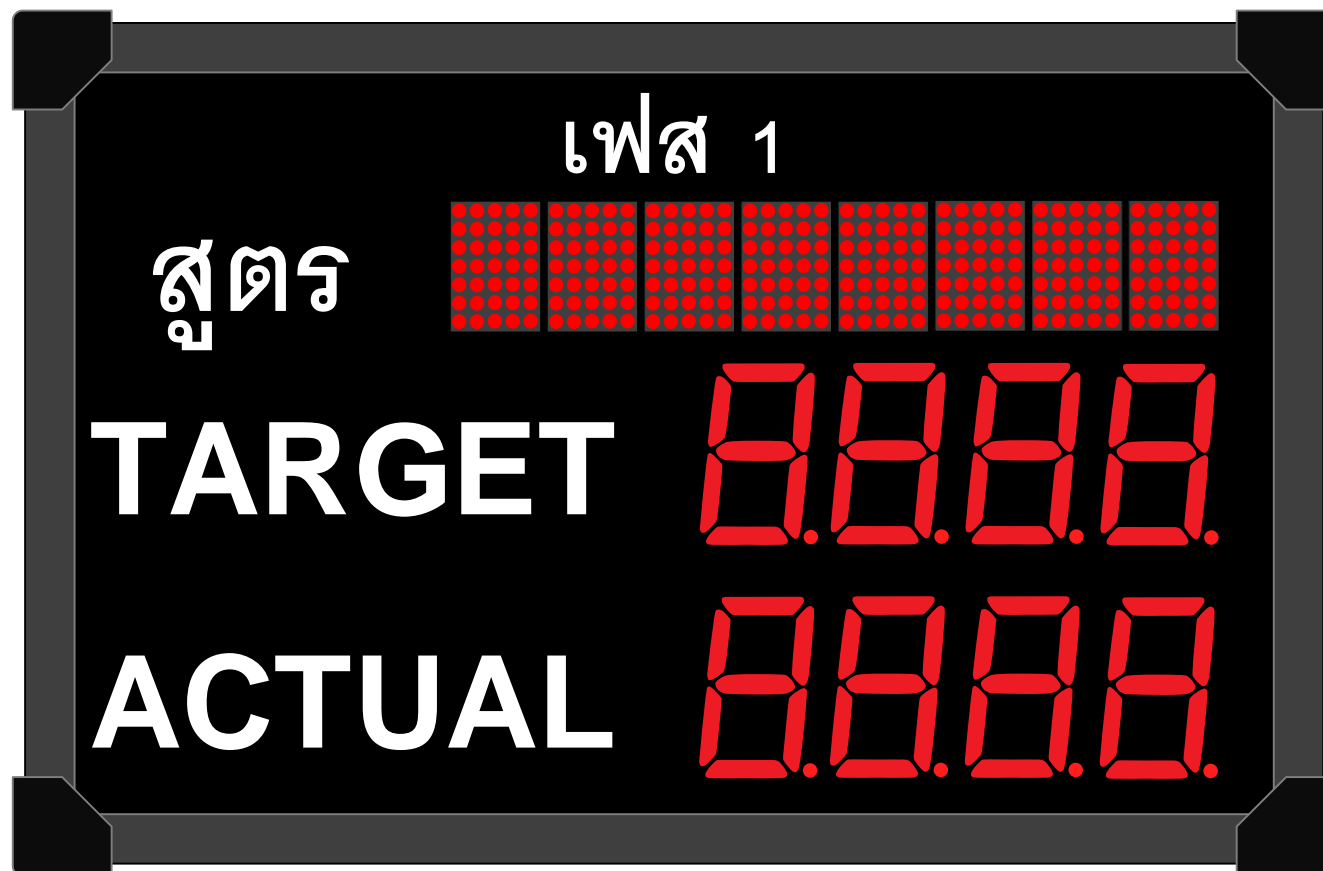

ราคาตั้ง Big Display 4" : 32,200 บาท
- TGM-63166